

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 May 2005 (19.05.2005)


PCT

(10) International Publication Number  
WO 2005/045380 A1

- (51) International Patent Classification<sup>7</sup>: G01J 1/46, G02F 1/133
- (74) Common Representative: EASTMAN KODAK COMPANY; 343 State Street, Rochester, NY 14650-2201 (US).
- (21) International Application Number: PCT/US2004/035422
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 26 October 2004 (26.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/694,560 27 October 2003 (27.10.2003) US
- (71) Applicant (for all designated States except US): EASTMAN KODAK COMPANY [US/US]; 343 State Street, Rochester, NY 14650-2201 (US).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): COK, Ronald, Steven [US/US]; 36 Westfield Commons, Rochester, NY 14625 (US).

[Continued on next page]

(54) Title: CIRCUIT DETECTING AMBIENT LIGHT ON A DISPLAY

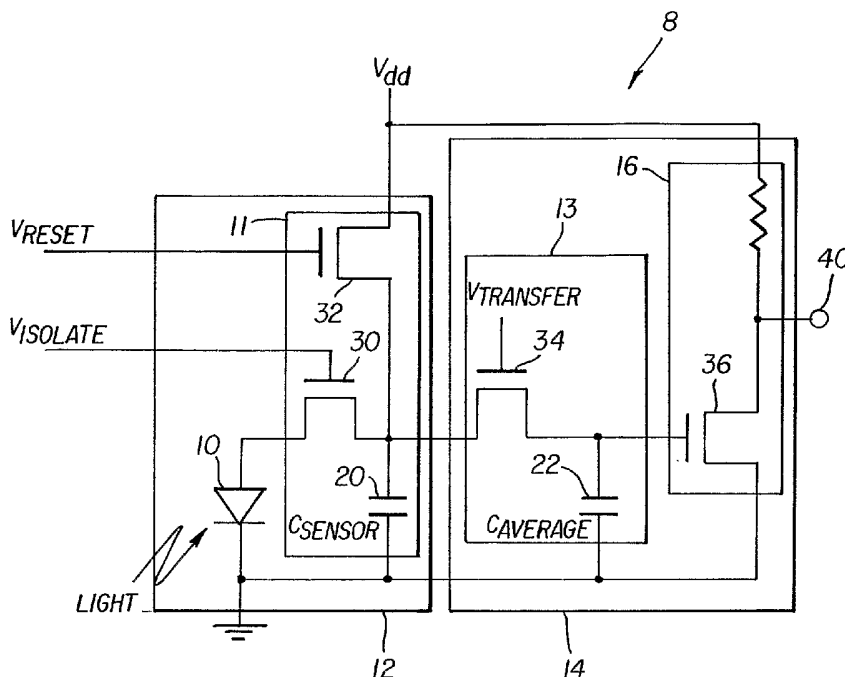

(57) Abstract: A circuit for detecting ambient light on a display includes a light integrating photosensor circuit having a photosensor and being responsive to ambient light for periodically producing successive photo signals representing the intensity of the ambient light; and an averaging circuit for receiving the successive photo signals and producing an average ambient light signal representing a continuous running average of the successive photo signals.

WO 2005/045380 A1

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE,

IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**CIRCUIT DETECTING AMBIENT LIGHT ON A DISPLAY****FIELD OF THE INVENTION**

The present invention relates to photosensor circuits and more particularly to solid state flat panel displays having photosensors for sensing ambient illumination.

**BACKGROUND OF THE INVENTION**

Flat panel displays such as liquid crystal displays (LCDs) or organic light emitting diode (OLED) displays are useful in a wide variety of applications under a wide variety of environmental conditions. When viewed in a dark environment (little ambient radiation), such displays need not be as bright as when viewed in a lighter environment (more ambient radiation). If the display light output is adjusted periodically to compensate for ambient light conditions, the display can maintain a fixed ratio between the ambient and displayed light even if the ambient light changes. This can, in turn, increase display brightness to improve visibility in a bright environment and increase display device lifetime and reduce power usage by reducing unnecessary display brightness in a dark environment.

The use of photosensors with displays to detect ambient light and adjusting the brightness of the display in response to ambient illumination is known. Efficient silicon photosensors are available and generally provide a current proportional to the light incident on the sensor. These photosensors are constructed on silicon substrates. Such sensors can be combined with displays to provide ambient sensing. For example, see JP2002-297096-A, which describes a circuit for providing ambient compensation to an electroluminescent display. However, as implemented, the sensor is separate from the display and senses the light at a single point. This increases the cost, number of components, and size of the device; reduces the sensitivity of the sensor; and does not directly measure the light incident on the display itself.

It is known to integrate a light sensor on an active-matrix display device for the purpose of sensing light emitted from the display device itself. See

for example, US 6,489,631 issued December 3, 2002 to Young et al., which describes a display having integrated photosensors for sensing light emitted by a light emitting element of the display. However, the arrangement of the sensor coupled with a light emitter limits the size of the photosensor and its ability to sense ambient light. Moreover, such photosensors constructed on flat panel displays do not have the efficiency of those constructed on silicon substrates and do not have the sensitivity necessary to provide a signal representative of lower light levels, for example  $< 100 \text{ cd/m}^2$ , where displays are often used. Hence, alternative circuits and designs are necessary.

When providing ambient compensation to a display, it is important that the light sensing device provide a continuously valid output that is always representative of the ambient illumination. If, instead, the output is periodically invalid, any compensation will be periodically incorrect and may cause flicker in the display. Alternatively, additional circuitry must be added to sample and hold the output of the light sensing device. Moreover, it is advantageous to provide a signal output that is representative of the ambient illumination over a range of light levels.

There is a need therefore for an improved photosensor for the detection of ambient light within an active matrix flat panel display.

## SUMMARY OF THE INVENTION

The need is met according to the present invention by providing a circuit for detecting ambient light on a display that includes a light integrating photosensor circuit having a photosensor and being responsive to ambient light for periodically producing successive photo signals representing the intensity of the ambient light; and an averaging circuit for receiving the successive photo signals and producing an average ambient light signal representing a continuous running average of the successive photo signals.

## ADVANTAGES

The advantages of this invention are an improved photosensor circuit for ambient compensation in low light conditions that can be readily integrated within an active matrix flat panel display.

### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic block diagram of a photosensor circuit according to the present invention;

5 Fig. 2 is a schematic circuit diagram of one embodiment of the photosensor circuit of Fig. 1;

Fig. 3 is a timing diagram useful in describing the operation of the circuit of Fig. 2; and

10 Fig. 4 is a schematic diagram of an embodiment of a photosensor circuit and display device according to the present invention.

### DETAILED DESCRIPTION OF THE INVENTION

Referring to Fig. 1, the present invention includes a circuit **8** having a photosensor **10** connected to a detection circuit **11**. The detection circuit **11** and photosensor **10** form a photosensor circuit **12** that is connected to an averaging circuit **14** comprising a storage circuit **13** and an output circuit **16**. The photosensor **10** may be any light-sensitive device suitable for use within a display system. For example, silicon or organic photodiodes or transistors may be employed. These photosensors and circuit elements may be discrete or, preferably, are integrated with a display to provide an integrated solution. When integrated with a display, any portion of, or all of, the circuit **8** may be constructed using thin film transistors and electrical components as are known in the flat panel display art. Display substrates may be made of rigid or flexible glass or plastic.

25 Referring to Fig. 2, a more detailed circuit diagram is shown. The photosensor **10** has two terminals, one of which is connected to a given voltage, for example ground, the other of which is connected to the drain of an isolation transistor **30**. The gate of the isolation transistor **30** is connected to an isolation signal *Visolate* and the transistor source is connected to a capacitor **20** (*Csensor*) for storing a charge representative of the light incident on the photosensor **10**.  
30 The capacitor **20** has one terminal connected to the given voltage terminal of the photosensor **10** and another terminal that is connected to the drain of a reset transistor **32**. The reset transistor **32**, capacitor **20**, and isolation transistor **30**

comprise the detection circuit 11. An external periodic reset signal drives the gate of the reset transistor 32 and the source of the reset transistor 32 is fixed to some known voltage (shown as Vdd) capable of charging the capacitor 20 when the reset signal turns on the reset transistor 32. The detection circuit 11 and the  
5 photosensor 10 form the photosensor circuit 12.

The periodic reset signal will periodically cause the capacitor 20 to charge to a known voltage, specified by Vdd and the reset transistor 32 characteristics. When the reset signal is charging the capacitor 20, the isolation transistor 30 is also turned on, thereby charging the photosensor 10 as well. While  
10 the capacitor 20 and photosensor 10 is charged, the output of the detection circuit is invalid, that is, it is not representative of the light incident on the phototransistor. After the reset signal is turned off, the photosensor 10 and the capacitor 20 are connected in parallel and, as light impinges on the photosensor 10, the capacitor 20 and the photosensor 10 discharge together through the  
15 isolation transistor 30 over time to produce a photo signal representative of the total flux of light incident on the photosensor 10 during an integration period between reset signals. After the integration period, the capacitor 20 and photosensor 10 will have a charge representative of the cumulative light incident on the photosensor during the integration period. The charge is inversely  
20 proportional to the ambient light incident on the photosensor 10, thus if more light is present, the charge will be smaller; if less light is present, the charge will be greater. The integrated light signal is measured because a periodic, integrated light signal collected over time is much more sensitive than a design that simply measures the instantaneous current from a photosensor.

25 The averaging circuit 14 includes a transfer transistor 34 whose gate is connected to a periodic transfer signal. A source of the transfer transistor 34 is connected to the sensor capacitor 20 and receives the photo signal. The drain of the transfer transistor 34 is connected to one terminal of an averaging capacitor 22. The other terminal of the averaging capacitor 22 is connected to the  
30 given voltage (e.g. ground). The transfer transistor 34 and the averaging capacitor 22 comprise a storage circuit 13 for an average photo signal.

At the end of the light integration time period, the isolation transistor **30** is turned off and the transfer transistor is turned on. The charge on the sensor capacitor **20** is then combined with the charge on the averaging capacitor **22** to form a charge representing an average signal. If the capacitors are equal in value, the charge will be the average of the charge on the two capacitors. If not, the average charge will be the ratio of the relative capacitor sizes and charges. When the capacitor charges are redistributed and the voltage across both capacitors is equal, the transfer transistor **34** is turned off and the reset and isolation transistors (**32** and **30**) are turned on and the cycle begins again.

The output circuit **16** includes an output transistor **36** whose gate is connected to the averaging capacitor **22**. The source is connected to a resistive load that is connected to a power signal such as Vdd to form an output signal **40** representative of the ambient illumination incident on the photosensor **10**. The drain can be connected to a given voltage. As configured, the output circuit provides an inverting amplifier whose input is the average signal representing a continuous running average of the successive photo signals and that produces an average ambient light signal output. When the charge stored in the capacitor **22** is large enough to cause the output transistor **36** to turn on, the output signal will be connected to the given voltage. When the charge stored in the capacitor **22** is smaller, the output transistor **36** will have an increasing impedance and the average ambient light signal **40** will increase up to the limit of the power signal, e.g. Vdd.

When the photosensor circuit is first powered up, the ambient light falling on the photosensor **10** is unknown, as is the charge in the capacitors and the value of the output signal. After an initial cycle, the charge in the sensor capacitor **20** will correctly represent the ambient illumination incident on the photosensor **10** and will be transferred to the averaging capacitor **22**. At this point, the voltage across the averaging capacitor **22** will not necessarily be equivalent to the voltage across the sensor capacitor **20** at the end of the light integration cycle but will be closer than before the charge transfer from the sensor capacitor **20**. The voltage across the averaging capacitor **22** will, in fact, represent the average charge in the sensor capacitor **20** and the averaging capacitor **22**

weighted by the relative sizes of the capacitors **20** and **22** and the charge originally stored in them. At each subsequent cycle, the voltage across the averaging capacitor **22** will come closer to the voltage across the sensor capacitor **20** as charge is transferred to or from the averaging capacitor **22**. Eventually, the  
5 voltage across both capacitors will be the same. After each cycle, the averaging capacitor **22** will store the average of the charge in the sensor capacitor **20** and the previous charge in the averaging capacitor **22** (weighted by capacitor size). Thus, the charge in the averaging capacitor **22** represents a continuous running average of the charges stored in successive cycles within the sensor capacitor **20**.

10 If the ambient light on the photosensor **10** changes, the charge in the sensor capacitor **20** will change and the voltage across the averaging capacitor will also change to match. Note that the averaging capacitor **22** does not need an explicit reset or charge deposition into a known state. Instead, the charge on the averaging capacitor **22** gradually assumes the correct value as charge is  
15 transferred from the sensor capacitor **20**. Hence, the output from the output circuit **16** is always valid and gradually assumes the correct value without creating abrupt discontinuous changes. Moreover, the output signal provides a continuous, analog signal that is representative of the ambient illumination over a wide range, limited by the saturation of the sensor capacitor **20** in bright conditions, and by the  
20 minimum output transistor **36** threshold voltage. By modifying the sizes of the capacitors **20** and **22**, the sensitivity range of the circuit to ambient light may be modified and by changing the ratio of the capacitor sizes, the extent of averaging can be controlled.

The timing signals for this circuit are illustrated in Fig. 3, where T  
25 represents the length of time the signals are applied in the states indicated.

The transfer and isolate signals driving the transfer transistor **34** and isolate transistor **30** respectively, are inverses of each other; that is, one signal is the inverse of the other. Therefore, the signals can be derived from a single signal, preferably the isolation signal. An inverse signal is readily created using a  
30 circuit like the output circuit **16** having a transistor whose gate is connected to the signal, drain is connected to a known voltage such as a ground, and whose source is connected through a load to a power signal.



It is also possible to simplify the circuit of Fig. 2 by eliminating the isolation transistor 30 and isolate signal. In this case, while the transfer transistor 34 is on, the sensor capacitor 20 and averaging capacitor 22 will continue to discharge, depending on the ambient light incident on the photosensor 10. Thus, the voltage will vary more and the output will not be as stable.

Alternative photosensor circuits may be employed and are included in the present invention. For example, photo capacitors that charge in the presence of light may be employed to provide a photo signal. In this embodiment, a reset signal must be employed to periodically discharge the photo capacitor. Photo resistors, photodiodes, and phototransistors may also be employed to discharge a sensor capacitor.

The photosensor circuit of Figs. 1 and 2 may be employed in a display system as shown in Fig. 4. Referring to Fig. 4, a substrate 50 has an array of light emitting elements, for example OLEDs, in a display area 52 and a photosensor circuit 8 integrated on the substrate 50. The photosensor circuit 8 provides an output signal 40 to a controller 44. The controller 44 responds to the output signal 40 and an input signal 46 to produce a display signal 42 that drives the display.

The signal from a thin film photosensor 10 is directly related to the area that it covers and the ambient radiation incident upon it. By increasing the area of an integrated photosensor 10, the output signal 40 from the circuit 8 may be increased without significantly increasing the size of the display.

A plurality of photosensors 10 can be electrically connected in common to provide one integrated photo signal or, alternatively, they can be separately addressed or combine their output. A greater number or size of integrated photosensors 10 can increase the signal, thereby improving the responsiveness of the ambient light detection. Moreover, the signal will be more representative of the overall ambient illumination incident on the display since, if a portion of the display is shadowed, having several sensors can provide several signals that can be averaged to produce an overall average of the illumination incident on the display area. Indeed, the location and shape of any shadows falling upon the display area 52 may be determined to a limited extent, thereby

providing further information that can be used to optimize the performance of the display.

The photosensor(s) **10** of the present invention are sensitive to the frequency distribution of the light incident upon the photosensor. This sensitivity  
5 is due to the absorption spectrum of the materials and to the structure of the layers used to construct the photosensor. The frequency sensitivity of the device may be modified by providing color filters between the photosensor and the ambient radiation. Such filters can be used to customize the ambient light response of the photosensor(s) **10**.

10 The present invention may be used in both top and bottom emitting OLED display structures. Thin film structures used for active matrix OLED displays may be employed to form the photosensors **10** and to provide circuitry **11** and **14** to generate and process suitable control signals for the photosensors **10**. The same power and control signal methods may be used to operate the display.  
15 There are also a variety of ways in which the photosensors can be connected that depend on various factors such as the layout of the display and the conductivity of the electrodes and signal lines.

The photosensor elements may be selected individually (as are the display pixel elements) or in groups. Existing address and signal lines may be  
20 used to select or reset elements using existing electronic control methods. Groups of photosensor elements can be joined either physically or logically to provide a measure of incident light over larger areas thus reducing both the specificity of the information and the need for supporting logic and interconnects.

It is also possible to use the present invention to obtain information  
25 concerning the color of the ambient illumination. By utilizing color filters located between the photosensor and the ambient light, the ambient light may be filtered. Color filter deposition techniques are well known in the art and have been publicly demonstrated for displays. If a plurality of photosensors are provided with different filters, the signals from the photosensors can be used to optimize the  
30 display, for example by adjusting the color or white point of the display. In this case only, photosensors with color filters of the same color would be connected in parallel.

The light emitting display may be an organic light emitting diode (OLED) display that includes multiple supporting layers such as light emitting layers, hole injection, hole transport, electron injection, and electron transport layers as is known in the art. The photosensor circuit 8 may be deposited in a common step with active matrix display circuitry and may include identical materials to simplify processing and manufacturing.

Any or all of the photosensor circuit 10, the detector circuit 11, and the averaging circuit 14 can be integrated directly onto the same substrate as the display device or it can be implemented externally to the display. In general, higher performance and greater accuracy can be achieved by integrating the circuitry directly with the display device but this may not be desirable for all display devices.

In a preferred embodiment, the invention is employed in a device that includes Organic Light Emitting Diodes (OLEDs) which are composed of small molecule or polymeric OLEDs as disclosed in but not limited to US 4,769,292, issued September 6, 1988 to Tang et al., and US 5,061,569, issued October 29, 1991 to VanSlyke et al. Many combinations and variations of organic light emitting displays can be used to fabricate such a device.

**PARTS LIST**

8	circuit
10	photosensor
11	detection circuit
12	photosensor circuit
13	storage circuit
14	averaging circuit
16	output circuit
20	capacitor
22	averaging capacitor
30	isolation transistor
32	reset transistor
34	transfer transistor
36	output transistor
40	output signal
42	display signal
44	controller
46	input signal
50	substrate
52	display area

**CLAIMS:**

1. A circuit for detecting ambient light on a display comprising:
  - a) a light integrating photo-sensor circuit having a photosensor and  
5 being responsive to ambient light for periodically producing successive photo signals representing the intensity of the ambient light; and
  - b) an averaging circuit for receiving the successive photo signals and  
producing an average ambient light signal representing a continuous running  
average of the successive photo signals.
- 10 2. The circuit claimed in claim 1, wherein the photosensor is a photodiode.
3. The circuit claimed in claim 1, wherein the photosensor is a photo  
15 capacitor.
4. The circuit claimed in claim 1, wherein the photosensor is a phototransistor.
- 20 5. The circuit claimed in claim 1, wherein the photosensor circuit and the averaging circuit are thin-film devices.
6. The circuit claimed in claim 1, wherein the photosensor is an  
organic photosensor.
- 25 7. The circuit claimed in claim 1, wherein the photosensor is a silicon photosensor.
8. The circuit claimed in claim 1, wherein the photosensor circuit  
30 includes a sensor capacitor, a reset transistor for applying an initial charge to the sensor capacitor, and a photosensor for discharging the sensor capacitor.

9. The circuit claimed in claim 8, further comprising an isolation transistor for connecting the photosensor to the sensor capacitor.

5 10. The circuit claimed in claim 1, wherein the averaging circuit includes an averaging capacitor for storing the average signal and a transfer transistor for periodically combining a photo signal with the average signal.

10 11. The circuit claimed in claim 10, further comprising a transistor output amplifier.

12. The circuit claimed in claim 1, wherein the photosensor circuit and averaging circuit are integrated on a common substrate.

15 13. A display, comprising:  
a) a substrate;  
b) a display area comprising an array of addressable light emitting elements formed on the substrate; and  
c) a circuit for detecting ambient light on a display including  
20 i) a light integrating photosensor circuit having a photosensor and being responsive to ambient light for periodically producing successive photo signals representing the intensity of the ambient light, and  
ii) an averaging circuit for receiving the successive photo signals and producing an average ambient light signal representing a continuous running average of the successive photo signals; and  
25 d) a controller responsive to the average ambient light signal and display control signals to control the display.

30 14. The display claimed in claim 13, wherein the display area is rectangular and the photosensor is located at an edge of the rectangular display area.

15. The display claimed in claim 13, wherein the display area is rectangular and the photosensor is located at a corner of the rectangular display area.

5                   16. The display claimed in claim 13, further comprising a plurality of photosensor circuits.

17. The display claimed in claim 16, wherein the photosensor(s) of the photosensor circuits surround the display area.

10

18. The display claimed in claim 13, further comprising a color filter located over a light receiving surface of the photosensor.

15                   19. The display claimed in claim 13, wherein the light emitting elements, the photosensor, and/or the photosensor circuit are integrated on a common substrate.

20                   20. The display claimed in claim 13, wherein the light emitting elements are OLEDs.

20

21. The display claimed in claim 13, wherein the circuit for detecting ambient light is formed on the substrate.

25                   22. The display claimed in claim 13, wherein the photosensor is formed on the substrate.

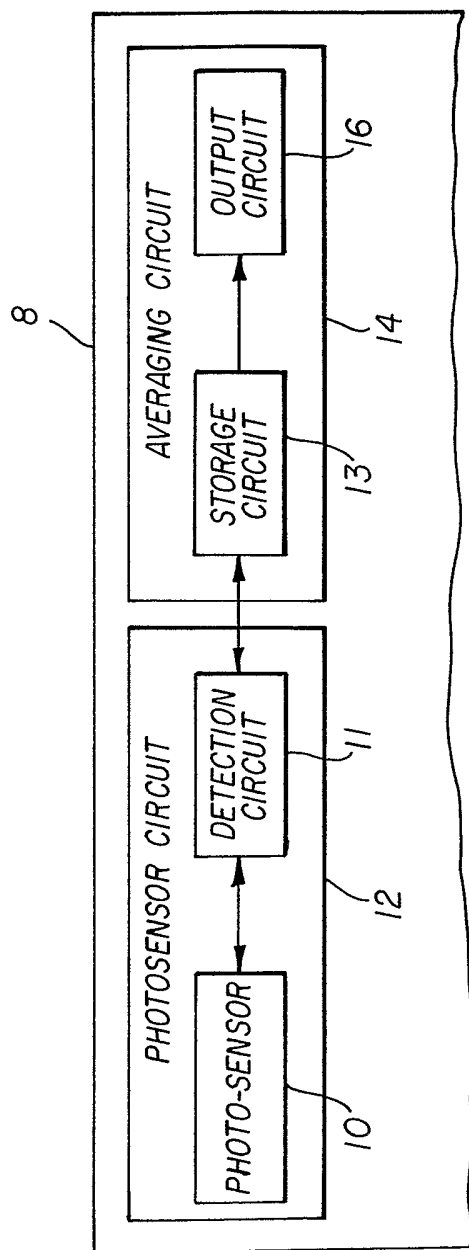


FIG. 1



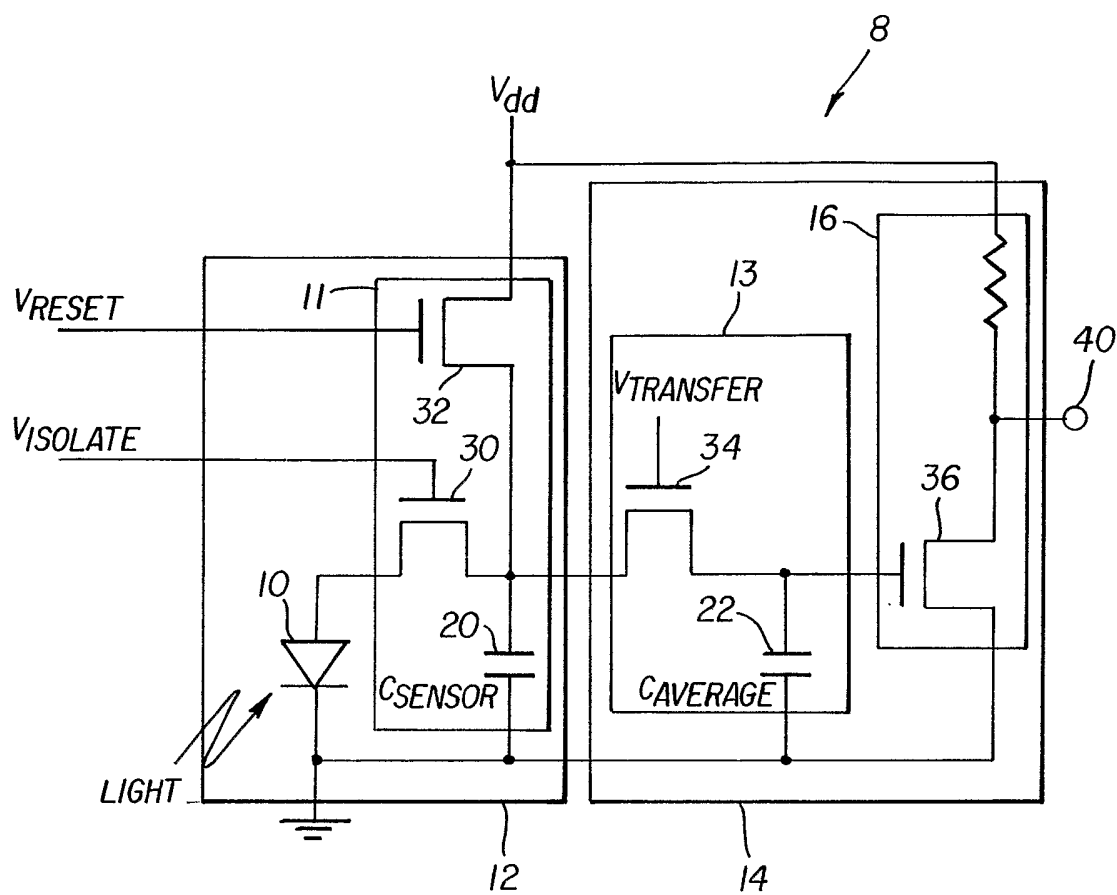


FIG. 2

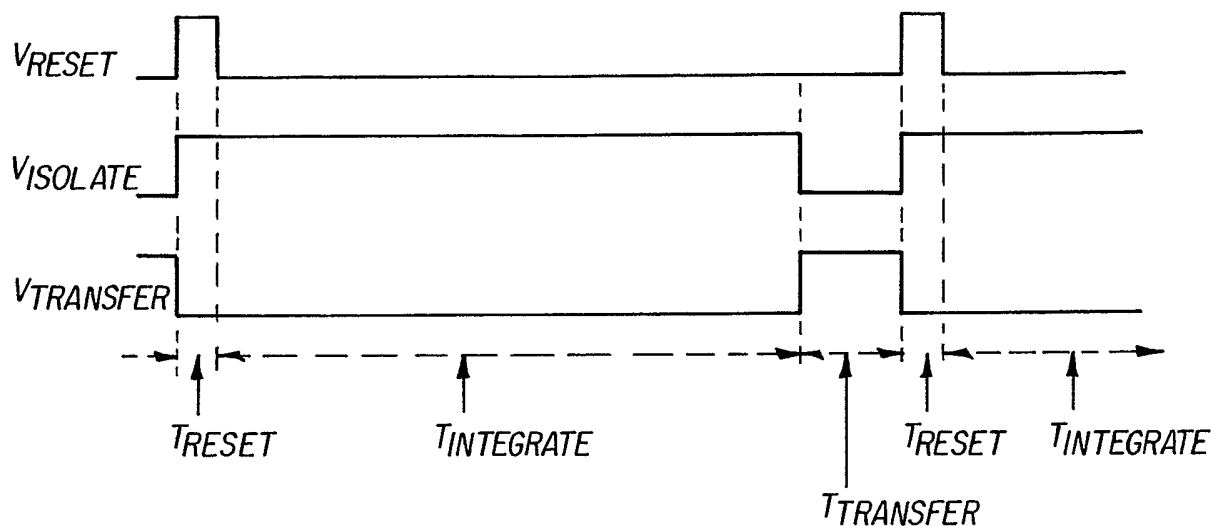


FIG. 3

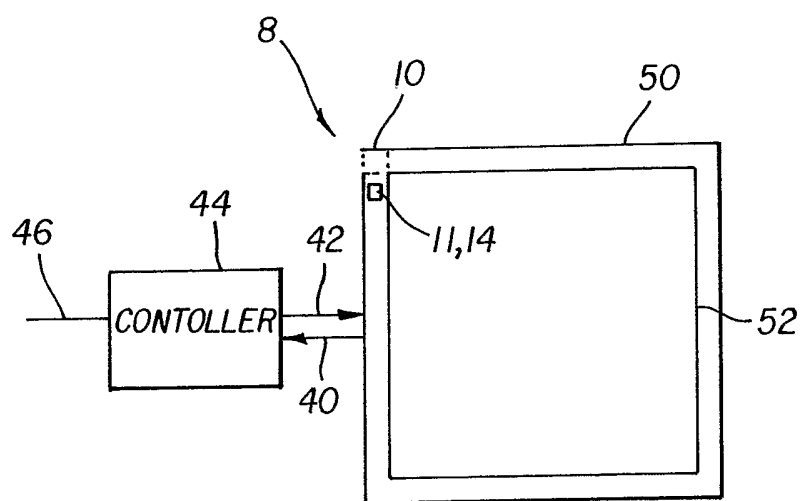


FIG. 4

# INTERNATIONAL SEARCH REPORT

National Application No  
Γ/US2004/035422

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 G01J/46 G02F1/133

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G01J G02F H01L H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 491 330 A (SATO ET AL) 13 February 1996 (1996-02-13) abstract column 8, line 52 - column 10, line 24 column 15, line 5 - column 18, line 3 figures 1,7,11	1-7, 10-12
Y	-----	13-22
X	US 2002/181112 A1 (BECHTEL JON H ET AL) 5 December 2002 (2002-12-05) abstract paragraphs '0095! - '0104! figure 11	1-9,12
X	DE 24 46 610 A1 (SIEMENS AG) 1 April 1976 (1976-04-01) page 6 figure 1	1-9
	----- -/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

17 March 2005

Date of mailing of the international search report

31/03/2005

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Haller, M

## INTERNATIONAL SEARCH REPORT

 International Application No  
 /US2004/035422

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 01, 28 February 1995 (1995-02-28) -& JP 06 282231 A (SANYO ELECTRIC CO LTD), 7 October 1994 (1994-10-07) abstract paragraphs '0003! - '0007!, '0014!, '0015!, '0020! figures 1-3	1-7, 13-18
Y	----- PATENT ABSTRACTS OF JAPAN vol. 2002, no. 07, 3 July 2002 (2002-07-03) -& JP 2002 072920 A (SHARP CORP), 12 March 2002 (2002-03-12) abstract paragraphs '0009! - '0013!, '0019! - '0034! figures 1-4	13-22
A	----- PATENT ABSTRACTS OF JAPAN vol. 2003, no. 05, 12 May 2003 (2003-05-12) & JP 2003 029710 A (NIPPON SEIKI CO LTD), 31 January 2003 (2003-01-31) cited in the application abstract	6,20
A	----- US 2001/052597 A1 (YOUNG NIGEL D ET AL) 20 December 2001 (2001-12-20) cited in the application abstract paragraphs '0019! - '0026! figure 2 -----	6,19-22

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

:T/US2004/035422

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5491330	A	13-02-1996 JP 3144736 B2	12-03-2001
		JP 7055555 A	03-03-1995
		GB 2280953 A ,B	15-02-1995
US 2002181112	A1	05-12-2002 US 6402328 B1	11-06-2002
		US 2004218277 A1	04-11-2004
		AU 2628800 A	07-08-2000
		CA 2356992 A1	27-07-2000
		EP 1147031 A1	24-10-2001
		JP 2003524545 T	19-08-2003
		WO 0043236 A1	27-07-2000
		US 2002093741 A1	18-07-2002
		US 6379013 B1	30-04-2002
		US 2005002103 A1	06-01-2005
		US 2002056806 A1	16-05-2002
		US 2004130789 A1	08-07-2004
		DE 2446610	A1
JP 06282231	A	07-10-1994	JP 3101466 B2 23-10-2000
JP 2002072920	A	12-03-2002	NONE
JP 2003029710	A	31-01-2003	NONE
US 2001052597	A1	20-12-2001 WO 0199191 A1	27-12-2001
		EP 1222691 A1	17-07-2002
		JP 2003536115 T	02-12-2003