

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number
WO 2004/066437 A1

(51) International Patent Classification⁷: **H01Q 5/00**, 1/36

Jaume [ES/ES]; P. Blasco Ibáñez N° 15 2°, 12500 VINARÓS (Castelló) (ES).

(21) International Application Number:

PCT/EP2003/000757

(74) Agent: **CARPINTERO LÓPEZ, Francisco**; Herrero & Asociados, S.L., Alcalá, 35, 28014 Madrid (ES).

(22) International Filing Date: 24 January 2003 (24.01.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicants (for all designated States except US): **FRAC-TUS, S.A.** [ES/ES]; Alcalde Barnils, s/n, Edificio Testa - Módulo C, Parque Empresarial Sant Joan Despí, 08190 Sant Cugat del Valles (Barcelona) (ES). **PUENTE BALIARDA, Carles** [ES/ES]; c/ Londres, 57 4° 2ª, 08036 Barcelona (ES). **BORJA BORAU, Carmen** [ES/ES]; Tvra. de Dalt, 67, 08024 Barcelona (ES).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,

[Continued on next page]

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ANGUERA PROS,**

(54) Title: BROADSIDE HIGH-DIRECTIVITY MICROSTRIP PATCH ANTENNAS

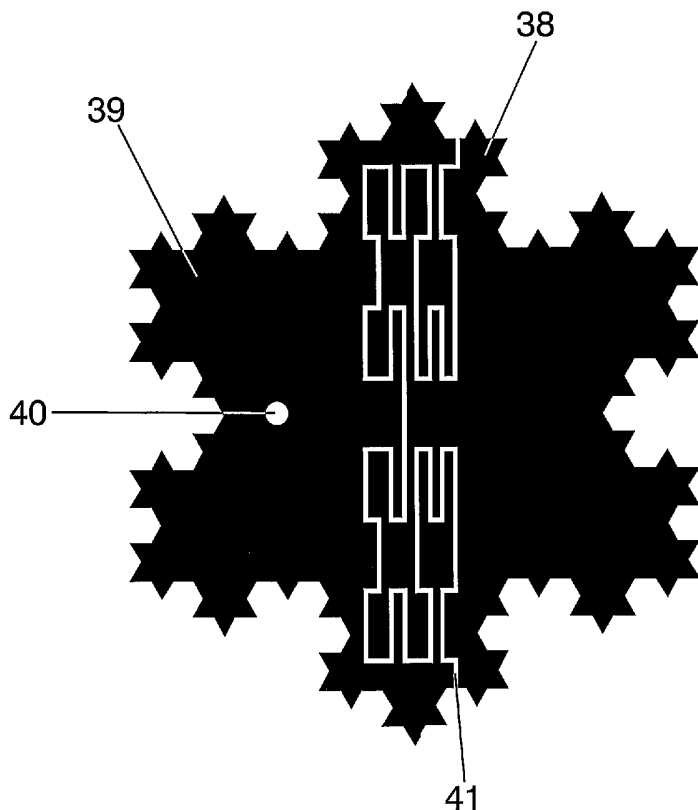

(57) Abstract: High-directivity microstrip antennas comprising a driven patch and at least one parasitic element placed on the same plane, operate at a frequency larger than the fundamental mode of the driven patch in order to obtain a resonant frequency with a high-directivity broadside radiation pattern. The driven patch, the parasitic elements and the gaps between them may be shaped as multilevel and/or Space Filling geometries. The gap defined between the driven and parasitic patches according to the invention is used to control the resonant frequency where the high-directivity behaviour is obtained. The invention provides that with one single element is possible to obtain the same directivity than an array of microstrip antennas operating at the fundamental mode.

WO 2004/066437 A1



SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

BROADSIDE HIGH-DIRECTIVITY MICROSTRIP PATCH ANTENNAS

5 **OBJECT OF THE INVENTION**

The present invention refers to high-directivity microstrip antennas having a broadside radiation pattern using electromagnetically coupled elements. A broadside radiation pattern is defined in the present invention as a
10 radiation pattern having the maximum radiation in the direction perpendicular to the patch surface.

The advantage of an antenna having a broadside radiation pattern with a larger directivity than that of the fundamental mode, is that with one single
15 element is possible to obtain the same directivity than an array of microstrip antennas operating at the fundamental mode, being the fundamental mode the mode that presents the lowest resonant frequency, but there is no need to employ a feeding network. With the proposed microstrip antenna, there are no losses due to the feeding network and therefore a higher gain can be obtained.

20

BACKGROUND OF THE INVENTION

The conventional mechanism to increase directivity of a single radiator is to array several elements (antenna array) or increase its effective area. This
25 last solution is relative easily for aperture antennas such as horns and parabolic reflectors for instance. However, for microstrip antennas, the effective area is directly related to the resonant frequency, i.e., if the effective area is changed, the resonant frequency of the fundamental mode also changes. Thus, to increase directivity for microstrip antennas, a microstrip array has to be used.
30 The problem of a microstrip array is that is necessary to feed a large number of

elements using a feeding network. Such feeding network adds complexity and losses causing a low antenna efficiency.

5 As a consequence, is highly desirable for practical applications to obtain a high-directivity antenna with a single fed antenna element. This is one of the purposes of the present invention.

10 Several approaches can be found in the prior art, as for example a microstrip Yagi-array antenna [J. Huang, A. Densmore, "Microstrip Yagi Array Antenna for Mobile Satellite Vehicle Application", IEEE Transactions on Antennas and Propagation, vol.39, n°7, July 1991]. This antenna follows the concept of Yagi-Uda antenna where directivity of a single antenna (a dipole in the classical Yagi-Uda array) can be increased by adding several parasitic elements called director and reflectors. This concept has been applied for a mobile satellite application. By choosing properly the element spacing (around 15 $0.35\lambda_0$ being λ_0 the free-space wavelength), directivity can be improved.

20 However, this solution presents a significant drawback: if a substrate with a low dielectric constant is used in order to obtain large bandwidth, the patch size is larger than the above mentioned element spacing of around $0.35\lambda_0$: the required distance can not longer be held. On the other hand, if a substrate with a high dielectric constant is used in order to reduce antenna size, the patch size is small and the coupling between elements will be insufficient for the Yagi effect function. In conclusions, although may be a good practical 25 solution for certain applications, it presents a limited design freedom.

30 Another known technique to improve directivity is to use several parasitic elements arranged on the same plane than the feed element (hereafter, the driven patch). This solution is specially suitable for broadband bandwidth. However, the radiation pattern changes across the band [G. Kumar, K. Gupta,

“Non-radiating Edges and Four Edges Gap-Coupled Multiple Resonator Broad-Band Microstrip Antennas”, IEEE Transactions on Antennas and Propagation, vol.33, n°2, Feb.1985].

5 A similar solution than the prior one, uses several parasitic elements on different layers [P. Lafleur, D. Roscoe, J.S. Wight, “Multiple Parasitic Coupling to an Outer Antenna Patch Element from Inner Patch Elements”, US Patent Application 09/217,903]. The main practical problem of this solution is that several layers are needed yielding a mechanical complex structure.

10

 A novel approach to obtain high-directivity microstrip antennas employs the concept of fractal geometry [C. Borja, G. Font, S. Blanch, J. Romeu, “High directivity fractal boundary microstrip patch antenna”, IEE Electronic Letters, vol.26, n°9, pp.778-779, 2000], [J. Anguera, C. Puente, C. Borja, R. Montero, 15 J. Soler, “Small and High Directivity Bowtie Patch Antenna based on the Sierpinski Fractal”, Microwave and Optical Technology Letters, vol.31, n°3, pp.239-241, Nov 2001]. Such fractal-shaped microstrip patches present resonant modes called fracton and fractinos featuring high-directivity broadside radiation patterns. A very interesting feature of these antennas is that for certain 20 geometries, the antenna presents multiple high-directivity broadside radiation patterns due to the existence of several fracton modes [G. Montesinos, J. Anguera, C. Puente, C. Borja, “The Sierpinski fractal bowtie patch: a multifractal-mode antenna”. IEEE Antennas and Propagation Society International Symposium, vol.4, San Antonio, USA June 2002]. However, the 25 disadvantage of this solution is that the resonant frequency where the directivity performance is achieved can no be controlled unless one changes the patch size dimensions.

 Some interesting prior art antennas geometries, such as those based on 30 space-filling and multilevel ones, are described in the PCT applications

["Multilevel Antennae", publication number: WO0122528.], and ["Space-Filling Miniature Antennas", publication number: WO0154225].

5 A multilevel structure for an antenna device, as it is known in the prior art, consists of a conducting structure including a set of polygons, all of said polygons featuring the same number of sides, wherein said polygons are electromagnetically coupled either by means of a capacitive coupling or ohmic contact, wherein the contact region between directly connected polygons is narrower than 50% of the perimeter of said polygons in at least 75% of said
10 polygons defining said conducting multilevel structure. In this definition of multilevel structures, circles, and ellipses are included as well, since they can be understood as polygons with a very large (ideally infinite) number of sides. An antenna is said to be a multilevel antenna, when at least a portion of the antenna is shaped as a multilevel structure.

15 A space-filling curve for a space-filling antenna, as it is known in the prior art, is composed by at least ten segments which are connected in such a way that each segment forms an angle with their neighbours, i.e., no pair of adjacent segments define a larger straight segment, and wherein the curve can
20 be optionally periodic along a fixed straight direction of space if and only if the period is defined by a non-periodic curve composed by at least ten connected segments and no pair of said adjacent and connected segments define a straight longer segment. Also, whatever the design of such SFC is, it can never intersect with itself at any point except the initial and final point (that is, the
25 whole curve can be arranged as a closed curve or loop, but none of the parts of the curve can become a closed loop).

SUMMARY OF THE INVENTION

The present invention relates to broadside high-directivity microstrip patch antennas comprising one driven patch and at least one coupled parasitic patch (the basic structure), placed on the same layer and operating at a frequency larger than the fundamental mode. The fundamental mode being understood in the present invention, as the mode that presents the lowest resonant frequency.

One aspect of the present invention is to properly couple one or more parasitic microstrip patch elements to the driven patch, to increase the directivity of the single driven element .

Although the scheme of Fig.2 is geometrically similar to other electromagnetically coupled schemes, specially those for broadband bandwidth, the difference here is that the antenna is operating at a higher mode, i.e., the resonant frequency is larger than the resonant frequency on the fundamental mode. Another difference with those structures of the prior art operating at the fundamental mode, is that in prior-art structures the gap between the driven and parasitic patches is adjusted to enlarge bandwidth; however, in the present invention the gap is not used for that purpose, but to control the resonant frequency where the high-directivity behaviour is obtained. In other words, for conventional electromagnetic schemes like that presented in Fig.2, the gap is designed to maximize impedance bandwidth. For the present invention, given a driven and parasitic patch sizes, the shape and dimensions of the gap between them can be chosen to control the resonant frequency where the high-directivity behaviour is obtained.

Fig.1 shows a driven and a parasitic patch where the gap between them is defined by a space-filling curve. Comparing the structure of Fig.1 and Fig.2, resonant frequencies associated with the high-directivity broadside radiation

pattern is different. To add more freedom design, several electromagnetic coupled parasitic patches may be added to the driven element.

5 A particular embodiment of the basic structure of the invention based on a driven element and at least a parasitic patch, may be defined according to a further aspect of the invention to obtain a multifunction antenna. A multifunction antenna is defined here as an antenna that presents, a miniature feature at one frequency and a high-directivity radiation pattern at another frequency. For a multifunction antenna, the driven and parasitic patches are in contact using a short transmission line. .This particular scheme is useful because it is possible to obtain a resonant frequency much lower than the fundamental mode of the driven element and maintain a resonant frequency with a high-directivity broadside radiation pattern.

10 A multifunction antenna is interesting for a dual band operation. For example, the first band is operating at GPS band where a miniature antenna is desired to minimize space; for the second band a high-directivity application may be required such an Earth-artificial satellite communication link.

15 Patch geometries may be any of the well-known geometries as squares, rectangles, circles, triangles, etc. However, other geometries such as those based on space-filling and multilevel ones can be used as well. These geometries are described in the PCT publications WO0122528 "Multilevel Antennae", and WO0154225 "Space-Filling Miniature Antennas".

20 Some advantages of the present invention in comparison to the prior art are: it is mechanically simple because either the driven and the parasitic patches are placed on the same layer; the cost of the antenna is obviously related to the mechanical conception which it is simple; the operating frequency is not only controlled by the patch dimensions, as it is the case of

25

30

the prior art solution, in the present invention is also controlled by the coupling between the driven and parasitic patches.

For example, for the prior-art multifraction-mode antenna, the patch electrical size where the high-directivity occurs is discrete; in the present invention, the gap configuration, between the driven and parasitic patches, is chosen to obtain a high-directivity broadside radiation pattern for a specified patch electrical size.

BRIEF DESCRIPTION OF THE DRAWINGS

To complete the description and with the object of assisting in a better understanding of the present invention and as an integral part of said description, the same is accompanied by a set of drawings wherein, by way of illustration and not restrictively, the following has been represented:

Figure 1.- Shows a perspective view of a driven and a parasitic patch separated by a gap. Both patches are placed on the same plane defined by a substrate above a groundplane. A coaxial probe feed is used to feed the driven patch. The gap is defined by a space-filling curve.

Figure 2.- Shows a top plan view of a prior art structure formed by a driven and a parasitic patch where the gap is defined by a straight line. For the present invention this scheme differs from prior art, because the operating frequency is different than the frequency of the fundamental mode, that is, the operating frequency is larger than 20% of the fundamental mode of the driven patch.

Figure 3.- Shows a similar embodiment than Fig.2 but in this case square-shaped patches are used and four parasitic elements are coupled to

the central driven element by straight gap. This structure is different from prior art structures because the gap between patches is designed to obtain a resonant frequency with a high-directivity broadside radiation pattern. The operating frequency is more than 20% than that of the fundamental mode, that is, the operating wavelength is 20% smaller than λ_0 (free-space operating wavelength).

Figure 4.- Shows a similar embodiment than Fig.3 but only two parasitic elements are used.

Figure 5.- Shows a similar embodiment than Fig. 2 but in this case a space-filling gap is used to couple the parasitic patch to the driven one.

Figure 6.-Shows a similar embodiment than Fig. 5 but two parasitic patches are coupled to the driven patch.

Figure 7.- Shows a multifunction patch acting as a miniature and as high-directivity antenna. In this embodiment, all the surface presents continuity to the feed line.

Figure 8.- Shows a similar embodiment than Fig. 2 but in this case the perimeter of the driven and parasitic patches are defined by a space-filling curve based on the Koch fractal. Both patches are separated by a straight gap.

Figure 9.- Shows a similar embodiment than Fig.8 but in this case the driven and parasitic patches are multilevel geometries based on the Sierpinski bowtie.

Figure 10.- Shows a similar embodiment than Fig. 8 but in this case the gap between the driven and parasitic patches is defined by a space-filling curve based on the Hilbert fractal.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig.1 shows a preferred embodiment of the high-directivity antenna formed by a driven patch (1) and a parasitic patch (2) placed on the same substrate (3) above a groundplane (6). The said driven patch (1) and parasitic patch (2) can be printed over a dielectric substrate (3) or can be conformed through a laser process. Any of the well-known printed circuit fabrication techniques can be applied to pattern patch surface over the dielectric substrate (3). Said dielectric substrate (3) can be for instance a glass-fibre board, a teflon based substrate (such as Cuclad[®]) or other standard radiofrequency and microwave substrates (as for instance Rogers 4003[®] or Kapton[®]).

The dielectric substrate (3) can even be a portion of a window glass of a motor vehicle if the antenna is to be mounted in a motor vehicle such as a car, a train or an airplane, to transmit or receive radio, TV, cellular telephone (GSM 900, GSM 1800, UMTS) or other communication services of electromagnetic waves. Of course, a matching network can be connected or integrated at the input terminals (not shown) of the driven patch (1). The antenna mechanism described in the present invention may be useful for example for a Mobile Communication Base Station antenna where instead of using an array of antennas a single element may be used instead. This is an enormous advantage because there is no need to use a feeding network to feed the elements of the array. This results in a lesser complex antenna, less volume, less cost and more antenna gain. Another application may be used as a basic radiating element for an undersampled array, as the one described in the

20

25

application PCT/EP02/0783 "Undersampled Microstrip Array Using Multilevel and Space-Filling Shaped Elements".

5 The feeding scheme for said driven patch can be taken to be any of the well-known schemes used in prior art patch antennas, for instance: in figure 1 a coaxial cable (43) with the outer conductor connected to the ground-plane (6) and the inner conductor connected to the driven patch (1) at the desired input resistance point (4). Of course the typical modifications including a capacitive gap on the patch around the coaxial connecting point (4) or a capacitive plate connected to the inner conductor of the coaxial placed at a distance parallel to the patch, and so on can be used as well. It could also consists of a microstrip transmission line sharing the same ground-plane as the driven patch antenna with the strip capacitively coupled to the driven patch and located at a distance below the said driven patch, or in another embodiment with the strip placed below the ground-plane and coupled to the driven patch through an slot, and even a microstrip transmission line with the strip co-planar to the driven patch. All these mechanisms are well known from prior art and do not constitute an essential part of the present invention.

20 One of the main aspects of the present invention is to properly design the gap between patches to work in a high-frequency resonant frequency mode to obtain a high-directivity broadside radiation pattern. In Fig.1 the gap (5) between the driven patch (1) and the parasitic patch (2) is defined by a space-filling curve based on the Hilbert fractal curve. Fig.6 follows the same concept but in this case, two parasitic microstrip patches (24,25) are coupled to the driven patch (23) respectively through gaps (44) and (27). Gap or gaps can be placed anywhere on the patch surface, not necessary in the middle, that is the dimension of the driven and parasitic patches may be different . Moreover, the curve that is defining the gap or gaps between patches may present

asymmetries with respect to a horizontal or vertical axis, in order to add more design freedom.

Fig.2 shows another preferred embodiment where in this case the gap (8) between driven patch (7) and parasitic patch (9) is defined by a straight line in order to reduce the coupling between said two patches. This is useful for frequency allocation of the resonant frequency where the high-directivity occurs. A feeding point (10) can be observed on the driven patch (7).

In an embodiment of the scheme of Fig.2, the gap (8) between patches (7) and (9) was adjusted to be 0.1mm where a high-directivity behaviour occurs around 11GHz. The fundamental mode of the driven patch of Fig.2 is around 4GHz for a given patch size where it is clear that 11GHz is a higher frequency mode. A prior-art scheme would operate at such frequency rather than 11GHz and to achieve a broadband behaviour for standing wave ratios (SWR) lower than, the gap would be larger than 0.1mm; otherwise the coupling between patches would be so tight that no broadband behaviour would be observed. To obtain a broadband behaviour for such case, gap between patches is around 0.5mm (obviously these values are particular ones)

Fig.3 represent the same scheme than Fig.2 but in this case several parasitic patches (11) are coupled to the driven patch (12) in order to obtain more bandwidth and directivity. For Fig.3, two feeding probes (13) are used to excite two orthogonal higher-resonant frequencies with the said high-directivity broadside radiation pattern.

In the embodiments of figure 2 and 3, the operating frequency is larger than 20% of the fundamental mode of the driven patch.

Fig.4 represent the same scheme than Fig.2 but in this case two parasitic patches (16) and (17) are coupled to the driven patch (15) through gaps (18).

5 In the embodiment of figure 5, the driven patch (19) and the parasitic patch (20) are coupled through the gap (22) shaped as a Space-Filling curve. The feeding point (21) is properly placed on the driven patch (19).

10 In figure 6, two parasitic patches (24) and (25) are coupled respectively through gaps (44) and (27) to a central driven patch (23) which is fed in the point (26).

15 Fig.7 shows another preferred embodiment for multifunction purposes, in which the driven patch (28) and parasitic patch (29) are in direct contact by means of a short transmission line (42). This is advantageous because permits to obtain one resonant frequency much lower than the fundamental mode of the driven patch with broadside radiation pattern and on the other hand, another resonant frequency with high-directivity features. In the embodiment of fig.7, the transmission line (42) lies across the gap between the driven and parasitic patch (28,29), so that the gap is interrupted and two gaps (43' and 43'') are formed.

25 Space-filling or multilevel geometries may be used to design at least a part of the driven and parasitic patches. Fig.8 shows another preferred embodiment where a space-filling geometry based on Koch fractal is used to define the perimeter of driven patch (32) and the parasitic patch (31). Both patches (32) and (31) are separated by a straight gap (30). This embodiment is meant to improve the high-directivity features of the present invention. A feeding point (33) can be observed in the driven patch (32).

30

Fig.9 represents another preferred embodiment where a multilevel geometry based on the Sierpinski bowties is used to shape the driven patch (34) and the parasitic patch (36). A straight gap (35) is defined between the driven and parasitic patches (34,36).

5

The gaps between driven and parasitic patches may be also defined by space-filling curves. For instance, in fig 10 the gap (41) between the driven patch (39) and the parasitic patch (38) is based on the Hilbert fractal.

10

It is to be understood that even though various embodiments and advantages of the present invention have been described in the foregoing description, the above disclosure is illustrative only, and changes may be made in details, yet remain within the spirit and scope of the present invention, which is to be limited only by the appended claims.

15

CLAIMS

5 1^a.- A high-directivity microstrip patch antenna comprising a driven patch and at least one parasitic patch coupled to said driven patch by means of a gap, the driven and parasitic patches being placed on the same plane defined by a dielectric substrate, **characterized** in that the resonant frequency of the antenna is larger than the frequency of the fundamental mode, said resonant frequency being determined by the shape and dimensions of said gap for a given patch sizes, the antenna having a high-directivity radiation pattern at said resonant frequency.

10

15 2^a.- An antenna according to claim 1 characterized in that the resonant frequency of the antenna is at least 20% larger than the frequency of the fundamental mode.

3^a.- An antenna according to claims 1 and 2 characterized in that the gap between the driven patch and parasitic patch or patches is defined by a space-filling curve.

20 4^a.- An antenna according to claim 1 and 2 characterized in that the gap between the driven patch and parasitic patch or patches is a straight line.

25 5^a.- An antenna according to any of the preceding claims characterized in that at least a part of the driven patch and at least a part of the parasitic patch or patches are defined by a space-filling curve or a multilevel structure.

30 6^a.- An antenna according to any of the preceding claims characterized in that the driven patch and the parasitic patch or patches are connected by a coplanar transmission line across the gap in between, the antenna having a first resonant frequency which is lower than the

fundamental mode of the driven element, and a second resonant frequency higher than said fundamental mode where the high-directivity occurs, the antenna therefore having a dual band operation.

5 7^a.- An antenna according to any of the preceding claims characterized in that it comprises one driven patch and four parasitic patches, the driven patch having four sides and each one of the parasitic patches being coupled by a gap to one of the sides of the driven patch.

10 8^a.- An antenna according to any of the claims 1 to 6 characterized in that it comprises one driven patch and a parasitic patch, the perimeter of said driven and parasitic patch being defined by the Koch fractal.

15 9^a.- An antenna according any of to the claims 1 to 6 characterized in that it comprises one driven patch and a parasitic patch, wherein the driven and parasitic patch are multilevel geometries based on the Sierpinski bowtie.

20 10^a.- An antenna according to any of the claims 1 to 3 and 5 to 9 characterized in that the gap between the driven and parasitic or parasitics patches is defined by a space-filling curve based on the Hilbert fractal.

25

30

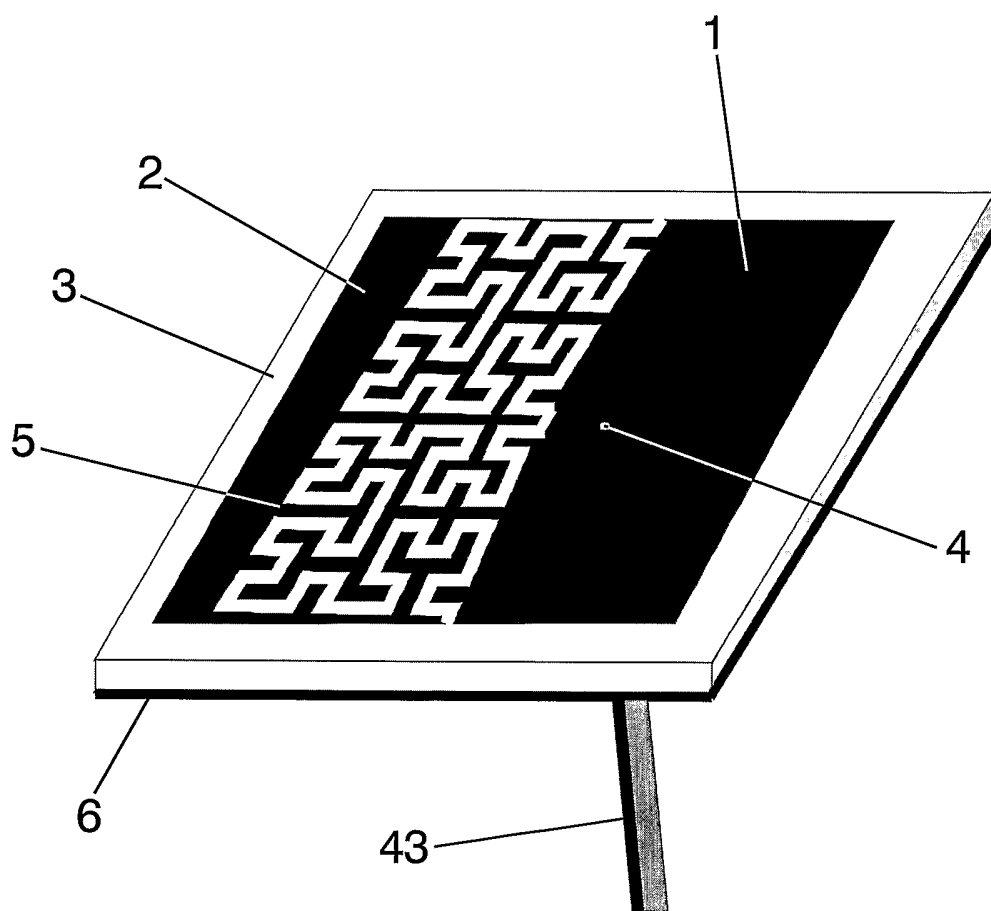


FIG.1

2/10

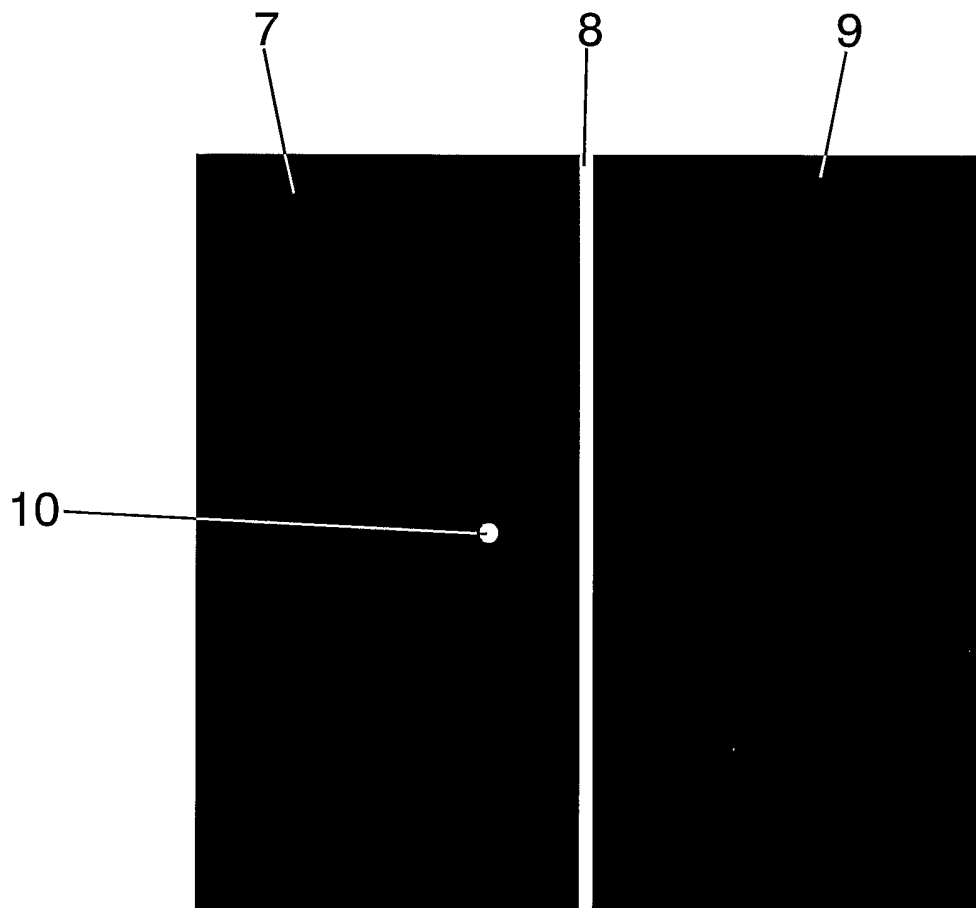


FIG.2

3/10

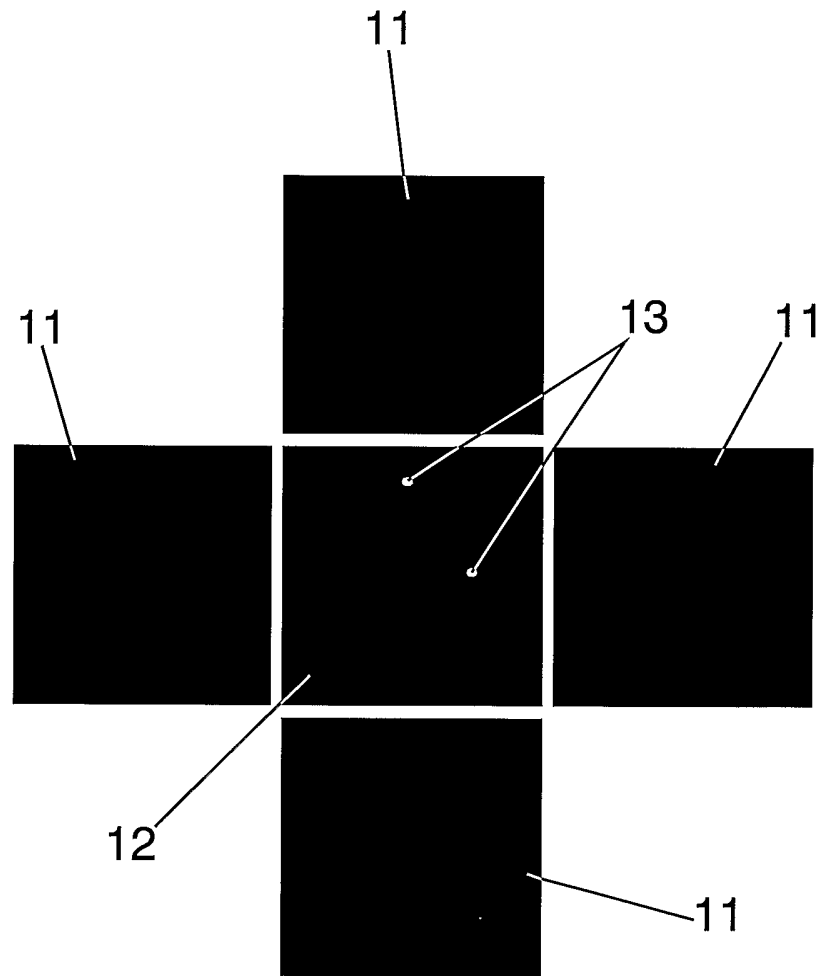


FIG.3

4/10

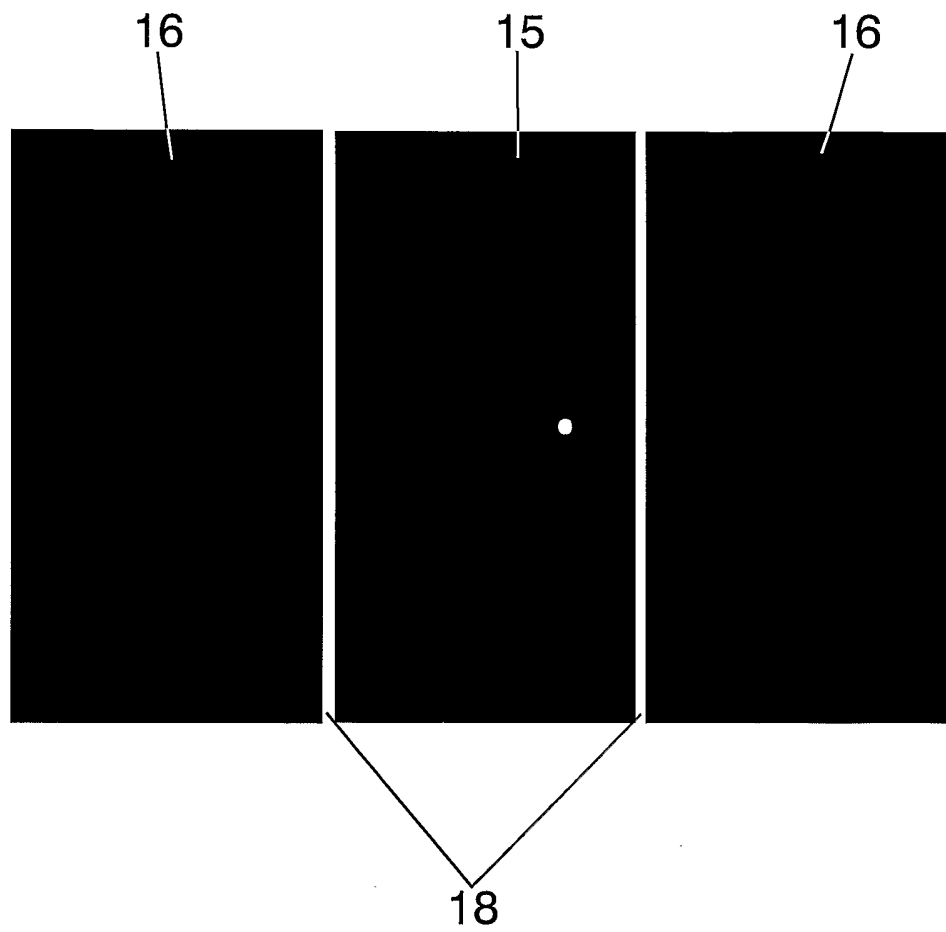


FIG.4

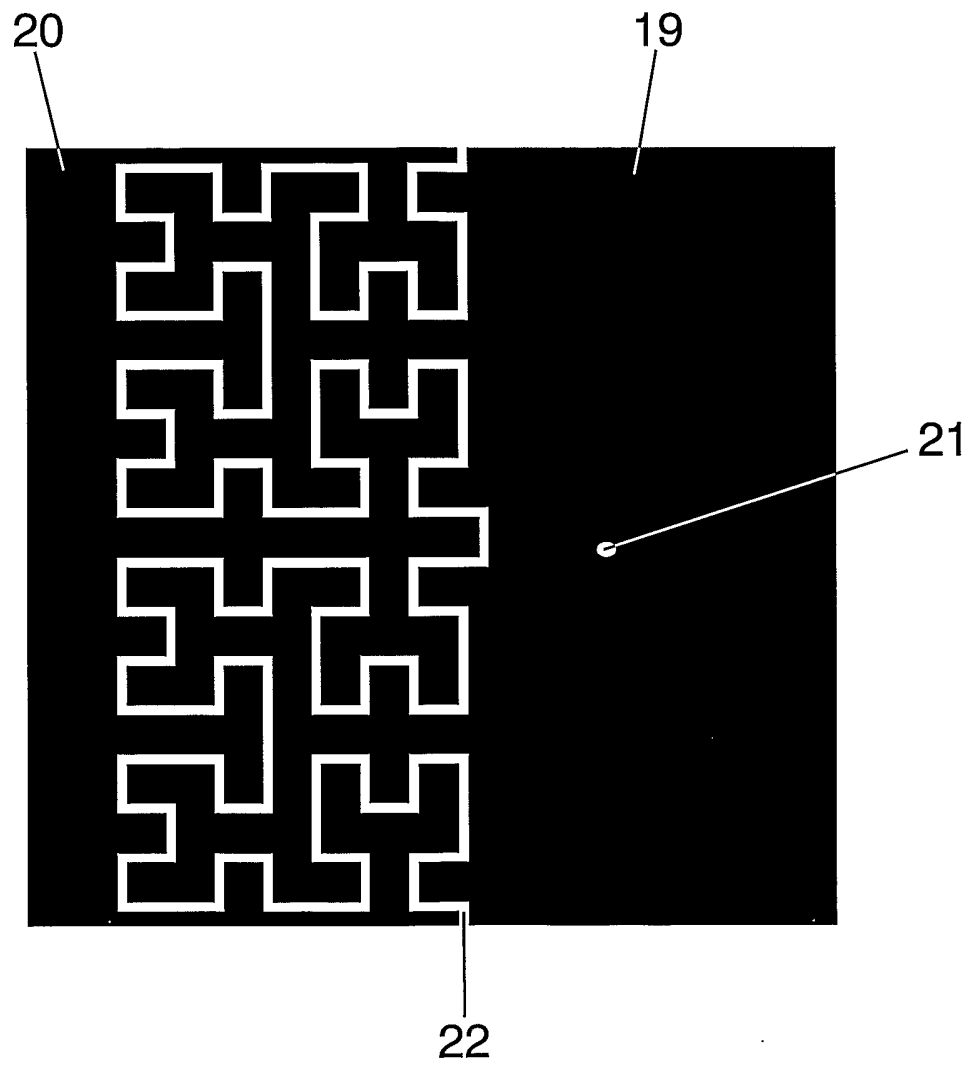


FIG.5

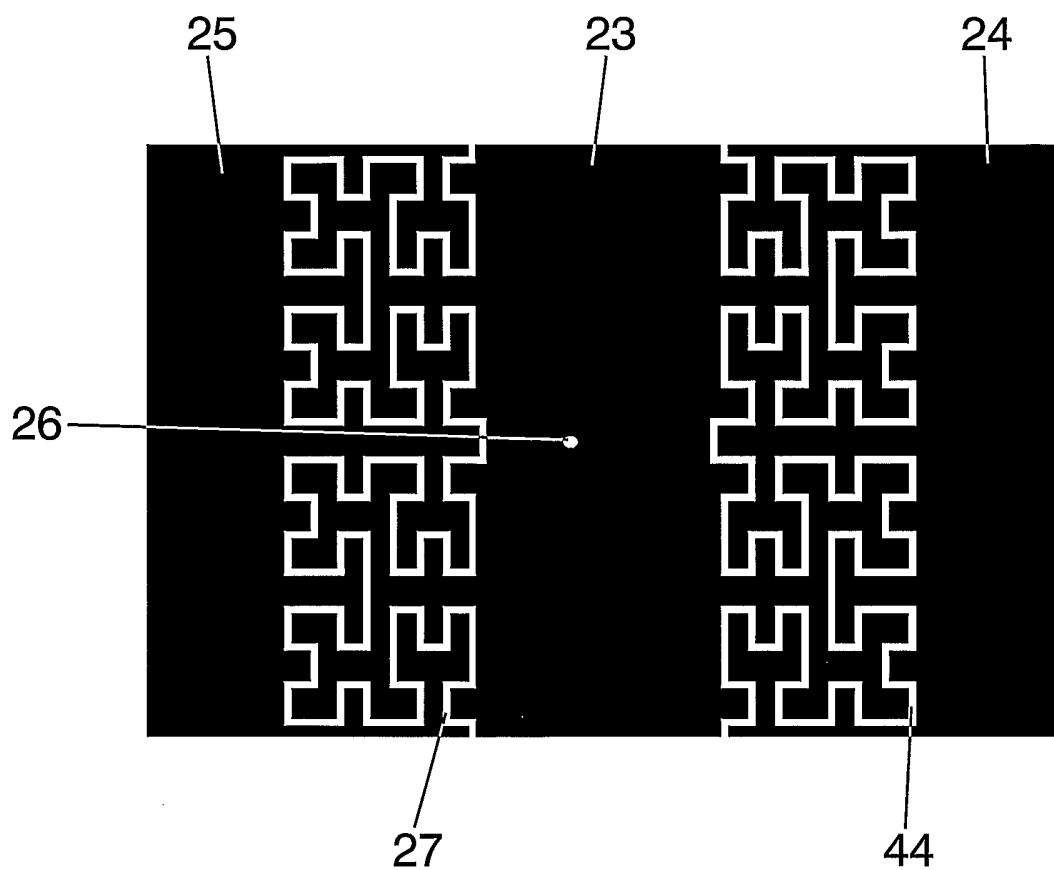


FIG. 6

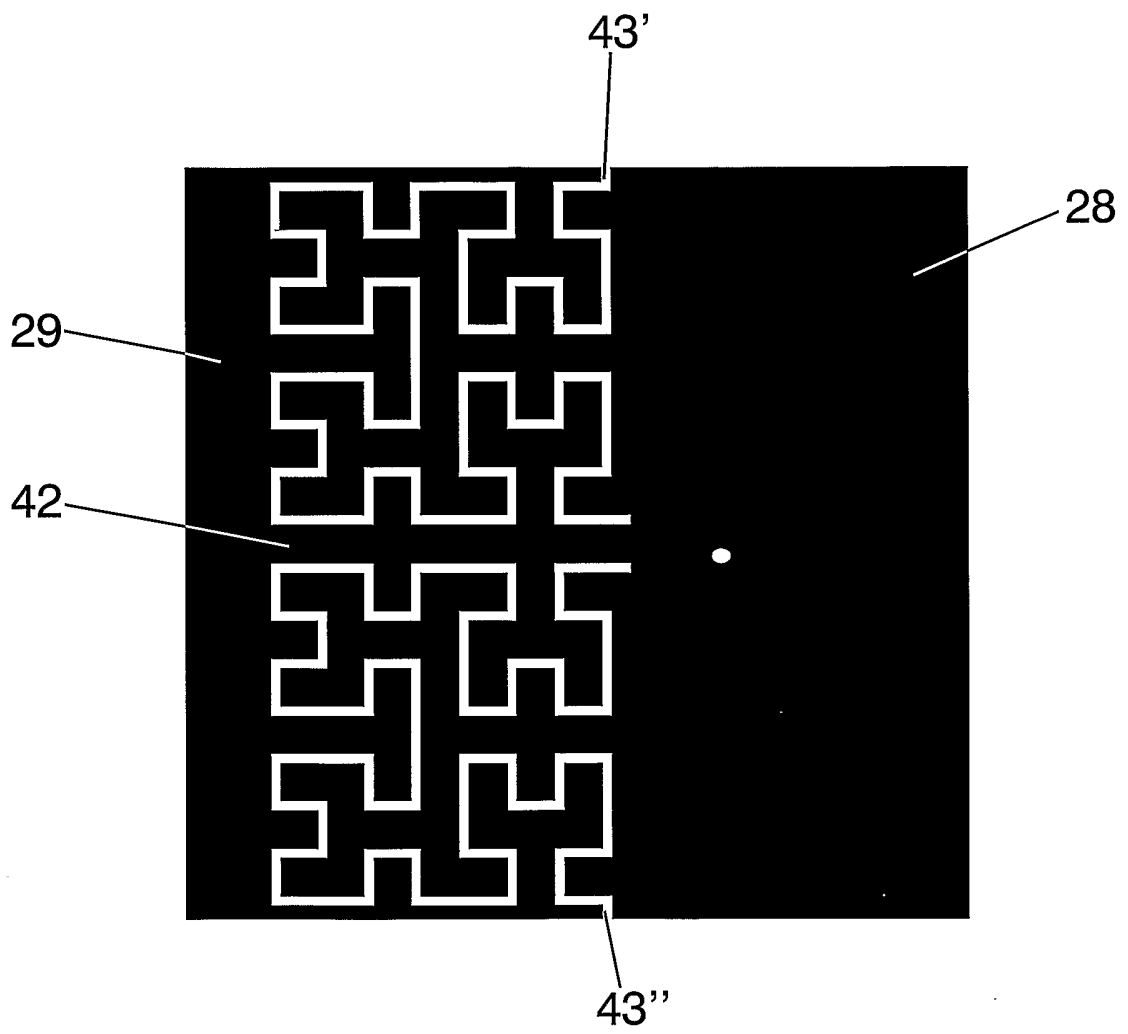


FIG.7

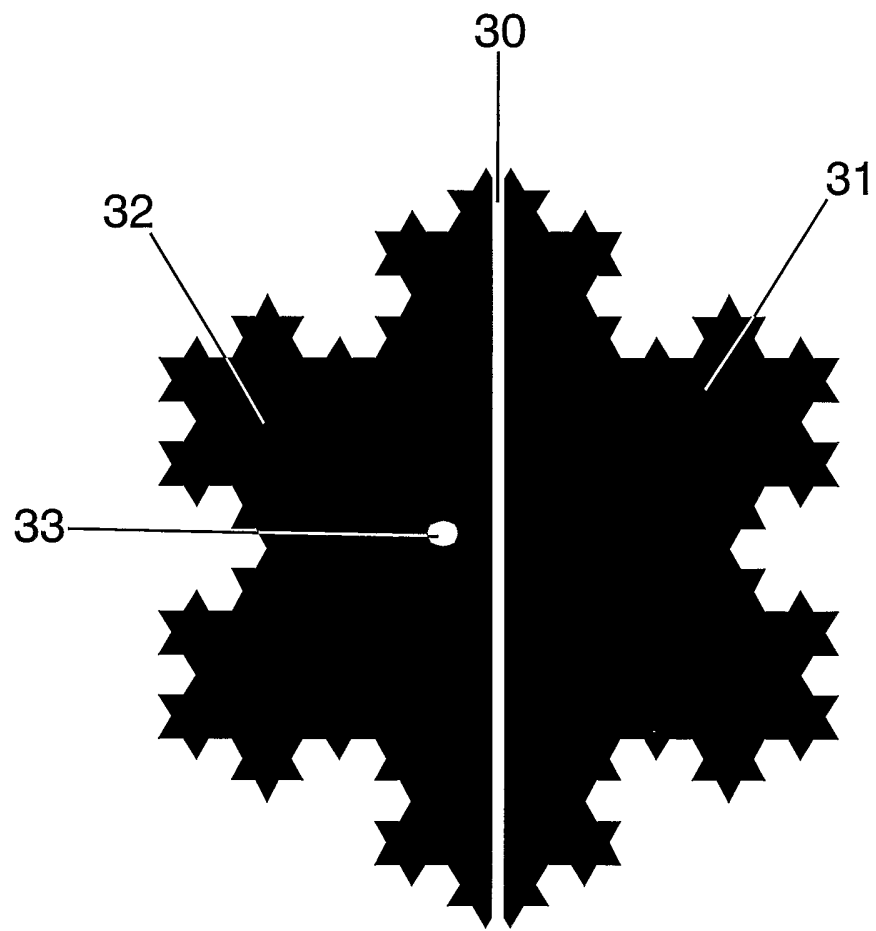


FIG. 8

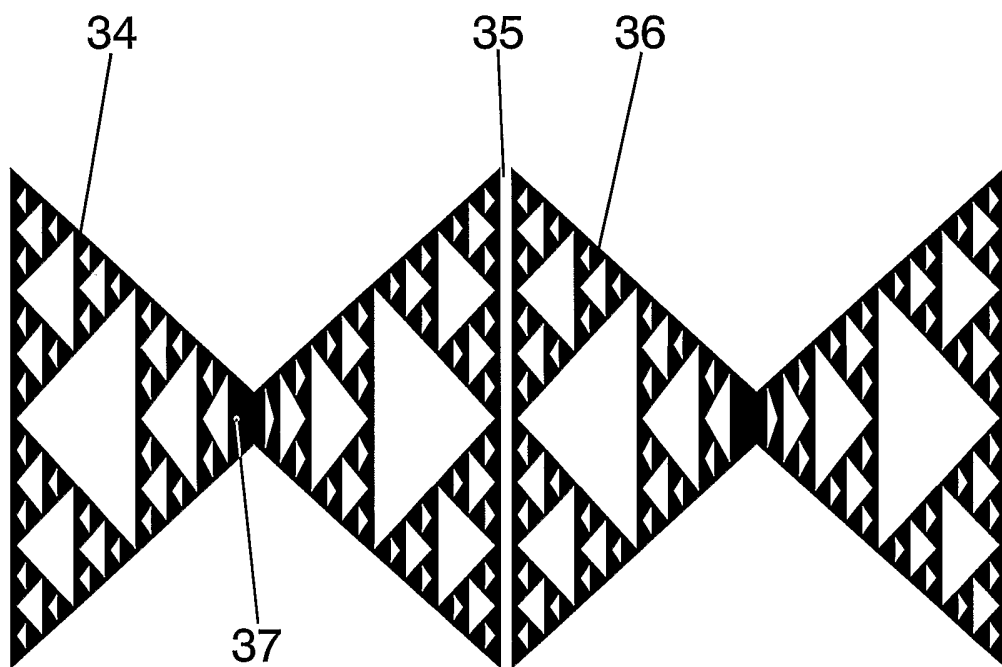


FIG.9

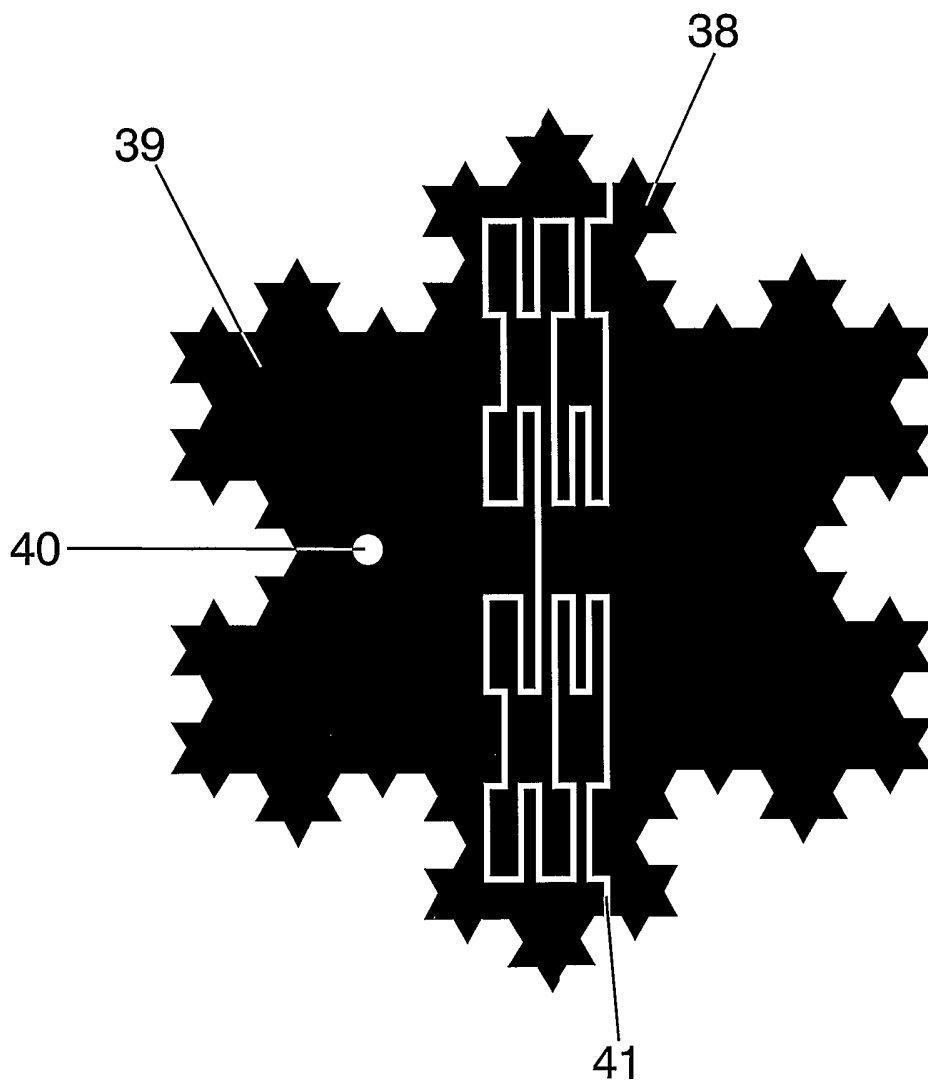


FIG.10

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/00757

| A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H01Q5/00 H01Q1/36 | | |
|--|--|--|
| According to International Patent Classification (IPC) or to both national classification and IPC | | |
| B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H01Q | | |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched | | |
| Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX, IBM-TDB | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category ° | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| X | HARA PRASAD R V ET AL: "MICROSTRIP FRACTAL PATCH ANTENNA FOR MULTI-BAND COMMUNICATION" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 36, no. 14, 6 July 2000 (2000-07-06), pages 1179-1180, XP001101868 ISSN: 0013-5194 | 1-7 |
| Y | page 1179, left-hand column, line 25-29; figure 1 page 1180, left-hand column; table 2 --- -/-- | 8-10 |
| <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. | | |
| ° Special categories of cited documents : | | |
| *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family | | |
| Date of the actual completion of the international search 11 November 2003 | | Date of mailing of the international search report 15/01/2004 |
| Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016 | | Authorized officer Cordeiro, J-P |

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/00757

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category ° | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| Y | <p>BORJA C ET AL: "High directivity fractal boundary microstrip patch antenna" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 36, no. 9, 27 April 2000 (2000-04-27), pages 778-779, XP006015180 ISSN: 0013-5194 abstract; figures 1,3 page 778, left-hand column, line 19-42 -----</p> | 8-10 |
| A | <p>WO 99 33143 A (UNITED KINGDOM GOVERNMENT ;WIGHT JAMES S (CA); ROSCOE DAVID (CA);) 1 July 1999 (1999-07-01) abstract; figures 1-3 page 5, line 23 -page 6, line 21 -----</p> | 5 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/00757

| Patent document cited in search report | | Publication date | Patent family member(s) | | Publication date |
|--|---|------------------|-------------------------|-------------|------------------|
| WO 9933143 | A | 01-07-1999 | AT | 236463 T | 15-04-2003 |
| | | | AU | 1746499 A | 12-07-1999 |
| | | | CA | 2316288 A1 | 01-07-1999 |
| | | | WO | 9933143 A1 | 01-07-1999 |
| | | | DE | 69813035 D1 | 08-05-2003 |
| | | | EP | 1070366 A1 | 24-01-2001 |
| | | | US | 6133882 A | 17-10-2000 |
