



## COMMERCIAL SOFFIT PANEL

### 3/8" SOFFIT PANEL SYSTEM

The Englert E-375 Soffit Panel, in solid or perforated, offers aesthetic, functionality, and ease of installation. The positive lock between the two panels insures a snug and sure lock between the panels as well as a concealed fastener.


### SYSTEM APPLICATIONS

- Residential or commercial use
- Standard boxed lengths 12'-0"
- Applied over light gauge metal or wood framing

### SUBSTRATES

- .032" aluminum, bone white
- 24 gauge steel available, solid only\*
- .032" aluminum, Englert standard colors\*

\*Minimum quantity requirement

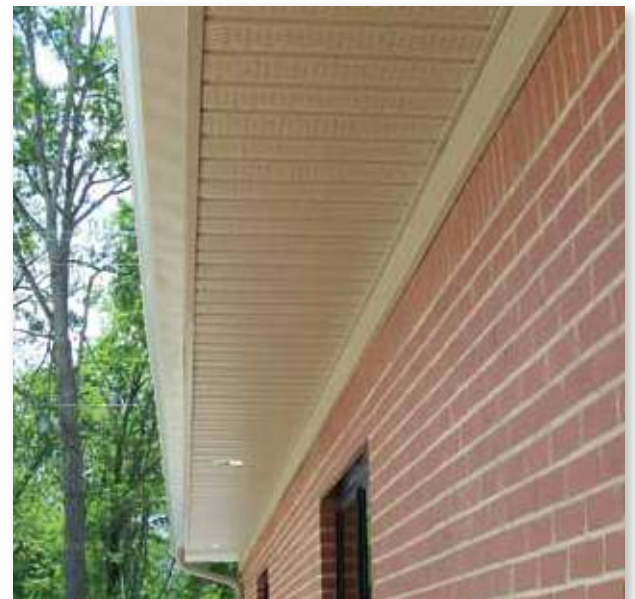



### FINISHES

Englert's Series E-375 Soffit Panel is stocked in bone white, Kynar 500®/ULTRA-Cool™ - Low Gloss Finish, along with matching J trims.

Englert can match the color of virtually any material – including brick, wood and fabric. Minimum quantities would be required on anything other than white.

### SYSTEM WARRANTY


- Non- pro-rated Kynar 500®/ULTRA-Cool™ - Low Gloss Finish warranty, see Englert for samples.

### VENTED PANELS

Englert Series E-375 Soffit Panels will provide a net free ventilation area (NFVA) of 6.528 square inches per square foot.



E-375 3/8" Soffit Panel

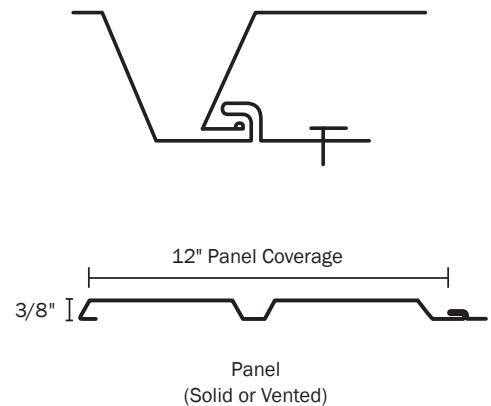

Distributed by:

Kynar 500® is a registered trademark of Atochem. N.A.  
ULTRA-Cool™ is a trademark of BASF.

Copyright ©2011 Englert Inc. All rights reserved.

90110Z