



**Apple Watch Series 8 (GPS)**

**Apple Watch Series 8 (GPS + Cellular)**

## **Apple Recycler Guide**

April 2023

# Contents

- 3 [About This Guide](#)
- 4 [Identification](#)
- 5 [Directive 2012/19/EU Annex VII Components](#)
- 6 [Safety Considerations](#)
- 9 [Recommended Tools](#)
- 10 [Disassembly Instructions](#)
- 19 [Material Categorization of Output Fractions](#)

# About This Guide

Apple Recycler Guides provide guidance for electronics recyclers on how to disassemble products to maximize recovery of resources. The guides provide step-by-step disassembly instructions and information on the material composition to help recyclers direct fractions to the appropriate material recycler.

To conserve important resources, we work to reduce the materials we use and aim to one day source only recycled or renewable materials in our products. A key path to reaching that goal is resource recovery from end-of-life electronics.

Disassembly procedures are intended to be performed only by trained electronics recycling professionals. The recycler is responsible for independently evaluating and ensuring compliance with all applicable environmental, health, and safety laws related to the work. These include but are not limited to laws relating to the management, handling, shipping, and disposal of the outputs of this work as waste and laws in place to ensure the health and safety of all employees who support this work.

For questions or feedback about this guide, email [contactesci@apple.com](mailto:contactesci@apple.com).

**Note:** The enclosures for the Apple Watch Series 8 models in this guide may be aluminum or stainless steel. This guide was created using the Apple Watch with an aluminum enclosure, but the procedures are the same for each model and enclosure material.

# Identification

You can find the model number in the band slot of the Apple Watch.



*Model numbers:*  
A2770, A2771, A2772, A2773, A2774, A2775, A2857, A2858

If the band is attached, press and hold the band release button, then slide the band across to remove it.



# Directive 2012/19/EU Annex VII Components

Directive 2012/19/EU Annex VII requirements apply to the following substances and components.

<b>Substance/Component</b>	<b>Apple Part Name</b>	<b>Removal Instructions</b>
Printed circuit board if the surface is greater than 10 square centimeters	Display logic board, main logic board	Follow steps 1–8
External electric cables	Magnetic charging cable	Follow step 1
Battery	Lithium-ion polymer battery	Follow steps 1–4
Cover glass and organic light-emitting diode (OLED) display if the surface is greater than 100 square centimeters	OLED display	Follow steps 1–3
No further substances or components as listed in Annex VII		

# Safety Considerations

The recycler is responsible for independently evaluating all activities undertaken by its employees to perform or support the work and ensuring compliance with all applicable health and safety laws related to the work. These include but are not limited to laws relating to the health and safety of all employees who perform or support this work. The recycler is also responsible for evaluating the workspace and ensuring that the area in which the work is to be undertaken is designed using ergonomic best practices and meets all ergonomic requirements to ensure the protection of its employees.

## Personal Protective Equipment

Personal protective equipment should be worn during the entire recycling process.



Wear hand protection



Wear foot protection



Wear eye protection



Wear a mask



Wear protective clothing

## Battery Safety

This product uses a lithium-ion polymer battery. Before beginning any disassembly work, ensure that a safe working procedure for handling lithium-ion batteries has been established, which could include discharging the batteries so that they can be more safely managed. The following considerations may also be included:

- Remove anything from your person that could conduct energy, such as jewelry and watches, to avoid electric shock to yourself or the logic board.
- To avoid the potential for thermal runaway and the release of potentially noxious fumes, don't puncture, strike, or crush lithium-ion polymer batteries or devices powered by them.
- Don't throw, drop, or bend the battery.
- Don't expose the battery to excessive heat or sunlight.
- Don't use tools that are sharp or conduct electricity.
- Keep your workspace clear of foreign objects and sharp materials.
- Dispose of batteries according to local environmental laws and guidelines.

## Workspace safety guidelines

- Use heat-resistant gloves and safety glasses.
- Keep a sand dispenser within arm's reach (2 feet or 0.6 m) on one side of the workstation, not above the workstation. The dispenser should be a wide-mouthed, quick-pour metal container with a flip-top lid or tray that contains 8–10 cups (1.9–2.4 L) of clean, dry, untreated sand.
- Keep the battery at least 2 feet (0.6 m) from paper and other combustible materials.
- Work in an area with adequate ventilation.

## Handling a thermal runaway

If you notice any of the following signs, a thermal runaway is likely underway, and you should act immediately:

- The lithium-ion polymer battery or a device containing one begins to smoke or emit sparks or soot.
- The battery pouch suddenly and quickly puffs out.
- You hear hissing or popping sounds.

**Don't** use water or an ABC/CO<sub>2</sub> fire extinguisher on a thermal runaway battery or a device containing one. Water and ABC/CO<sub>2</sub> fire extinguishers will not stop the reaction.

**Do** smother the battery or device immediately with plenty of clean, dry sand, dumped all at once. Timing is critical; the faster you pour all the sand, the faster the thermal runaway will stop.

**Do** leave the room for 30 minutes if the thermal runaway causes any irritation.

**Do** wait 30 minutes before touching the battery. Wear heat-resistant gloves and safety glasses to remove the battery from the sand, or use a touchless thermometer to measure the battery temperature. Only touch the battery when the event has finished.

**Do** dispose of the damaged battery or device (including any debris removed from the sand) according to local environmental laws and guidelines.

## OLED Safety

Broken OLEDs must be handled properly to ensure the safety of your employees and mitigate any hazards. Package broken OLEDs in an appropriate container to properly manage the hazards associated with the materials and store only with compatible materials. All waste must be properly classified, packaged, and labeled in accordance with all relevant laws and regulations.

## Hazard Warnings



Broken glass hazard



Rechargeable battery hazard




Chemical inhalation hazard




# Recommended Tools


Miniature plastic pry bar




Miniature pry bar



Phillips screwdriver





Precision slotted screwdriver



# Disassembly Instructions

## 1. Remove the magnetic charging cable.

- » *Ensure that the Apple Watch is turned off.*
- » *Disconnect the magnetic charging cable.*

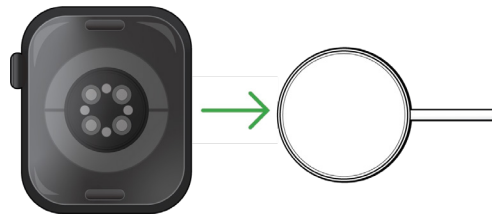

## 2. Remove the display.




Broken glass hazard




Chemical inhalation hazard

### Tools Used




- » *Hold the Apple Watch at the edge of a counter with the display facing up.*
- » *Insert the tool tip between the display and the enclosure. Push the handle down to pry the display off the enclosure.*

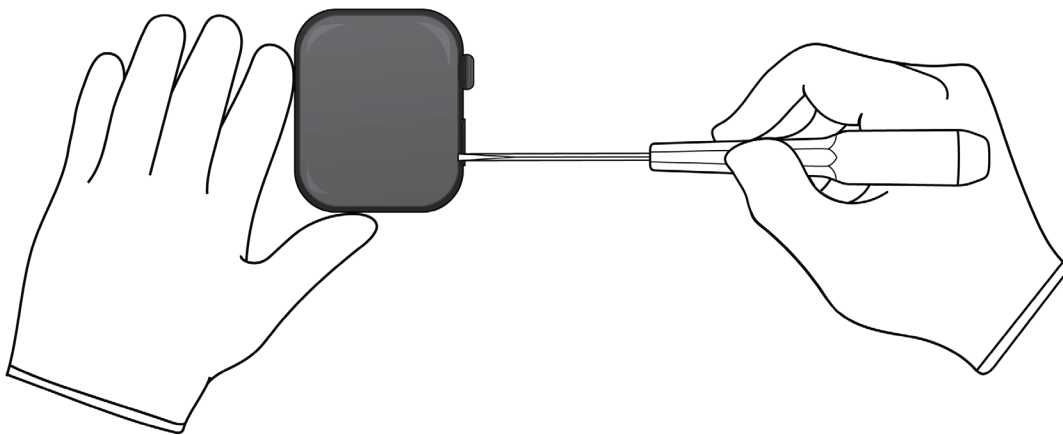


- » *Remove the display by hand. Set the enclosure aside.*

### 3. Remove the display logic board.


- » *Lay the display facedown.*
- » *Pry off the display logic board.*

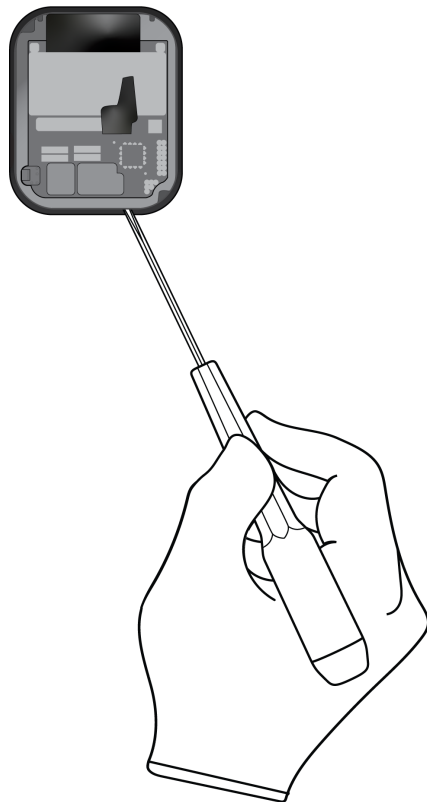

#### Tools Used



#### Fraction



*Display logic board*

**PMs**  
Precious Metals


#### Fraction




*OLED display*

**GL**  
Glass

4. From the enclosure, carefully remove the lithium-ion polymer battery.

 Rechargeable battery hazard

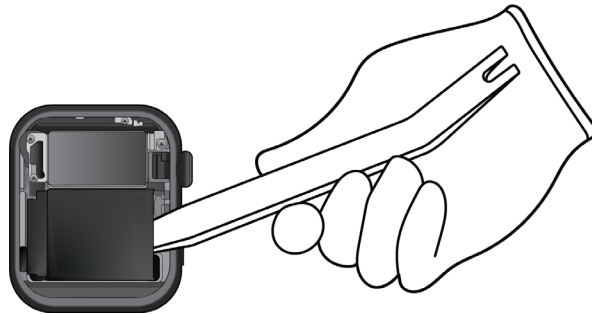

Tools Used




Fraction




Lithium-ion polymer battery

**BT**  
Battery


5. Pry off the Taptic Engine.

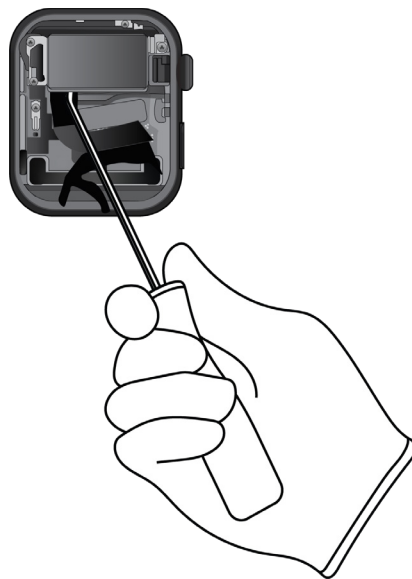

Tools Used




Fraction



Taptic Engine

**REE**  
Rare Earth Elements

6. Pry off the speaker.

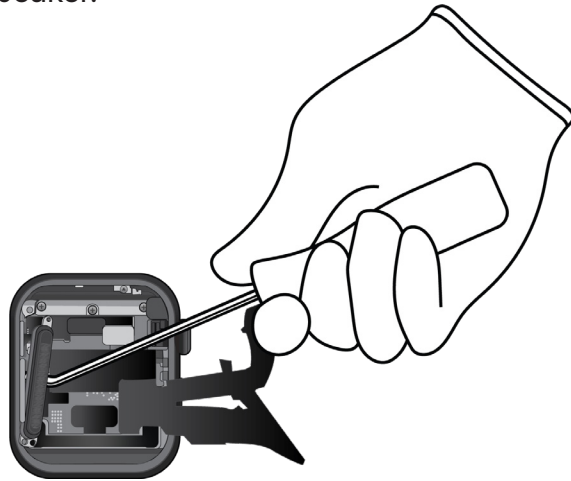

Tools Used




Fraction




Speaker

REE  
Rare Earth  
Elements

7. Remove the main logic board brackets by unscrewing the six Phillips fasteners.

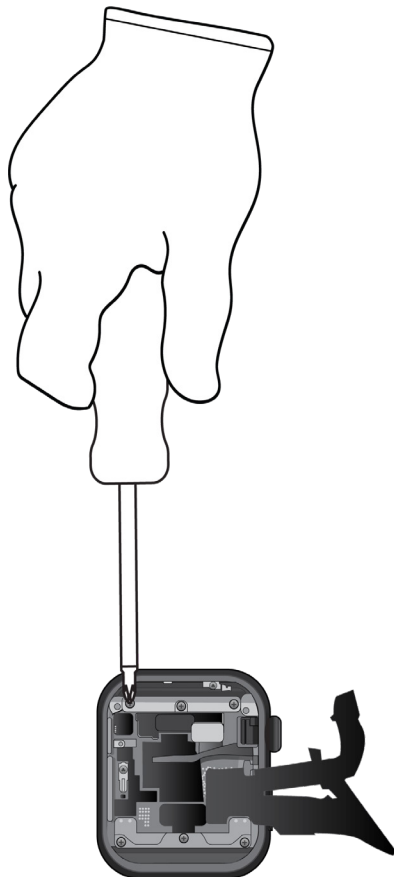

Tools Used




Fraction



Fasteners (x6)

Fe  
Ferrous


Fraction



Main logic board  
brackets

Fe  
Ferrous

8. Pry off the main logic board.

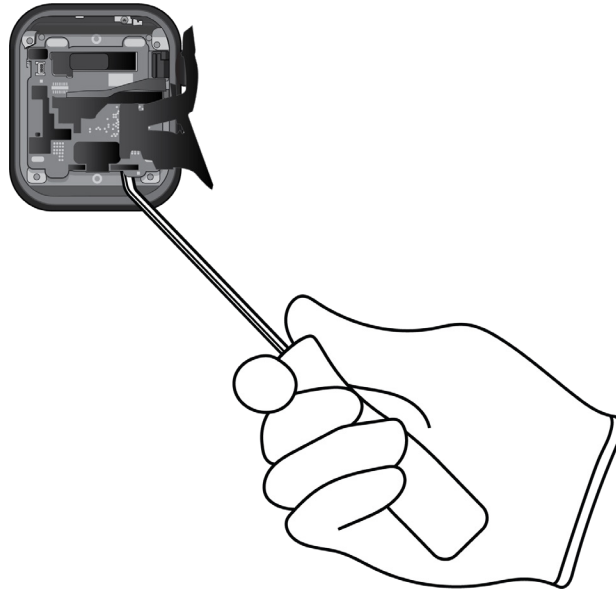

Tools Used



Fraction





Main logic board


PMs

Precious Metals

9. Remove the microphone bracket by unscrewing the two Phillips fasteners.

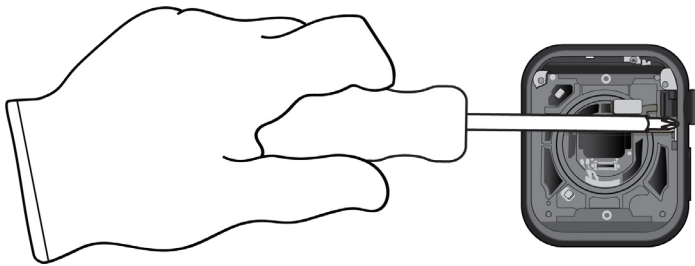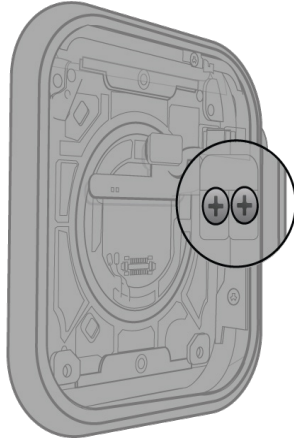

Tools Used



Fraction



Fasteners (x2)

Fe

Ferrous

Fraction




Microphone bracket

Fe

Ferrous



**10.** Pry off the microphone array.

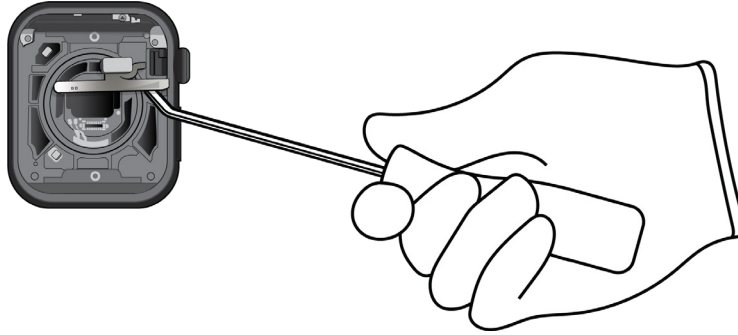

Tools Used



Fraction




*Microphone array*

**Cu**


Copper

## 11. Remove the sensor array.

- » *Flip the enclosure so that the sensor array is facing up.*
- » *Pry the sensor array off the enclosure.*

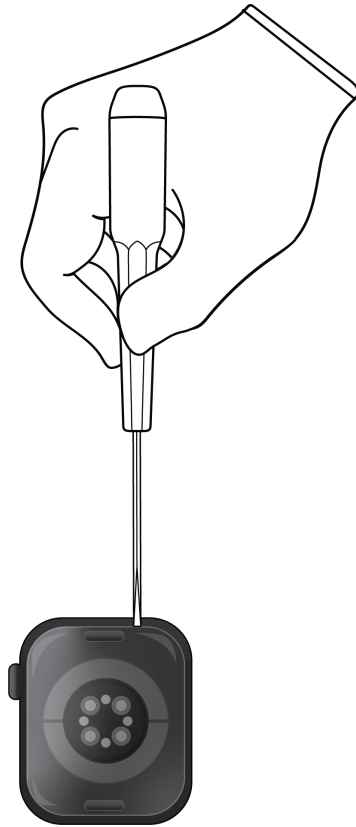

### Tools Used



### Fraction



Sensor array

Cu  
Copper

### Fraction








Enclosure

Al  
Aluminum

# Material Categorization of Output Fractions

All outputs from this process must be managed, handled, and disposed of in accordance with applicable waste laws and regulations, including but not limited to the Waste Framework Directive and its national enactments in Europe.

Fraction	Downstream Processing
<p data-bbox="435 554 570 579"><b>Aluminum</b></p>  <p data-bbox="451 806 553 827"><i>Enclosure</i></p> <p data-bbox="228 884 756 972"><b>Note:</b> Depending on the material, the enclosure may be processed as aluminum or ferrous (a stainless steel enclosure).</p>	<p data-bbox="964 554 1276 579"><b>Primary Target Material</b></p>  <p data-bbox="927 779 1313 804"><b>Potential Additional Materials</b></p> 

<p data-bbox="451 1073 553 1098"><b>Battery</b></p>  <p data-bbox="367 1268 634 1289"><i>Lithium-ion polymer battery</i></p>	<p data-bbox="964 1073 1276 1098"><b>Primary Target Material</b></p> 
---	--

**Fraction**

**Downstream Processing**

**Ferrous**



*Fasteners (x8)*



*Main logic board brackets*



*Microphone bracket*

**Primary Target Material**



**Glass**



*OLED display*

**Primary Target Material**




**Potential Additional Materials**



**Fraction**

**Downstream Processing**

**Logic Boards**



*Display logic board*



*Main logic board*


**Primary Target Material**




**Potential Additional Materials**



**Mixed Electronics**



*Magnetic charging cable*



*Microphone array*



*Sensor array*

**Primary Target Material**



**Potential Additional Materials**



**Fraction**

**Downstream Processing**

**Rare Earth Magnets**



*Taptic Engine*



*Speaker*

**Primary Target Material**



**Potential Additional Materials**

