

GOODaaa Welcome Guide



PN-W22
36000mAh QI Solar Power Bank

Important safety instructions

Warning: When using this product, basic precautions should always be followed, including the following:
 A. Carefully read the User Manual before using the power bank.
 B. Close supervision is needed when power bank is used near children.
 C. Do not strike, hit or insert any foreign objects into the power bank or any of its ports.
 D. Do not expose the power bank to heavy rain/snow to avoid malfunction.
 E. Do not immerse the power bank into water to avoid malfunction.
 F. Do not disassemble or reassemble the power bank without authorization from manufacturer.
 G. Do not use the power bank if it has been damaged or modified. If you see bulging, swelling, leakage or other abnormality from the power bank, stop using it immediately.

Special Attention


- The suggested working/storage temperature is between -4°F and +140°F (-20°C~+60°C).
- Do not expose a power bank to fire or extreme high temperature. Exposure to fire or temperature above 176°F/80°C may cause battery swelling up or explosion.
- Do not leave the power bank on the car dashboard without supervision. Under hot weather, the temperature inside a parked car can reach above 176°F/80°C may cause battery swell up or explode.
- Do not leave the power bank on the flat surface of concrete, metal and wooden floor to have the battery being solar charged. Under strong sunlight, the surface temperature of concrete, metal and wooden floor may reach above 170°F/80°C, where the battery may swell up or explode.
- For solar panel charging, we recommend that you hang the power bank in a ventilated environment for solar charging to avoid swell up of the battery due to extremely high temperature.

Legal and the Regulatory Compliance

All GOODaaa power bank have undergone extensive tests and the strict quality control procedure. Both our factory and products are tested and certified.

- ISO 9001: Quality management system that demonstration our ability to consistently provide products and service that meet customer and applicable statutory and regulatory requirements.
- UN38.3 Test Certificate: This ensures that the battery cell used in the power bank adheres to safety standards for things like maximum continuous charge voltage, cut off voltage, cell number, nominal voltage, discharge etc.
- MSDS Certificate: This is the Material Safety Data Sheet, all our power banks come with MSDS sheets, these sheets outline the hazardousness material with batteries, handling procedures, precaution etc.
- UL 2056 Test Certificate: A safety standards proves that the products has been gone through a series of in-depth evaluations by UL expert engineers.
- CE Certificate: All our power banks are certified with CE certificates to ensure they comply with regulations for sale in Europe Market.

PRODUCT DETAILS

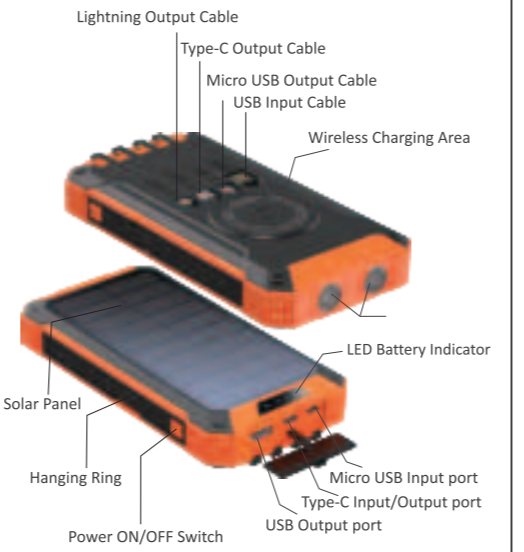

Thank you for choosing GOODaaa Wireless Solar Power Bank. Here's the instruction for your better experience

Product Parameters

OUT1: Lightning Output	DC5V/1A
OUT2: TYPE-C Output	DC5V/3A
OUT3: Micro USB Output	DC5V/2A
OUT4: USB Output	DC5V/3A (MAX)
In1: USB Input	DC5V/3A
In2: Micro USB Input	DC5V/2.1A
TYPE-C: Type-C Input/Output	DC5V/3A
Capacity	36000mAh
Power of LED Light	1W
Solar Charging Input	DC5V/0.32A*3 with 25000LUX light intensity

Package Include:
 GOODaaa Solar Power Bank×1
 User Manual×1 Carabiner ×1

Product features:

- Exclusive appearance design, fashion, beautiful.
- Made of original A-grade polymer battery, safe, stable, and durable.
- Wireless charging, compatible with Qi standard mobile phones.
- High-capacity portable power bank, support multiple USB ports output at the same time.
- With large solar panels charging inputs, charging anytime, anywhere.
- Equipped with a LED light, convenient for outdoor use.
- Built-in 3 kinds of output cables and an input cable, get rid of cumbersome, charging conveniently.

Instructions:

1. Turn on/ Turn off:
 Press the power switch to turn on the power bank, the LED indicator on. Without the device connected, the power bank will automatically shut down after 30 seconds.

2. Charge the power bank
Solar charging
 Place the solar panels facing upward in the direct sunlight, the sunlight will be converted into electricity to charge the power bank. The solar charging performance will be more effective under strong light. When the temperature is high in summer, please do not place the power bank on the concrete floor, car, and other places where heat gathers. When the power bank temperature exceeds 50 degrees, please stop using solar energy to charge the power bank.

Power charging
 Plug the TYPE-C or Micro USB cable into the input port, the LED indicator flash, battery power will be displayed digitally when charging. The power indicator will always on when fully charged.

3. Charging cell phones and other electronic products
Charging with cable
 Lightly press the power switch to turn on the power bank, the LED power indicator lights up, plug the charging cable in the USB port and your device.

Wireless Charging
 Press the power switch and the green light of wireless charging on the back is on. Put the phone to the wireless charging area of the product to charge the phone wirelessly. If you use the wireless charger to charge your phone, the phone case must not contain metal and the thickness of the case must not exceed 4mm.

Charging with built-in cable
 Press the power switch to turn on the power bank, the LED power indicator lights up, take the cable out and plug it into the corresponding charging port to charge the device.

4. LED light
 Press and hold the power button for 3 seconds to turn on the LED light, when the light is on, press and hold the button again to turn off.

Product maintenance:
 To ensure the maximum efficiency of this product, please pay attention to the following matters:
 (1) Keep away from moisture and corrosive substances.
 (2) Do not use chemicals to clean the product.
 (3) When the product is not used for a long time, please charge it once every six months.

Other important notes:
 (1) This product is suitable for charging equipment within the specifications of DC5V/3A, if use the charging equipment beyond this specification may cause damage to the product.
 (2) Please do not disassemble or modify this product.

- Please pay attention to fire and moisture, to prevent malfunction.
- Do not use this product in the high-temperature environment (≥65°C).
- Please connect the equipment that meets the output specification of this product.
- Please do not use it for too long.
- If the battery expands, leaks, or emits a strange smell, please stop using it immediately.

Common problems and solutions:

- Press the power switch, only the blue LED power indicator flashes**
 Battery power is about to run out, please charge this product immediately
- Unable to charge the unit**
 Replace the charger adapter and charging cable and try to charge the product again
- Cannot charge the phone or other devices**
 Please plug and unplug the charging cable again to connect the cell phone and the power bank.
- The power bank cannot be fully charged even being charged for a long time.**
 Please use the cable equipped and the charger adapter that supports 5V/2.1A or above output.
 The current of Lightning charging is low, resulting in a long charging time, it is recommended to charge the power bank through Micro USB or Type-C input.

Other common treatment methods:

- Check if the button is flexible
- Check if the charging indicator is well when charging
- Check whether the USB input cable is good and whether there is any abnormality after connecting to the power bank
- Check if the USB output cable is good and if there is any abnormality when connecting to the device that needs to be charged
- Check if there is any abnormal noise or odor in the product
- Please do not disassemble the power bank, the warranty does not cover human-made damage
- If the problems cannot be solved after the above methods, please contact our after-sales service for help.

Warranties and after-sales service:

- Every GOODaaa product is provided with at least 12 months of warranty and lifelong technical support.
- Within 30 days from the date of purchase, products in good packaging and without damage can be returned and fully refunded. Please note that customers will bear the shipping fee if products have no quality problems.
- A free exchange for products having quality problems within 12 months.
- If you are not 100% satisfied with our products, please feel free to contact our customer service at juanying_us@126.com. We attach great importance to customer feedback and will get back to you within 24 hours(excluding weekends).

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 -- Reorient or relocate the receiving antenna.
 -- Increase the separation between the equipment and receiver.
 -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 -- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.