

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2006207652 B2**

- (54) Title
Method and device for dimming lighting control devices to a predefined level
- (51) International Patent Classification(s)
H05B 37/02 (2006.01) **H05B 41/40** (2006.01)
- (21) Application No: **2006207652** (22) Date of Filing: **2006.01.10**
- (87) WIPO No: **WO06/077028**
- (30) Priority Data
- | (31) Number | (32) Date | (33) Country |
|--------------------------|-------------------|--------------|
| 10 2005 002 973.6 | 2005.01.21 | DE |
| 10 2005 008 996.8 | 2005.02.28 | DE |
- (43) Publication Date: **2006.07.27**
- (44) Accepted Journal Date: **2011.12.08**
- (71) Applicant(s)
TridonicAtco GmbH & Co. KG
- (72) Inventor(s)
Maier, Joachim;Juen, Reinhold
- (74) Agent / Attorney
Shelston IP, Level 21 60 Margaret Street, Sydney, NSW, 2000
- (56) Related Art
US 5519289
US 6388396

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
27. Juli 2006 (27.07.2006)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2006/077028 A1

- (51) Internationale Patentklassifikation:
H05B 37/02 (2006.01) *H05B 41/40* (2006.01)
- (21) Internationales Aktenzeichen: PCT/EP2006/000144
- (22) Internationales Anmeldedatum:
10. Januar 2006 (10.01.2006)
- (25) Einreichungssprache: Deutsch
- (26) Veröffentlichungssprache: Deutsch
- (30) Angaben zur Priorität:
10 2005 002 973.6 21. Januar 2005 (21.01.2005) DE
10 2005 008 996.8 28. Februar 2005 (28.02.2005) DE
- (71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): TRIDONICATCO GMBH & CO. KG [AT/AT];
Färbergasse 15, A-6851 Dornbirn (AT).
- (72) Erfinder; und
- (75) Erfinder/Anmelder (nur für US): JUEN, Reinhold


[AT/AT]; Sandgasse 4, A-6850 Dornbirn (AT). MAIER, Joachim [AT/AT]; Am Eisweiher 2, A-6850 Dornbirn (AT).

- (74) Anwalt: RUPP, Christian; Mitscherlich & Partner, Sonnenstrasse 33, Postfach 33 06 09, 80066 München (DE).
- (81) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare nationale Schutzrechtsart): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU,

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD AND DEVICE FOR DIMMING LIGHTING CONTROL DEVICES TO A PREDEFINED LEVEL

(54) Bezeichnung: DIMMEN VON LEUCHTMITTELBETRIEBSGERÄTEN AUF VORAB DEFINIERTE PEGEL

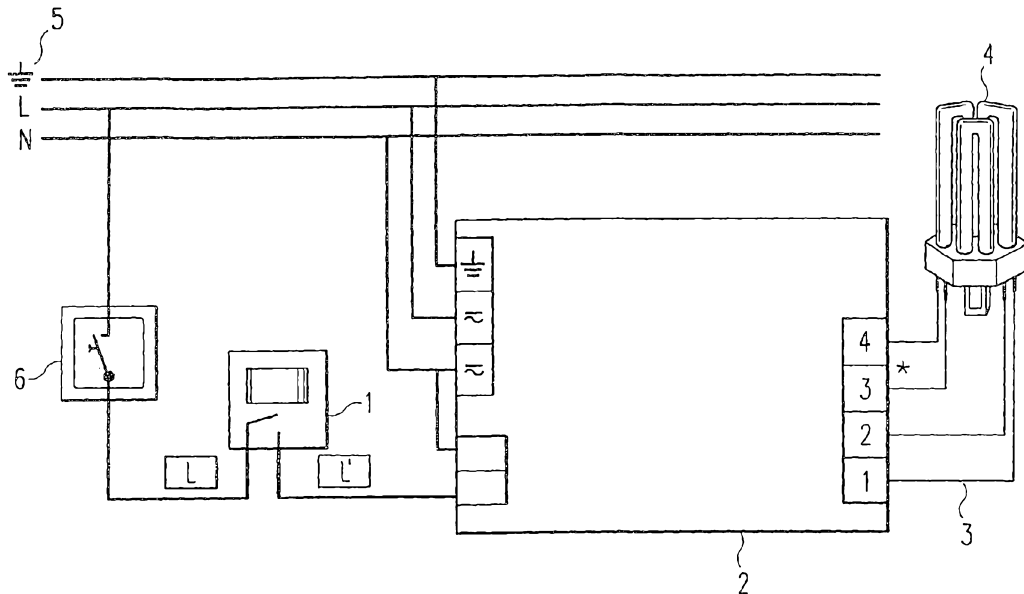

(57) Abstract: The invention relates to a method for controlling electronically controlled lighting control devices or parts thereof depending on the detection of a movement in a defined space. For this purpose, an output signal of a motion detector connected to a supply voltage, which detector outputs the supply voltage as an output signal depending on the detection of a motion, is evaluated and the electronically controlled lighting control device is adjusted to one or a plurality of defined dimming levels depending on the output signal of the motion detector.

[Fortsetzung auf der nächsten Seite]

WO 2006/077028 A1



TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

Veröffentlicht:

— mit internationalem Recherchenbericht

(57) Zusammenfassung: Zur Ansteuerung von elektronisch gesteuerten Leuchtmittelbetriebsgeräten oder Teilen abhängig von der Erfassung einer Bewegung in einem definierten Raum werden die folgende Schritte ausgeführt: Auswerten eines Ausgangssignals eines mit einer Versorgungsspannung verbundenen Bewegungsmelders, der abhängig von der Erfassung einer Bewegung die Versorgungsspannung als Ausgangssignal ausgibt, und Ansteuerung des elektronisch gesteuerten Leuchtmittelbetriebsgeräts auf einen von mehreren vorgegebenen Dimmpegnen abhängig von einem Ausgangssignal des Bewegungsmelders.

**DIMMING OF LIGHTING MEANS OPERATING DEVICES
TO PREVIOUSLY DEFINED LEVELS**

Field of the Invention

The present invention relates in general to methods and
5 devices by means of which lighting means, such as LEDs,
gas-discharge lamps, high-pressure lamps etc. can be
controlled and/or regulated to previously defined dimming
levels (dimming stages).

Background of the Invention

10 Any discussion of the prior art throughout the
specification should in no way be considered as an
admission that such prior art is widely known or forms part
of common general knowledge in the field.

Such electronic operating devices are generally known as an
15 electronic ballast (EB) in the sector of gas-discharge
lamps.

It is known from the prior art to drive, for example, such
electronic ballast (EBs), in order to cite only one example
of lighting means operating devices, via a digital bus. In
20 this regard, reference is made to the literature in
connection with the so-called DALI (digital addressable
light interface) standard. In this case, digital signals
are therefore fed to a lighting means operating device at a
control input, which signals can predetermine, inter alia,
25 desired dimming values.

Since a user does not always desire to use the associated
bus device including a digital controller for a lighting
means operating device with such a digital interface, as
well, operating devices are also known from the prior art

in which either even a digital signal or else a signal produced by means of a pushbutton supplied with mains voltage can be applied to such a digital control input (digital interface). In this case, a user, if he does not wish to go beyond the digital periphery, can therefore drive the digital control input of the operating device by means of actuating the pushbutton. In the process, for example, the duration and repetition rate of the actuation of the pushbutton is evaluated by the connected operating device as a signal for connection/disconnection or for dimming.

An example of such an operating device, to whose digital control input a signal originating from a pushbutton or switch supplied with mains voltage can also be applied, is mentioned, for example, in the German utility model DE 297 24 657.

It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

20 **Summary of the Invention**

According to a first aspect of the invention there is provided a method for driving electronically controlled lighting means operating devices, the method including the following steps:

- 25 evaluating an output signal of a motion sensor, which is connected to a supply voltage and outputs the supply voltage as an output signal as a function of the detection of a motion, and
 - setting the electronically controlled lighting means operating device to one of a plurality of
- 30

predetermined dimming levels as a function of an output signal of the motion sensor, it being possible for at least one of the predetermined dimming levels to be programmed and/or adjusted,

5 wherein the motion sensor is supplied with the supply voltage independent from the operating device.

According to a second aspect of the invention there is provided a method for driving electronically controlled lighting means operating devices, the method including the
10 following steps:

evaluating an output signal of a motion sensor, which is connected to a supply voltage and outputs the supply voltage as an output signal as a function of the detection of a motion, and

15 setting the electronically controlled lighting means operating device to one of a plurality of predetermined dimming levels as a function of an output signal of the motion sensor, wherein the output signal of the motion sensor is detected at a control input of a digital
20 interface of the operating device and the motion sensor is supplied with the supply voltage independent from the operating device.

According to a third aspect of the invention there is
25 provided a method for driving electronically controlled lighting means operating devices, the method including the following steps:

advance-programming two different dimming stages in a lighting means operating device, and

30 selectively setting one of the two dimming stages as a function of a control signal, which is fed to the lighting means operating device;

wherein the operating device, which is capable of setting more than two dimming levels, detects the connection of a motion sensor and converts to operation with only two dimming levels; and

5 wherein the motion sensor is supplied with a supply voltage independent from the operating device.

According to a fourth aspect of the invention there is provided a method for driving electronically controlled lighting means operating devices, the method including the following steps:

detecting a motion in a defined area using a motion detector, and

15 for the case of the detection of a motion, starting from a quiescent value, setting the lighting means operating device to a desired operational value, which is different than the quiescent value and indicates a greater luminous efficiency of the connected lighting means in comparison with the quiescent value, it being possible for the quiescent value and/or the desired operational value to be programmed;

20 wherein the motion detector is supplied with a supply voltage independent from the operating device.

25 According to a fifth aspect of the invention there is provided a method for driving electronically controlled lighting means operating devices, the method including the following steps:

30 advance-programming two different dimming stages in a lighting means operating device, and

selectively setting one of the two dimming stages as a function of a control signal, which is fed to the lighting means operating device;

wherein an operating device which is capable of setting more than two dimming levels detects the connection of a motion sensor and converts to operation with only two dimming levels.

5

According to a sixth aspect of the invention there is provided a lighting means operating device,

having a control input,

two different dimming levels being stored in the operating device which are each greater than 0% and to which a connected lighting means is controlled and/or regulated as a function of a signal applied to the control input, it being possible for at least one of the dimming levels to be programmed and/or adjusted based on an output signal from a connected motion sensor, and wherein the motion sensor is supplied with a supply voltage independent from the operating device.

20 According to a seventh aspect of the invention there is provided a method for driving electronically controlled lighting means operating devices, the method including the step of:

detecting when a motion sensor is connected to the operating device, the operating device converting to operation with only two dimming levels when a motion sensor is detected.

According to an eighth aspect of the invention there is provided a lighting means operating device,

30 having a control input,


two different dimming levels being stored in the operating device which are each greater than 0% and to which a connected lighting means is controlled and/or

regulated as a function of a signal applied to the control input, the control input being part of a digital interface, wherein it is possible for at least one of the dimming levels to be programmed and/or
5 adjusted based on an output signal from a connected motion sensor, and wherein the motion sensor is supplied with a supply voltage independent from the operating device.

According to a ninth aspect of the invention there is
10 provided a method for driving electronically controlled lighting means operating devices, the method including the step of:

detecting when a motion sensor is connected to the operating device, the operating device converting to
15 operation with only two dimming levels when a motion sensor is detected;
wherein the motion sensor is supplied with a supply voltage independent from the operating devices.

The invention therefore proposes a method for driving
20 electronically controlled lighting means operating devices. A typical example of such a lighting means operating device is an electronic ballast (EB) for gas-discharge lamps. According to the invention, an output signal of a motion sensor, which is connected to a supply voltage, is
25 evaluated. Then, the electronically controlled lighting means operating device is set to one of a plurality of predetermined dimming levels as a function of the output signal of the motion sensor.

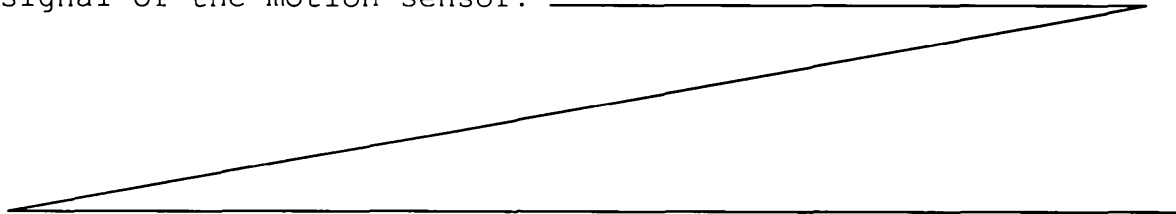

The output signal of the motion sensor can in this case be detected in a control input of the operating device which is provided isolated from the voltage supply of the lighting means operating device.

In this case, the control input may be designed such that either a digital signal or a mains voltage signal can be applied to it.

10

In accordance with a further aspect of the present invention, a method for driving electronically controlled lighting means operating devices is provided, at least two different dimming stages (dimming levels) being preprogrammed in advance in a lighting means operating device. Then, selectively one of the two dimming stages is set as a function of a control signal, which is fed to the lighting means operating device. Both dimming stages in this case indicate a luminous efficiency of more than 0%.

In accordance with yet a further aspect of the present invention, a method for driving electronically controlled lighting means operating devices is provided, in which a motion is detected in a defined area. If a motion is positively detected, starting from a quiescent value, the lighting means operating device is set to a desired operational value, which is different than the quiescent value, the desired operational value indicating a greater luminous efficiency of the connected lighting means in comparison with the quiescent value.

In this case, the desired operational value can be maintained automatically over a defined period of time before the quiescent value is set again.

The quiescent value and/or the desired operational value can in this case be capable of being adjusted or programmed.

- 5 In this case, the quiescent value can be adjusted to a value of more than 0% luminous efficiency.

The invention also relates to a computer software programming product, which supports a method of the
10 abovementioned type if it is running on a computing device or if it is implemented by means of hard-wiring.

The invention also relates to an operating means for lighting means which is designed to carry out such a
15 method.

A further aspect of the present invention relates to a lighting means operating device which has a control input. In this case, two different dimming levels are
20 stored in the operating device which are each greater than 0% and to which a connected lighting means is controlled and/or regulated as a function of a signal applied to the control input.

25 In this case, the control input can be designed such that either a digital signal with a first voltage level or a signal originating from a mains voltage with a level which is different than the first voltage level can be applied. The two mentioned types of signal can
30 be evaluated by the operating device and converted for driving a connected lighting means.

The invention also relates to a system for driving electronically controlled lighting means operating
35 devices, the system having a motion sensor, which is connected to a supply voltage, and a lighting means operating device. The lighting means operating device

has a control input, to which an output signal of the motion sensor can be fed. In this case, the lighting means operating device can set a connected lighting means automatically to a higher luminous efficiency in response
5 to a motion detected by the motion sensor.

Yet a further aspect of the present invention relates to a system for driving lighting means which has a motion sensor and a lighting means operating device connected thereto. The lighting means operating device sets a connected
10 lighting means to a desired operational value, which is different than the quiescent value, if a motion is detected in a defined area by the motion sensor. In this case, the desired operational value is higher than a quiescent value.

The lighting means operating device can in particular be an
15 electronic ballast (EB).

Brief Description of the Drawings

Further advantages, features and properties of the present invention will now be explained with reference to the single figure of the drawings attached as an annex.


20 Figure 1 shows a first system according to the invention for driving a lighting means, and

Figure 2 shows a further exemplary embodiment, in which a motion sensor communicates with a lighting means operating device via a digital bus.

25 **Preferred Embodiments of the Invention**

Figure 1 schematically illustrates a motion sensor 1, which is known in principle, an electronic ballast (EB) 2 and two connected lighting means 4 at the output 3 of the EB.

Mention has already been made in the introduction of the fact that the EB 2 only represents one example of an operating device for lighting means

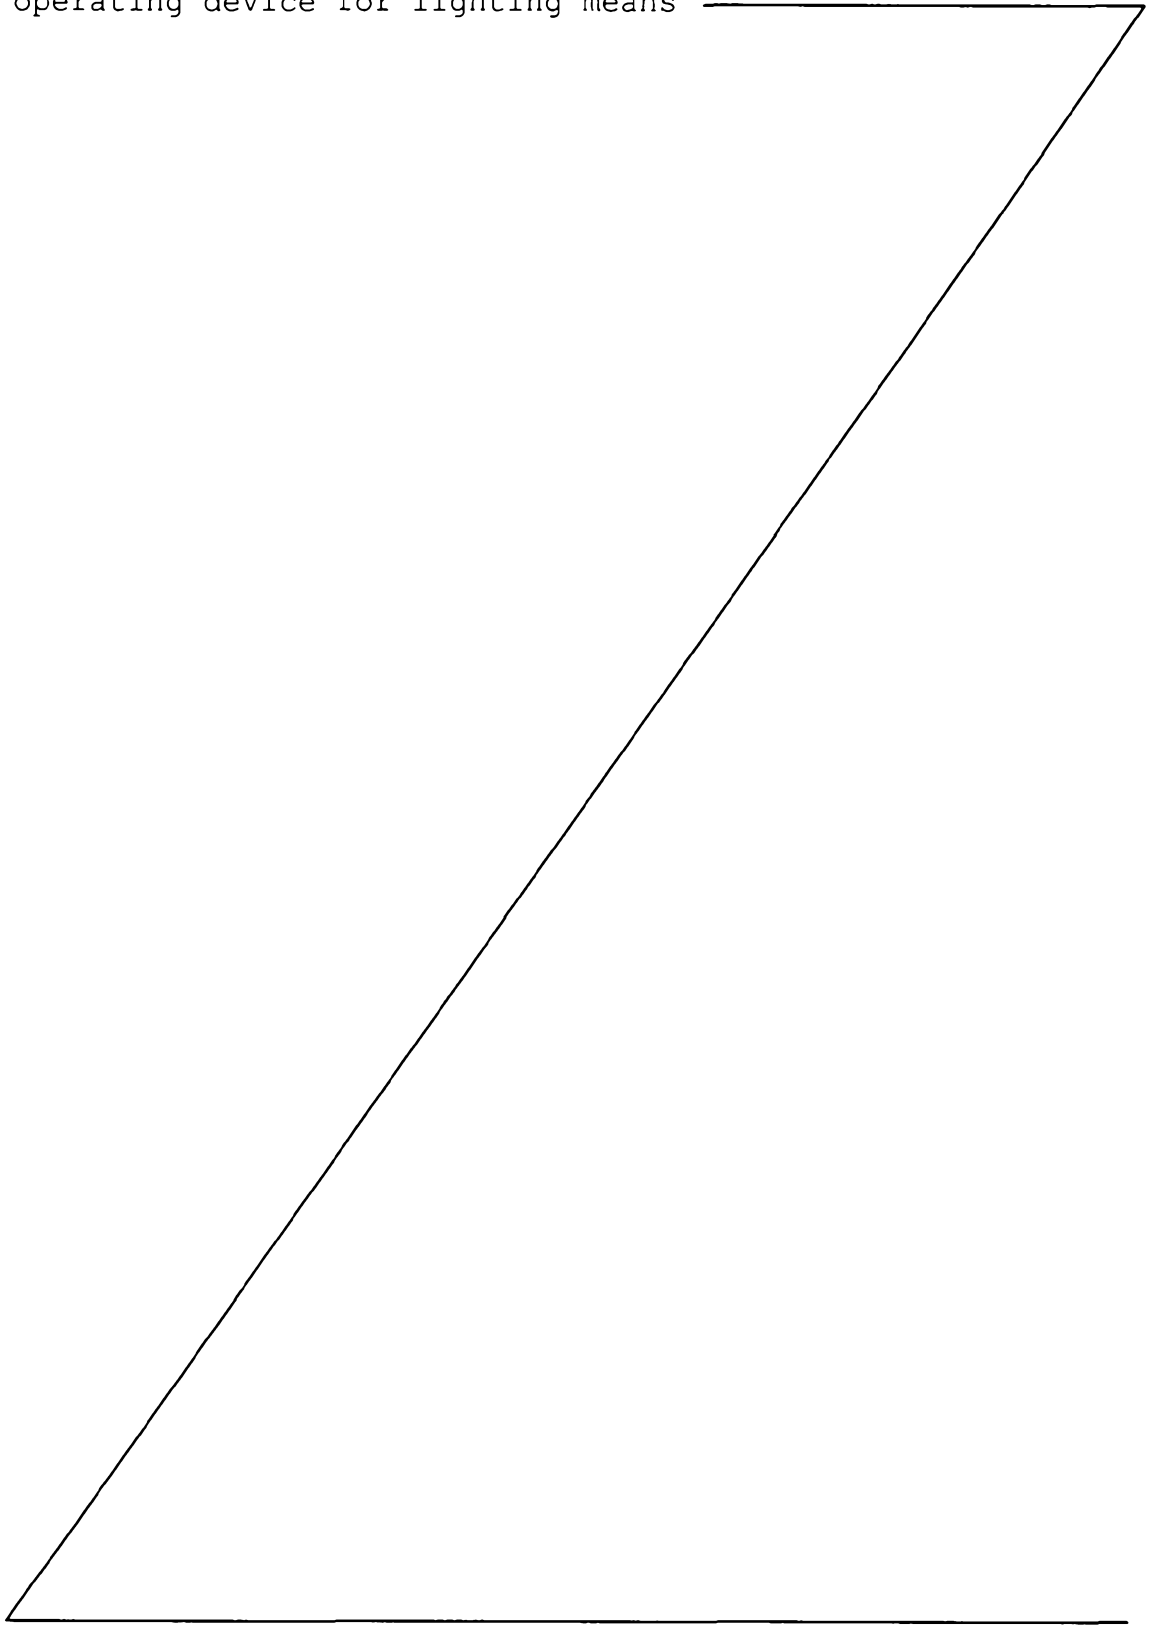

and the present invention can freely be applied to any other desired lighting means and therefore beyond gas-discharge lamps.

5 The EB 2 illustrated has three terminals PE, L, N, which can be connected to ground, to the phase and to the neutral conductor of a voltage supply 5.

Furthermore, the illustrated EB also has an interface
10 having two terminals D1, D2. This interface D1, D2, as can already be seen from the brief designation of the terminals, can be designed such that its digital signals are fed, for example, in accordance with the DALI standard in order to transmit commands to the EB 2
15 or in order to transmit commands at these terminals from the EB 2 to a connected bus, such as the DALI bus, for example, if a bidirectional communication is provided.

20 Optionally, the terminals D1, D2 can therefore also be designed to receive digital commands with subsequent signal processing. In any case, the claims D1, D2 are designed such that signals can be applied to them which originate from a supply voltage, such as the mains
25 voltage, for example. In the example illustrated, the terminal D2 is connected to the neutral conductor N of the voltage supply 5.

A conventional motion sensor 1 is connected between the
30 other signal control input D1 of the EB 2 and the phase conductor L of the voltage supply 5 (the function of the optional timer 6, which is likewise connected therebetween, will be explained later). The phase L of the supply voltage 5 is therefore fed to this motion
35 sensor 1 on the input side. The output signal of the motion sensor 1, which is therefore fed to the control input D1 of the EB 2, is denoted by L'.

Essentially two different signals can therefore be applied to the control input D1, namely one for the case in which a motion is detected by the motion sensor 1 and a signal, which is different than this, for the case in which the motion sensor 1 does not identify a motion.

In particular, these two signal states, which correspond to the output signal of the motion sensor, can be defined as follows:

When a motion is detected by the motion sensor 1, it closes the connection between the phase conductor L and the control input D1, with the result that the signal level of the phase conductor L is applied to the control input D1. In the EB 2, a defined dimming level is stored in advance which is set by the EB 2 if the detection of a motion by the motion sensor 1 is reproduced by the phase conductor L being connected to the control input D1.

On the other hand, if the motion sensor 1 does not identify any motion in the range monitored by it, in accordance with this exemplary embodiment the connection between the control input D1 and the phase conductor L of the voltage supply 5 is isolated, with the result that no voltage is applied to the control input D1. For this case, which can therefore be interpreted by the EB 2 as no motion having been identified, a second dimming value can be preprogrammed in the EB 2 which will be referred to below as the quiescent value corresponding to a motion not having been identified. This quiescent value may in particular be a lower dimming level in comparison with the desired operational value in the event of a motion being identified.

Typical applications for such a system for driving lighting means are, for example, stairwells or corridors. Advantageously, in this case no further
5 control units are required in addition to the lighting means operating device and the motion sensor.

If a motion is identified by the motion sensor 1 and, as a result, for example the mains voltage is applied
10 to the control input D1 of the EB 2, said EB 2 can, for example, set a connected lighting means automatically to 100% luminous efficiency. If, on the other hand, no motion is identified, and thus the signal '0' is applied to the control input D1 (no voltage), the
15 lighting means can be controlled to a lower value such as, for example, 5% luminous efficiency.

If, therefore, the motion sensor identifies the presence of a person, for example in a stairwell, this
20 stairwell is automatically illuminated with sufficient luminous efficiency, for example 100%.

After a predetermined period of time, which can be programmed or adjusted, for example, in the EB 2 or
25 else corresponds to the (again possibly adjustable) delay time of the motion sensor 1 after identification of a motion, the motion sensor again interrupts the connection to the control phase L. The connected lighting means is therefore set to the quiescent value
30 again, which corresponds to a substantially lower level in comparison with the desired operational value.

As has been stated, both the quiescent value and the desired operational value on detection of a motion can
35 be capable of being adjusted or programmed using the EB 2.

Provision may furthermore be made for a timer 6 to also be connected in series, in addition to the motion sensor, which timer predetermines time spans of use (for example mornings, evenings, dusk, etc.) in which
5 the function of the motion sensor is switched to be active. The timer therefore only connects the control phase L to the motion sensor within the time span of use, with the result that the motion sensor can in turn only produce a connection between the control input D1
10 and the control phase L during the time span of use.

These time spans of use, however, can also be adjusted in the operating device or in the motion sensor itself, for example.

15

Adjusting the two dimming levels (quiescent value, desired operational value) can take place, for example, via an interface. This can be carried out during operation, during installation, during manufacture etc.
20 The interface can also have a wire-free design.

The EB can also be designed to automatically identify the connection of a motion sensor. This is advantageous, for example, when the EB is one which has
25 a continuous dimming range or a virtually continuous dimming range of, for example, from 1% to 100%, which automatically switches over to a two dimming level operation when the connection of a motion sensor to the terminals D1, D2 is identified.

30

A typical application is therefore the identification of people at certain periods of time (during the morning, during the evening) in a stairwell etc.

35 Figure 2 illustrates the fact that a motion sensor 7 may also be an element of a digital bus system (for example in accordance with the DALI standard). In this

case, the motion sensor 7 can transmit the information on the detection of a motion in the form of a digital signal via a bus line 8 to connected operating devices 2, 2'. This information, as provided, for example, in 5 the DALI standard, can be addressed and one or a group of connected operating devices with lighting means 4, 4' respond with the corresponding address.

In addition, the digital controllers (DALI GC, DALI 10 SC), control elements (DALI touchpanel) and interfaces (DALI SCI) which are conventional in the DALI system can naturally also be connected, for example. Programming of the above-described levels and periods of time can take place, for example, via these 15 interfaces.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A method for driving electronically controlled lighting means operating devices, the method including the following steps:
 - 5 evaluating an output signal of a motion sensor, which is connected to a supply voltage and outputs the supply voltage as an output signal as a function of the detection of a motion, and
 - setting the electronically controlled lighting means operating device to one of a plurality of predetermined dimming levels as a function of an output signal of the motion sensor, it being possible for at least one of the
 - 10 predetermined dimming levels to be programmed and/or adjusted, wherein the motion sensor is supplied with the supply voltage independent from the operating device.

2. A method for driving electronically controlled lighting means operating devices, the method including the following steps:
 - 15 evaluating an output signal of a motion sensor, which is connected to a supply voltage and outputs the supply voltage as an output signal as a function of the detection of a motion, and
 - setting the electronically controlled lighting means operating device to one of a plurality of predetermined dimming levels as a function of an
 - 20 output signal of the motion sensor, wherein the output signal of the motion sensor is detected at a control input of a digital interface of the operating device and the motion sensor is supplied with the supply voltage independent from the operating device.

3. The method as claimed in claim 1 or 2, the output signal of the motion sensor
- 25 being detected at a control input of the operating device which is provided isolated from the voltage supply of the lighting means operating device.

4. The method as claimed in claim 3, wherein it is possible for either a digital signal
- 30 or a signal originating from a supply voltage, in particular a mains voltage, to be applied to the control input.

5. A method for driving electronically controlled lighting means operating devices, the method including the following steps:
 - advance-programming two different dimming stages in a lighting means operating device, and
 - 5 selectively setting one of the two dimming stages as a function of a control signal, which is fed to the lighting means operating device; wherein the operating device, which is capable of setting more than two dimming levels, detects the connection of a motion sensor and converts to operation with only two dimming levels; and
 - 10 wherein the motion sensor is supplied with a supply voltage independent from the operating device.

6. A method for driving electronically controlled lighting means operating devices, the method including the following steps:
 - detecting a motion in a defined area using a motion detector, and
 - 15 for the case of the detection of a motion, starting from a quiescent value, setting the lighting means operating device to a desired operational value, which is different than the quiescent value and indicates a greater luminous efficiency of the connected lighting means in comparison with the quiescent value, it being possible for the quiescent value and/or the
 - 20 desired operational value to be programmed; wherein the motion detector is supplied with a supply voltage independent from the operating device.

7. The method as claimed in claim 6, the desired operational value being maintained over a defined period of time before the quiescent value is set again.

- 25 8. The method as claimed in claim 7 wherein the defined period of time for maintaining the desired operational value is capable of being adjusted or programmed.

9. The method as claimed in any one of claims 5 to 8, it being possible for the quiescent value and/or the desired operational value to be adjusted.

10. The method as claimed in any one of claims 5 to 9, the quiescent value being adjusted to a value of more than 0% luminous efficiency.
11. The method as claimed in any one of the preceding claims wherein an operating device which is capable of setting more than two dimming levels detects the connection of a motion sensor and converts to operation with only two dimming levels.
12. A computer software programming product, wherein the computer software programming product supports a method as claimed in any one of the preceding claims if it is running on a computing device of an operating device.
13. An operating means for lighting means, designed to carry out a method as claimed in any one of claims 1 to 11.
14. A lighting means operating device,
having a control input,
two different dimming levels being stored in the operating device which are each greater than 0% and to which a connected lighting means is controlled and/or regulated as a function of a signal applied to the control input, it being possible for at least one of the dimming levels to be programmed and/or adjusted based on an output signal from a connected motion sensor, and wherein the motion sensor is supplied with a supply voltage independent from the operating device.
15. A lighting means operating device,
having a control input,
two different dimming levels being stored in the operating device which are each greater than 0% and to which a connected lighting means is controlled and/or regulated as a function of a signal applied to the control input, the control input being part of a digital interface, wherein it is possible for at least one of the dimming levels to be programmed and/or adjusted based on an output signal from a connected motion sensor, and wherein the motion sensor is supplied with a supply voltage independent from the operating device.
16. The operating device as claimed in claim 14 or 15, designed such that either a digital signal with a first voltage level or a signal originating from a mains voltage

with a level which is different than the first voltage level can be applied to the control input, and such that the two mentioned types of signal can be converted by the operating device for driving a connected lighting means.

17. The operating device as claimed in any one of claims 14 to 16, having more than
5 two dimming levels which switches over to operation with two defined dimming levels when the motion sensor is connected.
18. The operating device as claimed in any one of claims 14 to 17, designed to maintain the desired operational value over a defined period of time before it sets the quiescent value again.
- 10 19. A system for driving electronically controlled lighting means operating devices, having a lighting means operating device as claimed in any one of claims 14 to 18 and a motion sensor, which is connected to a supply voltage and is connected to a control input of the lighting means operating device, such that a connected lighting means is set to a higher luminous efficiency in response to a motion detected by
15 the motion sensor.
20. A method for driving electronically controlled lighting means operating devices, the method including the step of:
detecting when a motion sensor is connected to the operating device, the operating device converting to operation with only two dimming levels when a motion
20 sensor is detected;
wherein the motion sensor is supplied with a supply voltage independent from the operating devices.
21. A method for driving electronically controlled lighting means operating devices substantially as herein described with reference to any one of the embodiments of
25 the invention illustrated in the accompanying drawings and/or examples.
22. A lighting means operating device substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or examples.

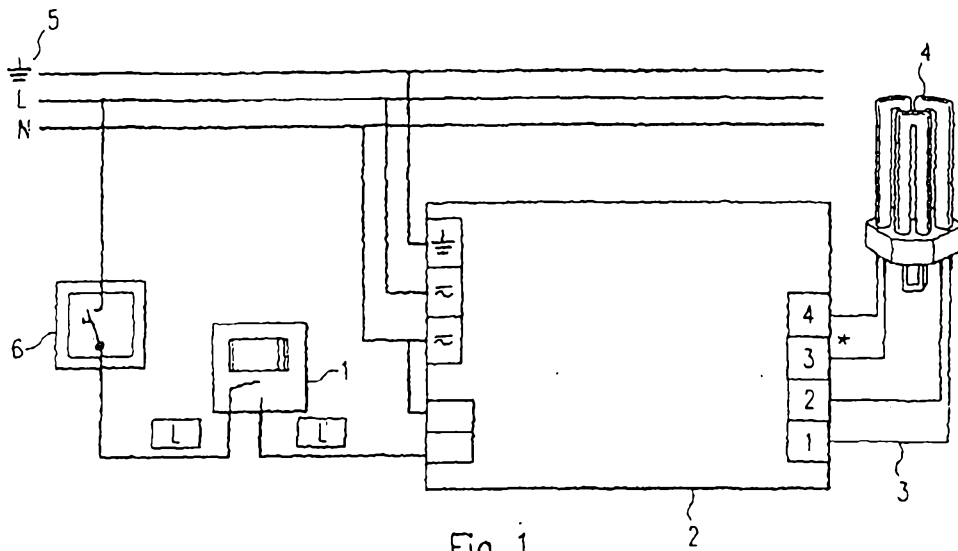


Fig. 1

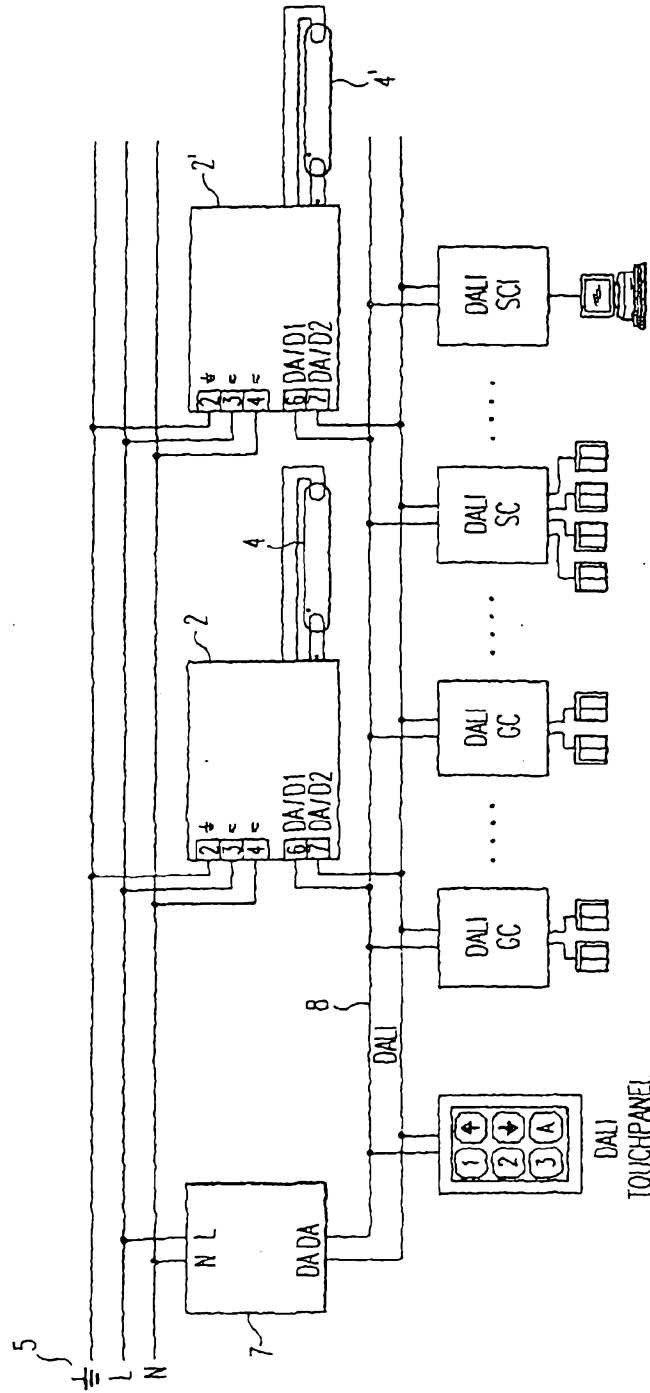


Fig. 2