
# мotive

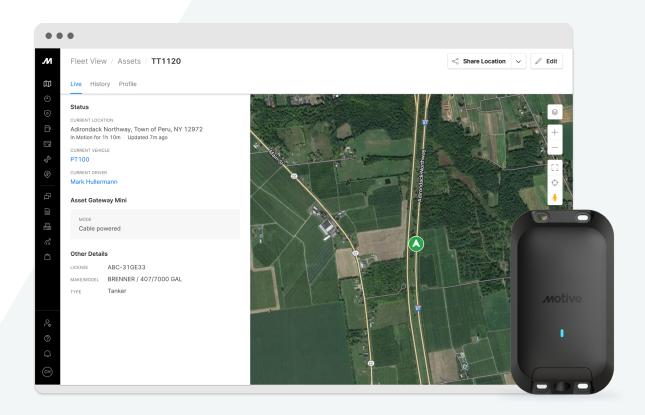

## **Asset Gateway Mini**


Get unparalleled visibility into the location, utilization, and health of your equipment.

The Asset Gateway Mini helps you monitor high volume inventories, with a small form factor and 5 year battery life. Get both cable- and battery-powered options in a single device, with real-time telematics and location tracking for all types of equipment.

### Key benefits

### Unparalleled visibility and control

Real-time GPS tracking eliminates time spent on manual check-ins.




#### Maximize utilization

Track engine hours and idling to improve efficiency and bill accurately.



#### **Protect your assets**


Automatic geofence alerts detect unauthorized use to prevent theft and loss.



### Key benefits (continued)

#### Minimize downtime

Preventive maintenance helps you stay ahead of issues to minimize equipment downtime.



#### **Key Features**



### Real-time visibility in one dashboard

Maximize utilization with current and historical location of every equipment and trailer from a single dashboard.



### **Locate My Asset**

Recover stolen or missing equipment and plan for capacity with on-demand location requests. Coming soon.



### Automatic vehicle asset pairing

Ensure accurate delivery by automatically linking nearby vehicles and assets, confirming which vehicle is hauling which asset.



#### Instant alerts

Quickly address issues with alerts for unexpected movements, geofence breaches, low battery, dormancy, and more.



### Maintenance reminders

Avoid costly repairs and downtime by scheduling maintenance based on factors like engine hours and mileage.



### Shareable live location

Enhance customer satisfaction by providing accurate delivery windows and tracking your cargo's successful delivery.

### **Specifications**

Power source	Asset Gateway Mini (Powered)	Asset Gateway Mini (Unpowered)
	<ul> <li>Cable connected to external power source</li> <li>9V-32V input using CBL-3WR-AG31.1</li> </ul>	<ul> <li>Replaceable lithium ion disulfide battery</li> <li>Nominal voltage: 6.0 VDC</li> <li>Rated capacity: 3400 mAh</li> <li>5 year expected life on default settings (2 GPS pings a day)</li> </ul>
Location check-in rate	1 min capture / 1 min report	Default check-in rate: 12 hour capture / 12 hour report
		Optional configurations
Memory	1 month of log data (one check-in every minute)	50 years of log data (two checkins per day)
Unit lifetime	5-year warranty	
Dimensions	5.83 × 3.27 × 1.28 in (148 × 83 × 32.5mm)	
Weight	10 oz (284.2 g)	
Sensors and data streams	<ul> <li>Motion Sensor</li> <li>Battery Level</li> <li>Speed (&lt; 1,900 kph)</li> <li>Altitude (&lt; 18,000 m)</li> <li>Location</li> <li>Heading</li> <li>Temperature</li> </ul>	

Cellular	4G CAT-M1 US, Canada, Mexico Ready		
GPS	GPS support only		
Security	Secure data communication with server, secure firmware update		
Operating temperature	-40°F-140°F (-40°C-60°C)		
Storage temperature	-40°F-140°F (-40°C-60°C)		
Environmental rating	IP67 - Waterproof up to 1m submersion IP69K - Highest grade resistance to high pressure, high temperature spraydown		
Environmental testing	Tests include:  High temperature/humidity (IEC 60068 2-38)  Thermal shock (IEC 60068 2-14)  Dry heat operating life (IEC 60068 2-2)  Cold operating life (IEC 60068 2-1)  Salt spray (IEC 60068 2-11)  Solar (outdoor) weathering (IEC68-2-5)	<ul> <li>Heated vibration - commercial vehicle (ISO 16750-3)</li> <li>Operation bumping (IEC 60068-2-27)</li> <li>Free drop test (MIL-STD-810G Method 516.6)</li> <li>Gravel bombardment (SAE J400)</li> </ul>	
Certifications	<ul> <li>FCC &amp; ISED Certified</li> <li>PTCRB™ Certified</li> </ul>		

· Certified for the AT&T Network

## мotive

₩	6	
gomotive.com	855-434-3564	sales@gomotive.com