

who can access advanced  
materials for biosensors and  
medical devices?

**you can.**

**working for you.**




**SunChemical®**

a member of the DIC group



Color & Comfort

# We offer a full range of materials for the biosensor industry

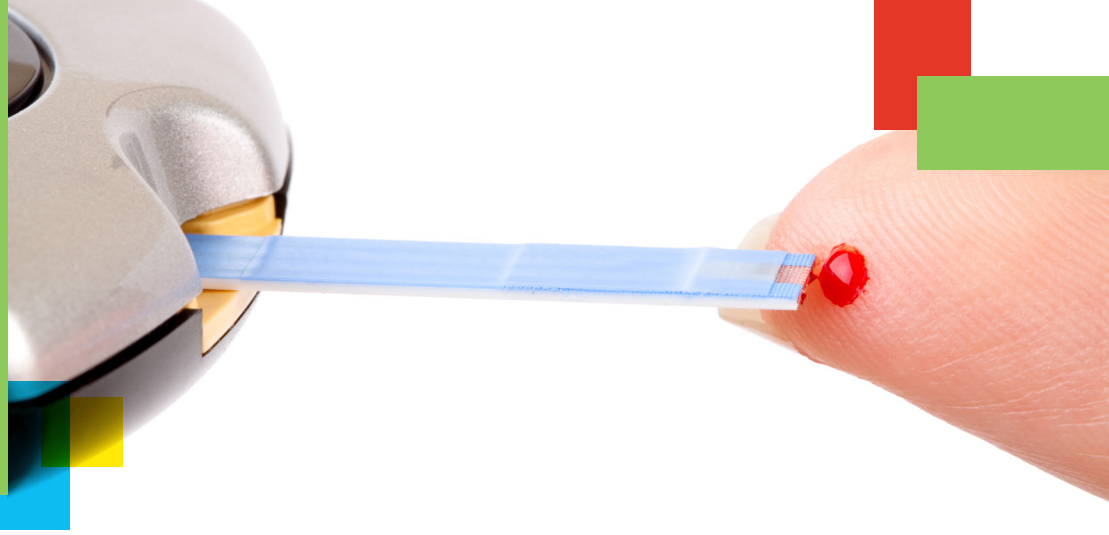

## SunSens for Biosensors

Sun Chemical Advanced Materials offers a portfolio of inks and pastes that are tailor-made for biosensors, including diagnostic sensors and environmental sensors.

Available in screen, flexographic and custom formulations. Sun Chemical materials are optimized for sensors in the detection of:

- Alcohol
- Pyruvate
- Glucose
- Sucrose
- Lactate
- Algal toxins
- Mycotoxins
- Fructose
- Progesterone
- Cholesterol
- DNA
- Acetylcholinesterase
- Ammonia
- Glutamate

## Working / Counter Electrode Materials

Sun Chemical offers a range of precious metal, carbon graphite inks that feature superior electrochemical performance and a low coefficient of variation.

- Our range of gold and platinum inks are available for low and high temperature substrates
- Our range of carbon graphite inks are highly electrochemically active
- Sun Chemical's range of mediator containing carbon graphite inks can be used with various types of enzyme groups, for example oxidases and dehydrogenases. The mediators include Prussian Blue, Potassium Ferrocyanide and Cobalt Phthalocyanine.

## Gold Electrode Materials

Sun Chemical has a range of gold electrode pastes developed for electrochemical sensors and biosensors which can be used for self-assembled monolayers in enzymatic biosensors, and are also suitable for all forms of electrochemistry. Gold electrode materials from Sun Chemical are also ideal for immunosensors and are available in low and high temperature formulations with higher conductivity.

Gold Electrode Materials				
Paste Type	Product Code	Compatible Substrates	Primary Applications/Benefits	Normalized Sheet Resistance
Gold Paste	C2041206P2	Polyester, PVC, Polycarbonate or ceramic	This is a screen printable gold polymer paste designed to provide excellent electrochemical performance in biosensor working electrodes. This is used in Medical Diagnostics, Environmental Sensor and the Agri-Food Industries. Cured at 80 °C for 30 minutes. Highly compatible with our counter and reference electrodes materials. Suitable for Self-assembled monolayers, DNA and Immuno-sensors.	≤ 0.08 Ω/square at 25 μm DFT
High Temperature Gold	C2090908D1	96% alumina or similar ceramic	A screen printable gold paste designed for printing high definition electrodes in sensor applications. Fired at 700 C for 30 minutes this is designed to provide high definition electrodes. Designed to remove all polymeric residues from the surface and to provide a very thin layer of highly conductive gold layer, excellent electrochemical performance. The paste is designed for firing at high temperatures to ceramic substrates.	≤ 4 Ω/square at 25 μm DFT

## Platinum Electrode Materials

Platinum electrode materials from Sun Chemical are available in cross linked polymeric, standard polymeric, and high temperature varieties. Optimized for both high and low temperature substrates, Sun Chemical's platinum electrode materials are engineered for a range of electrochemical sensors and biosensors.

Platinum Electrode Materials				
Paste Type	Product Code	Compatible Substrates	Primary Applications/Benefits	Normalized Sheet Resistance
Platinum	C2020322P6	Polyester, PVC, Polycarbonate or ceramic	Used for printing working electrodes in low temperature electro-chemical sensor applications. It can also be used as a counter electrode. Used to electrochemically measure hydrogen peroxide, and can be coupled to produce biosensors, with oxidase enzymes, DNA or immunosensors.	$\leq 0.32 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT
Polymeric Platinum	C2050804P9	Polyester, ceramics, Kapton, etc.	Platinum Paste is a screen printable paste designed for low temperature printing working electrodes in electrochemical sensor applications. It can also be used as counter electrodes. The paste is designed for curing on polymeric substrates.	$\leq 0.59 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT
Platinum	C51002P6	96% Alumina, or similar ceramic	Used for firing at high temperatures on ceramic substrates. Used as a screen printable paste designed for printing high temperature working electrodes in electrochemical sensor applications. It can also be used as counter electrodes.	$\leq 320 \text{ m}\Omega/\text{square}$ at 25 $\mu\text{m}$ DFT

## Working / Counter Electrode Materials

Working electrode materials from Sun Chemical are optimized for use on various flexible and ridged substrates, including alumina, polyester, PVC, and more. Available in tailor made formulations, for enzyme-based technology, are ideal for reactions involving NADH and hydrogen peroxide.

Working / Counter Electrode Materials				
Paste Type	Product Code	Compatible Substrates	Primary Applications/Benefits	Normalized Sheet Resistance
Carbon/Graphite	C2030519P4	Alumina, Polyester, PVC, Valox FR1	Used in mass production of glucose biosensors producing good printed line definition and ideal for electrochemical applications. Good reversible cyclic voltammetric properties with Ferricyanide mediator. Used in conjunction with UV dielectrics and heat cure dielectrics.	$\leq 30 \Omega/\text{square}$ at 16 $\mu\text{m}$ DFT
Carbon/Graphite	C2180626D6	Polyester, PVC, Polycarbonate or ceramic	A quicker drying version of C2030519P4.	$\leq 50 \Omega/\text{square}$ at 15 $\mu\text{m}$ DFT
Graphene/Carbon	C2171023D1	Suitable for polymeric such as PET, PBT, PVC, or Ceramic	Used as a screen printable conductive paste for use in a variety of applications, including conductive tracks and biosensors. Provides high conductivity to sensors and biosensors.	$\leq 7.5 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT
Carbon/Graphite	C2130814D2	Polyester, PVC or Ceramic	Used as a screen printable conductive paste for mass production of blood glucose biosensors. Highly conductive, provides tough, scratch resistant printed films. Provides good flexibility and adhesion. Good impedance results from 100 kHz to 500 Hz.	$\leq 10 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT
Carbon/Graphite	C2170411D1	Polyester, PVC or Ceramic	Used as a screen printable conductive paste for mass production of blood glucose biosensors. Highly conductive and provides tough, scratch resistant printed films. Provides good flexibility and adhesion. Grades available for different resin types and viscosities. Good impedance results from 100 kHz to 500 Hz.	$\leq 10 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT
Carbon Paste	C2090225D3	Alumina, Polyester, PVC, Valox FR1	Low-cost carbon graphite ink used in 2-reference electrodes of mass printed blood sugar glucose strips.	$\leq 137 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT

## Reference / Counter Electrode Materials and Silvers for Underprinting

Sun Chemical is the leading provider of Silver/Silver Chloride inks. Batches up to 500 kg can be produced providing a consistent product with stable linear electrochemical response. Silver/Silver Chloride can be manufactured as thermoplastic or thermoset inks with Ag to AgCl ratios varying from 40:60 to 90:10. Silver underprint inks are available which can lower the resistance of carbon working electrodes if specific electrode designs cause high resistance tracks.

Silver Silver-Chloride Reference Electrode Materials and Silver underprinting inks							
Paste Type	Product Code	Compatible Substrates	Product Benefits	Primary Applications	Sheet Resistance		
Ag	C2080415P2	Polyimide, PET, PEN, FR4, ITO, Alumina	Low cost silver ink, suitable for flexible conductive tracks, underprints and counter electrodes. It is currently used in mass production of glucose biosensor tracks and also to print underneath carbon graphite inks to enhance conductivity.	Used in medical circuitry for interconnects, conductive tracks, underprints and counter electrodes	≤ 15 mΩ/square at 25 μm DFT		
Ag	C2120918P1	Polyimide, PET, PEN, FR4, ITO, Alumina	Used in mass produced rotary screen printed biosensors with excellent adhesion, conductivity and print properties. Fast evaporating solvents.		≤ 15 mΩ/square at 25 μm DFT		
Ag	C2180423D2	Polyimide, PET, PEN, FR4, ITO, Alumina	Designed to provide maximum flexibility in flexible biosensors in addition to our stretch and crease package. This product is also suitable for in-mould electronics.		≤ 0.08 Ω/square at 25μm DFT		
AgC	C2181108D2	Polyimide, PET, PEN, FR4, ITO, Alumina	Blended with carbon to provide a low silver content, low resistance and a good adhesion with polymeric substrates. Low temperature and fast curing.		≤ 0.1 Ω/square at 25μm DFT		
Ag	C2050926P2	Ceramic	Designed for high temperature curing onto ceramic substrates to print interconnects and counter electrodes for medical sensors.		≤ 3m Ω/25μm DFT		
Ag/AgCl (40:60)	C2040308P2	Polyester, PVC, Polycarbonate, Polyimide, PET, PEN, FR4, ITO, Alumina	Applications in Medical Diagnostics, Environmental Sensors and the 'Agri-Food' Industries. Good print definition.	Medical sensors, biosensors, EKG/ ECG, EEG and Environmental Sensors. DNA Sensors & Lab on a Chip	≤ 5 Ω/square at 25μm DFT		
Ag/AgCl (50:50)	C2131007D3		Ratio of Silver to Silver Chloride of 50/50 with good reference electrode properties. The paste is in a ready to use form at a viscosity suitable for automatic or semi-automatic screen printing.		≤ 100 mΩ/square at 25μm DFT		
Ag/AgCl (60:40)	C2130809D5		Excellent adhesion, conductivity and electrochemical performance. Popular reference electrode used in standard electrochemical base transducers.		≤ 3Ω/square at 25μm DFT		
Ag/AgCl (60:40)	C2030812P3		Slower drying solvents compared to C2130809D5.		≤ 5Ω/square at 25μm DFT		
Ag/AgCl (60:40)	C61003P7		Excellent adhesion, conductivity and electrochemical performance.		≤ 3Ω/square at 25 μm DFT		
Ag/AgCl (60:40)	C2180730D1		Used for continuous glucose monitoring. Excellent adhesion, conductivity and electrochemical performance.		≤ 3.5Ω/square at 25 μm DFT		
Ag/AgCl (70:30)	C2090225P7		A slower drying version of C2130102D1 with good reference electrode properties.		≤ 500 mΩ/square at 16 μm DFT		
Ag/AgCl (70:30)	C2130102D1		Ratio of Silver to Silver Chloride of 70/30 with a reduced particle size so capable of fine-line printing.		≤ 700 mΩ/square at 25 μm DFT		
Ag/AgCl (80:20)	C2130429D3		Ratio of Silver to Silver Chloride of 80/20 with good reference electrode properties.		≤ 30 mΩ/square at 25 μm DFT		
Ag/AgCl (80:20)	C2140310D1		Ratio of Silver to Silver Chloride of 80/20 developed to have an improved wetting and contact angle compared to C2130429D3.		≤ 40 mΩ/square at 25 μm DFT		
Ag/AgCl (90:10)	C2000218P5		Ratio of Silver to Silver Chloride of 90/10 specifically designed for ceramic substrates. Good reference electrode properties and 9 months of shelf life.		≤ 200 mΩ/square at 25 μm DFT		
Ag/AgCl (90:10)	C60531P1		Polyester, PVC, Polycarbonate or Ceramic		Designed to provide excellent mechanical response for CGM (Continuous Glucose Monitoring) biosensors used in ICU Intensive Care Units	Medical sensors, biosensors	≤ 0.2 Ω/square at 13 μm DFT
Ag/AgCl/Carbon Graphite	C2190310D1		Alumina, Polyester, PVC, Valox FR1		Low cost Ag/AgCl formulation blended with Carbon/Graphite, designed specifically for medical devices that require low cost and high performing reference electrodes.	Sensors, Biosensors and EEG, ECG/EKG market.	≤ 3 Ω/square at 25 μm DFT

## Mediated Working Electrode Materials

Mediated working electrode materials from Sun Chemical are optimized for use on various flexible and ridged substrates, including alumina, polyester, PVC, and more. Available in tailor made formulations, for enzyme-based technology, are ideal for reactions involving NADH and hydrogen peroxide.

Mediated Electrode Materials				
Paste Type	Product Code	Compatible Substrates	Primary Applications/Benefits	Normalized Sheet Resistance
Cobalt Phthalocyanine Mediated Carbon Graphite Paste	C2030408P3	Polyester, PVC, Polycarbonate or ceramic	Used for screen printing working electrodes. This is a carbon/graphite paste which has been optimized to give superior electrochemical performance and contains Cobalt Phthalocyanine as mediator that makes it suitable for use with oxidase enzymes where hydrogen peroxide is generated and detected.	$\leq 63 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT
Prussian Blue Mediated Carbon Graphite Paste	C2070424P2	Polyester, PVC, Polycarbonate or ceramic	Used for screen printing working electrodes. These electrodes, when used in conjunction with specific oxidase type enzymes, enable the detection of many analytes.	$\leq 49 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT
Potassium Ferrocyanide Mediated Carbon Graphite Paste	C2070508P4	Polyester, PVC, Polycarbonate or ceramic	Used for screen printing working electrodes. These electrodes when used in conjunction with specific oxidase type enzymes, enable the detection of many analytes, especially with Horseradish Peroxidase for hydrogen peroxide (H2O2) detection.	$\leq 46 \Omega/\text{square}$ at 25 $\mu\text{m}$ DFT

## Insulation or Cover Coat Materials

Dielectric / Insulation Electrode Materials from Sun Chemical can be used to define the working electrode area or to isolate conductive tracks. SunSens insulation or cover coat materials minimize the pin-holing effect.

Insulation Electrode Materials					
Paste Type	Product Code	Compatible Substrates	Primary Applications	Additional Notes	Product Benefits
White Dielectric	D2070209P6	Polyester, PVC, Polycarbonate or ceramic	Designed specifically for use in normal screen printing or rotary screen-printed Biosensors and Electro Luminescent systems.	White	Excellent adhesion, chemical and environmental resistance.
Grey Dielectric	D2070423P5	Polyester, PVC, Polycarbonate or ceramic	Suitable for defining electrode areas and forms a protective layer over the electrode tracking during immersion of the electrode.	Grey	The formulation is designed for maximum flexibility.
White Dielectric	D2100824D2	Polyester, PVC, Polycarbonate or ceramic	Designed for use in electrochemical biosensors and other printed electronics Epoxy based high Dielectric constant white over coat. Ideal for large printing areas.	White	Excellent Opacity, excellent Insulation, and long screen life.
White Dielectric	D2130510P2	Polyester, PVC, Polycarbonate or ceramic	Designed for use in electrochemical biosensors and other printed electronics. Epoxy based high hiding power white over coat.	White	Excellent Opacity, excellent Insulation, and long screen life.
White Dielectric	D2171220D2	Polyester, PVC, Polycarbonate or ceramic	Suitable for defining electrode areas and forms a protective layer over the electrode tracking during immersion of the electrode. Used in CGM's.	White	The formulation is designed for maximum flexibility. This paste is hydrophilic in nature.
Blue Polymer Dielectric	D50706P3	Polyester, PVC, Polycarbonate or ceramic	Suitable for defining electrode areas and forms a protective layer over the electrode tracking during immersion of the electrode.	Blue	This product offers resistance to most solvent attack.



*Solutions. Tailor-Made.*

We deliver solutions that are tailor-made to your needs through our broad portfolio of products and technologies.



### A partner who transforms with you.

Today's environment requires more than change. It demands transformation — and a partner who's willing to transform with you. Sun Chemical, a member of the DIC group, is a leading producer of printing inks, coatings and supplies, pigments, polymers, liquid compounds, solid compounds, and application materials. Together with DIC, Sun Chemical has over 20,000 employees located at 176 subsidiaries across 63 countries working every day to meet the needs of customers by improving performance on the essentials of business, such as reliable, on-time delivery and consistent product quality. Sun Chemical tailors solutions to unique customer needs and brings new ideas and the latest technology to market. As you move forward into a world of stiffer competition, faster turnarounds, more complex demands and sustainable products, count on Sun Chemical to be your partner.

**working for you.**

**[www.sunchemical.com](http://www.sunchemical.com)**  
**[advancedmaterials@sunchemical.com](mailto:advancedmaterials@sunchemical.com)**

Although the information presented here is believed to be reliable, Sun Chemical Corporation makes no representation or guarantee to its accuracy, completeness or reliability of the information. All recommendations and suggestions are made without guarantee, since the conditions of use are beyond our control. There is no implied warranty of merchantability or fitness for purpose of the product or products described herein. In no event shall Sun Chemical Corporation be liable for damages of any nature arising out of the use or reliance upon the information. Sun Chemical Corporation expressly disclaims that the use of any material referenced herein, either alone or in combination with other materials, shall be free of rightful claim of any third party including a claim of infringement. The observance of all legal regulations and patents is the responsibility of the user.

SUNCHEMICAL, SUNSENS and SOLUTIONS. TAILOR-MADE. are either registered trademarks or trademarks of Sun Chemical Corporation in the United States and/or other countries. DIC is a trademark of DIC Corporation, registered in the United States and/or other countries. Copyright © 2020 Sun Chemical Corporation. All rights reserved.

Sun Chemical Advanced Materials  
 USA +1 973 404 6600  
 Latin America +55 11 2462 2500  
 Europe +44 1761 414471  
 Asia +86 21 62289922

**SunChemical<sup>®</sup>**  
 a member of the DIC group   
 Color & Comfort