

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 September 2002 (06.09.2002)


PCT

(10) International Publication Number
WO 02/067753 A1

- (51) International Patent Classification⁷: A47L 9/16
Douwinus [NL/GB]; 96 Sydney Place, Bath, Bath and South East Somerset BA2 6NE (GB).
- (21) International Application Number: PCT/GB02/00301
- (22) International Filing Date: 24 January 2002 (24.01.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0104678.8 24 February 2001 (24.02.2001) GB
- (71) Applicant (for all designated States except US): **DYSON LTD** [GB/GB]; Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **VUIJK, Remco**
- (74) Agents: **CAGE, John, D.** et al.; Intellectual Property Department, Dyson Limited, Tetbury Hill, Malmesbury, Wiltshire SN16 0RP (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

[Continued on next page]

(54) Title: A VACUUM CLEANER

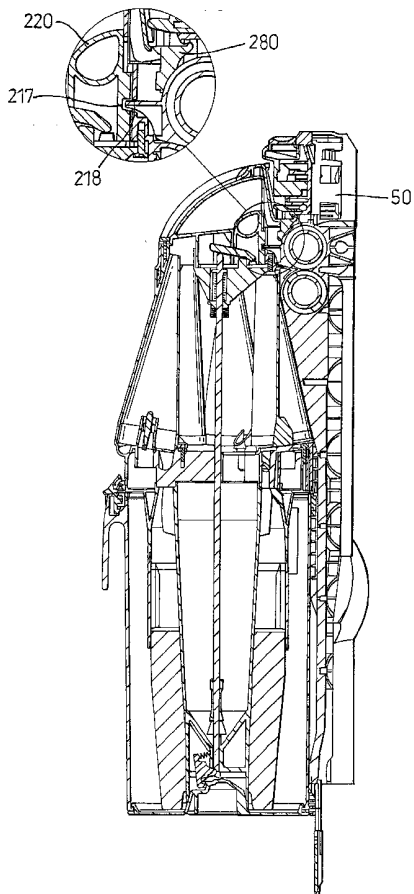

(57) Abstract: A cyclonic vacuum cleaner (10) comprises a separating unit (20) for separating dirt and dust from a dirt-laden airflow which is drawn in by the cleaner. The separating unit (20) has a chamber (205) with a collection area for collecting dirt and dust which is separated from the airflow. A base (210) of the separating unit (20) is movable between a closed position (Fig. 3) in which the closure member (210) seals the chamber and an open position by operation of a releasing means (220, 222, 230, 260). The releasing means is inhibited from releasing the base (210) when the unit (20) is stowed on the chassis (50) of the cleaner.



WO 02/067753 A1



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS,*

MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG) of inventorship (Rule 4.17(iv)) for US only

Published:

- *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A Vacuum Cleaner

This invention relates to a vacuum cleaner which incorporates a collecting chamber.

5 Vacuum cleaners which separate dirt and dust from an airflow without the use of a filter bag, so-called bagless vacuum cleaners, are becoming increasingly popular. Most bagless cleaners use cyclonic or centrifugal separation to spin dirt and dust from the airflow. By avoiding the use of a filter bag as the primary form of separation, it has been found possible to maintain a consistently high level of suction, even as the
10 collecting chamber fills with dirt.

The principle of cyclonic separation in domestic vacuum cleaners is described in a number of publications including EP 0 042 723. In general, an airflow in which dirt and dust is entrained enters a first cyclonic separator via a tangential inlet which causes the
15 airflow to follow a spiral or helical path within a collection chamber so that the dirt and dust is separated from the airflow. Relatively clean air passes out of the chamber whilst the separated dirt and dust is collected therein. In some applications, and as described in EP 0 042 723, the airflow is then passed to a second cyclone separator which is capable of separating finer dirt and dust than the upstream cyclone. The airflow is
20 thereby cleaned to a greater degree so that, by the time the airflow exits the cyclonic separating apparatus, the airflow is almost completely free of dirt and dust particles.

While bagless vacuum cleaners are successful in maintaining a consistently high level of suction, the absence of a bag can make it difficult to dispose of the dirt and dust
25 which is collected by the cleaner. When the separating chamber of a bagless cleaner becomes full, a user typically removes the collecting chamber from the chassis of the machine, carries the chamber to a dust bin or refuse sack and tips the chamber upside down. Often dirt and dust is densely packed inside the collecting chamber and it may be necessary for a user to manually dislodge the dirt by reaching into the chamber and
30 pulling at the collected mass of dust and fibres, or to shake or bang the collecting

chamber against the side of a dustbin. In some cases, this can cause a fair amount of mess.

5 Some solutions to this problem have been proposed. US 5,090,976 describes the use of a disposable liner which can be fitted inside the cyclonic separating chamber. When the liner is full, the liner is lifted out of the chamber and disposed of. WO 98/10691 describes a cyclonic collection chamber where a bag is retained, in a collapsed state, in the base of the collection chamber. When the collection chamber is full, the base is unscrewed from the chamber so that the bag can extend downwardly from the base.

10 Dirt and dust slides out of the collecting chamber into the bag and the bag can then be sealed and separated from the collecting chamber for disposal. Both of these solutions have a disadvantage in that they require a user to keep a supply of spare bases or liners, which adds to the cost of maintaining the machine.

15 EP 1 023 864 describes a dust-collecting device for a cyclonic vacuum cleaner. The dust-collecting chamber can be removed from the chassis of the cleaner for emptying. A bottom lid of the dust-collecting chamber is attached by way of a hinge to the remainder of the chamber and the lid can be released by pressing a release button. A ribbed cylindrical filter is fitted inside the dust-collecting chamber and is rotatable

20 within the chamber to encourage the release of dirt which is stored in the chamber.

The present invention seeks to provide a bagless vacuum cleaner which is more convenient for a user to manipulate.

25 Accordingly, the present invention provides a bagless vacuum cleaner comprising a collecting chamber which is removable from a stowed position on a chassis of the vacuum cleaner, the collecting chamber comprising an inlet for receiving a dirt-laden airflow, an air outlet, a collection area for collecting, in use, dirt and dust which has been separated from the airflow and wherein part of the chamber wall in the region of

30 the collection area is a closure member which is movable between a closed position in which the closure member seals the chamber and an open position in which dirt and

dust can escape from the collection area, the chamber further comprising releasing means for releasing the closure member from the closed position, and wherein the releasing means are inhibited from releasing the closure member when the separator is in the stowed position.

5

By inhibiting operation of the releasing means when the collecting chamber is stowed on the chassis of the cleaner, it is not possible for a user to accidentally release the closure member. This avoids the mess which would result if the cleaner were operated with the closure member partially open or if the collecting chamber were removed from the chassis with the closure member partially open. Indeed, the manner in which the collecting chamber is supported on the chassis is such that a user may not be aware that they had inadvertently released the closure member until they removed the collecting chamber from the chassis.

15 The term 'bagless' is intended to cover a broad range of vacuum cleaners which have a reusable collecting chamber, and includes, inter alia, cleaners which separate dirt and dust by way of cyclonic, centrifugal or inertial separation.

Preferably the closure member remains coupled to the collecting chamber, such as by a pivotal coupling. Thus, a user does not need to struggle with refitting the closure member and there is no risk of the closure member falling into a dust bin or refuse sack along with the dirt and dust which is released from the collecting chamber.

It is convenient for the actuating member to be located adjacent a handle for carrying the collecting chamber. This allows a user to carry and empty the collecting chamber with one hand.

Preferably agitating means are provided for agitating dirt held within the collection area, the agitating means being operable by the releasing means. This helps to dislodge any dirt that may have become 'stuck' in the collection area. Also, a user does not need to separately operate the release and the agitating means.

30

Preferably the closure member is pivotably fixed to the collecting chamber. However, it is also possible for the closure member to be slideably movable with respect to the collecting chamber.

5

The collecting chamber preferably comprises a cyclonic separator where dirt-laden air is spun at high speed to centrifugally separate dirt from the airflow but it can be any form of bagless separator where the collecting chamber is reused after it has been emptied.

10 The collecting chamber can have more than one separation stage. Preferably the collection areas of the first, second (and further) stage separators each lie adjacent the closure member such that all of the collected dirt and dust can be readily emptied from the collecting chamber.

15 Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows a bagless vacuum cleaner;

20 Figure 2 shows just the dirt and dust separation unit of the vacuum cleaner of Figure 1;

Figure 3 is a cross-section along line A-A of the dirt and dust separation unit of Figure 2, with the base of the unit in a closed position;

25 Figure 4 shows the same cross-section as Figure 3 but with the base in a partially open position;

Figure 5 shows the same cross-section as Figure 3 but with the base in a fully open position;

30

Figure 6 is a cross-section through the dirt and dust separation unit mounted on the chassis of the vacuum cleaner;

Figure 6A is a more detailed view of the same cross-section as Figure 6, showing the
5 feature on the chassis which inhibits movement of the trigger release mechanism;

Figure 7 is a more detailed view of the lower part of the cross-section of Figure 3; and,

Figure 8 shows how dirt and dust accumulates in the dirt and dust separation unit.

10

Referring to Figures 1 to 3, a vacuum cleaner 10 has a main chassis 50 which supports dirt and dust separation apparatus 20. The lower part of the cleaner 10 comprises a cleaner head 22 for engaging with the floor surface. The cleaner head has a downwardly facing suction inlet and a brush bar is mounted in the mouth of the inlet for
15 agitating the floor surface. The cleaner head is pivotably mounted to a motor housing 24 which houses the motor and fan of the cleaner. Support wheels 26 are mounted to the motor housing for supporting the cleaner and allowing movement across a floor surface. A spine of the chassis 50 extends upwardly from the motor housing 24 to provide support for the components of the cleaner. A cleaning wand 42 having a second
20 dirty air inlet 43 is connected by way of a hose (not shown) to the chassis at the base of the spine 50. The wand 42 is releasable from the spine 50 so as to allow a user to carry out above-the-floor cleaning and cleaning in places which are inaccessible by the main cleaning head 22. When the wand is fixed to the spine 50, the wand 42 forms the
25 handle of the cleaner and a handgrip 40 at the remote end of the wand 42 allows a user to manoeuvre the cleaner. These features of the cleaner are well known and have been well documented elsewhere and can be seen, for example, in cleaners which are manufactured by DYSON™, and thus will not be described in any further detail.

Dirty air from the cleaner head 22 or wand inlet 43 is carried to the separator unit 20 by
30 inlet conduit 28 and inlet 30. Separator 20 is a cyclonic separator which spins dirt, dust and other debris out of the airflow by centrifugal separation. One particular form of

separator unit 20 is shown in detail in the figures as a preferred embodiment but it should be understood that there are many other ways in which the separator could be constructed. In the illustrated separator unit 20, airflow passes through a first separation stage and then a second separation stage. The first separation stage is a substantially

5 cylindrically-walled cyclonic chamber 205 whose purpose is to separate large debris and dirt from the airflow. Inlet 30 is arranged to direct dirty air into the chamber 205 in a tangential direction to the wall of the chamber. Fins or baffles 207 extend radially outwardly from a central core of the chamber and serve to discourage separated dirt or dust from becoming re-entrained in the airflow when the vacuum cleaner is first started.

10 The outlet of the first separation stage is a shroud 260, i.e. an apertured annular wall mounted coaxially inside the chamber 205. The area on the inner side of the shroud leads to the second separation stage. The second separation stage is a set of tapered cyclonic chambers 240 which are arranged in parallel with one another. Each cyclonic chamber 240 has a tangential inlet 242, an outlet 243 for separated dirt and dust and a

15 cleaned air outlet 244. Each of the cleaned air outlets 244 of the cyclonic chambers 240 communicate with an outlet conduit such that air from the individual outlets of the parallel cyclonic chambers is recombined into a single flow. The outlet conduit mates with a port on the chassis spine 50 when the separator unit 20 is fitted to the chassis.

20 In use dirty air which is laden with dirt, dust and other debris enters the first separation stage via inlet 30 and follows a spiral path around the chamber 205. The centrifugal force acting on the material in the airflow causes the larger debris and dirt to be separated from the airflow. This separated material collects at the base of the chamber 205, against base 210, due to a combination of gravity and the pressure gradient which

25 exists in chamber 205 while the cleaner is in operation. The airflow passes through the shroud 260. The shroud 260 causes air to perform a sharp change of direction and causes fibrous material to collect on the outer wall of the shroud 260. The airflow passes to the second separation stage where it is divided between the cyclonic chambers. Air enters a respective one of the chambers via a tangential inlet and is then constrained

30 to follow a spiral path of decreasing radius which greatly increases the speed of the airflow. The speed is sufficient to separate dirt and extremely fine dust from the

airflow. The separated dirt and dust exits the cyclonic chambers 240 via outlets 243 which communicate with a central conduit 245. Dirt and dust falls, under gravity, towards the base of conduit 245 and collects at the lower end of the conduit 245 adjacent the base 210 in region 270 (Figure 8). Cleaned air from the parallel chambers 245 is recombined into a single flow and is channelled out of the separator unit 20, down the spine 50 of the chassis and through a pre-motor filter, fan and post-motor filter before finally being exhausted from the cleaner.

It should be understood that the second separation stage need not be a set of parallel cyclonic chambers 240. The second separation stage could be a single tapered cyclonic chamber which can fit inside the cylindrical chamber of the first separation stage, as shown in EP 0 042 723. Alternatively, the second separation stage could be a further cylindrical cyclone or it could be omitted altogether. The first separation stage may be a tapered chamber rather than the cylindrical one described. However, in each of these alternatives, dirt and dust will be separated from an airflow without the use of a filter bag and will collect in a collection area.

The separator unit 20 is supported by the chassis 50 and is releasably held upon the chassis by a catch 280, shown more clearly in Figure 6A. The separator unit 20 is shown by itself in Figures 2 - 5. The separator unit 20 is releasable from the chassis to allow the separator to be emptied. A handle 202 is provided at the top of the separator unit 20 for allowing a user to carry the unit 20. The base 210 of the separator unit is movable between a closed position (shown in Figures 2, 3) and an open position (shown partially open in figure 4 and fully open in Figure 5) to permit emptying of the unit 20. The base 210 is hinged 214 to the cyclone chamber 205 to allow pivotal movement between the base 210 and chamber 205. Two separate collection areas lie adjacent to the base 210. The first collection area is the annular region between the cylindrical chamber wall 205 and the inner wall 206 at the lower end of the separator. The second collection area 270 is the area within the tube-like part 206. Thus, when base 210 opens, material empties from both of the collection areas. The outer annular edge of the base 210 has a radially inwardly extending slot to hold a seal 212. In use, with the base

closed, the seal 212 fits tightly against the inner wall of the chamber 205 to maintain an air and dust-tight seal. A second seal 213 extends axially outwardly from the lower annular edge of part 206 such that it fits tightly against the axially extending wall of the raised central cap of the base 210. Seals could be located in other positions to achieve the same sealing effect of the base. The base 210 is held in the closed position by a lock mechanism 260, 262. The locking mechanism is controlled by a manually operable trigger 220. A linking mechanism 222, 223, 224, 230 joins the trigger 220 to the lock mechanism. Trigger 220 is received in a vertically extending channel on the spine-facing side of the separator which confines the trigger to follow a vertical movement. A lug on the trigger cooperates with a lever arm 222. The lever is pivotably fixed to the housing such that the remote end of the lever arm pushes downwardly against the upper end 231 of push rod 230. The push rod 230 is resiliently biased by spring 223 in the position shown in Figure 3 and can be displaced downwardly (to the position shown in Figure 4) against the action of the spring 223 when the trigger is pulled. Spring 223 is held in a cavity of the housing and respective ends of the spring 223 act against the end wall of the cavity and the flange which is carried by the push rod 230 near end 231. The linking mechanism is shielded from dust by a gaiter 224, which is attached to the push rod 230 and the housing of the separator unit. The gaiter 224 stretches as the push rod moves downwardly, maintaining a dust-tight shield for the mechanism behind the gaiter 224.

The lowermost end of the push rod has an inclined face which cooperates with a similarly inclined face on the catch 260 at the base. Catch 260 is pivotably mounted to the base and can be displaced, against the bias of spring 262, to the position shown in Figure 4. The catch has a hook 263 which engages with a corresponding hooked feature 264 on the central part of the base 210 so as to hold the base 210 in the closed position. The lowermost surface of the catch 260 is curved such that when the base 210 is pushed towards the closed position the catch 260 is displaced, allowing the hook 264 on the base 210 to engage with the hook 263 on the catch 260.

It will be appreciated that the trigger, linking mechanism and lock can be realised in many alternative ways. For example, the trigger 220 could be linked directly to the push rod 230, rather than being indirectly linked by the lever 222.

5 The lower end of the push rod 230 also carries an agitator 250. The agitator 250 is fixed to the push rod and thus moves upwardly and downwardly with the push rod as the trigger 220 is operated. In use, a plug of dirt and dust may form at the lower end of the second collection area, next to base 210. The agitator 250 has radially outwardly extending fins. In use, movement of the agitator will either push the plug or break the
10 plug into smaller parts which can then fall out of the collection area. The inner surfaces of the collection tube are smooth and tapered to discourage dirt from settling. The agitator could be more elaborate than the one shown here. For example, the agitator could be arranged to rotate about the longitudinal axis of the push rod 230 as the push rod moves upwards or downwards. A second agitator could be provided in the first
15 collection area, the second agitator also being linked to the push rod or release mechanism. The cutting effect of the agitator on a plug of material can be improved by forming sharp or pointed edges on the agitator.

To ensure an air and dust-tight seal around the base, the seal 212 fits tightly against the
20 chamber. This may cause the base to 'stick' in the closed position when the catch 260 is released. The push rod 230 has a sufficient length such that, when it is operated, it moves downwardly towards the catch 260, operates catch 260 and then continues to move towards the base 210, pushing against the base, overcoming the resistance of the seal 212 against the chamber wall 205 and thus pushing the base 210 open.

25 In use, a user removes the separator unit 20 from the chassis by operating release member 280 and carries the separator unit 20, by way of handle 202, to a dust bin or refuse sack. The lower end of the separator unit is held over or within the dust bin or sack and the trigger 220 is pulled. This causes the base 210 to swing open and dirt, dust
30 and debris which has been collected in the chamber 205 falls out of the unit 20 into the bin. Due to the distance between the handle and base, and the direction in which the

dirt falls from the unit 20, a user is not brought into contact with the dirt. As the dirt collects against the part of the chamber which opens, i.e. base 210, the dirt falls out of the chamber 205 with little or no additional effort by a user. Fine dust collected within the second stage collector 270 can be fully cleared by the user operating trigger 220
5 several times. This will operate agitator 250.

Figure 6 shows the separator unit 20 in position on the chassis 50 of the cleaner 10. To ensure that the base 210 is not accidentally opened when the cleaner is in use, the chassis 50 has a projection 218 which fits inside a notch 217 on the trigger 220 when
10 the separator unit 20 is fitted to the chassis 50. Thus, the trigger 220 is inhibited from moving in the vertical direction which is necessary for the closure member 210 to be released.

In the arrangement shown in the drawings the base 210 is pivotably fixed to the
15 chamber. It would also be possible for the base to be slideable with respect to the chamber.

Claims

1. A bagless vacuum cleaner comprising a chassis and a collecting chamber which is removable from a stowed position on the chassis, the collecting chamber comprising
5 an inlet for receiving a dirt-laden airflow, an air outlet, a collection area for collecting, in use, dirt and dust which has been separated from the airflow and wherein part of the chamber wall in the region of the collection area is a closure member which is movable between a closed position in which the closure member seals the chamber and an open position in which dirt and dust can escape from the collection area, the chamber further
10 comprising releasing means for releasing the closure member from the closed position, and wherein the releasing means are inhibited from releasing the closure member when the separator is in the stowed position.
2. A vacuum cleaner according to claim 1 wherein the chassis of the vacuum
15 cleaner has a projection for locating in a recess on the releasing means of the collecting chamber and for inhibiting movement of the releasing means.
3. A vacuum cleaner according to claim 1 or 2 wherein the releasing means is operable to apply an opening force to the closure member.
20
4. A vacuum cleaner according to claim 3 wherein the closure member is pivotably attached to the chamber and the releasing means is operable to apply an opening force to the closure member at a position which is spaced from the pivot.
- 25 5. A vacuum cleaner according to any one of the preceding claims wherein the releasing means comprises an actuating member and a linking mechanism which couples the actuating member to the closure member.
- 30 6. A vacuum cleaner according to claim 5 further comprising agitating means for agitating dirt held within the collection area, the agitating means being operable by the actuating member.

7. A vacuum cleaner according to claim 6 wherein the agitating means is mounted on the linking mechanism.
- 5 8. A vacuum cleaner according to any one of claims 5 to 7 wherein the actuating member is located at an opposite end of the collecting chamber to where the closure member is located.
9. A vacuum cleaner according to any one of claims 5 to 8 further comprising a
10 handle for carrying the collecting chamber and wherein the actuating member is located adjacent the handle.
10. A vacuum cleaner according to claim 9 wherein the actuating member is a
15 trigger mechanism which is located beneath the handle.
11. A vacuum cleaner according to any one of the preceding claims wherein the
closure member is lockable in the closed position.
12. A vacuum cleaner according to claim 11 wherein the closure member is
20 automatically locked as the closure member is moved towards the closed position.
13. A vacuum cleaner according to claim 12 wherein the lock is resiliently mounted
such that it can be temporarily displaced by the closure member as the closure member
is moved towards the closed position.
- 25 14. A vacuum cleaner according to any one of the preceding claims wherein the
closure member is pivotably fixed to the collecting chamber.
15. A vacuum cleaner according to any one of claims 1 to 13 wherein the closure
30 member is slideably movable with respect to the collecting chamber.

16. A vacuum cleaner according to any one of the preceding claims wherein the closure member carries a seal for sealing against the part of the collection area in which it is fitted.
- 5 17. A vacuum cleaner according to any one of the preceding claims wherein the closure member forms a surface against which dirt and dust can collect during operation of the vacuum cleaner.
18. A vacuum cleaner according to claim 17 wherein the closure member forms a
10 base of the collecting chamber.
19. A vacuum cleaner according to any one of the preceding claims wherein the collecting chamber comprises a cyclonic separator.
- 15 20. A vacuum cleaner according to claim 19 further comprising a second stage separator and a second stage collection area, and wherein both the second stage and first stage collection areas lie adjacent the closure member.
21. A vacuum cleaner according to claim 20 wherein the second stage collection
20 area lies within the first stage collection area.
22. A vacuum cleaner according to claim 21 further comprising a wall which separates the second stage collection area from the first stage collection area.
- 25 23. A vacuum cleaner substantially as described herein with reference to the accompanying drawings.

1/6

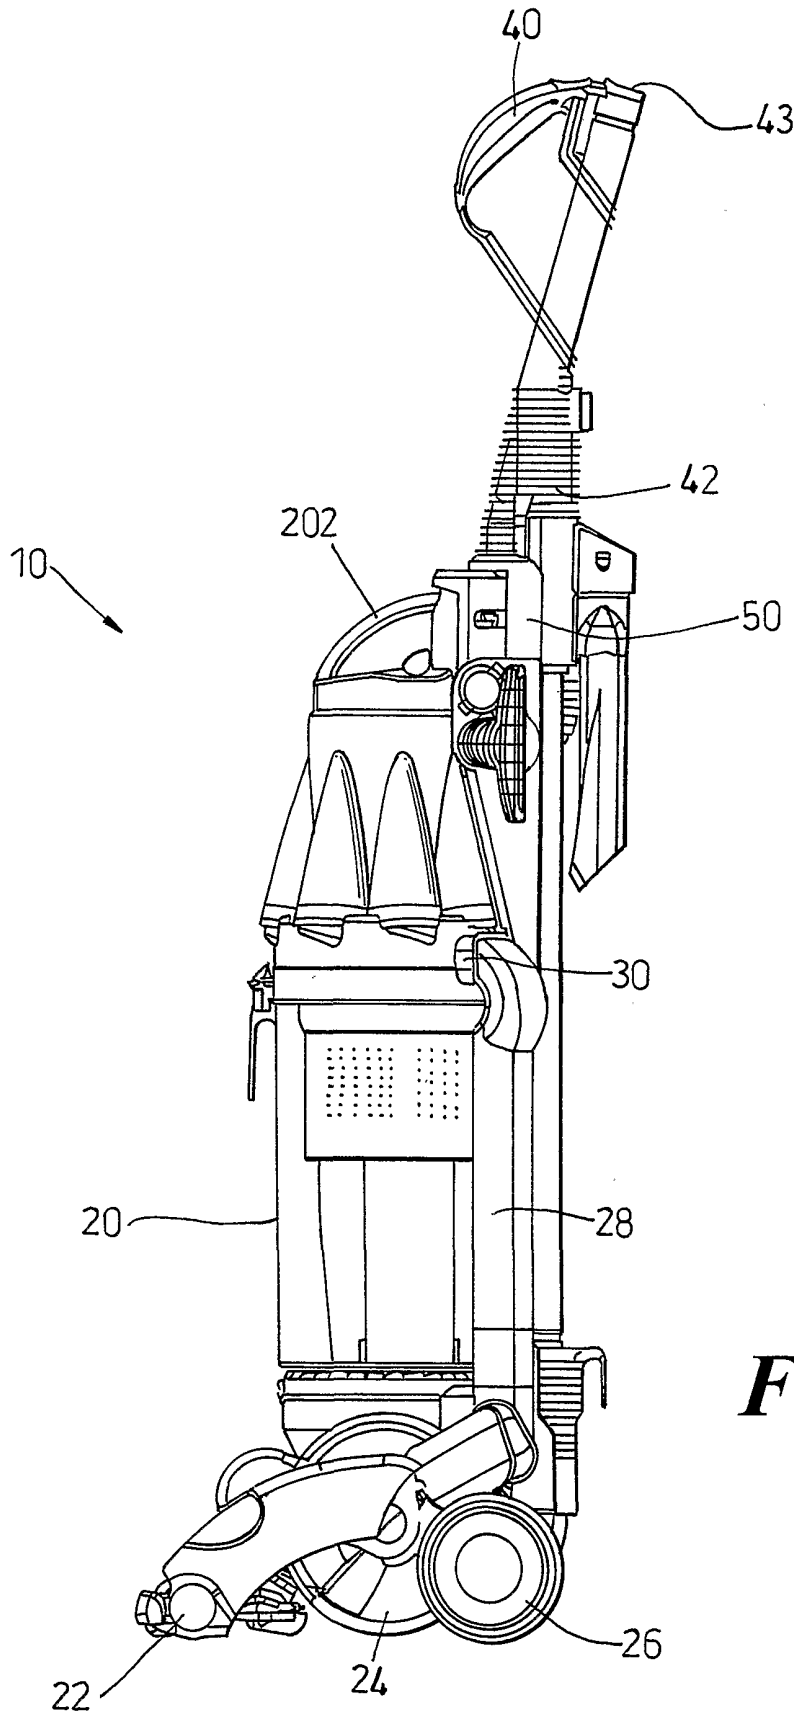


Fig. 1

2/6

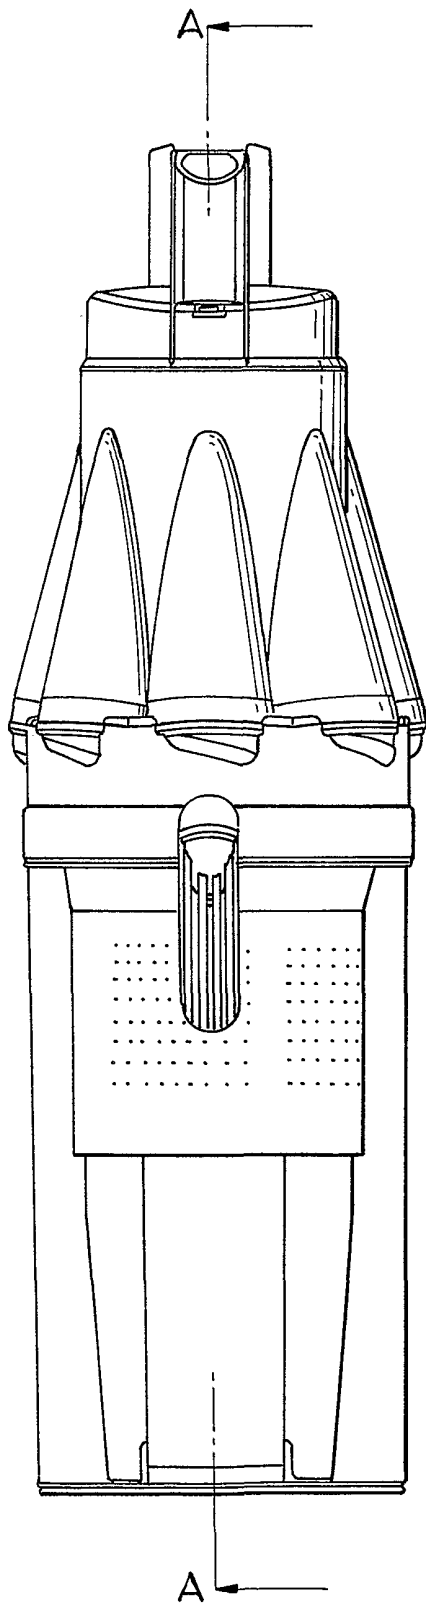


Fig. 2

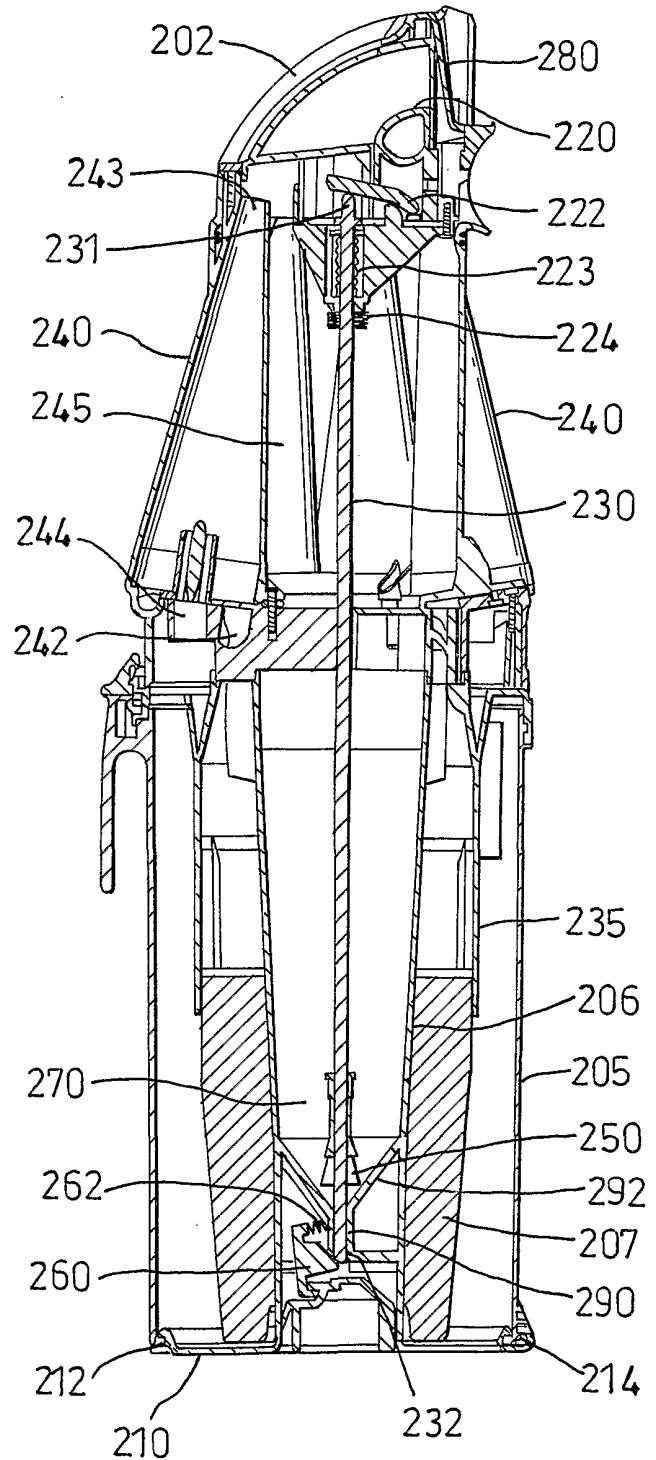


Fig. 3

3/6

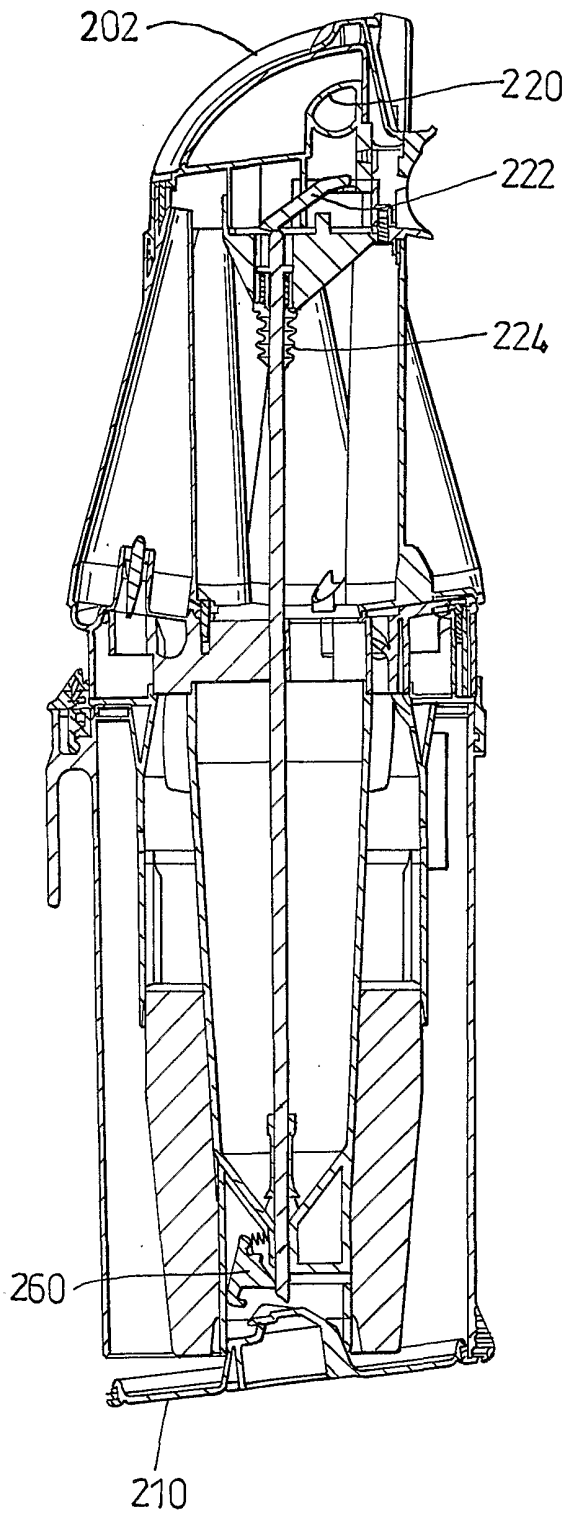


Fig. 4

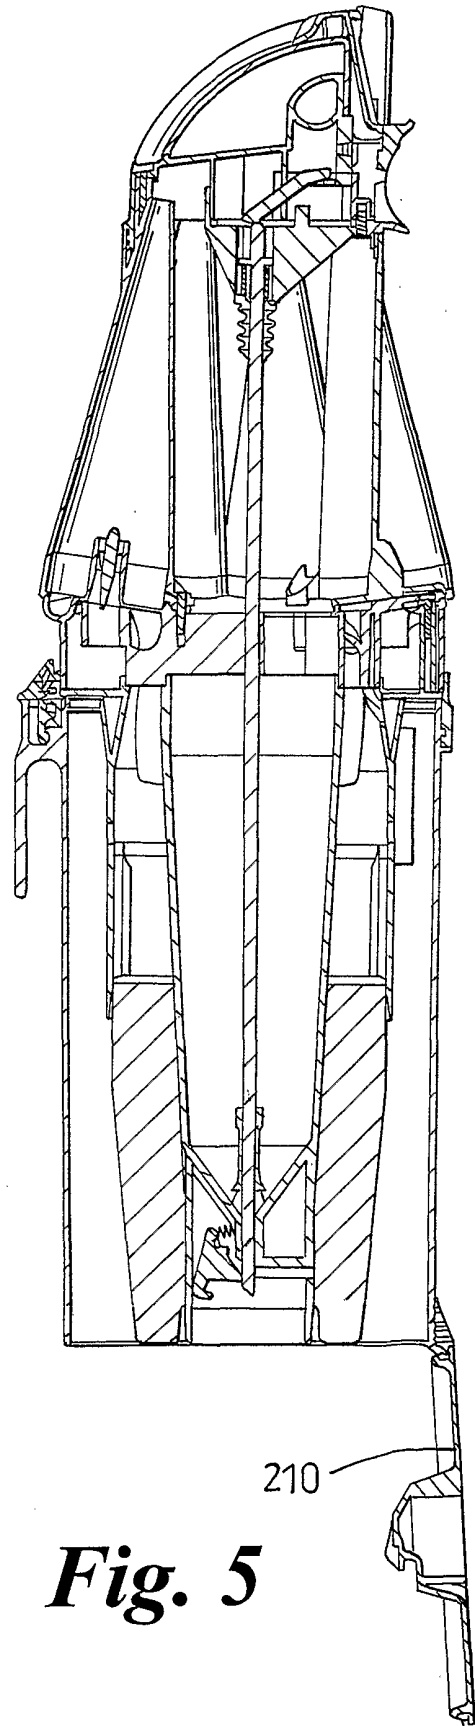
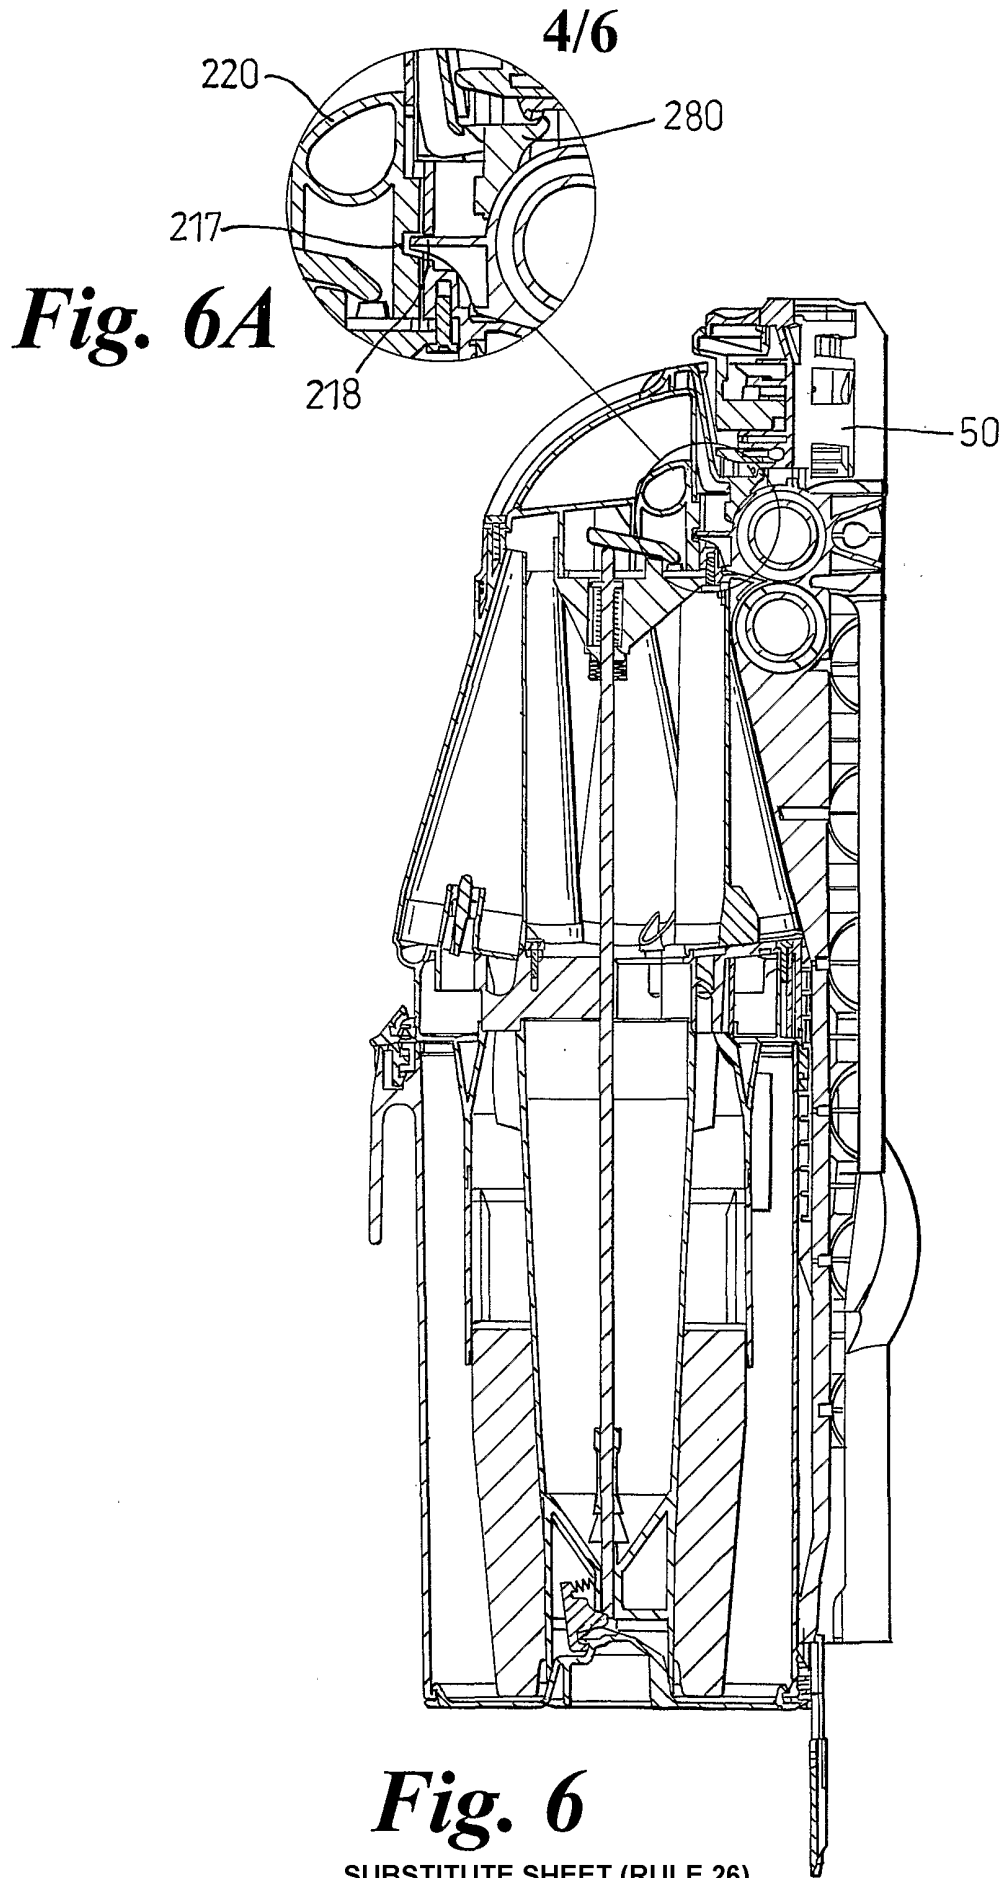


Fig. 5



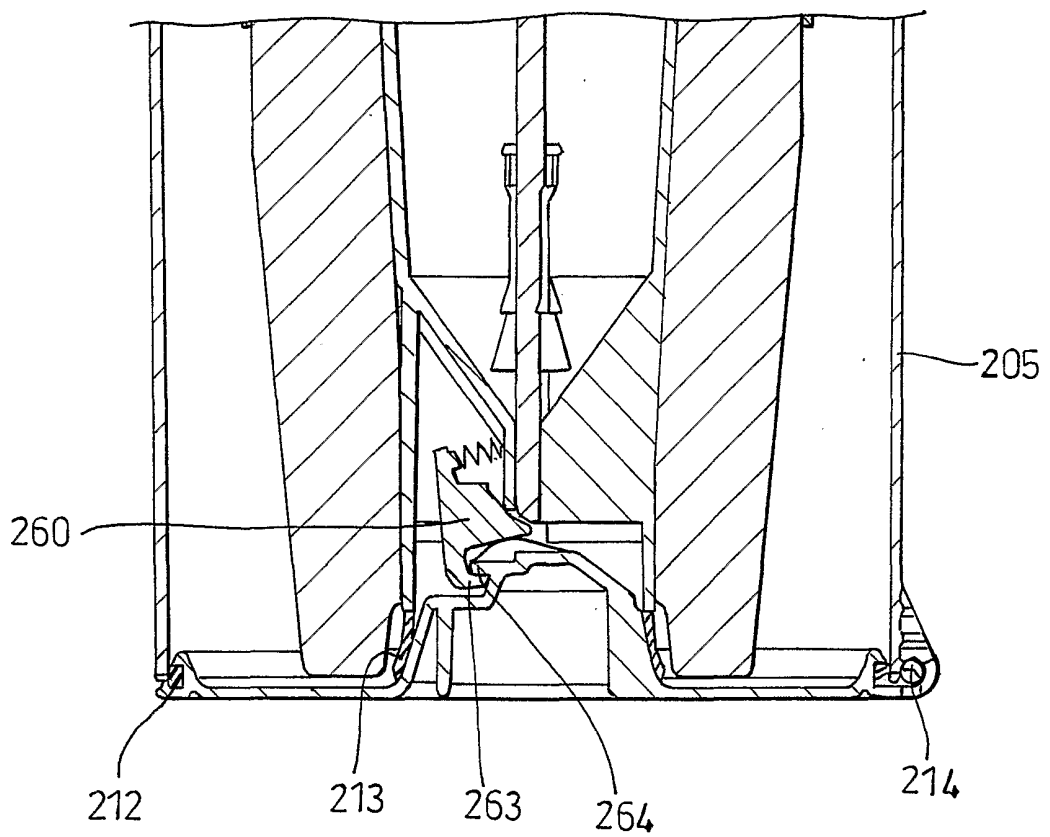


Fig. 7

6/6

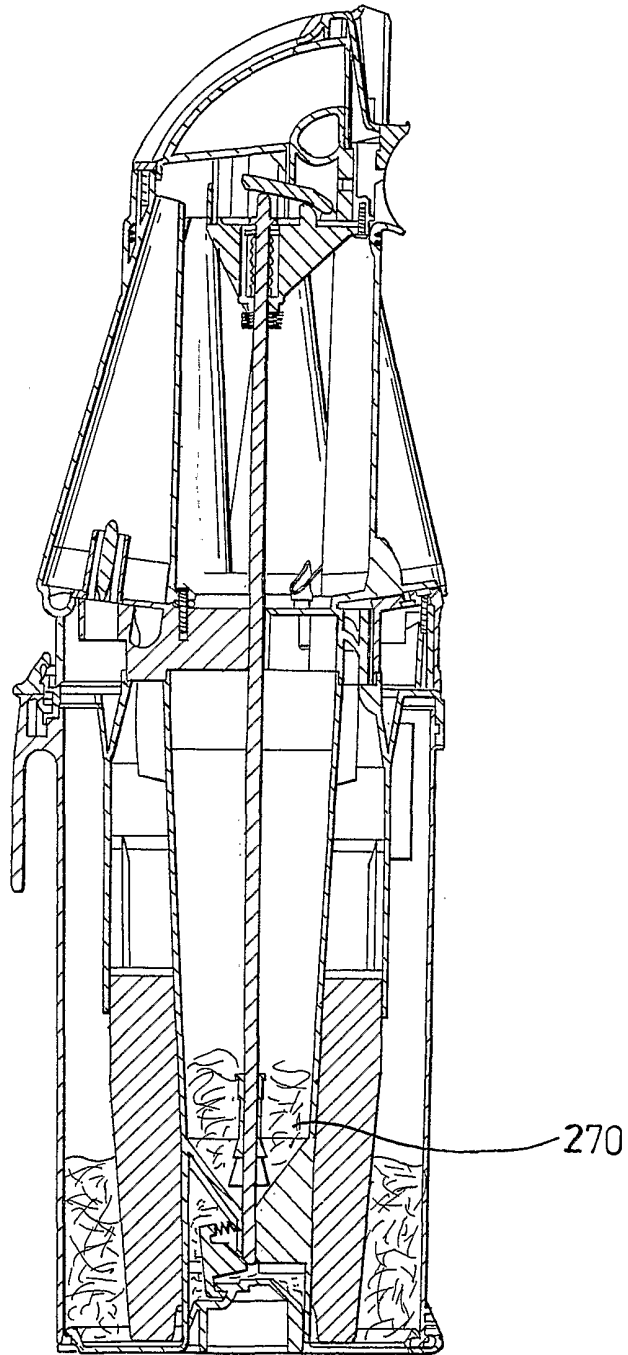


Fig. 8

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 02/00301

<p>A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A47L9/16</p> <p>According to International Patent Classification (IPC) or to both national classification and IPC</p>														
<p>B. FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols) IPC 7 A47L B04C</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p>Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal</p>														
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1"> <thead> <tr> <th>Category °</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>GB 2 344 746 A (NOTETRY LTD) 21 June 2000 (2000-06-21) page 9, paragraph 2 page 11, line 15 - line 17 page 12, line 4 - line 5; figures 3,5A,5B</td> <td>1-3,9, 10,15, 19-22</td> </tr> <tr> <td>Y</td> <td>--- EP 1 023 864 A (SANYO ELECTRIC CO) 2 August 2000 (2000-08-02) cited in the application column 7, line 8 - line 17 column 7, line 23 - line 25 column 16, line 47 -column 17, line 10 column 20, line 44 -column 21, line 15; figure 28 --- -/--</td> <td>4-6,8, 11-14, 16-18</td> </tr> <tr> <td>Y</td> <td>EP 1 023 864 A (SANYO ELECTRIC CO) 2 August 2000 (2000-08-02) cited in the application column 7, line 8 - line 17 column 7, line 23 - line 25 column 16, line 47 -column 17, line 10 column 20, line 44 -column 21, line 15; figure 28 --- -/--</td> <td>4-6,8, 11-14, 16-18</td> </tr> </tbody> </table>			Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	GB 2 344 746 A (NOTETRY LTD) 21 June 2000 (2000-06-21) page 9, paragraph 2 page 11, line 15 - line 17 page 12, line 4 - line 5; figures 3,5A,5B	1-3,9, 10,15, 19-22	Y	--- EP 1 023 864 A (SANYO ELECTRIC CO) 2 August 2000 (2000-08-02) cited in the application column 7, line 8 - line 17 column 7, line 23 - line 25 column 16, line 47 -column 17, line 10 column 20, line 44 -column 21, line 15; figure 28 --- -/--	4-6,8, 11-14, 16-18	Y	EP 1 023 864 A (SANYO ELECTRIC CO) 2 August 2000 (2000-08-02) cited in the application column 7, line 8 - line 17 column 7, line 23 - line 25 column 16, line 47 -column 17, line 10 column 20, line 44 -column 21, line 15; figure 28 --- -/--	4-6,8, 11-14, 16-18
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
X	GB 2 344 746 A (NOTETRY LTD) 21 June 2000 (2000-06-21) page 9, paragraph 2 page 11, line 15 - line 17 page 12, line 4 - line 5; figures 3,5A,5B	1-3,9, 10,15, 19-22												
Y	--- EP 1 023 864 A (SANYO ELECTRIC CO) 2 August 2000 (2000-08-02) cited in the application column 7, line 8 - line 17 column 7, line 23 - line 25 column 16, line 47 -column 17, line 10 column 20, line 44 -column 21, line 15; figure 28 --- -/--	4-6,8, 11-14, 16-18												
Y	EP 1 023 864 A (SANYO ELECTRIC CO) 2 August 2000 (2000-08-02) cited in the application column 7, line 8 - line 17 column 7, line 23 - line 25 column 16, line 47 -column 17, line 10 column 20, line 44 -column 21, line 15; figure 28 --- -/--	4-6,8, 11-14, 16-18												
<p><input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.</p>														
<p>° Special categories of cited documents:</p> <table border="0"> <tr> <td>*A* document defining the general state of the art which is not considered to be of particular relevance</td> <td>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>*E* earlier document but published on or after the international filing date</td> <td>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</td> </tr> <tr> <td>*O* document referring to an oral disclosure, use, exhibition or other means</td> <td>*Z* document member of the same patent family</td> </tr> <tr> <td>*P* document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			*A* document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	*E* earlier document but published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.	*O* document referring to an oral disclosure, use, exhibition or other means	*Z* document member of the same patent family	*P* document published prior to the international filing date but later than the priority date claimed			
A document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention													
E earlier document but published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone													
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.													
O document referring to an oral disclosure, use, exhibition or other means	*Z* document member of the same patent family													
P document published prior to the international filing date but later than the priority date claimed														
<p>Date of the actual completion of the international search 18 March 2002</p>		<p>Date of mailing of the international search report 04/04/2002</p>												
<p>Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016</p>		<p>Authorized officer Papadimitriou, S</p>												

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/00301

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 781 962 A (FIEGEL PAUL E ET AL) 21 July 1998 (1998-07-21) figures 2,4,6 ---	1
A	US 4 571 772 A (DYSON JAMES) 25 February 1986 (1986-02-25) figures 7,8,10 ---	1
A	US 3 040 362 A (KRAMMES DON C) 26 June 1962 (1962-06-26) figure 1 -----	1

INTERNATIONAL SEARCH REPORT

International Application No. PCT/GB 02 00301

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 23

Claim 23 does not define clearly and unambiguously the material features of the vacuum cleaner.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int	ional Application No
PCT/GB 02/00301	

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
GB 2344746	A	21-06-2000	AU 1576200 A	12-07-2000
			EP 1139846 A1	10-10-2001
			WO 0036963 A1	29-06-2000
EP 1023864	A	02-08-2000	JP 2000342492 A	12-12-2000
			AU 1358300 A	03-08-2000
			CN 1263754 A	23-08-2000
			EP 1023864 A2	02-08-2000
			TW 412413 B	21-11-2000
			US 6192550 B1	27-02-2001
US 5781962	A	21-07-1998	NONE	
US 4571772	A	25-02-1986	US 5160356 A	03-11-1992
US 3040362	A	26-06-1962	CH 345986 A	30-04-1960
			CH 362183 A	31-05-1962
			DE 1134488 B	
			DE 1143307 B	
			DE 1229687 B	
			FR 1229032 A	02-09-1960
			FR 1233293 A	12-10-1960
			GB 882020 A	08-11-1961
			GB 1042434 A	14-09-1966
			GB 928046 A	06-06-1963
			MY 5662 A	31-12-1962
			MY 3864 A	31-12-1964
			US 3117337 A	14-01-1964