

(12) UK Patent Application (19) GB (11) 2 154 355 A

(43) Application published 4 Sep 1985

(21) Application No 8500861

(22) Date of filing 14 Jan 1985

(30) Priority data

(31) 84/005094	(32) 13 Jan 1984	(33) JP
84/120153	12 Jun 1984	
84/213175	11 Oct 1984	
84/225245	26 Oct 1984	
84/225246	26 Oct 1984	

(51) INT CL⁴
G09G 3/36

(52) Domestic classification
G5C A310 A342 A375 HG
U1S 2206 G5C

(56) Documents cited
GB A 2017372 GB A 2013954 GB 1566516
GB A 2015225 GB 1602165 EP A1 0002190

(58) Field of search
G5C

(71) Applicant
Ricoh Company Ltd (Japan),
3-6 Nakamagome 1-chome, Ohta-ku, Tokyo, Japan


(72) Inventors
Wasaburo Ohta
Takamichi Enomoto
Kiyohiro Uehara

(74) Agent and/or Address for Service
Marks & Clerk,
57-60 Lincoln's Inn Fields, London WC2A 3LS

(54) Liquid crystal color display device

(57) A display device includes a liquid crystal cell 1, one or two polarizers 5,6, and a fluorescent light-emitting means (7,8,71). The liquid crystal cell 1 and one polarizer, disposed on one side thereof, or the liquid crystal cell and two polarizers sandwiching the cell, jointly constitute a switching element for passing electromagnetic radiation in a pattern representing the image given by an image signal. A fluorescent layer 71 is responsive to the electromagnetic radiation from a lamp 8 for emitting chromatic fluorescent light. Where the fluorescent light-emitting means (7,8,71) has a color filter, the fluorescent light passes through the color filter to display the image. The fluorescent layer 71 or filter may be formed of regions emitting or passing red, green or blue light, which regions are aligned with an electrode array 21, the electrodes of which activate discrete regions of the liquid crystal 11 to enable the fluorescent light to pass through the polarizer or polarizers 5,6.

FIG. 1

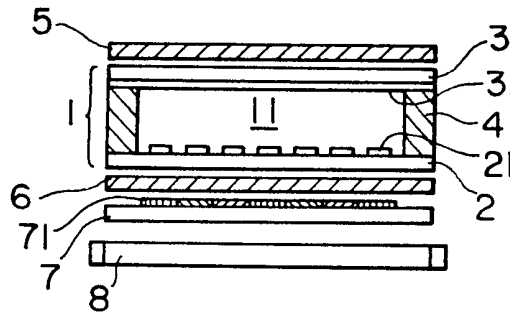

GB 2 154 355 A

FIG. 1

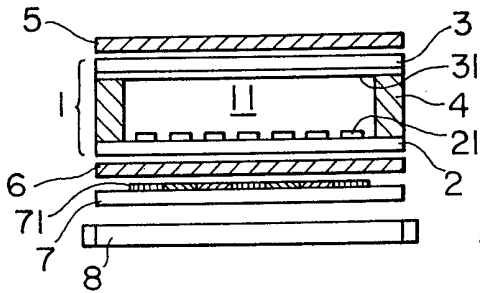


FIG. 2

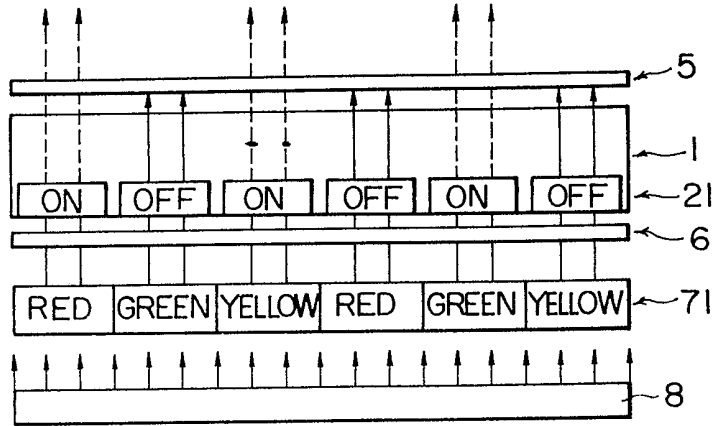


FIG. 3

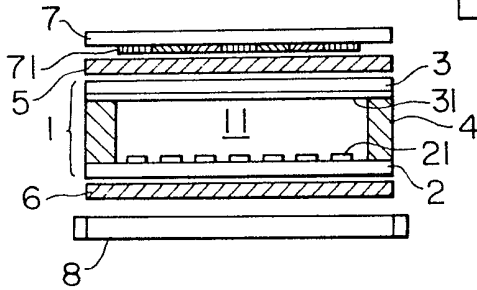


FIG. 4

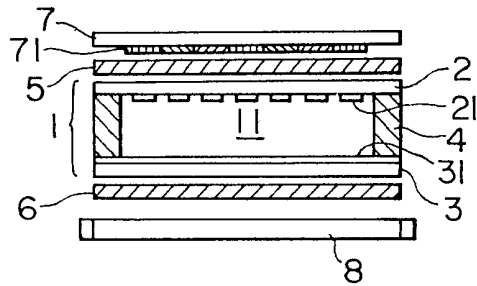


FIG. 5

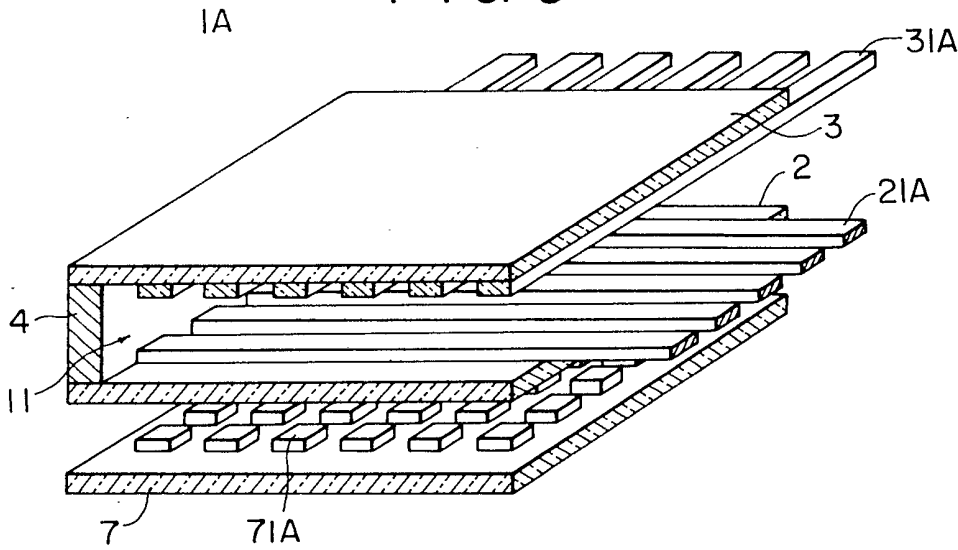


FIG. 6

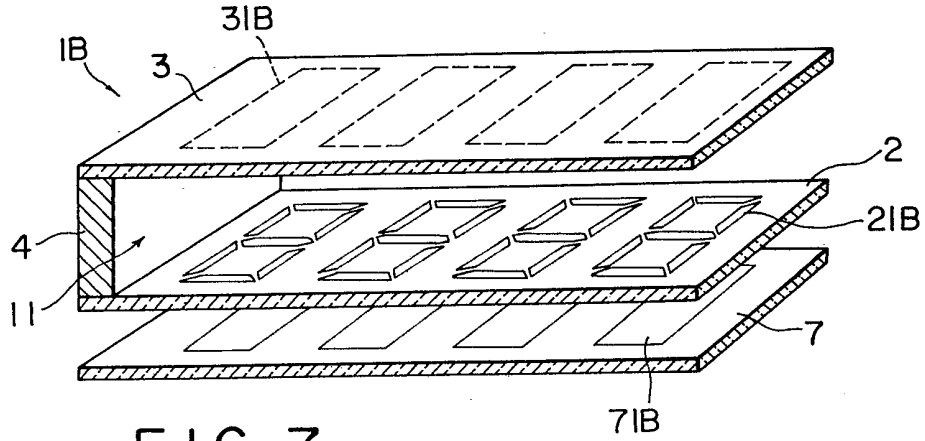


FIG. 7

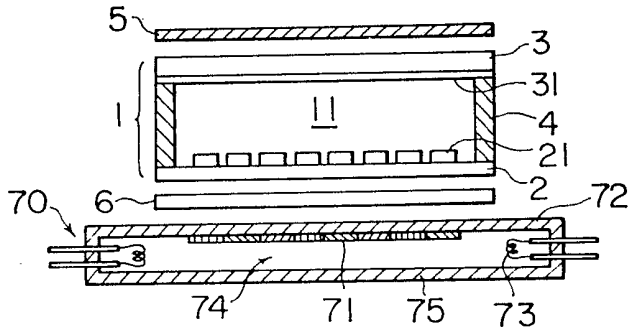


FIG. 8

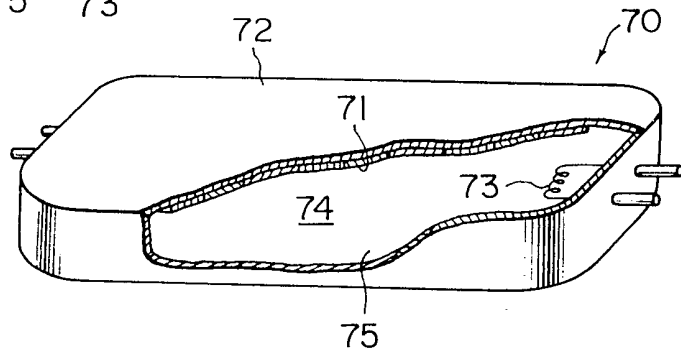


FIG. 9

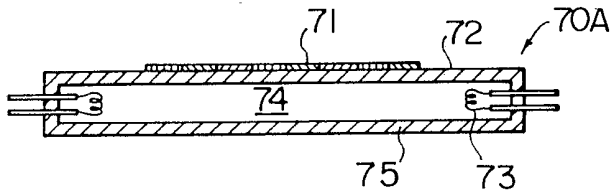


FIG. 10

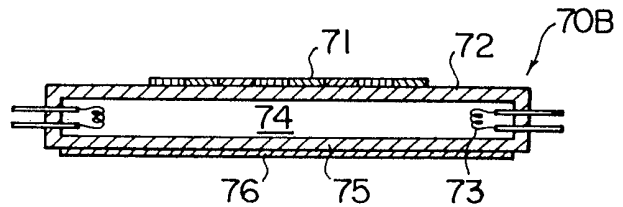


FIG. 11

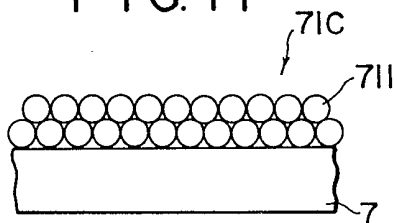


FIG. 12

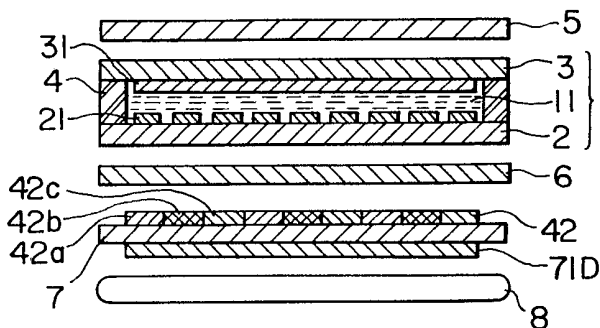


FIG. 13

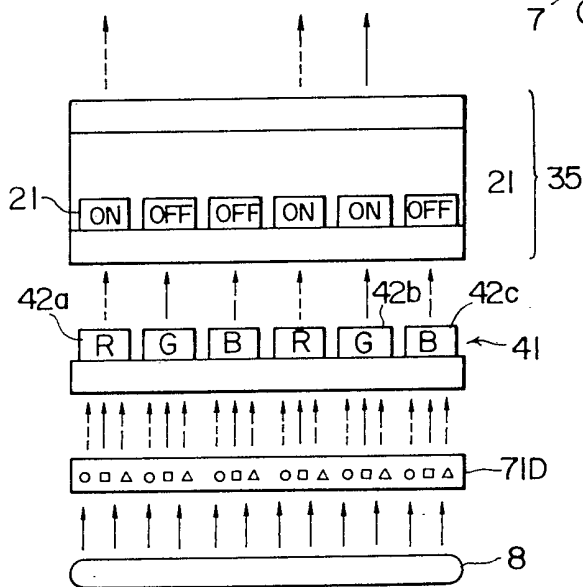


FIG. 14

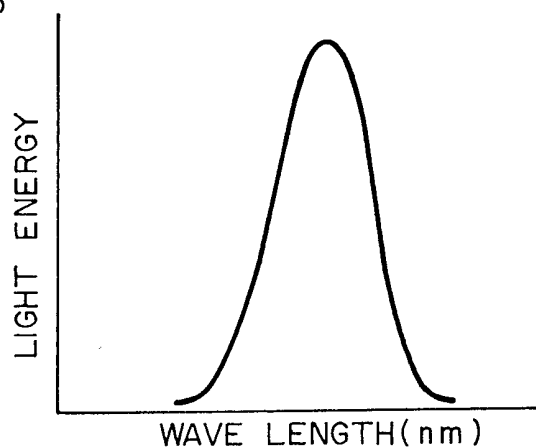


FIG. 15

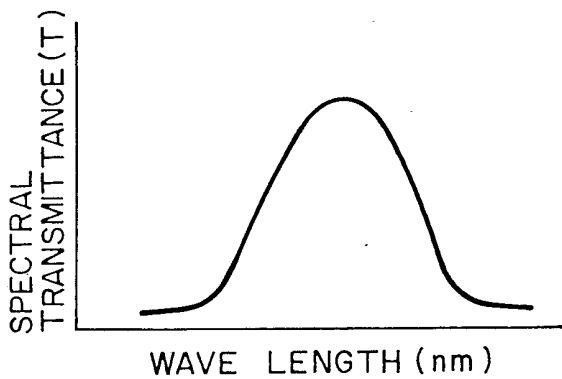


FIG. 16

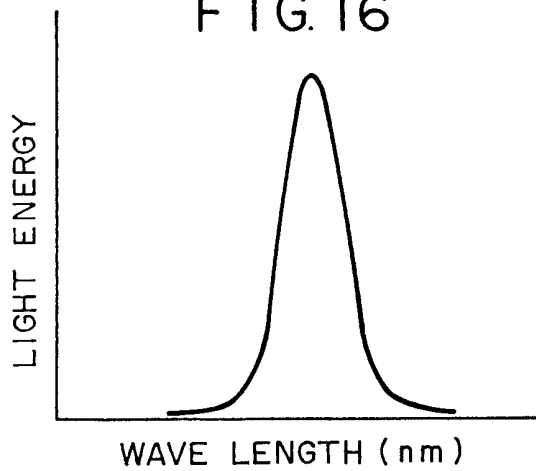


FIG. 17

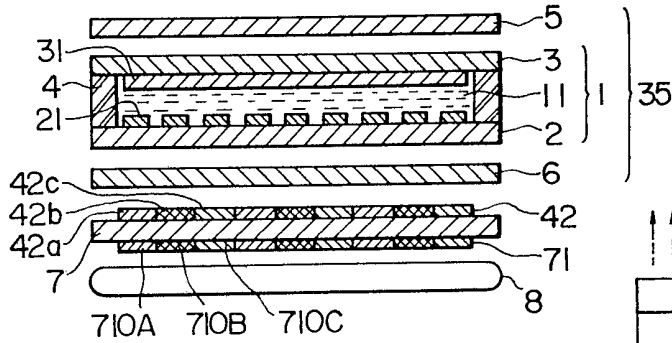


FIG. 18

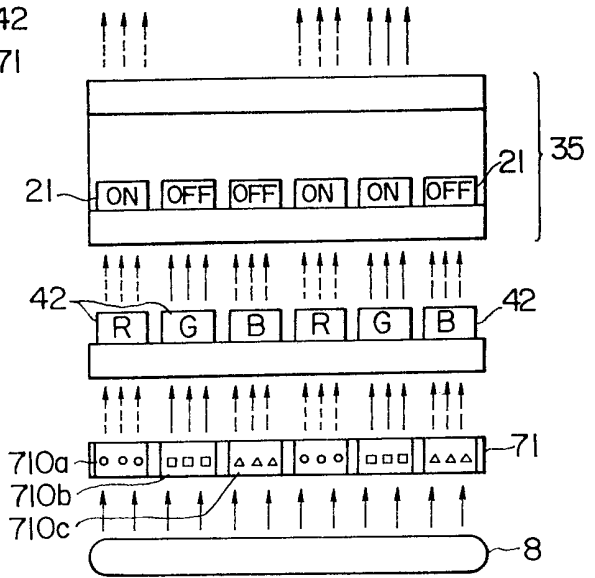


FIG. 19

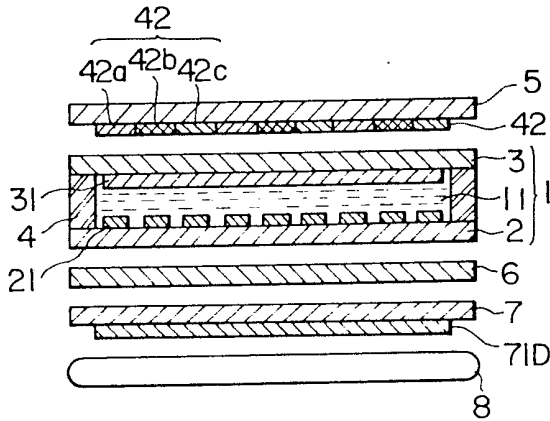


FIG. 21

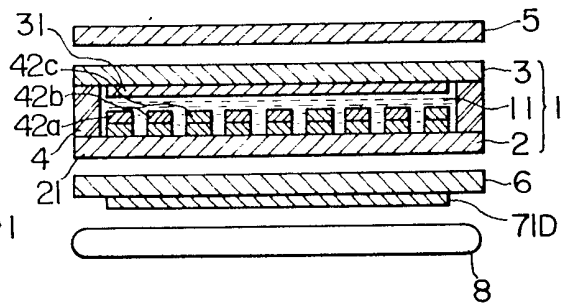


FIG. 20

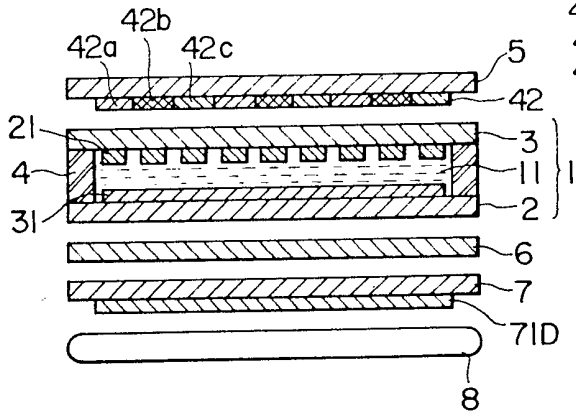


FIG. 22

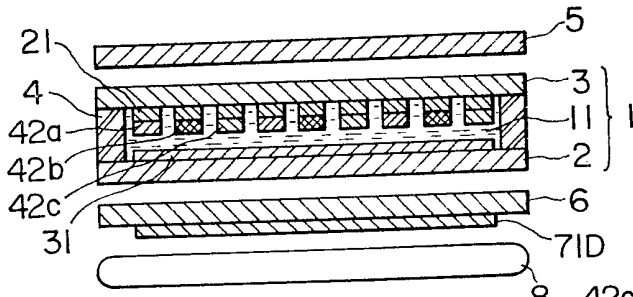


FIG. 23

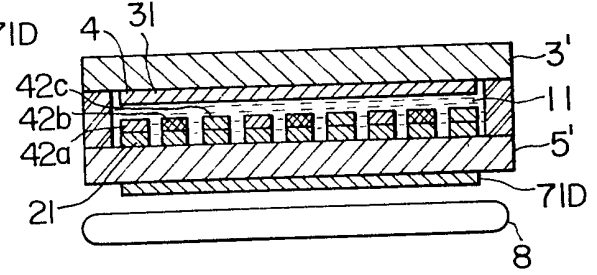


FIG. 24

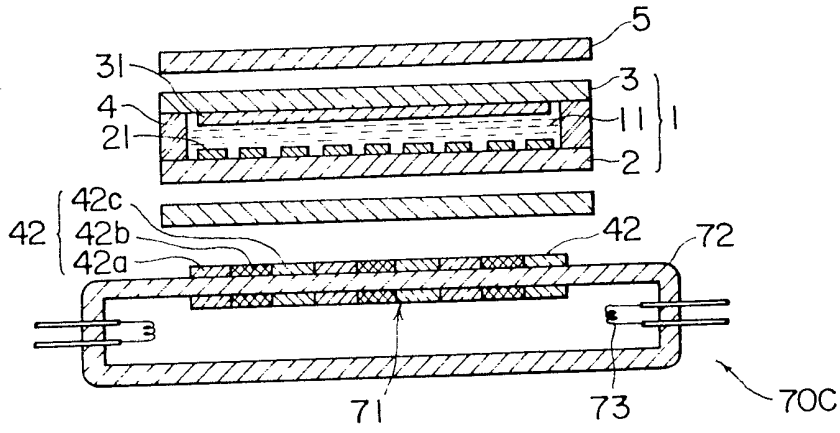


FIG. 25

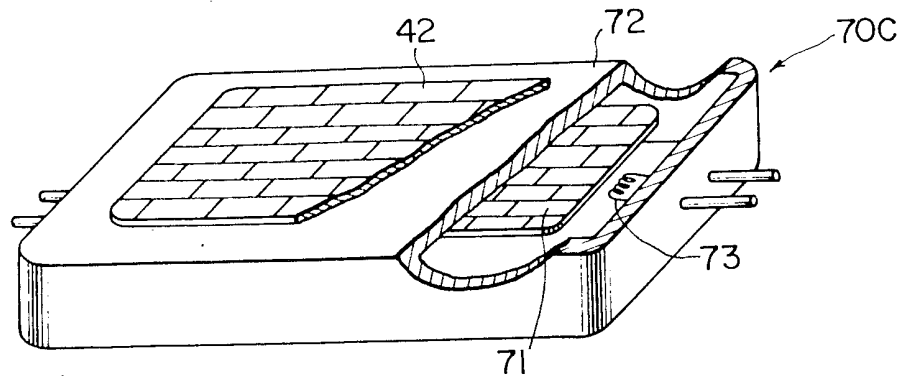


FIG. 26

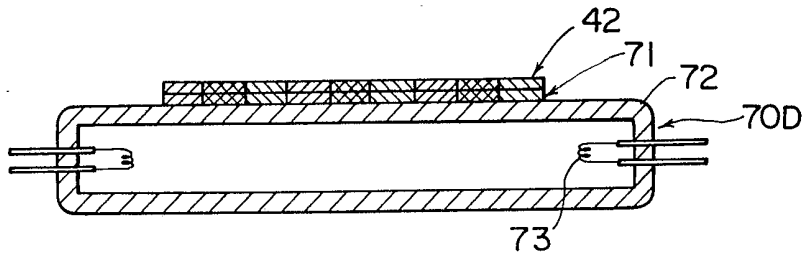


FIG. 27

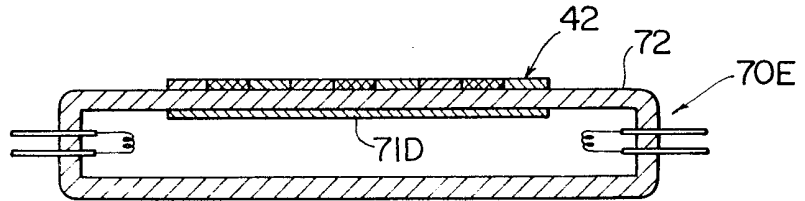


FIG. 28

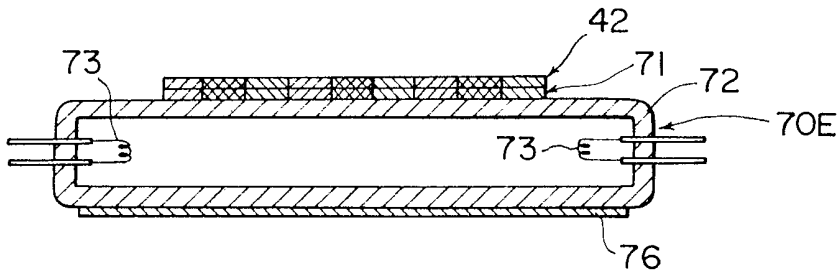


FIG. 29 (A)

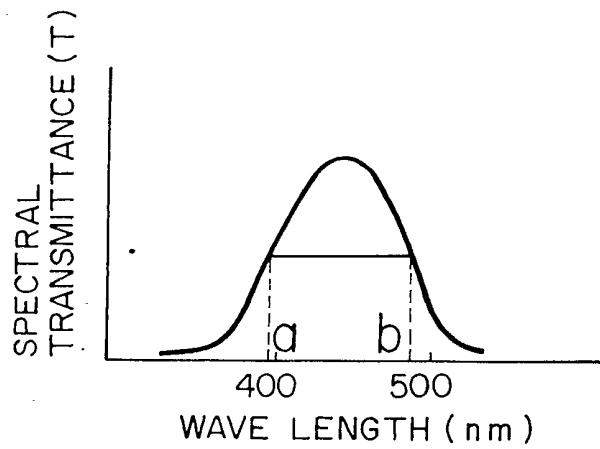


FIG. 29(B)

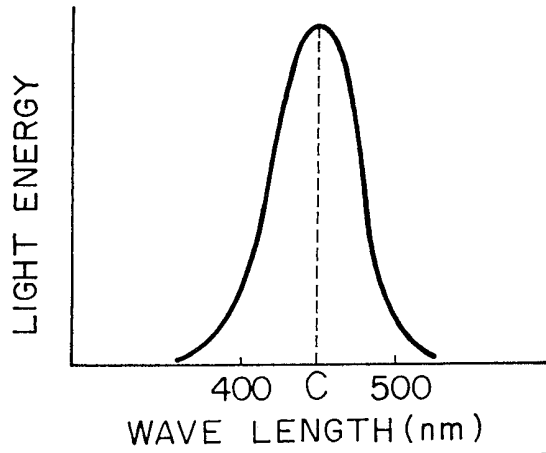


FIG. 30(A)

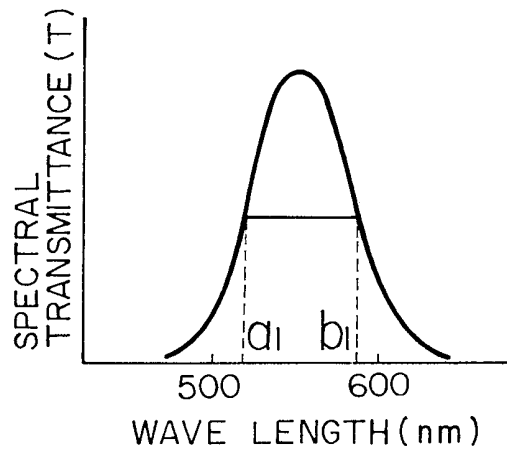


FIG. 30(B)

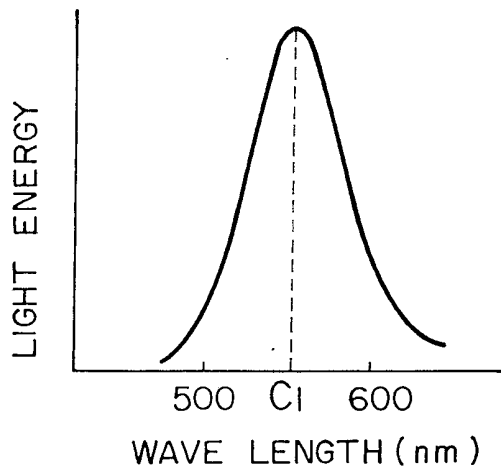


FIG. 31(A)

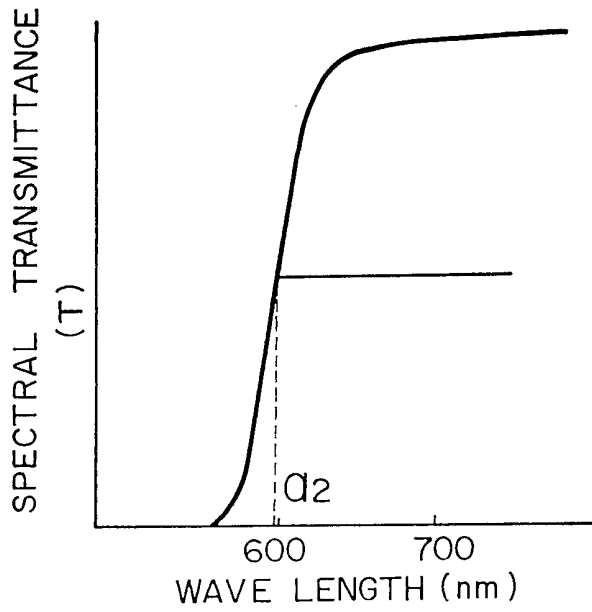


FIG. 31(B)


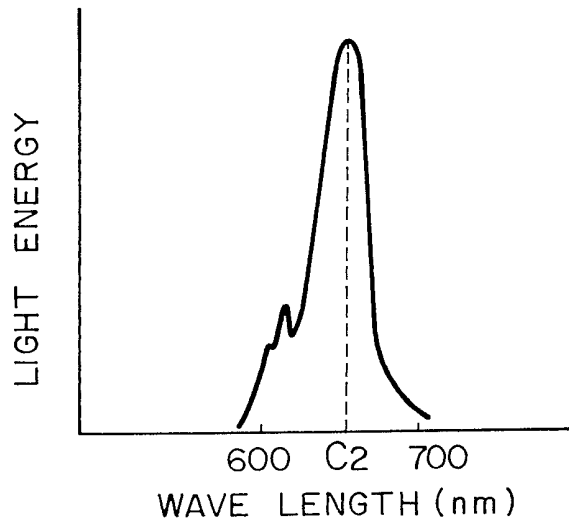


FIG. 32

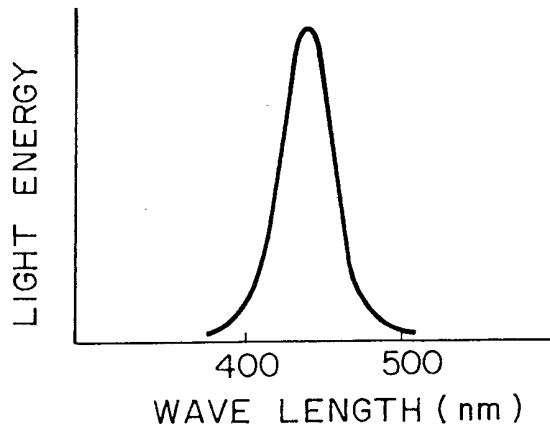

SPECIFICATION

Liquid crystal color display device

- 5 The present invention relates to a liquid crystal color display device, and more particularly to a liquid crystal color display device for use in a television receiver of a flat configuration, an office-automation component, and other image display systems. 5
- Heretofore, color display devices have typically employed CRTs (cathode-ray tubes) and have widely been used in television display units, OS (office automation) components, and other display units. The CRT is a type of vacuum tube having a large conical shape. The display unit 10 composed of the CRT must therefore be powered by a high-voltage power supply, requires a complex driver circuit, and is large in overall size. 10
- Recent years have seen the development of panel-shaped liquid crystal display devices, which have resulted in pocketable liquid crystal color television receivers. As described in a periodical 15 "Nikkei Electronics", 1983, 5-23, pages 102 to 103, such a pocketable liquid crystal color television receiver comprises a liquid crystal panel composed of a glass plate having red, green, and blue color filters assigned to each pixel, another transparent plate with an array of thin-film transistors disposed thereon, a TN (twisted nematic) liquid crystal material sealed between the plates, and a pair of polarizers sandwiching the plates, and an illuminating light source 20 positioned behind the liquid crystal panel. The thin-film transistors are fabricated in association with the red, green, and blue color filters of the respective pixels for switching light. However, the liquid crystal color display device described above still remains to be improved since color generation and reproducibility are insufficient due to the use of the optical filters, and displayed images have a low contrast and hence cannot be seen well. 20
- 25 Accordingly, it is an object of the present invention to provide an improved liquid crystal color display device which is of a low profile and capable of producing clear color images. 25
- According to the present invention, a liquid crystal color display device has a liquid crystal cell, one or two polarizers, and a fluorescent light-emitting means.
- The liquid crystal cell has a pair of transparent plates, a sealing frame, and a liquid crystal 30 material sealed in a cell defined by the transparent plates and the sealing frame. The sealed liquid crystal material may be a twisted nematic (hereinafter referred to as "TN") liquid crystal, a guest-host (hereinafter referred to as "G-H"), or the like. The transparent plates support electrodes disposed thereon in sandwiching relation to the liquid crystal material and having a form selected dependent on images to be displayed. For example, the electrodes may be 35 combined to provide a two-dimensional matrix of pixels or segments of pixels, as described later on with respect to embodiments of the present invention. 35
- One polarizer is employed in the case where the liquid crystal cell contains a G-H liquid crystal, and is disposed on one side of the liquid crystal cell. Two polarizers are disposed in sandwiching relation to the liquid crystal cell. The one or two polarizers and the liquid crystal 40 cell jointly constitute a switching element for passing electromagnetic radiation dependent on an image represented by an image signal applied to the liquid crystal cell. 40
- The fluorescent light-emitting means has at least a fluorescent layer and a lamp, and may also have a color filter. Thus, one form of the fluorescent light-emitting means has a fluorescent layer and a lamp, and another form of the fluorescent light-emitting means has a fluorescent layer, a 45 lamp, and a color filter. 45
- The fluorescent layer comprises a layer of a fluorescent material capable of emitting desired fluorescent radiation of chromatic color in response to electromagnetic radiation emitted from the lamp. An image represented by an image signal applied by the liquid crystal cell is displayed by fluorescent radiation emitted from the fluorescent layer.
- 50 The color filter is employed to pass fluorescent radiation emitted by the fluorescent layer to adjust the intensity of emitted fluorescent radiation or reduce the wavelength range of the passing fluorescent radiation for making the same approach monochromatic light. 50
- The lamp radiates electromagnetic radiation to enable the fluorescent layer to emit fluorescent radiation. The electromagnetic radiation emitted by the lamp must be responsible for enabling 55 the fluorescent layer to emit fluorescent radiation, and for this reason may not necessarily be visible light. 55
- The fluorescent layer may be disposed in front of, behind, or within the liquid crystal cell as seen from an observer of the liquid crystal color display device, and may be mounted, as desired, on an inner or outer wall surface of the lamp, a surface of the polarizer, the transparent 60 plate of the liquid crystal cell, or a transparent plate provided for supporting the fluorescent layer. 60
- The color filter may be disposed in a desired position in front of the fluorescent layer as seen from the observer of the liquid crystal color display device, and may be mounted on an inner or outer wall surface of the lamp, a surface of the polarizer, or the transparent plate of the liquid 65 crystal cell. 65

- The liquid crystal color display device of the foregoing construction is of a low profile as a whole. Since images are displayed directly by emitted fluorescent radiation, the display images are much brighter than those on conventional display devices. The liquid crystal color display device can display as bright and clear colored images as those displayed on cathode-ray tubes for use in color television receivers. The use of the color filter makes displayed images clearer. 5
- The invention will be further described by way of example, with reference to the accompanying drawings, in which:
- Figure 1* is an exploded cross-sectional view of a liquid crystal color display device according to an embodiment of the present invention; 2
- 10 *Figure 2* is a schematic diagram illustrative of operation of the liquid crystal color display device shown in Fig. 1; 10
- Figure 3* is an exploded cross-sectional view of a liquid crystal color display device according to another embodiment of the present invention;
- 15 *Figure 4* is an exploded cross-sectional view of a liquid crystal color display device according to still another object of the present invention; 15
- Figure 5* is an exploded fragmentary perspective view of an arrangement of electrodes in a liquid crystal cell;
- Figure 6* is an exploded fragmentary perspective view of another arrangement of electrodes in a liquid crystal cell;
- 20 *Figure 7* is an exploded cross-sectional view of a liquid crystal color display device according to a further embodiment of the present invention; 20
- Figure 8* is a perspective view, partly broken away, of a lamp as a fluorescent light-emitting means;
- Figure 9* is a cross-sectional view of another lamp as a fluorescent light-emitting means;
- 25 *Figure 10* is a cross-sectional view of still another lamp as a fluorescent light-emitting means; 25
- Figure 11* is an enlarged fragmentary view of a fluorescent layer;
- Figure 12* is an exploded cross-sectional view of a liquid crystal color display device according to a still further embodiment of the present invention;
- 30 *Figure 13* is a schematic diagram showing operation of the liquid crystal color display device illustrated in Fig. 12; 30
- Figures 14 through 16* are graphs explanatory of operation of a color filter;
- Figure 17* is an exploded cross-sectional view of a liquid crystal color display device according to another embodiment of the present invention;
- 35 *Figure 18* is a schematic diagram showing operation of the liquid crystal color display device illustrated in Fig. 17; 35
- Figure 19* is an exploded cross-sectional view of a liquid crystal color display device according to another embodiment of the present invention;
- Figure 20* is an exploded cross-sectional view of a liquid crystal color display device according to still another embodiment of the present invention;
- 40 *Figure 21* is an exploded cross-sectional view of a liquid crystal color display device according to still another embodiment of the present invention; 40
- Figure 22* is an exploded cross-sectional view of a liquid crystal color display device according to still another embodiment of the present invention;
- Figure 23* is an exploded cross-sectional view of a liquid crystal color display device according to still another embodiment of the present invention; 45
- 45 *Figure 24* is an exploded cross-sectional view of a liquid crystal color display device according to still another embodiment of the present invention; 45
- Figure 25* is a perspective view, partly cut away, of a lamp as a fluorescent light-emitting means employed in the liquid crystal color display device illustrated in Fig. 24;
- 50 *Figure 26* is a cross-sectional view of another lamp as a fluorescent light-emitting means; 50
- Figure 27* is a cross-sectional view of still another lamp as a fluorescent light-emitting means;
- Figure 28* is a cross-sectional view of a still further as a fluorescent light-emitting means; and
- Figures 29(A), 29(B), 30(A), 30(B), 31(A), 31(B), and 32* are graphs explanatory of the relationship between wavelength distributions of emitted fluorescent radiation and spectral 55
- 55 transmittances of color filters. 55
- Fig. 1 shows a liquid crystal color display device according to an embodiment of the present invention, the liquid crystal color display device having a liquid crystal cell generally designated by the reference numeral 1. The liquid crystal cell 1 is composed of a TN liquid crystal material 11, a transparent plate 2 having a transparent pixel electrode 21, a transparent plate 3 60
- 60 confronting the transparent plate 2 and having a common electrode 31, and a peripheral sealing frame 4, the transparent plates 2, 3 and the sealing frame 4 jointly sealing the liquid crystal material 11. A first polarizer 5 is disposed on the transparent plate 3 which will be observed by an observer during operation of the liquid crystal cell 1. A second polarizer 6 is disposed on the opposite transparent plate 2 and has an axis of polarization normal to that of the first polarizer 65
- 65 5. The liquid crystal color display device also includes a transparent plate 7 disposed closely to 65

the second polarizer 6 and supporting a fluorescent layer 71 thereon. The fluorescent layer 71 is composed of a mosaic of fluorescent layer elements aligned respectively with the pixel electrodes 21 for emitting fluorescent light in red, green, and blue in response to ultraviolet or near-ultraviolet radiation irradiating the fluorescent layer elements. The ultraviolet or near-ultraviolet radiation for exciting the fluorescent layer 71 to emit fluorescent radiation is radiated from a lamp 8 disposed adjacent to the transparent plate 7. The liquid crystal cell 1 and the polarizers 5, 6 jointly constitute a switching element, and the transparent plate 7, the fluorescent layer 71, and the lamp 8 jointly constitute a fluorescent light-emitting means.

The transparent pixel electrode 21 is composed of a matrix of minute electrode elements which can be driven or energized independently of each other. The other transparent electrode 31 is of a flat construction confronting all of the electrode elements of the transparent pixel electrode 21. Therefore, when a voltage is applied between a certain electrode element of the transparent pixel electrode 21 and the transparent electrode 31, the liquid crystal material 11 is subjected to an electric field only between the certain electrode element and the transparent pixel electrode 31. Under this condition, the electrode element will be referred to as being turned on. The electrode element which is not placed under the above condition will be referred to as being turned off.

The fluorescent layer 71 comprises a mosaic arrangement of minute fluorescent layer elements capable of emitting red fluorescent light, minute fluorescent layer elements capable of emitting green fluorescent light, and minute fluorescent layer elements capable of emitting blue fluorescent light. The fluorescent layer elements in the mosaic arrangement are disposed in positionally corresponding relation to the electrode elements in the matrix of the transparent pixel electrode 21, so that when the observer sees the liquid crystal color display device in a direction normal to the polarizer 5 in Fig. 1, the electrode elements of the transparent pixel electrode 21 must look aligned with the corresponding fluorescent layer elements of the fluorescent layer 71.

Operation of the display device of Fig. 1 will be described with reference to Fig. 2.

In Fig. 2, the blocks of the fluorescent layer elements of the fluorescent layer 71 are labelled with letters indicating the colors of fluorescent light emitted from the respective fluorescent layer elements. It is now assumed that the electrode elements are turned on and off as shown in Fig. 2 by an image signal applied to the liquid crystal cell 1 by thin-film transistors or the like (not shown).

When the lamp 8 is energized under such a condition, the lamp 8 emits ultraviolet or near-ultraviolet radiation to enable all of the fluorescent layer elements of the fluorescent layer 71 to emit fluorescent light of their own colors. The emitted fluorescent light as it has passed through the polarizer 6 becomes linearly or elliptically polarized light which is passed through the liquid crystal cell 1 and then falls on the polarizer 5. Since the axis of polarization of the polarizer 5 is normal to that of the polarizer 6, and the light having passed through the turned-off electrode elements keeps its direction of polarization unchanged, the same light indicated by the solid-line arrows cannot pass through the polarizer 5.

In regions where the electrode elements are energized, however, the orientation of molecules of the TN liquid crystal material is twisted through substantially 90° under the applied electric field, and hence the plane of polarization of the light having passed through the energized electrode elements is also twisted through substantially 90° into agreement with the axis of polarization of the polarizer 5. Therefore, only the light, as indicated by the broken-line arrows, having passed through the energized electrode elements can pass through the polarizer 5, and can be viewed as a color image by the observer.

Figs. 3 and 4 are illustrative of modifications of the embodiment of Fig. 1.

In the embodiment of Fig. 3, the transparent plate 7 is disposed outwardly of the first polarizer 5 with the fluorescent layer 71 facing the first polarizer 5. The fluorescent layer 71 is also composed of a mosaic of independent fluorescent layer elements aligned with respective electrode elements of the transparent pixel electrode 21. Since the fluorescent layer 71 is positioned more closely to the observer than it is in the embodiment of Fig. 1, the observer can observe clearer color images.

According to the embodiment of Fig. 4, the liquid crystal cell 1 is disposed such that the transparent pixel electrode 21 is closer to the observer, and the fluorescent layer 71 is positioned outwardly of the first polarizer 5. This arrangement reduces any positional deviation between the fluorescent layer elements of the fluorescent layer 71 and the electrode elements of the transparent pixel electrode 21, and produces clearer color images.

In the foregoing embodiments, the transparent electrode 31 is flat in configuration, and the transparent pixel electrode 21 has a matrix of electrode elements.

However, a liquid crystal cell 1A shown in Fig. 5 includes a transparent electrode 21A composed of strips and a transparent electrode 31A composed of strips extending perpendicularly to the strips of the transparent electrode 21A. A fluorescent layer 71A comprises a matrix of fluorescent layer elements aligned respectively with overlapping portions or intersections of the


strips of the transparent electrodes 21A, 31A. A driver circuit for the electrodes 21A, 31A is different from that in the embodiment of Fig. 1. More specifically, a voltage is impressed between one strip of the transparent electrode 21A and one strip of the transparent electrode 31A to apply an electric field to the liquid crystal material 11 between an overlapping portion or intersection of the energized electrode stripes.

Fig. 6 shows still another embodiment in which a transparent pixel electrode 21B on the transparent plate 2 is a combination of 7-segment electrodes each in the shape of a numeral "8". A transparent electrode 31B on the transparent plate 3 is also composed of electrode elements each in the form of a numeral "8", and a fluorescent layer 71B on the transparent plate 7 is similarly composed of fluorescent layer elements each in the form of a numeral "8". The fluorescent layer elements may emit fluorescent light of any desired chromatic color. Alternatively, the fluorescent layer elements indicative of integers and those representative of fractions to the decimal point may emit fluorescent light of different colors, or the fluorescent layer elements representing numbers in the third and greater places and those in other places may emit fluorescent light of different colors.


Prior to the description of other embodiments, the components of the liquid crystal color display devices according to the foregoing embodiments will be described in specific detail.

The TN liquid crystal material 11 employed in the liquid crystal cell 1 has a property such that the orientation of molecules is twisted 90° between electrodes across which a voltage is applied, and in the absence of the applied voltage, the molecules are untwisted and line up parallel to each other. Almost all liquid crystal materials having the above property can be used for carrying out the present invention. Examples of such liquid crystal materials are given as below:

- (1) Liquid crystal compound of p-alkylbenzylidene-p'-cyanoaniline and p-alkoxybenzylidene-p'-cyanoaniline
- (2) Liquid crystal compound of phenylbenzoates



- X, Y represent an alkyl group, an alkoxy group, etc.
- (3) Liquid crystal compound of cyanobiphenyls and cyanoterphenyls

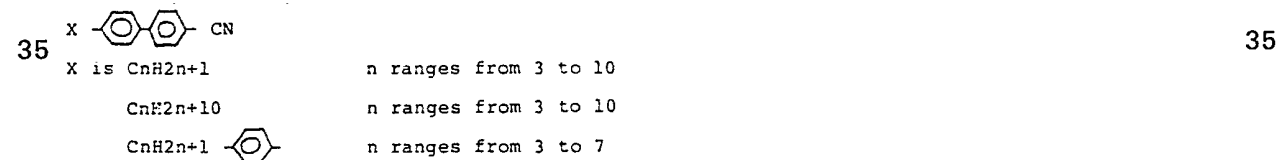

- (4) Liquid crystal compound of cyclohexanecarboxylphenyle-esters
- (5) Liquid crystal compound of phenylcyclohexanes and biphenylcyclohexanes
- (6) Liquid crystal compound of phenylpyrimidines and phenyldioxanes
- (7) Mixture of the above liquid crystal compounds or mixture of the above liquid crystal compounds and cholesteric compounds

The transparent plate 2 may be formed of glass or a plastic material such as polyester (PET), polysulfone polycarbonate (PC), polypropylene (PP), etc. A G-H liquid crystal cell may be used instead of the TN liquid crystal cell. With this modification, only one polarizer may be used as described above.

The transparent pixel electrode 21 is formed as electrode elements on the transparent plate 2 by depositing a transparent conductive film of $\text{In}_2\text{O}_3(\text{Sn})$, or indium oxide doped with tin (Sn), by vacuum evaporation, sputtering, or CVD (chemical vapor deposition), or a transparent conductive film of $\text{SnO}_2(\text{Sb})$, or tin oxide doped with antimony (Sb), by the same process, and dividing the transparent conductive film into smaller segments by a photoetching process. The transparent pixel electrode 21 has a thickness ranging from 500Å to 200Å and has a resistance of 10 kilohm. As described above, a voltage representative of a color image signal is applied to the transparent pixel electrode 21 by TFTs (thin-film transistors), not shown.

The other transparent plate 3 is formed of the same material as that of the transparent plate 2, that is, glass or a plastics material. The transparent electrode 31 is formed on the transparent plate 3 in the same process and of the same material as the transparent electrode 21 is formed, but not divided into smaller segments.

The transparent pixel electrode 21 and the transparent electrode 31 are spaced from each other by an interval ranging from 3 μm to 20 μm by the sealing frame 4 bonded to the transparent bases 2, 3 in order to seal the liquid crystal material 11 therebetween. From the electrode elements of the transparent pixel electrode 21, there extend lead wires (not shown)

connected to an outer signal source for applying image signals. The sealing frame 4 may be formed of an epoxy resin, an alkyl resin, a cellulosic resin, or the like.

The transparent plate 7 supporting the fluorescent layer 71 is made of the same material as that of the transparent plates 2, 3 of the liquid crystal cell 1.

5 The fluorescent layer elements of the fluorescent layer 71 are made of fluorescent materials for emitting fluorescent light in red, green, and blue in response to ultraviolet or near-ultraviolet radiation radiated thereon. The fluorescent materials for emitting red fluorescent light include $Y_2O_3 : Eu$ (yttrium oxysulfide : europium) and $Y_2O_2 : Eu$ (yttrium oxide : europium). The fluorescent materials for emitting green fluorescent light include $ZnS : CuAl$ (zinc sulfide : doped with copper aluminum), $(Zn Cd) S : Cu$ (zinc sulfide, cadmium : doped with copper), and zinc sulfide, cadmium : doped with silver (Ag). The fluorescent materials for emitting blue fluorescent light include $ZnS : Ag$ (zinc sulfide : doped with silver) and $(ZnS, ZnO) : Ag$ (zinc sulfide, zinc oxide : doped with silver). 10

For forming the fluorescent layer 71 on the transparent plate 7, a photoresist is used to mask other portions of the transparent plate 7 than positions where fluorescent layer elements are to be formed, and the surface of the transparent plate 7 is coated with a solution or suspension of a powdery fluorescent material, a binder as of a cellulosic resin or an alkyl resin, and an organic solvent. Then, the photoresist is removed by an inorganic or organic removal solution for thereby forming a first submatrix of fluorescent layer elements for emitting fluorescent light in one color. Similarly, second and third submatrixes of fluorescent layer elements for emitting fluorescent light in the other two colors. These first through third submatrixes of fluorescent layer elements jointly constitute the fluorescent layer 71. 15 20

The above process of forming the fluorescent layer 71 may be the same as the process of manufacturing cathode-ray tubes for use in color television receivers. Furthermore, inasmuch as the fluorescent layer of the invention is not used in a vacuum and is of a flat configuration, it may be formed by a printing process similar to a three-color gravure printing process. As an alternative, the fluorescent layer 71 may be formed by a lithographic process using a photoresist. 25

The polarizers 5, 6 may be formed of the same material. For example, they are fabricated by immersing a web of PVA (polyvinyl alcohol) which is not stretched in an aqueous solution of iodine, removing the web out of the aqueous solution, uniaxially stretching the web in one direction so that the length of the web will be 3 to 5 times the original length thereof, laminating the stretched web at both surfaces thereof with a polyester resin to prevent iodine from subliming away and also preventing the web from absorbing moisture from the atmosphere, and then cutting off the web to a desired size. According to the present invention, the polarizers 5, 6 thus manufactured are disposed such that their axes of polarization are normal to each other. 30 35

The lamp 8 may comprise a mercury lamp or UVF (ultraviolet fluorescent) lamp, for example, capable of emitting electromagnetic radiation, primarily ultraviolet and/or near-ultraviolet radiation which can excite the fluorescent layer 71 to emit fluorescent radiation. The lamp 8, singly or in plurality, is placed in a plane or juxtaposed for illuminating the surface of the liquid crystal cell 1 or the fluorescent layer 71. 40

It should be understood that the above components of the liquid crystal color display device can be manufactured in other processes and of other materials than described above without departing from the scope and spirit of the present invention. 45

Fig. 7 shows another embodiment of the present invention in which the fluorescent layer 71 is disposed on an inner surface of a tubular wall of a lamp 70 closely to the liquid crystal cell 1. Therefore, the lamp 70 constitutes a fluorescent light-emitting means. Fig. 8 illustrates the lamp 70 in perspective with parts broken away. Argon and mercury are sealed as a sealed gas 74 in the lamp 70. When a current is passed through a filament 73, thermions are emitted from the filament 73 and ionize the sealed gas 74, during which time ultraviolet radiation is emitted to enable the fluorescent layer 71 to emit fluorescent radiation. 50

In a modification of the fluorescent light-emitting means illustrated in Fig. 9, a lamp 70A serving as the fluorescent light-emitting means has the fluorescent layer 71 disposed on an outer surface of a transparent plate 72 constituting a tube wall of the lamp 70A. Since the fluorescent layer 71 is disposed more closely to the transparent pixel electrode 21, color spreads are reduced and clearer images can be produced. With the arrangement of Fig. 9, the transparent plate 72 must be made of a material capable of transmitting ultraviolet radiation, and such a material should preferably be transparent quartz, transparent Pyrex or Vycor (commercial names, manufactured Corning Glass Works). 55 60

According to a further modification shown in Fig. 10, a reflecting film 76 for reflecting ultraviolet radiation is disposed on an outer surface of a tube wall 75 of a lamp 70B serving as the fluorescent light-emitting means remotely from the transparent plate 72 of the lamp 70B. Where the reflecting film 76 is made of aluminum or silver, it can double as a rapid-start electrode for improving rising characteristics of the lamp 70B at the time it is turned on. The 65

reflecting film may also be attached to the tube wall 75 of the lamp 70 as shown in Fig. 7 in which the fluorescent layer 71 is disposed on the inner surface of the transparent plate 72.

Emission of ultraviolet radiation from the lamp will be described in greater detail.

The sealed gas 74 of mercury and argon in the lamp 70 is controlled such that the mercury is kept under a vapor pressure ranging from 1×10^{-2} Torr to 1×10^{-3} Torr and the argon is kept under a vapor pressure ranging from 1 Torr to 5 Torr under normal operation condition. When a current is passed through the filament 73 from a power supply and an igniting circuit (not shown), the filament 34 is heated up to a temperature at which thermions are emitted. The emitted thermions collide with moving atoms of vaporized argon and ionize them, thus starting an electric discharge. The thermions and ionized argon atoms then collide with mercury atoms and ionize them, whereupon electromagnetic radiation having a wavelength of 2537 Å is emitted as main ultraviolet light.

The transparent plate 72 supporting the fluorescent layer 71 may be made of the same material as that of the transparent plates 2, 3 of the liquid crystal cell 1. Where the lamps shown in Figs. 9 and 10 are employed, the transparent plate 72 is made of transparent quartz, Pyrex or Vycor, for example, capable of passing ultraviolet radiation of the wavelength of 2537 Å therethrough.

Although the fluorescent material for the fluorescent layer is primarily powdery in nature, there may be employed a particulate fluorescent material mixed with or colored by a fluorescent dye.

Fig. 11 schematically shows, on an enlarged scale, an arrangement in which a fluorescent layer 71C composed of a particulate fluorescent material 711 is disposed on the transparent plate 7 as shown in Fig. 1. The particulate fluorescent material 711 comprises minute particles colored with a fluorescent dye and is deposited on the transparent plate 7 by dispersing the minute particles in a resin lacquer solution to produce a wax-like mixture, and applying the wax-like mixture to the transparent plate 7 by a masking printing process. The spherical particles of the particulate fluorescent material may be made of ceramic, a copolymer of divinylbenzene, polystyrene, benzoguanamine, or the like, and should preferably have a diameter ranging from 5 to 20 μm , particularly from 5 to 10 μm . The transparent plate 7 may be of glass or plastic film, as described above.

According to an experiment, 5 parts of Epocolor-FP-30 (manufactured by Nihon Shokubai Kagaku Kogyosha) which is composed of minute particles of benzoguanamine colored by a fluorescent dye and 500 parts of a 20 %-alcohol solution of polyvinyl acetate were mixed and kneaded sufficiently to produce a uniform paste, which was printed and baked on a glass plate, thereby forming a fluorescent layer composed of a red particulate fluorescent material highly capable of emitting fluorescent radiation. For the fluorescent layer of the particulate fluorescent material has an additional light-scattering effect as compared with a fluorescent layer having a flat fluorescent dye layer, and hence can emit brighter light with a clearer hue.

Fluorescent layer elements composed of red, green, and blue particulate fluorescent materials may be printed and baked in a mosaic pattern on a transparent plate, and a transparent electrode may be formed of indium oxide/Sn on the fluorescent layer elements. The resultant construction may be used as one (such as indicated by the reference numeral 1 in Fig. 1) of the transparent plates of the liquid crystal cell. This arrangement makes the liquid crystal cell simpler in structure.

According to an embodiment illustrated in Fig. 12, a fluorescent layer 71D is mounted on the transparent plate 7 interposed between the lamp 8 and the polarizer 6, the fluorescent layer 71D being disposed on a surface of the transparent plate 7 which faces the lamp 8. A color filter 41 is mounted on an opposite surface of the transparent plate 7 which faces the polarizer 6. The lamp 8, the transparent plate 7, the fluorescent layer 71D, and the color filter 42 jointly constitute a fluorescent light-emitting means. The color filter 42 is of a mosaic pattern composed of minute filter elements 42a for passing red light therethrough, minute filter elements 42b for passing green light therethrough, and minute filter elements 42c for passing blue light therethrough. Each of these filter elements 42a, 42b, 42c will hereinafter be referred to as a "pixel filter". The pixel filters are aligned respectively with the electrode elements of the transparent pixel electrode 21.

The fluorescent layer 71D uniformly contains fluorescent materials capable of emitting red, green, and blue fluorescent light, but is not divided into elements.

Fig. 13 explains the operation of the liquid crystal color display device shown in Fig. 12. When the lamp 8 is energized, the fluorescent materials (for emitting light in red; green; and blue) in the fluorescent layer 71D are excited to emit three colours in red (indicated by R), green (indicated by G), and blue (indicated by B), these colours being indicated by \rightarrow , \rightarrow , \rightarrow respectively, in Fig. 13. These lights fall on the pixel filters of the color filter 41. The red pixel filters 42a (R) pass the red light (R \rightarrow), the green pixel filters 42b (G) pass the green light (G \rightarrow), and the blue pixel filters 42c (B) pass the blue light (B \rightarrow). The red, green, and blue lights having passed through the respective pixel filters then enter a liquid crystal unit 35 of Fig. 13,

which is composed of the liquid crystal cell 1 and the polarizers 5, 6. As described above, the electrode elements of the transparent pixel electrode 21 in the liquid crystal unit 35 are aligned respectively with the pixel filters of the color filter 41. Therefore, when a voltage representing a color image signal is applied to the transparent pixel electrode 21 by thin-film transistors (not shown), the light passing through the liquid crystal unit 35 can be controlled. The liquid crystal unit 35 includes a 90°-TN cell interposed between parallel polarizers having their axes of polarization normal to each other. Only those rays of light which have passed through the pixel filters corresponding to the energized electrode elements can pass through the liquid crystal unit 35 and are observed as an image displayed in full colors. In Fig. 13, the R light and G light have passed through the liquid crystal unit in the proportion of 2:1.

The light entering the color filter 41 is mixed fluorescent radiation of R, G, B emitted by the fluorescent layer 71D, and is brighter than ordinary light emitted by a white-color light source. While white light has an energy distribution lying fully across a wavelength range having a visible wavelength range in its center and includes light in a wavelength range which does not substantially contribute to color separation into the three primaries R, G, B almost all light energy of the light emitted from the R, G, B fluorescent materials is utilized for color separation. With the fluorescent light emitted from the fluorescent materials, therefore, the energy utilization efficiency is high, and it is possible to produce bright images. The light generated by passing the R, G, B fluorescent radiations through the R, G, B pixel filters, respectively, is represented by the product of fluorescent wavelength characteristics and pixel filter wavelength characteristics, and hence has a sharp rising edge and is light having a small half-value width and approaching monochromatic light, with the result that bright images can be produced. Where the G fluorescent radiation from the green fluorescent material has a spectral wavelength characteristics as shown in Fig. 14, for example, and falls on the green (G) pixel filter 42 having characteristics of Fig. 15, the light having passed through the G pixel filter has a spectral characteristics as shown in Fig. 16, that is, becomes G light close to monochromatic light having a clear-cut characteristics curve. Since the fluorescent radiation from the fluorescent material has a large amount of light energy, a bright image can be generated from the light having passed through the color filter.

Fig. 17 shows another embodiment in which the fluorescent layer 71 is of a mosaic pattern composed of fluorescent layer elements which are aligned with the pixel filters and the electrode elements. Fig. 18 is illustrative of operation of the liquid crystal color display device shown in Fig. 17. In Fig. 18, the fluorescent layer 71 is composed of mosaic-patterned fluorescent layer elements 710A, 710B, 710C for passing red (R), green (G), and blue (B) lights, respectively. The arrangement of Figs. 17 and 18 allows a greater amount of energy of R, G, B lights to pass through the pixels and be observed as more detailed images than the arrangement of Figs. 12 and 13.

Modifications of the embodiment of Fig. 12 will be described hereinbelow.

Fig. 19 shows an arrangement in which the color filter 42 is mounted on a surface of the polarizer 5 which is on the side of the liquid crystal cell 1 to be observed by the observer.

In a modification shown in Fig. 20, the transparent pixel electrode 21 and the transparent electrode 31 are positionally switched around in the liquid crystal cell 1 in Fig. 19. The liquid crystal color display device of Fig. 20 can produce clearer images than that of Fig. 19 because the transparent pixel electrode 21 and the color filter 42 are located closely to each other.

According to another modification of Fig. 21, the pixel filters 42a, 42b, 42c of the color filter 42 are disposed respectively on the electrode elements of the transparent pixel electrode 21 to prevent the pixel filters from being misaligned with the pixel electrode elements. The fluorescent layer 71d is disposed on the second polarizer 6 to make the overall construction thinner in profile.

The arrangement of Fig. 22 is of substantially the same as that of Fig. 21 except that the pixel electrode 21 and the pixel filters 42a, 42b, 42c are disposed on the upper plate 3 of the liquid crystal cell 1.

According to a modification of Fig. 23, the upper and lower plates of the liquid crystal cell are composed of polarizer plates 3', 5' to achieve a thinner construction. The fluorescent layer 71D is disposed on the lower polarizer plate 5'.

The fluorescent layer 71 shown in Fig. 1 can also be employed in the modifications illustrated in Figs. 19 through 23.

The color filter can be deposited by a photolithographic process, an electrodeposition process, a vacuum evaporation process, a printing process, or the like. Although the color filter may comprise a dichroic mirror having a multilayer film composed of a material of a high refractive index and a material of a low refractive index or a dye filter, the dye filter is more advantageous in terms of cost. The dye used in the dye filter may be Lanyl red GG for red pixel filters, Suminol milling yellow MR and Cibacron turquoise blue TG-E for green pixel filters, and Cyanine 6B for blue pixel filters.

While in each of the above embodiments the transparent pixel electrode is employed and

driven as by TFTs in an active matrix drive mode for full-color image display, other electrode arrangements may be used, and monochromatic or multicolor image display other than the full-color image display may be performed.

For example, strips of electrodes may be provided in X and Y directions, and pixel filters and also pixel fluorescent elements may be disposed in alignment with intersections of the electrode stripes (see Fig. 5) for displaying images in full colors in a multiplex drive mode. With such a modification, the liquid crystal cell, the fluorescent layer, and the color filter may be arranged in the same manner as described above. Since the multiplex drive mode has a limitation on a higher duty cycle due to a crosstalk effect, the active matrix drive mode is more advantageous than the multiplex drive mode.

A liquid crystal color display device shown in Fig. 24 has a lamp 70C serving as a fluorescent light-emitting means and having the color filter 42 disposed on an outer wall surface of the lamp 70 (identical to the lamp 70 in Fig. 7) which faces the liquid crystal cell 1. The color filter 42 is composed of pixel filters arranged in alignment with the respective fluorescent layer elements of the fluorescent layer 71 on the inner wall surface of the lamp 70. The lamp 70C is also illustrated in the perspective view of Fig. 25, partly cut away.

A lamp 70D shown in Fig. 26 as a fluorescent light-emitting means has the color filter 42 superimposed on the fluorescent layer 71 disposed on the outer wall surface of the lamp (identical to the lamp 70A in Fig. 9). In Fig. 27, a fluorescent layer 71D is disposed on an inner wall surface of a lamp 70E. Fig. 28 shows still another lamp 70F serving as a fluorescent light-emitting means and having the color filter 42 superimposed on the fluorescent layer 70a on the lamp (identical to the lamp 70B in Fig. 10). These lamps 70, 70As, 70B, 70C, 70D, 70E, 70F can themselves be used as novel light sources for illuminating originals in a color separating device in a color copying machine.

The color filters shown together with the fluorescent layers and the lamps in the fluorescent light-emitting means in Figs. 12, 17, 19, 20, 21, 22, 23, and 24 have the function described with reference to Figs. 14, 15, and 16.

Light energy can effectively be utilized for increasing the color purity of displayed images by selecting the wavelength of fluorescent light in each color emitted from the fluorescent layer to fall within the width of the half value of the transmittance of each pixel filter in the color filter. For example, where the pixel filter for passing blue light has a spectral characteristics as shown in Fig. 29(A), the maximum wavelength C (Fig. 29(B)) of blue fluorescent light emitted by the fluorescent layer is selected to be positioned between a wavelength range in the width a-b of the half value of the spectral transmittance. Then, the blue light having passed through the pixel filter has a clear-cut characteristics curve as shown in Fig. 32, in which the blue light is closer to monochromatic blue light. Inasmuch as the fluorescent radiation from the fluorescent material has a large amount of light energy, bright light can be obtained from the filter.

Where the pixel filter for passing green light has a spectral characteristics as shown in Fig. 30(A), the maximum wavelength C_1 (Fig. 30(B)) of green fluorescent light is selected to be positioned between a wavelength range in the width a_1-b_1 of the half value of the spectral transmittance.

Where the pixel filter for passing red light has a spectral characteristics as shown in Fig. 31(A), the spectral characteristics of the red fluorescent light is selected to be as shown in Fig. 31(B).

Fluorescent materials having the peak values C, C_1 , C_2 include NP102, NP220, and NP320 (commercial names, manufactured by Nichia Chemical). When these fluorescent materials are illuminated with ultraviolet radiation, they emit fluorescent light having peaks at wavelengths 460 nm, 544 nm, and 620 nm, respectively.

By thus selecting the maximum wavelength of fluorescent radiation from the fluorescent layer to fall within the width of the half value of the spectral transmittance of the color filter, almost all light energy can be utilized for color separation, with the result that the energy utilization efficiency is high and bright images can be displayed.

In the event the color filter is used, the transparent electrode in the liquid crystal cell may be arranged as shown in Figs. 5 and 6.

Although certain preferred embodiments have been shown and described, it should be understood that many changes and modifications may be made therein without departing from the scope of the invention as defined in the accompanying claims.

CLAIMS

1. A liquid crystal color display device for displaying a color image represented by an applied image signal, comprising:
 - (a) a liquid crystal cell responsive to the image signal for twisting a plane of polarization of electromagnetic radiation passing therethrough;
 - (b) polarising means cooperating with said liquid crystal cell to constitute a switching element;

65 and

(c) fluorescent light-emitting means having a fluorescent layer and lamp means for generating electromagnetic radiation, said fluorescent layer being responsive to the electromagnetic radiation for emitting chromatic fluorescent light.

2. A liquid crystal color display device according to claim 1, wherein said fluorescent light-emitting means further includes a color filter for passing said chromatic fluorescent light from said fluorescent layer, whereby the image represented by the applied image signal can be displayed by the chromatic fluorescent light. 5
3. A liquid crystal color display device according to claim 1 or 2, wherein said liquid crystal cell contains a twisted nematic liquid crystal material.
- 10 4. A liquid crystal color display device according to claim 1 or 2, wherein said liquid crystal cell contains a guest-host liquid crystal material. 10
5. A liquid crystal color display device according to any one of claims 1 to 4, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material therebetween, each of said transparent plates being made of glass, polyester, polysulfone or polypropylene. 15
6. A liquid crystal color display device according to any one of claims 1 to 5, wherein said fluorescent layer is disposed behind said liquid crystal cell as seen from an observer of the liquid crystal color display device.
7. A liquid crystal color display device according to claim 6, wherein said fluorescent layer is disposed on a surface, facing said lamp, of a polarizer which is disposed behind said liquid crystal cell. 20
8. A liquid crystal color display device according to claim 6, wherein said fluorescent light-emitting means further includes a transparent plate supporting said fluorescent layer thereon and disposed between a polarizer which is disposed behind said liquid crystal cell and said lamp means. 25
9. A liquid crystal color display device according to claim 6, wherein said fluorescent layer is mounted on an inner or outer surface of a tube wall of said lamp means, which wall is proximal of said liquid crystal cell.
10. A liquid crystal color display device according to claim 9, wherein said fluorescent light-emitting means includes a reflecting film disposed on a tube wall of said lamp means remote from said liquid crystal cell. 30
11. A liquid crystal color display device according to claim 10, wherein said reflecting film is made of aluminum or silver.
12. A liquid crystal color display device according to any one of claims 1 to 5, wherein said fluorescent layer is disposed in front of said liquid crystal cell as seen from an observer of the liquid crystal color display device. 35
13. A liquid crystal color display device according to claim 12, wherein said fluorescent layer is mounted on a surface, facing the observer, of a polarizer.
14. A liquid crystal color display device according to claim 12, wherein said fluorescent light-emitting means further includes a transparent plate supporting said fluorescent layer thereon in facing relation to said liquid crystal cell, said transparent plate being disposed more closely toward the observer than said polarizer to be seen by the observer. 40
15. A liquid crystal color display device according to claim 1, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, one of said transparent plates supporting a transparent pixel electrode composed of a matrix of minute electrode elements, the other transparent plate supporting a flat transparent electrode confronting said matrix of minute electrode elements, said fluorescent layer being composed of a mosaic pattern of minute fluorescent layer elements capable of emitting red, green, and blue fluorescent light, said minute fluorescent layer elements being disposed in alignment with respective electrode elements. 50
16. A liquid crystal color display device according to claim 1, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, one of said transparent plates being disposed behind said liquid crystal material as seen from an observer of the liquid crystal color display device and supporting a transparent pixel electrode composed of a matrix of minute electrode elements, the other transparent plate being disposed in front of said liquid crystal material and supporting a flat transparent electrode confronting said matrix of minute electrode elements, said fluorescent layer being composed of a mosaic pattern of minute fluorescent layer elements capable of emitting red, green, and blue fluorescent lights, said minute fluorescent layer elements being disposed in alignment with said electrode elements, respectively. 60
17. A liquid crystal color display device according to claim 1, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, one of said transparent plates being disposed in front of said liquid crystal material as seen from an observer of the liquid crystal color display device and supporting a transparent pixel electrode composed of a matrix of minute electrode elements, the other transparent plate 65

being disposed behind said liquid crystal material and supporting a flat transparent electrode confronting said matrix of minute electrode elements, said fluorescent layer being composed of a mosaic pattern of minute fluorescent layer elements capable of emitting red, green, and blue fluorescent lights, said minute fluorescent layer elements being disposed in alignment with said electrode elements, respectively. 5

18. A liquid crystal color display device according to claim 1, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, said transparent plates supporting strips of transparent electrodes extending substantially perpendicularly to one another, said fluorescent layer being composed of a plurality of minute fluorescent layer elements aligned respectively with intersections of said electrode strips. 10

19. A liquid crystal color display device according to claim 1, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, one of said transparent plates supporting a transparent electrode in the form of at least one seven-segment pattern in the shape of a numeral "8", the other transparent plate supporting a flat transparent electrode confronting said transparent electrode of at least one seven-segment pattern. 15

20. A liquid crystal color display device according to claim 19, wherein said fluorescent layer can emit fluorescent light of a certain chromatic color as a whole.

21. A liquid crystal color display device according to claim 19, wherein said transparent electrode has a plurality of seven-segment patterns each shaped as a numeral "8" for displaying numerals as integers and decimal fractions, said fluorescent layer being capable of emitting fluorescent light of different colors for the integers and fractions, respectively. 20

22. A liquid crystal color display device according to claim 19, wherein said transparent electrode has a plurality of seven-segment patterns each shaped as a numeral "8" for displaying numerals as integers, said fluorescent layer being capable of emitting fluorescent light of different colors for integers in third and greater places and other integers, respectively. 25

23. A liquid crystal color display device according to claim 2, wherein said fluorescent light-emitting means includes a transparent plate on which said fluorescent layer and said color filter are mounted, said fluorescent layer and said color filter being disposed between said lamp means and a polarizer behind said liquid crystal cell as seen from an observer of the liquid crystal color display device. 30

24. A liquid crystal color display device according to claim 2, wherein said fluorescent light-emitting means includes a transparent plate on which said fluorescent layer and said color filter are mounted, said fluorescent layer and said color filter being disposed in front of a polarizer positioned in front of said liquid crystal cell as seen from an observer of the liquid crystal color display device. 35

25. A liquid crystal color display device according to claim 2, wherein said fluorescent light-emitting means includes a transparent plate on which said fluorescent layer is mounted, said fluorescent layer being disposed between said lamp means and a polarizer behind said liquid crystal cell as seen from an observer of the liquid crystal color display device, said color filter being mounted on a polarizer closer to the observer. 40

26. A liquid crystal color display device according to claim 2, wherein said fluorescent layer and said color filter are mounted on a tube wall of said lamp means proximal of said liquid crystal cell. 45

27. A liquid crystal color display device according to claim 26, wherein said fluorescent layer and said color filter are mounted on an inner or outer surface of the tube wall of said lamp means. 45

28. A liquid crystal color display device according to claim 26, wherein said fluorescent layer is mounted on an inner surface of the tube wall of said lamp means, and said color filter is mounted on an outer surface of the tube wall of said lamp means. 50

29. A liquid crystal color display device according to claim 2, wherein said fluorescent light-emitting means also includes a reflecting film disposed on a tube wall of said lamp means distal of said liquid crystal cell.

30. A liquid crystal color display device according to claim 29, wherein said reflecting film is made of aluminum or silver. 55

31. A liquid crystal color display device according to claim 2, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, one of said transparent plates supporting a transparent electrode composed of a matrix of minute electrode elements, the other transparent plate supporting a flat transparent electrode confronting said matrix of minute electrode elements, said color filter being composed of a mosaic pattern of minute pixel filters capable of passing red, green, and blue fluorescent lights, said minute pixel filters being disposed in alignment with said electrode elements, respectively. 60

32. A liquid crystal color display device according to claim 2, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, said transparent plates supporting stripes of transparent electrodes extending substan- 65

tially perpendicularly to one another, said color filter being composed of a mosaic pattern of minute pixel filters for passing red, green, and blue fluorescent lights, said minute pixel filters being disposed in alignment with said electrode elements, respectively.

33. A liquid crystal color display device according to claim 31, wherein said transparent electrode composed of the electrode elements is mounted on the transparent plate closer to an observer of the liquid crystal color display device, said color filter being disposed on a polarizer closer than said liquid crystal cell to the observer. 5
34. A liquid crystal color display device according to claim 31 or 32, wherein said fluorescent layer comprises a mosaic pattern of minute fluorescent layer elements for emitting red, green, and blue fluorescent lights, said minute fluorescent layer elements being aligned respectively with the pixel filters of said color filter. 10
35. A liquid crystal color display device according to claim 31 or 32, wherein said fluorescent layer is composed of uniformly distributed fluorescent materials capable of emitting red, green, and blue fluorescent light so that the red, green, and blue fluorescent light can be emitted from said fluorescent layer all over an entire surface thereof. 15
36. A liquid crystal color display device according to claim 2, wherein wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, said transparent plates supporting transparent electrodes, respectively, said color filter being superimposed on one of said transparent electrodes. 20
37. A liquid crystal color display device according to claim 36, wherein said two polarizers double as said transparent plates, respectively, said fluorescent layer being mounted on a surface of the polarizer closer to said lamp. 20
38. A liquid crystal color display device according to claim 36, wherein said fluorescent layer is mounted on a surface, facing said lamp means, of the polarizer closer to said lamp. 25
39. A liquid crystal color display device according to claim 36, wherein said said color filter is composed of a mosaic pattern of minute pixel filters for passing red, green, and blue fluorescent lights, said transparent electrode on which said color filter is superimposed being composed of a plurality of minute pixel electrode elements aligned respectively with said pixel filters, the other transparent electrode comprising a flat transparent electrode confronting said pixel electrode elements as a whole. 30
40. A liquid crystal color display device according to claim 39, wherein said minute electrode elements and said color filter are mounted on one of said transparent plates of said liquid crystal cell, which is closer to an observer of the liquid crystal color display device. 30
41. A liquid crystal color display device according to claim 39, wherein said minute electrode elements and said color filter are mounted on one of said transparent plates of said liquid crystal cell, which is closer to said lamp means. 35
42. A liquid crystal color display device according to claim 36, wherein said transparent electrodes comprise stripes of electrodes extending substantially perpendicularly to one another, said color filter comprising a plurality of pixel filters capable of passing red, green, and blue fluorescent lights and superimposed on one of the strip electrodes, said pixel filters being aligned respectively with intersections of said stripes of electrodes. 40
43. A liquid crystal color display device according to claim 36, wherein said fluorescent layer is in the form of a continuous body composed of uniformly distributed fluorescent materials capable of emitting red, green, and blue fluorescent light. 45
44. A liquid crystal color display device according to claim 39 or 42, wherein said fluorescent layer is composed of a mosaic pattern of fluorescent layer elements for emitting red, green, and blue fluorescent light, said fluorescent layer elements being aligned respectively with the pixel filters of said color filter. 45
45. A liquid crystal color display device according to claim 2, wherein said liquid crystal cell comprises a liquid crystal material and two transparent plates sandwiching said liquid crystal material, one of said transparent plates supporting a transparent electrode in the form of at least one seven-segment pattern in the shape of a numeral "8", the other transparent plate supporting a flat transparent electrode confronting said transparent electrode of at least one seven-segment pattern. 50
46. A liquid crystal color display device according to claim 45, wherein said transparent electrode has a plurality of seven-segment patterns each shaped as a numeral "8" for displaying numerals as integers and fractions to the decimal point, said color filter being capable of passing fluorescent light of different colors for the integers and fractions, respectively. 55
47. A liquid crystal color display device according to claim 45, wherein said transparent electrode has a plurality of seven-segment patterns each shaped as a numeral "8" for displaying numerals as integers, said color filters being capable of passing fluorescent light of different colors for integers in third and greater places and other integers, respectively. 60
48. A liquid crystal color display device according to claim 45, wherein said fluorescent layer can emit fluorescent light of a certain chromatic color uniformly. 60
49. A liquid crystal color display device according to claim 45, wherein said fluorescent 65

layer can emit fluorescent light of colors corresponding to light passing through said color filter.

50. A liquid crystal color display device according to claim 2, wherein the fluorescent light emitted from said fluorescent layer has a wavelength ranging in the width of a half value of a spectral transmittance of said color filter.

- 5 51. A liquid crystal color display device according to any one of claims 1 to 50, wherein said fluorescent layer is formed of a powdery fluorescent material. 5
52. A liquid crystal color display device according to any one of claims 1 to 50, wherein said fluorescent layer is formed of a particulate fluorescent material composed of minute particles colored with a fluorescent dye.
- 10 53. A liquid crystal color display device according to any one of claims 1 to 50, wherein said fluorescent layer is formed of a particulate fluorescent material composed of minute particles mixed with a fluorescent dye. 10
54. A liquid crystal color display device according to any one of claims 1 to 50, wherein said electromagnetic radiation emitted from said lamp means is ultraviolet radiation.
- 15 55. A liquid crystal color display device according to any one of claims 1 to 50, wherein said electromagnetic radiation emitted from said lamp means is near-ultraviolet radiation. 15
56. A liquid crystal color display, comprising: a liquid crystal cell responsive to a signal for twisting the plane of polarisation of light passing therethrough, one or more polarizers cooperating with the liquid crystal cell to form a switch allowing light to pass or not pass through the cell and polarizer combination in response to the application of a said signal to the cell, light emitting means comprising a layer of fluorescent material behind said cell for emitting light of different colors, said cell having electrodes for activating discrete parts of said cell and cooperating with said light emitting means to form a variable color display. 20
57. A display as claimed in claim 56, wherein the light emitting means comprises a layer of fluorescent material substantially uniformly emitting light of different colors and a filter comprising arrays of filter elements of different color to form with said fluorescent layer arrays of pixel-like areas of different color. 25
58. A display as claimed in claim 56, wherein said fluorescent layer comprises arrays of pixel-like areas of fluorescent material of different color.
- 30 59. A display as claimed in claim 57 or 58, wherein an electrode on one side of said cell comprises an array of elements, each of which cooperates with a respective pixel-like area. 30
60. A display as claimed in claim 57 or 58, wherein the electrodes comprise a plurality of parallel strips on opposite sides of said cell, the strips on one side crossing those on the opposite side at points corresponding to the pixel-like areas.
- 35 61. A liquid crystal color display substantially as hereinbefore described with reference to the accompanying drawings. 35