

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2007 (05.04.2007)

PCT


(10) International Publication Number
WO 2007/036741 A1

- (51) International Patent Classification:
A61B 5/0408 (2006.01)
- (21) International Application Number:
PCT/GB2006/003637
- (22) International Filing Date:
29 September 2006 (29.09.2006)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0519836.1 29 September 2005 (29.09.2005) GB
- (71) Applicant (for all designated States except US):
SMARTLIFE TECHNOLOGY LIMITED [GB/GB];
42 High Street, Congleton, Cheshire CW12 1BD (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **DIAS, Tilak, Kithsiri** [GB/GB]; 6 Briar Hollow, Heaton Mersey, Stockport SK4 2EE (GB). **BEATTY, Paul, Charles, William** [GB/GB]; 91 Station Road, Marple, Stockport SK6 6NY (GB). **HURLEY, William** [GB/GB]; 64 Peterburg Road, Edgeley, Stockport SK3 9QX (GB). **MITCHAM, Kimberley** [GB/GB]; 10 St Peters Close, Glenfield, Leicester LE3 8QB (GB). **GRIFFITHS, Adrian, Keith** [GB/GB]; 330 Northenden Road, Sale, Cheshire M33 2PW (GB). **RAMGULAM, Rajcoomar, Baboo** [GB/GB]; 9 Sunningdale Drive, Prestwich, Manchester M25 1JX (GB).
- (74) Agent: **HITCHCOCK, Esmond, Antony**; Lloyd Wise, McNeight & Lawrence, Commonwealth House, 1-19 New Oxford Street, London WC1A 1LW (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONTACT SENSORS

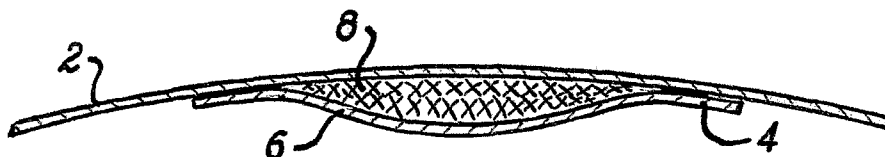

(57) Abstract: A non-invasive sensor has a contact membrane (6,16) and a cover membrane (2,12), the cover membrane being adapted for extension of a body surface to project the contact membrane against a body surface beneath it. The contact membrane will normally be attached to the cover membrane around its periphery such that at least one of the membranes forms a convex outer surface, and a spacing material (8,20) can be interposed between the membranes to achieve this object. The cover membrane may extend over a support element (10), with the contact membrane overlaying and spaced from the other face of the support element by spacing material.



WO 2007/036741 A1

Contact Sensors

This invention relates to contact sensors from monitoring activity at a body surface. Particularly, it relates to non-invasive sensors for attachment to or location on a body surface, for monitoring physiological signals. Such sensors can be incorporated in garments, as described in a paper presented to the Medicom 2004 conference by R. Paradiso, G. Loriga and N. Taccini, entitled, "Wearable Health Care System For Vital Signs Monitoring". Reference is also directed to published Patent Specification No. WO04/100784, incorporated herein by reference, disclosing knitted transducers which may serve as such sensors.

The sensors disclosed herein can also be used with the knitting techniques disclosed in our co-pending International Application also filed on 29th September 2006 with priority from British Application No: GB05/19837.9, incorporated by reference, and in garments and other knitted products made using those techniques.

Non-invasive sensors for monitoring activity at a body surface need to make intimate contact with the surface in order to function effectively. Such contact has been previously assured by adhering the sensor to the skin surface, or at least interposing a layer of conductive jelly to ensure the transmission of signals from the body to the sensor. These techniques have been felt to be somewhat clumsy and can create discomfort. Some research has therefore been directed at the attachment or incorporation of sensors on garments, with a respective garment holding the sensor in place.

According to the present invention, a non-invasive sensor monitoring activity at a body surface comprises a contact membrane and an adjacent cover membrane. The contact membrane is attached to the cover membrane around it's periphery such that at least one of the membranes forms a convex outer surface. The cover membrane is adapted to be extended over the body

surface to project the contact membrane against the body surface beneath it. Preferably, the cover membrane is more elastic than the contact membrane, such that the contact membrane is elastically unstretched when the cover membrane is extended over the body surface.

A sensor according to the invention may be reinforced by a support element. In this variant, the sensor comprises a cover membrane extending over one face of the element, which may be planar or curved; a contact membrane overlaying the other face of the support element and spaced from the support element by a spacing material, the contact membrane being substantially inextensible and attached to the cover membrane at the periphery of the support element. The cover membrane is normally stretched over the one face of the support element, and the support element may be held securely to the cover membrane by elastic sections. Such elastic sections will normally be more elastic than the cover membrane and may be fabric sections comprising low power elastomeric yarns. The cover membrane may also be a fabric, but comprising high power elastomeric yarns.

Sensors of the invention may be made part of a garment which delivers localised higher pressure to the body of the wearer at the sensor areas while delivering low, comfortable pressure to the rest of the body. In sensors that incorporate a support element as described above, the support element enables the contact member to preserve its shape and dimensions notwithstanding deformation or extension of the garment of which it is a part. Its shape will normally be convex, but in some circumstances the contact membrane can present a planar surface for contact with the body surface.

The contact membrane will normally be attached to the cover membrane substantially continuously around its periphery, and the space between the membrane may be occupied by a filler material. If the attachment is continuous around the contact membrane periphery, and the materials of the

respective membranes are impermeable, such a filler material may be liquid or at least a semi-solid. However, a dry filler material is normally preferred.

In sensors of the invention, the contact membrane may have transmissible characteristics which vary on distortion, enabling movement of the body surface to be monitored directly. Such sensors are described in the International patent publication referred to above. Alternatively, the contact membrane can form an electrode for receiving and transmitting electronic signals. It may comprise a knitted structure. Typically, such an electrode is a multi-point electrode, and the multi-points preferably comprise particles of silver or silver chloride at the surface of the membrane. Silver or silver chloride is preferred for the reason that the electrical conductance required to ensure good transmission of electrical signals is much less using these materials than other available options. Some experimental work has shown that electrodes knitted with silver yarns provided good quality ECG signals with a contact pressure around 10 Hgmm compared to stainless steel which required a minimum of 100 Hgmm pressure to achieve a similar signal quality. Lower contact pressures will of course be more comfortable to the wearer.

The requisite contact pressure can be provided in an elastomeric knitted structure created by "knitting-in" a covered elastomeric yarn or a conventional yarn blended with an elastomeric yarn such as Lycra. Such an elastomeric knitted structure, which may be the basic structure of a health monitoring vest, would form the cover membrane.

As described above, one of the membranes in sensors of the invention will normally form a convex outer surface. When the cover membrane is extended over a body surface, this will ensure that the contact membrane is urged against the surface for the monitoring of physiological signals. This can be accomplished by the manner in which two membranes of different elastic modulus are attached to each other. A substantially similar effect can be

achieved in a single knitted fabric having a contact side and a cover side, by increasing the stitch density on the contact side relative to the cover side over an area thereof which forms a convex surface on the contact side. The knitted fabric can then be extended over a body surface in the same way as described above, to project the area of increased stitch density against the body surface beneath it.

When a sensor according to the invention is to be attached to or incorporated in a garment, electrical connections to and from the sensor can comprise conductive yarns in the garment. Where the sensor itself comprises a knitted element, conductive yarns can be used to form the sensor. Particularly in the embodiment just referred to in which the sensor comprises a knitted fabric having a contact side and a cover side, the area of increased stitched density can comprise conductive yarns.

The invention will now be described by way of example and with reference to the accompanying schematic drawings wherein:

Figure 1 shows a plan view of a sensor according to one embodiment of the invention;

Figure 2 shows a cross section taken on line A-A of Figure 1;

Figure 3 is a cross-section similar to that of Figure 2 of another embodiment of the invention;

Figure 4 shows a variation of the embodiment of Figure 3;

Figure 5 is a perspective view of a sensor similar to that shown in Figure 3;

Figure 6 is a view similar to that of Figure 1 of a fabric sensor embodying the invention; and

Figure 7 is a cross section through a single layer of fabric embodying the invention.

The sensor shown in Figures 1 and 2 comprises a cover membrane 2 and a contact membrane 4 attached thereto. In a central section 6 of the contact membrane, it is spaced from the cover membrane 2 to form a space 8, and a convex outer surface, as shown in Figure 2. The space 8 may be occupied by a filler material to maintain the separation between the membranes in this section. If the respective membranes are impermeable, and the attachment between them around the section 6 is also sealed, then the filler material may be liquid, although a dry material is preferred. Of course, if the space 8 is effectively sealed, air confined therein can be sufficient to form a bubble if specific application of pressure is acquired. In many applications however, providing a convex outer surface is formed, then when the cover membrane is extended the contact membrane will be sufficiently urged against a respective body surface.

The sensor illustrated in Figures 1 and 2 would normally comprise an electrode, for receiving and transmitting electronic signals representative of physiological activity. A preferred form of electrode is a multi-point electrode, and a preferred multi-point electrode, will comprise a continuous layer of silver on the electrode surface and silver chloride particles at the electrode surface. If the contact membrane is a fabric, then a multipoint electrode may be created from a silver yarn or with a yarn with a continuous layer of silver on its surface. Such a contact membrane can be a knitted layer comprising electrically conductive yarns; for example, yarns comprising silver, gold or platinum. With such yarns, a knitted fabric can create multiple contact points at the yarn cross over points of stitches. Silver chloride particles can be conveniently located within the surface of the knitted electrode. Conductive yarns in the fabric may be used to carry electronic signals between the particles and remote terminals. In the case of knitted electrodes the

conductive yarns will be connected to the electrodes during the knitting process.

Figure 3 shows a cross-section through a sensor according to a variant of the invention which is reinforced by a support element 10. The cover membrane 12 extends over and is preferably stretched over the support element 10 to opposite sides of the support element. At this point, the cover membrane 12 can merge with or even be part of contiguous sections 14 for attachment to or incorporation into a garment. The support element 10 and the cover membrane 12 effectively define fixed boundaries, relative to which the contact membrane 16 is located.

The cover membrane 12 is typically a stretchable fabric such as a knitted fabric, and as noted above can be stretched over the support element 10. It can be attached directly to the support element 10, but is normally attached indirectly by connection to the contact membrane. The contact membrane 16 is either inextensible, or relatively inextensible relative to the cover membrane. In the embodiment illustrated, it is attached to the cover membrane either directly or indirectly, by elastic sections 18 on either side or disposed around the contact membrane 16. The elastic sections will normally be high stretch sections, typically comprising low power elastomeric yarns. The support element 10 and the contact membrane 16 will normally be square or rectangular, with well defined straight edges, suitably oriented relative to the plane or preferred axis or axes of stretch of the garment fabric 14. However, other shapes may be used for the support element and contact membrane and if the shape chosen is circular of course, a single elastic section 18 can circumscribe the contact element 16.

The contact element 16 is preferably spaced from the support element 10 by a filler or packing material 20. This can be selected to give the outer face of the contact membrane a desired profile, which may be convex or flat

depending on the intended use of the sensor. The cross-sectional area of the contact membrane 16 is normally less than that of the support element 10 to orient the elastic sections 18 as indicated, such that they make an acute angle with the support element 10.

In the embodiment illustrated in Figure 3, the support element 10 is shown as being generally planar. There can though, be circumstances in which a curved shape would be desirable. Such a variation is illustrated in Figure 4. The purpose of this variation is to generate increased pressure between the contact membrane 16 and the body surface to which it is applied. When the cover membrane 10 is stretched over the support element, it generates forces on the support element urging the contact membrane against the respective body surface. In other respects, the construction of this embodiment is similar to that of Figure 3. The sensor of Figures 3 and 4, as with that of Figures 1 and 2, will typically comprise an electrode with the sensing contacts being formed on the contact membrane as described above.

The formation of a sensor of the type shown in Figures 3, on a flat bed knitting machine, is described with reference to Figure 5. A relatively high modulus elastic yarn is knitted to create the cover membrane 12, as an extension of adjacent garment sections 14. This is knitted in a tube, first on the front needle bed and then across the rear needle bed of the knitting machine. By doing so with the same feeder, both sides are connected. The relative high modulus elastic yarn is then knitted only on the front needle bed while the conductive yarn is knitted on the rear bed to form the contact membrane 16. Four courses of the low modulus elastic yarn are knitted on the rear needle bed to form the elastic sections 18, connecting the high modulus yarns of the cover membrane 12 and the conductive yarns of the contact membrane 16. As shown, the contact and cover membranes form an open-ended enclosure in which the packing material 20 can be easily secured by attachment to one

or other of the membranes 12, 16. The ends may though be closed if desired, by additional elastic sections (18) or ties (not shown).

For the cover membrane, and for the adjacent garment sections, a suitable high modulus elastic yarn has a core of 570 D'T Lycra T902C (64.0%) with outer and inner covers (each 18.9%) of 33/10 text nylon 66. A suitable relatively low modulus yarn for the elastic sections is based on a core of 44f34 Nylon/78's Lycra (33.1%) with inner and outer covers of 1/78f46 textured nylon PA66DD (33.3% and 33.6% respectively).

Figure 6 illustrates an embodiment of the invention in which both the cover membrane and the contact membrane is a fabric. Knitted fabrics will normally be used, but in some circumstances woven or stitched-bonded fabrics can also be effective. If prepared quite separately, then the contact membrane can be attached to the cover membrane precisely round its periphery, such that the contact membrane defines the entire sensor section. It will be appreciated that conductive yarns may be incorporated in the structure of the cover membrane fabric to carry electronic signals to and from the contact membrane, which may also comprise conductive yarns. As discussed above, this can facilitate the formation of a multi-point electrode at the contact membrane surface.

Figure 7 shows a cross section through a single layer fabric having a contact side 22 and a cover side 24, but in which a convex surface is created on the cover side by an area 26 of increased stitch density on the contact side. While not comprising separately definable membranes, a similar effect is achieved when the fabric is extended over a body surface. Because of the increased density in the area, the contact surface in this area 26 will be urged against the body surface there beneath. The area can therefore be used as a sensor in the same way as the contact membranes described above with reference to Figures 1 to 5.

CLAIMS

1. A non-invasive sensor for monitoring activity at a body surface, comprising a contact membrane and a cover membrane, the contact membrane being attached to the cover membrane around its periphery such that at least one of the membranes forms a convex outer surface, the cover membrane being adapted for extension over a body surface to project the contact membrane against a body surface beneath it.

2. A sensor according to Claim 1 wherein the cover membrane is elastic relative to the contact membrane such that the contact membrane is elastically unstretched when the cover membrane is extended.

3. A sensor according to Claim 2 including a support element over which the cover membrane is stretched, the contact membrane being attached to the cover membrane at the periphery of the element.

4. A sensor according to Claim 3 wherein the contact membrane is attached to the cover membrane by elastic sections.

5. A sensor according to Claim 4 wherein the elastic sections comprise elastomeric yarns.

6. A sensor according to Claim 4 or Claim 5 wherein the elastic sections are knitted.

7. A sensor according to any preceding Claim wherein at least one of the contact membrane and the cover membrane are knitted.

8. A sensor according to Claim 7 wherein the cover membrane is a knitted fabric comprising elastomeric yarns.

9. A non-invasive sensor comprising a cover membrane extending over one face of a support element; a contact membrane overlaying the other face of the support element and spaced from the support element by a spacing material, the contact membrane being substantially inextensible and attached to the cover membrane at the periphery of the support element.

10. A non-invasive sensor according to Claim 9 wherein the support element is planar.

11. A non-invasive sensor according to Claim 9 wherein the support element is curved with its one face being convex.

12. A sensor according to any of Claims 9 to 11 wherein the cover membrane is stretched over the one face of the support element.

13. A sensor according to any of Claims 9 to 12 wherein the contact element is attached to the cover membrane by elastic sections.

14. A sensor according to Claim 13 wherein the elastic sections are fabric comprising elastomeric yarns.

15. A sensor according to any of Claims 9 to 14 wherein at least one of the cover and contact membranes are knitted.

16. A sensor according to any preceding Claim wherein the contact membrane is attached to the cover membrane substantially continuously around its periphery.

17. A sensor according to any preceding Claim wherein the space between the contact membrane and the cover membrane is occupied by a filler material.

18. A sensor according to any preceding Claim wherein the contact membrane forms an electrode.

19. A sensor according to Claim 18 wherein the electrode is a multi-point electrode.

20. A sensor according to Claim 19 wherein the multi-points comprise particles of silver chloride at the surface of the membrane.

21. A sensor according to any preceding Claim wherein the contact membrane is a textile structure having conductive yarns.

22. A sensor according to Claim 18 or Claim 19 wherein the contact membrane is a knitted layer comprising electrically conductive yarn.

23. A sensor according to Claim 22 wherein the contact membrane comprises multiple contact points at the yarn cross over points of stitches.

24. A sensor according to Claim 22 or Claim 23 wherein the conductive yarns comprise one of silver, gold or platinum.

25. A non-invasive sensor for monitoring activity at a body surface comprising a knitted fabric having a contact side and a cover side, with an increased stitch density on the contact side relative to the cover side over an area thereof which forms a convex surface on the contact side, the fabric being adapted for extension over a body surface to project said area of the contact side against a body surface beneath it.

26. A non-invasive sensor according to Claim 25 wherein the area of increased stitch density comprises conductive yarns.

27. A material incorporating a sensor according to any preceding Claim.

28. A material according to Claim 22 including at least one conductor extending from the sensor to an edge of the material.

29. A knitted material according to Claim 22 or Claim 23.

30. A garment comprising a material according to any of Claims 27 to 29.

31. A method of monitoring physical movements of a body surface comprising attaching a sensor according to any of Claims 1 to 26 to the body, and monitoring its deformation in response to movements of the body surface.

32. A method of monitoring electrical properties at a body surface comprising attaching a sensor according to any of Claims 18 to 21 to the body, and monitoring signals from the sensor generated in response to changing electrical properties at the body surface.

33. A method according to Claim 31 or Claim 32 wherein the body surface is a human body surface, and the sensor is part of a garment on the human body.

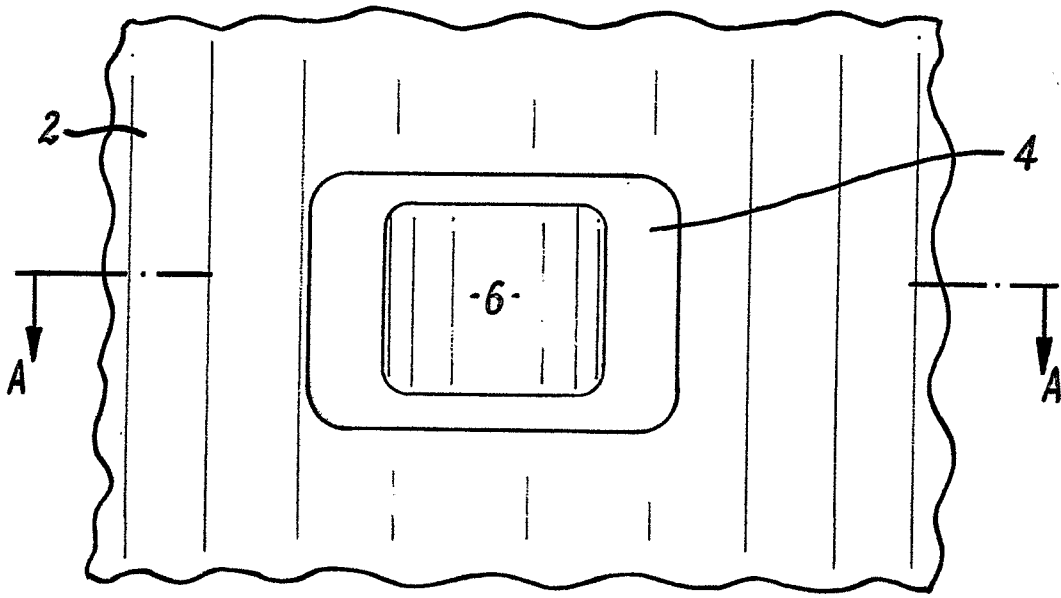


FIG. 1

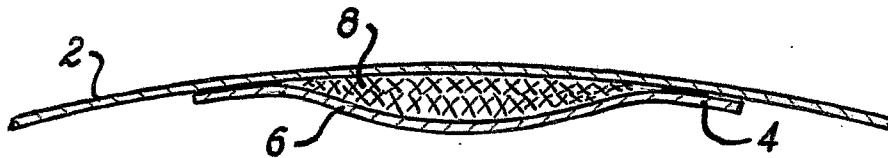


FIG. 2

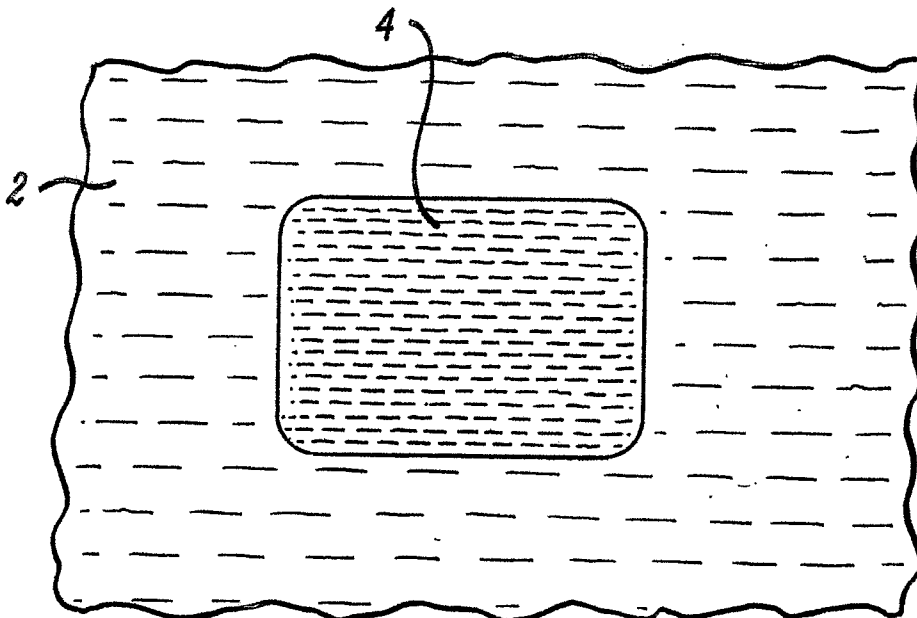


FIG. 6

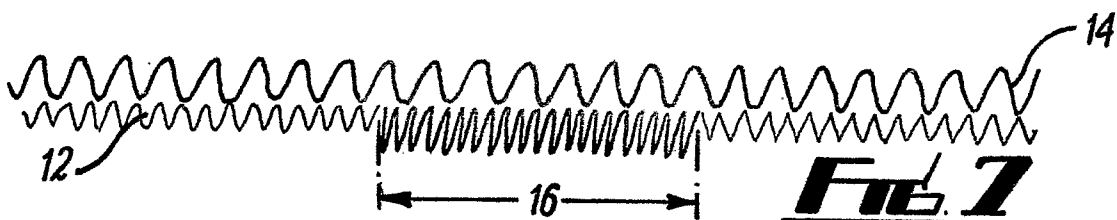


FIG. 7

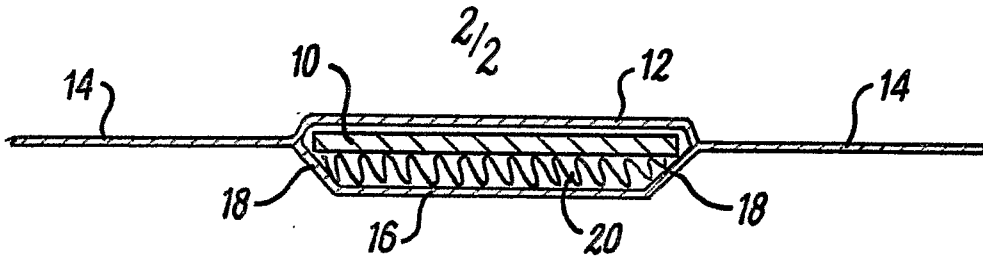


FIG. 3

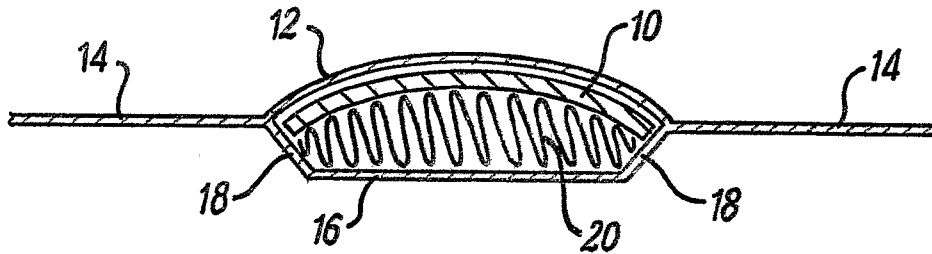


FIG. 4

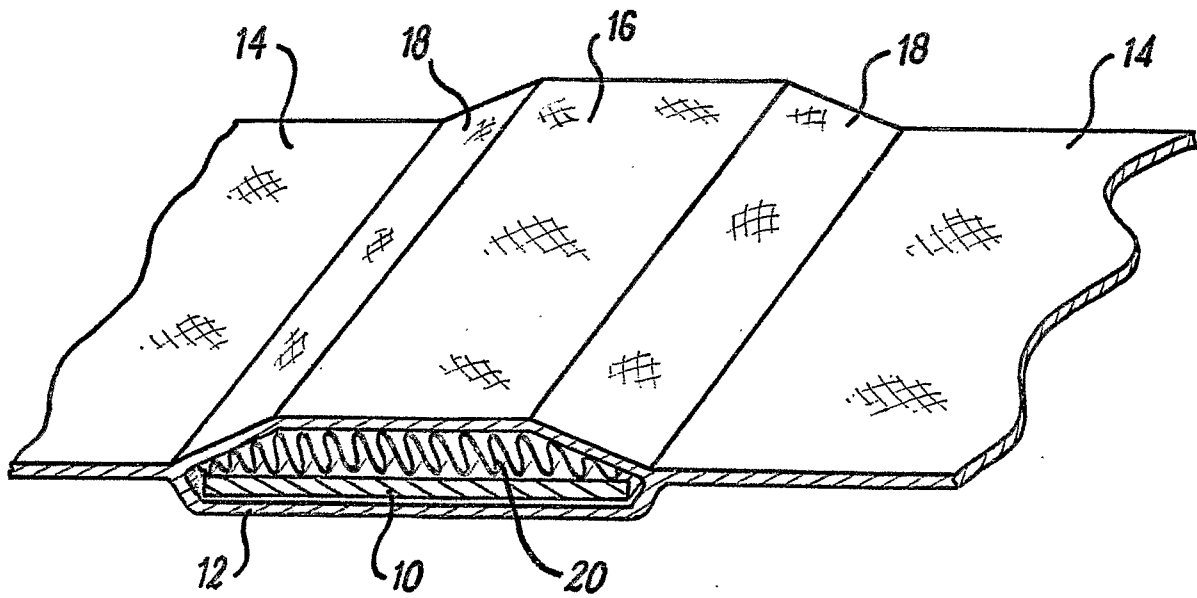


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2006/003637

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61B5/0408

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61B A41D A61N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/40091 A2 (GEORGIA TECH RES INST [US]; JAYARAMAN SUNDARESAN [US]; PARK SUNGMEE [U] 23 May 2002 (2002-05-23)	1-23,25, 27-33
Y	page 7, line 13 - page 9	24
Y	WO 03/094717 A (KONINKL PHILIPS ELECTRONICS NV [NL]; VALENTINE WARREN B [GB]; TILBURY) 20 November 2003 (2003-11-20) page 4, line 1 - page 6, line 25	24
X	GB 2 143 135 A (BIO STIMU TREND CORP) 6 February 1985 (1985-02-06) page 2, line 127 - page 3, line 28 page 4, line 73 - line 105	1,7-12, 15-24, 27,30-33
	-/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

6 December 2006

Date of mailing of the international search report

19/12/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Trachterna, Morten

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2006/003637

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 262 976 A2 (HON EDWARD H [US]; HON EDWARD D [US]; HON ROBERT W [US]) 6 April 1988 (1988-04-06) column 5, line 30 - column 6, line 27 -----	1-4, 9, 10, 31-33
X	US 5 218 973 A (WEAVER BENSON C [US] ET AL) 15 June 1993 (1993-06-15) column 5, line 8 - column 6, line 50 -----	1, 9-13, 15-24
X	WO 01/02052 A2 (BEKAERT SA NV [BE]; DEMEYERE EMMANUEL [BE]; HEIRBAUT GUIDO [BE]; STEEN) 11 January 2001 (2001-01-11) page 2, line 26 - page 3, line 11 page 4, line 29 - page 5, line 16 -----	1-8, 31-33
P, X	WO 2006/060934 A (BISCHOFF TEXTIL AG [CH]; BISCHOFF BERNHARD [CH]; ZWEIFEL HANS-JOERG [C]) 15 June 2006 (2006-06-15) page 3, line 8 - line 19 page 4, line 19 - page 5, line 5 page 11, line 20 - page 12, line 10 -----	1-4, 7, 9, 10, 12, 13, 15-19, 21, 27, 30, 32, 33

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/GB2006/003637

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0240091	A2	23-05-2002	NONE
WO 03094717	A	20-11-2003	AU 2003225502 A1 11-11-2003 CN 1652720 A 10-08-2005 EP 1509128 A1 02-03-2005 JP 2005525477 T 25-08-2005 US 2006234584 A1 19-10-2006
GB 2143135	A	06-02-1985	CA 1263710 A1 05-12-1989 DE 3480055 D1 16-11-1989 DE 128103 T1 12-09-1985 DK 268984 A 02-12-1984 EP 0128103 A1 12-12-1984 IL 71968 A 31-01-1989 NO 842222 A 03-12-1984
EP 0262976	A2	06-04-1988	AU 6927191 A 28-03-1991 AU 608540 B2 11-04-1991 AU 7907387 A 14-04-1988 BR 8705255 A 24-05-1988 CA 1318943 C 08-06-1993 DK 516187 A 03-04-1988 IE 872639 L 02-04-1988 JP 63277033 A 15-11-1988 PT 85860 A 30-11-1988
US 5218973	A	15-06-1993	CA 2061837 A1 23-09-1992 EP 0504715 A2 23-09-1992
WO 0102052	A2	11-01-2001	AU 5530900 A 22-01-2001
WO 2006060934	A	15-06-2006	NONE