

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 March 2006 (23.03.2006)

PCT

(10) International Publication Number
WO 2006/031044 A1

(51) International Patent Classification⁷: B24D 5/06

(21) International Application Number:
PCT/KR2005/003012

(22) International Filing Date:
13 September 2005 (13.09.2005)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2004-0073792
15 September 2004 (15.09.2004) KR

(71) Applicant (for all designated States except US): SE-
WON TECH CO., LTD. [KR/KR]; 564-43, Gajwa-dong,
Seo-gu, Incheon 404-250 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): PARK, Rin-soon
[KR/KR]; Yongsang APT. 1-401, 150-3, Wonjong-dong,
Ojeong-gu, Bucheon-si, Gyeonggi-do 421-200 (KR).

(74) Agent: LEE, Jun-seo; Korea Coal Center, 10th Floor,
80-6, Susong-Dong, Chongro-Ku, Seoul 110-727 (KR).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: GRINDING WHEEL

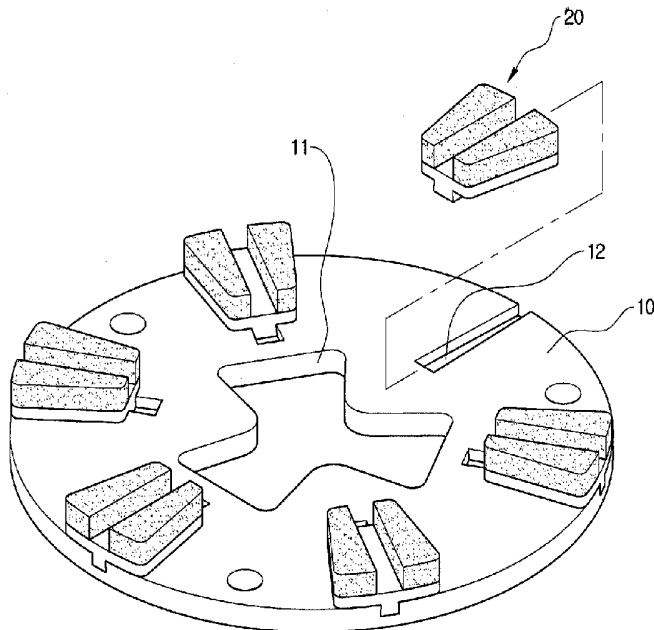

(57) Abstract: A grinding wheel has a disc having a connection hole formed at a center thereof, to which a rotation axis of a grinder is connected, and a plurality of abrasive segments detachably connected to a surface of the disc. A plurality of fixing recesses are radially formed on the surface of the disc at an interval and fixing protrusions having a shape corresponding to the fixing recesses are formed on bottom surfaces of the abrasive segments, so that the abrasive segments are connected to the disc by inserting the fixing protrusions into the fixing recesses. According to the grinding wheel, when the abrasive segment is worn away or inferior as it is used for a long time, it has only to replace the corresponding abrasive segment only. Accordingly, an economical efficiency is high.

WO 2006/031044 A1

Description

GRINDING WHEEL

Technical Field

- [1] The present invention relates to a grinding wheel used for grinding a surface of a rigid material such as stone, and more particularly to a grinding wheel having an abrasive segment formed by mixing, molding and sintering metal and diamond powders.

Background Art

- [2] As shown in Fig. 1, a grinding wheel according to the prior art comprises a disc 1 and a plurality of abrasive segments 2 radially provided to a surface of the disc 1 at an interval. The grinding wheel is generally connected to a rotation axis of an electrically powered grinder (not shown) and rotated to perform an abrading operation as the grinder is driven while the abrasive segments 2 are in contact with a surface of an object to be abraded. In order to connect the wheel to the grinder, there is formed a connection hole at a center of the disc 1, to which the rotation axis of the grinder is connected.
- [3] The abrasive segment 2 is made by mixing diamond powders with metal powders such as iron (Fe), tungsten (W), cobalt (Co) and the like that are bonding agents, molding and sintering them. Then, the abrasive segments 2 are integrally attached to the surface of the disc 1 using a silver-solder welding method, for example.
- [4] Like this, according to the grinding wheel of the prior art, the abrasive segments 2 are bonded to the disc 1 with the welding method and the like. Accordingly, when it is necessary to replace the abrasive segment 2 due to wears as it is used for a long time, the whole grinding wheel 2 including the disc 1 should be replaced. In particular, even when some of the abrasive segments 2 are inferior or damaged, it is required to replace the whole grinding wheel.

Disclosure of Invention

Technical Problem

- [5] Accordingly, the present invention has been made to solve the above problems. An object of the invention is to provide a grinding wheel capable of detachably connecting abrasive segments to a disc in a sliding manner and individually replacing the abrasive segments.

Technical Solution

- [6] In order to achieve the above object, there is provided a grinding wheel comprising a disc having a connection hole formed at a center thereof, to which a rotation axis of an grinder is connected; and a plurality of abrasive segments detachably connected to a

surface of the disc. According to the invention, a plurality of fixing recesses are radially formed on the surface of the disc at an interval and fixing protrusions having a shape corresponding to the fixing recess are formed on bottom surfaces of the abrasive segments, so that the abrasive segments are connected to the disc by inserting the fixing protrusions into the fixing recesses.

[7] According to the invention, when the abrasive segment is worn away as the grinding wheel is used for a long time, it has only to replace the worn abrasive segment only without replacing the grinding wheel. In addition, even when something is wrong with some of the abrasive segments, it has only to replace the wrong abrasive segment only and thus an economical efficiency thereof is high.

[8] In addition, according to the invention, the abrasive segment includes an abrasive tip mixed with diamond and metal and a metallic base part formed at a lower part of the abrasive tip. The fixing protrusion is formed a bottom surface of the base part. The abrasive tip and the base part are integrally formed by pressurizing and sintering diamond-metal mixed powders constituting the abrasive tip and metal powders constituting the base part at the same time.

[9] Like this, since the abrasive segment is formed in a body by pressurizing and sintering diamond-metal mixed powders and metal powders, it is possible to simplify a manufacturing process of the abrasive segment and to prevent a thermal deformation which can occur during the welding operation.

[10] In the mean time, according to an embodiment of the invention, the fixing recess and the fixing protrusion have such shape that a width thereof is gradually narrowed from a center part of the disc toward a periphery thereof so as to prevent the abrasive segment from being deviated from the disc when the grinding wheel is rotated.

[11] Additionally, in order to prevent the deviation of the abrasive segment more positively, the fixing recess may have such shape that a bottom surface thereof is gradually inclined downwardly from the center part of the disc toward the periphery.

[12] According to an embodiment of the invention, the fixing recess and the fixing protrusion may have a section of a dovetail shape.

Brief Description of the Drawings

[13] The above and other objects, features and advantages of the present invention will be more apparent from the following detailed description taken in conjunction with the accompanying drawings, in which:

[14] FIG. 1 is a perspective view of a grinding wheel according to the prior art;

[15] FIG. 2 is a perspective view of a grinding wheel according to an embodiment of the present invention;

[16] FIG. 3 is a perspective view showing an abrasive segment of the grinding wheel

according to the present invention;

[17] FIG. 4 is a perspective view showing a bottom of the abrasive segment shown in FIG. 3; and

[18] FIG. 5 is a perspective view showing a disc of a grinding wheel according to an embodiment of the invention.

Best Mode for Carrying Out the Invention

[19] Hereinafter, a preferred embodiment of the present invention will be described with reference to the accompanying drawings. In the following description of the present invention, a detailed description of known functions and configurations incorporated herein will be omitted when it may make the subject matter of the present invention rather unclear.

[20] As shown in Fig. 2, a grinding wheel according to an embodiment of the invention comprises a disc 10 and a plurality of abrasive segments 20 radially connected to a surface of the disc 10 at an interval. A connection hole 11 is formed at a center of the disc, to which a rotation axis of a grinder (not shown) is connected.

[21] As shown in Fig. 3, the abrasive segment 20 includes a base part 21 having a shape which is generally similar to a trapezoid and a pair of tips 22 having a shape which is approximately similar to a right-triangle, and symmetrically bonded to an upper surface of the base part 21. The tip 22 is made of a material having mixed diamond and metal and the base part 21 is made of a metal.

[22] The abrasive segment 20 is manufactured as follows. First, there is prepared a mold (not shown) having a same shape as the abrasive segment 20. Then, a section of the mold corresponding to the base part 21 is filled with only metal powders such as iron (Fe), tungsten (W), cobalt (Co) and the like without the diamond and sections of the mold corresponding to the tips are filled with a mixture of diamond and metal powders. After that, the powders filled in the mold are pressurized and sintered, thereby resulting in a final shape of the abrasive segment 20 as shown in Fig. 3.

[23] In order to connect the segment to the disc 10, a fixing protrusion 23 is formed at a center of a bottom surface of the base part 21 along a longitudinal direction of the base part, as shown in Fig. 4. The fixing protrusion 23 has such shape that a width thereof is gradually changed along a longitudinal direction, i.e., a trapezoidal shape.

[24] As shown in Fig. 5, there are formed a plurality of fixing recesses 12 in the surface of the disc 10, which are radially positioned at an interval apart from each other and extended along a radial direction correspondingly to the fixing protrusions 23 of the abrasive segments 20. The fixing protrusion 23 of the abrasive segment 20 is inserted into the fixing recess 12 of the disc 10, so that the abrasive segment 20 is connected to the disc 10.

[25] Correspondingly to the shape of the fixing protrusion 23, each of the fixing recesses 12 has a trapezoidal shape that a width thereof is gradually narrowed from the center part of the disc 10 toward a periphery thereof.

[26] As shown in Fig. 2, the fixing protrusion 23 is inserted from a wider part of the fixing recess 12 (the center part of the disc) toward a narrow part of the recess (the periphery of the disc). When the disc 10 is rotated as the grinder is operated in performing an abrading operation, the abrasive segment 20 is forced toward the periphery of the disc 10 due to a centrifugal force. At this time, since the fixing protrusion 23 and the fixing recess 12 have the shape that the width thereof is gradually narrowed toward the periphery, the fixing protrusion 23 is moved toward the periphery along the fixing recess 12 and engaged with the recess, so that the abrasive segment 20 is tightly fixed to the disc 10.

[27] As shown in Figs. 4 and 5, a surface of the fixing recess 12 and a bottom surface of the fixing protrusion 23 are inclined at an angle corresponding to each other toward the periphery of the disc 10 so that the fixing protrusion 23 can be smoothly inserted into the fixing recess 12.

[28] In addition, although it is not specifically shown in Figs., in order to positively prevent the abrasive segment 20 from being deviated from the disc when the disc 10 is turned upside down from the state shown in Fig. 5 for an abrading operation, sections of the fixing protrusion 23 and the fixing recess 12 may be formed into a dovetail shape.

Industrial Applicability

[29] As described above, according to the invention, the abrasive segment is detachably connected to the fixing recess of the disc surface. Accordingly, when the abrasive segment is worn away due to wears as it is used for a long time, it has only to replace the worn abrasive segment only, without the replacement of the disc. In addition, even when something is wrong with some of the abrasive segments, it has only to replace the wrong abrasive segment only and thus an economical efficiency thereof is high.

[30] In addition, since it is not required the welding operation for shaping and connecting the abrasive segment, there is no worry that the disc is deformed due to the heat occurring during the welding operation.


[31] While the invention has been shown and described with reference to certain preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made thereto without departing from the spirit and scope of the invention as defined by the appended claims.

[32]


Claims

- [1] A grinding wheel comprising:
a disc having a connection hole formed at a center thereof, to which a rotation axis of a grinder is connected; and
a plurality of abrasive segments detachably connected to a surface of the disc, wherein a plurality of fixing recesses are radially formed on the surface of the disc at an interval and fixing protrusions having a shape corresponding to the fixing recess are formed on bottom surfaces of the abrasive segments, so that the abrasive segments are connected to the disc by inserting the fixing protrusions into the fixing recesses,
wherein the abrasive segment includes an abrasive tip mixed with diamond and metal and a metallic base part formed at a lower part of the abrasive tip, and the fixing protrusion is formed a bottom surface of the base part, and
wherein the abrasive tip and the base part are integrally formed by pressurizing and sintering diamond-metal mixed powders constituting the abrasive tip and metal powders constituting the base part at the same time.
- [2] The grinding wheel according to claim 1, wherein the fixing recess and the fixing protrusion have such shape that a width thereof is gradually narrowed from a center part of the disc toward a periphery.
- [3] The grinding wheel according to claim 2, wherein the fixing recess has such shape that a bottom surface thereof is gradually inclined downwardly from the center part of the disc toward a periphery.
- [4] The grinding wheel according to claim 2, wherein the fixing recess and the fixing protrusion have a section of a dovetail shape.


[Fig. 1]

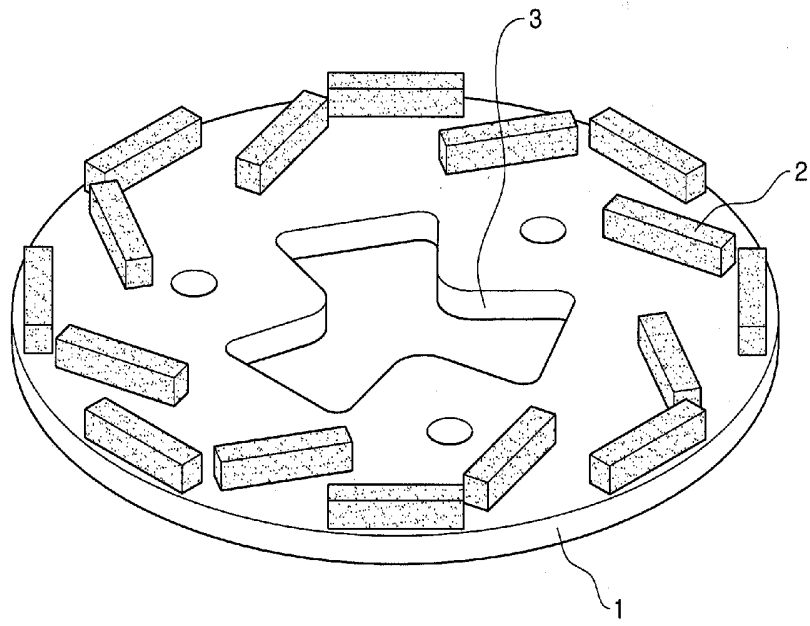


[Fig. 2]

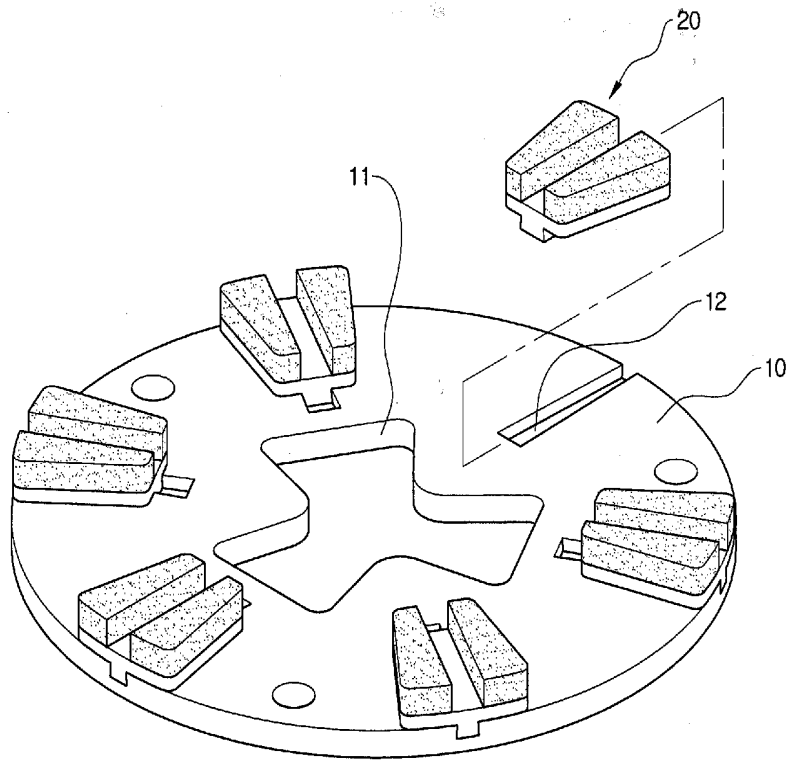


[Fig. 3]

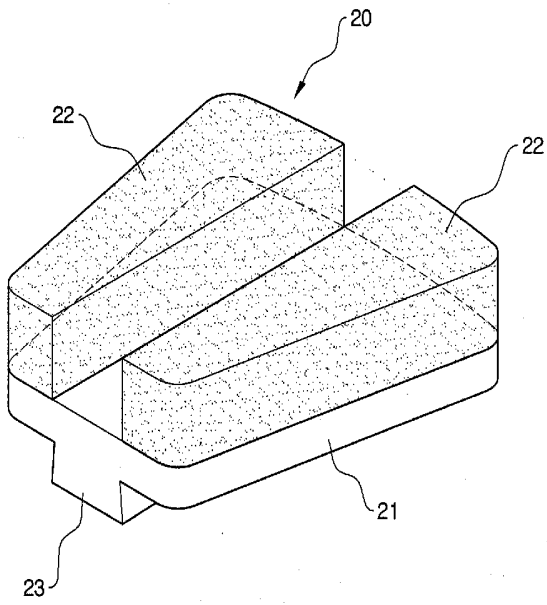

[Fig. 4]

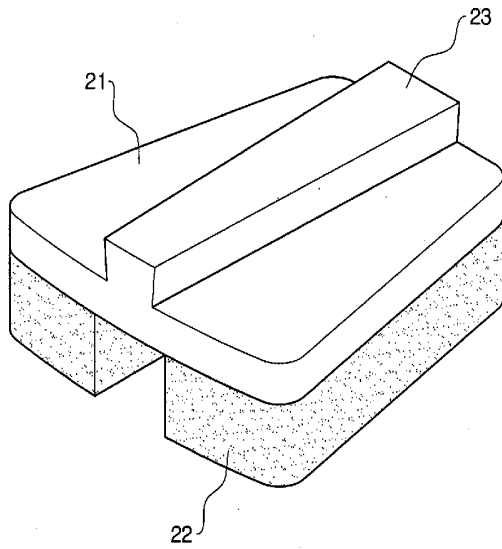

[Fig. 5]

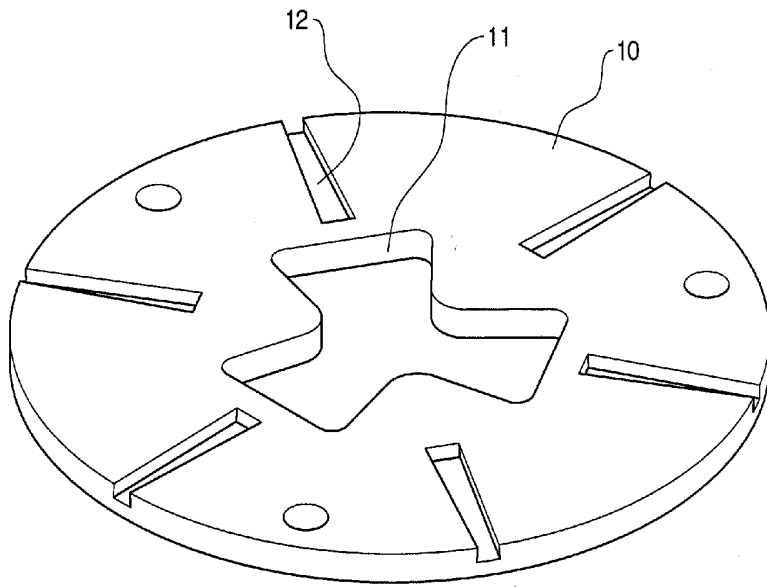

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2005/003012**A. CLASSIFICATION OF SUBJECT MATTER****IPC7 B24D 5/06**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
IPC 7 B24DDocumentation searched other than minimum documentation to the extent that such documents are included in the fields searched
KR : IPC AS ABOVEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
KIPONET, DELPHION, "ABRASIV* AND SEGMENT "**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 11-151675 A (SPEEDFAM CO LTD) 8 JUN 1999 SEE THE ABSTRACT AND FIG1 ~ FIG3	1, 2, 4
Y	US 5,243,790 A (ABRASIFS VEGA INC) 14 SEP 1993 SEE CULUMN 7 ROW 33 ~ ROW 53 AND FIG 6	1, 2, 4
Y	KR 284945 Y (SHIN-HAN DIAMOND CO LTD) 7 AUG 2002 SEE THE ABSTRACT AND FIG 7	2, 4
A	US 5,247,765 A (ABRASIVE TECHNOLOGY EUROPE, S.A.) SEE THE ABSTRACT AND FIGS	1 ~ 4

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 NOVEMBER 2005 (18.11.2005)

Date of mailing of the international search report

18 NOVEMBER 2005 (18.11.2005)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

HAM, Joung Hyun

Telephone No. 82-42-481-5458