

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 July 2009 (09.07.2009)

PCT

(10) International Publication Number
WO 2009/085249 A1

- (51) International Patent Classification: A61C 17/00 (2006.01)
- (21) International Application Number: PCT/US2008/013983
- (22) International Filing Date: 22 December 2008 (22.12.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 12/004,145 20 December 2007 (20.12.2007) US
- (71) Applicant (for all designated States except US): DENTSPLY INTERNATIONAL INC. [US/US]; 570 West College Avenue, P.O. Box 872, York, PA 17405-0872 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): CHRONISTER, Ben [US/US]; 276 Point Circle, York, PA 17406 (US). KILE, Jeremy [US/US]; 327 Brooke Lane, Wrightsville, PA 17368 (US). WERNER, Peter [US/US]; 3848 Sterling Way, Columbia, PA 17512 (US). BEANE, Bret [US/US]; 714 E. Whispering Oaks Drive, Palatine, IL 60074 (US). HEIL, Donald [US/US]; 210 Villa Avenue, Lake Villa, IL 60046 (US). SHERMAN, James [US/US]; 2610 Wexford Lane, York, PA 17404 (US). WHITCOMB, Robert [US/US]; 9 Wesley Drive, Carlisle, PA 17015 (US).
- (74) Agents: HURA, Douglas, J. et al.; Dentsply International Inc., 570 West College Avenue, P.O. Box 872, York, PA 17405-0872 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: DENTAL PROPHYLAXIS ANGLE HANDPIECE ASSEMBLY

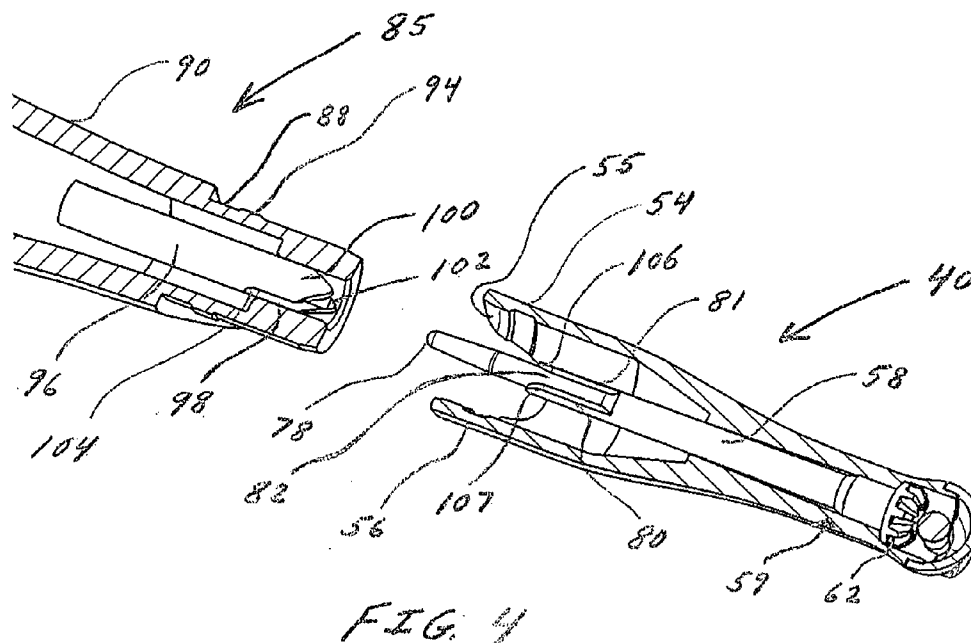


FIG. 4

(57) Abstract: A dental prophylaxis angle and handpiece assembly for cleaning and polishing teeth is provided. The dental prophylaxis angle is removably attached to the dental handpiece by an interlocking mechanism that includes extension locking tabs, a locking annular member, and an interlocking drive member in the handpiece. The prophylaxis angle is securely snap-fitted onto the handpiece and locked in place so that it has minimal lateral movement. After the prophylaxis angle has been used to treat a patient, it can be removed easily from the handpiece and disposed thereof.

WO 2009/085249 A1



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

DENTAL PROPHYLAXIS ANGLE AND HANDPIECE ASSEMBLY

BACKGROUND OF THE INVENTION

Field of the Invention

[001] The present invention relates generally to dental instruments used for cleaning and polishing teeth. More particularly, the invention relates to a dental prophylaxis angle and handpiece assembly. The dental prophylaxis angle is removably attached to the dental handpiece by a new interlocking mechanism.

Brief Description of the Related Art

[002] Today, dental professionals use dental instruments commonly known as dental prophylaxis (prophy) angles for cleaning and polishing teeth. Referring to **FIG. 1**, traditional prophy angles (10) include a one-piece or multi-piece tubular housing (12) having sleeve (14), neck (16), and head (18) portions. Normally, the head portion (18) extends at an angle of ninety (90) degrees with respect to the neck portion (16). However, in some cases, contra-prophy angles having a head portion that extends at an angle of greater than 90 degrees are used. Dental professionals use the contra-prophy angles for cleaning hard-to-reach tooth surfaces. In both types of prophy angles, the tubular housing contains a relatively long drive shaft (20) having a driving gear (22) at its forward-facing end. The driving gear (22) of the drive shaft interacts with a driven gear (24) located in the head (18) of the prophy angle. A boss (25), which is located on

top of the driven gear, is adapted for receiving a prophylaxis cup or other dental tool. The driven gear (24) is integrally connected to a relatively short shaft (26).

[003] The prophylaxis angle (10) is attached to a dental handpiece (30) by inserting the drive shaft (20) into a chuck system (32) such as a collet or other retaining means in the handpiece, for example, ISO 3964 locking system. In addition, the sleeve portion (14) of the prophylaxis angle contains a slot (15) which is adapted for receiving a standard positioning pin or finger (not shown) on the handpiece. The extended slot (15) permits the free end of the prophylaxis angle to expand. The chuck jaws (32) hold the shaft (20) in place and operatively couple the shaft to an electrical or air-driven motor inside of the handpiece. The chuck jaws (32) rotate on anti-friction ball bearings (34) in the handpiece. When an operator powers on the handpiece, the connected drive shaft of the prophylaxis angle rotates and the driving gear (22) intermeshes with the driven gear (24). This causes the prophylaxis angle to rotate along with the attached prophylaxis cup.

[004] The prophylaxis cup, which is filled with prophylaxis paste, is pressed against the tooth surfaces to clean and polish the teeth. Different prophylaxis pastes can be used depending upon the dental health of the patient and amount of dental plaque and calculus that needs to be removed. For example, NUPRO® prophylaxis paste, available from Dentsply International (York, PA) can be used as the prophylaxis paste, and this paste is available in different textures (fine, medium, and coarse) depending upon the size of the abrasive particles used in the paste. Fluoride-containing and fluoride-free prophylaxis pastes are available. A professional cleaning with prophylaxis paste helps prevent dental caries caused by bacteria in dental plaque. Bacteria produce acids that eat into the tooth eventually causing cavities to form therein. When the teeth are cleaned and polished by a dental professional, the dental plaque can be effectively removed from the tooth surfaces of the patient. In addition, calculus build-up and extrinsic stains caused by beverages and food such as, for example, coffee, tea, or soda, also can be effectively removed. The prophylaxis angles are normally made from an inexpensive, flexible plastic and the prophylaxis cup is made from a rubbery material. The dental professional disposes the prophylaxis angles and cups after one-time use on a patient.

[005] There are numerous dental prophylaxis angles and prophylaxis pastes systems known in the dental field including, for example, Upgrade® disposable prophylaxis angles (Sultan Dental Products); All Pro® disposable prophylaxis angles (Young Dental Manufacturing Co.); and NUPRO revolv® disposable prophylaxis angles (Dentsply International). Different handpiece connection systems for attaching the prophylaxis angles are described in the patent literature.

[006] For example, Kivlighan, US Patent 5,348,473 discloses a medical tool such as a dental prophylaxis angle. The housing is made of two plastic halves which snap-fit together. The right-hand housing portion includes ridges that project into the cavities of the left-hand housing portion. The housing portions are connected by pushing them towards each other so that the ridges on the first housing portion project into the cavities of the opposing housing portion. The locking ridges are forced into the locking cavities to maintain the two portions in their locked position.

[007] Bailey, US Patent 5,531,599 discloses plastic, easy-to-assemble dental prophylaxis contra-angles, wherein the head of the prophylaxis angle is angled at an angle greater than 90 degrees with respect to the handpiece. An elongated slot in the body of the prophylaxis angle permits the body to be force-fit onto a standard dental handpiece. The body of the prophylaxis angle can be slipped over the nose of a handpiece, such as a Doriot type handpiece having a collet, which receives the drive shaft of the angle.

[008] Bailey, US Patent 5,683,247 discloses a maintenance-free dental prophylaxis angle comprising a one-piece body including a sleeve and a head. The angle is designed to be used for an extended period of time, for example, one year without requiring any lubrication. The angle includes an internal lubricant circulating system. A slit is cut into the sleeve of the prophylaxis angle and this creates two spring fingers which expand slightly when the angle is placed on a handpiece. This creates a size-on-size frictional fit with the nose of the handpiece and it to hold the prophylaxis angle body independently of the handpiece chuck.

[009] Kraenzle, US Patent 6,203,322 discloses a dental prophylaxis angle having a forward end formation with a hinged closure that allows access to the gears and drive shaft inside of the

angle. The closure is secured in a fixed position on the forward end formation by locking elements. The prophy angle includes a drive shaft that drives a rotor in the head of angle. The drive shaft is driven by a driving mechanism in a dental handpiece and the prophy angle is attached to the handpiece in a conventional fashion.

[0010] Conventional dental prophy angles and handpiece systems are generally effective; however, there is a need for an improved system. Traditional systems can have some drawbacks. For example, after prolonged use and excessive vibrational motion, some drive shafts of some prophy angles can shear off in the handpiece. The broken-off drive shaft can be difficult to remove from the handpiece and normally it must be returned to the factory for repair. Another problem with some conventional prophy angle and handpiece systems is that the prophy angle shows poor stability when it is mounted on the handpiece. Some prophy angles tend to wobble and rock. The prophy angles have excessive lateral movement. This can cause significant problems when the prophy angle / handpiece assembly is being used during a cleaning procedure. A dental professional may feel uncomfortable using such an unstable prophy angle / handpiece assembly, and it may cause added anxiety for the user and patient being treated.

[0011] Thus, there is a need in the dental industry for a prophy angle and handpiece assembly which is more stable and feels more comfortable. The assembly should have a good ergonomic design and be durable and lightweight. It is important that the prophy angle and handpiece assembly have good dimensional stability so that the prophy angle does not wobble and rock freely while it is being used. The prophy angle should be locked securely onto the handpiece. At the same time, a dental professional should be able to remove the prophy angle easily in order to substitute a new prophy angle in place thereof as needed. The present invention provides such a prophy angle and handpiece assembly having these objects, features, and advantages as well as others.

SUMMARY OF THE INVENTION

[0012] The present invention is directed to a dental handpiece and prophy angle assembly used for cleaning and polishing teeth. The prophy angle is removably attached to the handpiece. The invention also encompasses the prophy angle by and in itself. The prophy angle comprises an

elongated tubular body with proximal and distal end portions. The proximal end portion includes a hollow head member. The head member may include a hinged closure, which opens, so that the chamber of the head member and central bore of the tubular body are accessible. The hinged closure can be secured to the prophy angle by locking detents on the head member that snap into slots in the hinged closure.

[0013] A first (driven) gear is mounted in the hollow head chamber. A prophylaxis cup containing prophy paste or a prophylaxis brush cup can be supported by the driven gear. The central bore of the prophy angle contains a drive shaft having a second (driving) gear on its forward-facing end for driving the driven gear. In one embodiment, the axis of the driven gear is angled at 90 degrees with respect to the axis of the driving gear. In other embodiments, the axis of the driven gear is angled at an angle in the range of about 90 to about 130 degrees, preferably 108 degrees. Preferably, the driven gear and driving gear each include beveled gear teeth that are staggered in relation to each other so that the respective gear teeth can intermesh together.

[0014] In the preferred embodiment, the rear-facing end of the drive shaft has a piloting tip for guiding the prophy angle onto the dental handpiece. The drive shaft also includes at least one or more protruding self-aligning tabs that define a recessed locking surface or surfaces adapted for receiving an interlocking drive member located in the handpiece. The self-aligning characteristic can be achieved with or without the piloting tip. The distal end of the prophy angle is open-ended so that it can be mounted onto the handpiece. The distal end includes at least one first locking extension with first locking tab and can have a second locking extension with second locking tab or more iterations of the same. The external surface of the prophy angle may include a handle area having a textured external surface for providing a better grip and feel.

[0015] The dental handpiece includes a forward-facing tubular nose portion and a rear-facing handle portion. The nose portion includes a central or offset aperture adapted for receiving the drive shaft and at least one locking annular member for engaging the first and second locking tabs of the prophy angle. The nose portion of the handpiece further contains an interlocking drive member having at least one and in the preferred embodiment a second self-aligning forward-facing extension prongs that define a locking slot. The interlocking drive member could

have more than two self-aligning forward-facing extension prongs that define multiple locking slots. As the prophy angle and handpiece are assembled together, the extension prongs of the drive member in the handpiece slide into the recessed locking surface of the drive shaft in the prophy angle. The nose portion of the dental handpiece may include at least one or more nesting cut-out portions, and the locking extensions located on the distal end of the prophy angle mate with these complementary-shaped cut-out portions. In a similar manner, the distal end of the prophy angle may include locking recession or recessions and the nose portion of the dental handpiece may include complementary-shaped nesting surfaces. The locking recession or recessions of the prophy angle mate with the nesting surfaces of the dental handpiece when the assembly is in a locked position.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The novel features that are characteristic of the present invention are set forth in the appended claims. However, the preferred embodiments of the invention, together with further objects and attendant advantages, are best understood by reference to the following detailed description in connection with the accompanying drawings in which:

[0017] **FIG. 1** is a side cross-sectional view of a prophy angle and handpiece assembly of the prior art;

[0018] **FIG. 2** is a side partial cross-sectional view of one embodiment of the prophy angle of this invention;

[0019] **FIG. 3** is a side perspective view of one embodiment of the prophy angle of this invention;

[0020] **FIG. 4** is a partial cross-sectional exploded view of one embodiment of the assembly of this invention showing the drive shaft of the prophy angle and drive member of the handpiece;

[0021] **FIG. 4A** is an exploded view of one embodiment of the assembly of this invention showing the drive shaft of the prophy angle and drive member of the handpiece;

[0022] FIG. 5 is a partial cross-sectional (through the extension prongs of the drive member) side perspective view of one embodiment of the handpiece of this invention;

[0023] FIG. 5A is a partial cross-sectional (through the locking slot between the extension prongs) side perspective view of one embodiment of the handpiece of this invention;

[0024] FIG. 6 is an exploded view of one embodiment of the prophy angle and handpiece of this invention;

[0025] FIG. 6A is a rear partial cross-sectional view of one embodiment of the prophy angle of this invention;

[0026] FIG. 7 is a side cross-sectional view (through the extension prongs of the drive member) of one embodiment of the assembly of this invention showing the prophy angle attached to the handpiece;

[0027] FIG. 7A is a rear cross-sectional view (through the locking slots between the extension prongs) of one embodiment of the assembly of this invention showing the prophy angle attached to the handpiece;

[0028] FIG. 8 is a rear perspective view of one embodiment of the prophy angle showing the offset locking recessions;

[0029] FIG. 9 is a side partial cross-sectional view of another embodiment of the prophy angle of this invention showing the axis of the driven gear angled at greater than ninety degrees with respect to the axis of the driving gear;

[0030] FIG. 9A is a side full cross-sectional view of the prophy angle shown in FIG. 9;

[0031] FIG. 9B is a rear perspective view of the prophy angle shown in FIG. 9;

[0032] FIG. 9C is a rear partial cross-sectional view of the prophy angle shown in FIG. 9; and

[0033] FIG. 9D is a side perspective view of the prophy angle body shown in FIG. 9.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0034] Referring to the drawings, the prophy angle of the instant invention is generally indicated at (40) in FIG. 2. As will be hereinafter more fully described, the prophy angle (40) generally comprises an elongated tubular body (42) with proximal (44) and distal (46) end portions. The tubular body (42) includes a handle or sleeve region (48), a neck region (50), and a head region (52) that defines a hollow chamber (53). The interior of the tubular body (42) defines a central bore extending from the proximal (44) to distal (46) end portions. The bore in the handle (48) has substantially the same diameter as the diameter of the dental handpiece (not shown) that will receive the prophy angle (40). The diameter of the bore tapers off so that the neck region (50) has a smaller diameter than the handle (48). The distal end (46) of the tubular body (42) includes a first locking extension (54) with a first locking tab (55) and an opposing second locking extension (56) with a second locking tab (57) (FIG. 6A). It should be understood that the tubular body (42) could contain more or less than two extension tabs. For example, the tubular body (42) could include four extension tabs in another version. The distal end (46) of the tubular body (42) is open-ended so that the prophy angle (40) can slide onto a dental handpiece as described further below.

[0035] The central bore of the prophy angle (40) further includes a drive shaft (58) having forward-facing (59) and rear-facing (60) end portions. The drive shaft (58) is positioned inside of the bore so that extends along the longitudinal axis of the bore and is generally co-axial thereto. The forward end (59) of the shaft (58) includes an integrally connected driving gear (62) that extends into the hollow head (53). The drive shaft (58) may be referred to as a "long gear." The hollow head (53) encloses a rotor (64) having a driven gear (66), which may be referred to as a "short gear." In FIG. 2, the axis of the driven gear (66) is angled at ninety (90) degrees with respect to the axis of the driving gear (62) for illustration purposes only. It should be understood that the axis of the driven gear (66) may be angled at greater than ninety (90) degrees with respect to the axis of the driving gear (62) if such a configuration is desired. For example, in

other embodiments, the axis of the driven gear (66) may be disposed at an angle greater than ninety (90) degrees, preferably 108 degrees.

[0036] The rotor (64) mounted in the head chamber (53) further includes a flange (68) and button head (70) adapted for receiving a prophylaxis cup (72) or other dental element. Although the prophy angle (40) will be described herein as including a prophylaxis cup for cleaning and polishing the teeth, it should be understood that a brush or other dental element may be mounted on the prophy angle (40) if desired. In operation, the teeth of the short gear (66) engage the complementary teeth of the long gear (62) in the head chamber (53). The teeth are staggered in relation to each other so that the teeth along the short gear (66) will conform to the recesses located between the teeth of the long gear (62). As the driving gear (62) rotates about the axis of the drive shaft (58), the driving gear (62) intermeshes with the driven gear (66). The driving gear (62) transfers rotating motion to the driven gear (66). This causes the driven gear (66) and attached prophy cup (72) to rotate. The rotating prophy cup (72), which contains prophy paste, is applied to the tooth surfaces to clean and polish the teeth of the patient.

[0037] As shown in **FIG. 3**, the head portion (52) of the prophy angle (40) may include a closing member (74) that pivots on a hinge (75). When the hinged closing member (74) is pulled open, the bore of the tubular body (42) and the head chamber (53) are accessible. When the prophy angle (40) is being used, the hinged closing member (74) remains in a closed position. The hinged closing member (74) may be secured to the external surface of the tubular body (42) by locking detents (76) located on the head portion (52) of the prophy angle that snap into slots (77) on the hinged closing member. In addition, the handle portion (48) may have a textured external surface (for example, dimples, recessed features, embossed features, graphics, patterns, or the like) to provide the user with a better grip, control, and tactile feel.

[0038] Referring to **FIG. 4**, the rear-facing end (60) of the drive shaft (58) further includes at least a first (80) and second (81) self-aligning tabs that form a recessed locking surface (82) located there between. The self-aligning tabs (80, 81) are perpendicular or angled/tapered with respect to the longitudinal axis of the entire drive shaft (58). The recessed locking surface (82)

of the drive shaft (58) is of sufficient length so that it is capable of receiving a drive member (96) located in the dental handpiece (85) as discussed further below.

[0039] As shown in **FIGS. 6 and 6A**, the drive shaft (58) is of sufficient length so that it extends beyond the rear-facing opening of the tubular body (42) and can be inserted into a dental handpiece (85). It is not necessary for the drive shaft (58) to extend beyond the open-ended distal portion (46) of the tubular body (42). In other embodiments, the drive shaft (58) may have a shorter length. The drive shaft (58) further includes a piloting tip (78) for guiding the prophy angle (40) onto the handpiece (85) and into the drive member (96). In other embodiments, the drive shaft (58) may not have a piloting tip (78). The first locking extension (54) with first locking tab (55) and second locking extension (56) with second locking tab (57) are used to lock the prophy angle (40) in place and may prevent rotation/shifting after it has been inserted onto the handpiece (85) as discussed further below. In other embodiments, the tubular body (42) may contain one or multiple locking extensions and locking tabs, or the locking mechanism could be located above the locking extensions, where it could be segmented or continuous (360 degrees).

[0040] In **FIGS. 5 and 6**, a dental handpiece (85), suitable for receiving the prophy angle (40), is shown. The handpiece (85) includes a forward-facing tubular nose portion (88) and a rear-facing handle portion (90). Preferably, the handpiece (85) is powered by batteries (not shown) located in a battery compartment in the handle portion (90). The nose portion (88) includes a central or offset aperture (92) adapted for receiving the drive shaft (58) of the prophy angle (40). The nose portion (88) contains an interlocking drive member (96) having at least a first (98) and second (100) self-aligning extension prongs for driving the drive shaft (58). In other embodiments, the nose portion (88) may have multiple self-aligning extension prongs.

[0041] As further shown in **FIG. 6**, the nose portion (88) of the handpiece (85) includes a locking annular member (94) adapted for engaging the first and second locking tabs (55, 57) of the prophy angle (40). It is recognized that the locking annular member (94) may be protruding or recessed or continuous (360 degrees). In other versions, the locking member (94) can be segmented or located above the nesting cut-outs (95). The nose portion (88) also includes indented surface areas (95) on its external body. These indented areas or nesting cut-outs (95)

are adapted for receiving at least one or more locking extensions (54, 56) of the prophy angle (40). The locking extensions (54, 56) of the prophy angle (40) mate with the complementary-shaped nesting cut-outs (95) of the handpiece (85). In a similar manner, the handpiece (85) includes a nesting surface (97) that mates with the complementary-shaped locking recessions (99) of the prophy angle (40) (**FIG. 7**).

[0042] Turning back to **FIG. 4**, the interlocking drive member (96) having at least a first and second self-aligning extension prongs (98, 100) is shown being assembled onto the drive shaft (58). The prongs (98, 100) define an open locking slot (102) located there between so that the drive member (96) can slide onto the drive shaft (58). A conventional drive source (not shown) such as a motor can be used to drive the drive member (96); the drive source is located in the handpiece (85). The drive source is operatively coupled to the drive member (96), which drives the drive shaft (58).

[0043] In **FIG. 6**, the prophy angle (40) is shown being placed on the dental handpiece (85). Here, the piloting tip (78) of the drive shaft (58) is guided into the central or offset aperture (92) of the nose portion (88) and the locking tabs (55, 57) catch and lock with the protruding inner continuous (360 degrees) or semi-continuous annular member (94). Meanwhile, the locking extensions (54, 56) of the prophy angle (40) slide into the nesting cut-outs (95a, 95b) surrounding the nose portion (88) of the handpiece (85). The complementary-shaped nesting cut-outs (95a, 95b) on the surface of the handpiece (85) receive the locking extensions (54, 56). This creates a keying and/or anti-rotation mechanism between the prophy angle (40) and handpiece (85). As shown in **FIG. 8**, the first locking recession (99a) of the prophy angle (40) may have different dimensions than the second locking recession (99b) so they are offset or asymmetrical. These locking recessions (99a, 99b) mate with the complementary-shaped nesting surfaces (97a, 97b) of the handpiece (85), which are also offset or asymmetrical. In a preferred embodiment the locking recessions (99a, 99b) are offset or asymmetrical, but they can be configured in parallel or symmetrical positions in other versions of the prophy angle (40). For example, in an alternative version, the respective locking recessions (99a, 99b) on the prophy angle (40) have the same dimensions and are not offset, but symmetrical. These locking recessions (99a, 99b) mate with the corresponding nesting surfaces (97) of the handpiece (85),

which also are not offset. In other embodiments, the prophy angle (40) may have one or multiple locking extensions (54,56) and nesting cut-outs (95a, 95b).

[0044] The above-described keying or anti-rotation mechanism provides the prophy angle and handpiece assembly of this invention with improved stability. As the locking extensions (54, 56) slide into the nesting cut-outs (95a, 95b) of the handpiece (85), the drive member (96) inside of the handpiece (85) slides onto the recessed locking surface (82) of the drive shaft (58). The drive member (96) slides onto the locking surface (82) so that the notches (104, 105) of the extension prongs (98, 100) make contact with the shoulder abutments (106, 107) of the first and second self-aligning tabs (80, 81) of the drive shaft (58). In **FIGS. 7** and **7A**, the prophy angle (40) is shown locked in place on the dental handpiece (85). In the locked position, the locking tabs (55, 57) of the prophy angle (40) are locked with the inner annular member (94) of the handpiece (85).

[0045] Basically, a dental professional can load the prophy angle (40) by pushing the prophy angle (40) onto the dental handpiece (85) until he or she feels the resistance of the protruding internal locking annular member (94). The keying or anti-rotation features of the prophy angle (40) and handpiece (85), as described above, ensure that the prophy angle (40) can only be inserted onto the handpiece (85) in one direction for an asymmetrical design. In other embodiments, it is possible that the prophy angle (40) could be inserted onto the handpiece in multiple directions for a symmetrical design. The user should continue pushing the prophy angle (40) slightly further until feeling or hearing the "click" of the extension locking tabs (55, 57) snapping over the locking annular member (94). The force applied to the prophy angle (40) should be sufficient to cause the locking tabs (55, 57) to deflect and snap over the annular member (94). The snapping of the locking tabs (55, 57) over the annular member (94) may be audible to the user. In this manner, the prophy angle (40) is securely snap-fitted onto the handpiece (85). Once the prophy angle (40) has been inserted onto the handpiece (85) and locked in place, it has minimal lateral and angular movement. The prophy angle (40) does not rotate or wobble or rock freely.

[0046] The prophy angle (40) and handpiece (85) members are self-aligning and this further helps control lateral and rotational motion of the prophy angle (40) after it has been inserted onto the handpiece (85). In addition, the nose portion (88) of the handpiece (85) is relatively long and this helps improve the stability of the assembly. The locked prophy angle and handpiece assembly has good ergonomics, is very stable, and feels comfortable to the user. The system of this invention provides other advantages. For example, if the drive shaft (58) of the prophy angle (40) accidentally breaks-off inside of the handpiece (85) so that one piece of the shaft (58) remains in the prophy angle (40) and the other piece remains in the handpiece (85), the broken piece inside of the handpiece can be removed easily. The user simply needs to invert the handpiece (85) and the broken piece will fall out. This is a significant advantage over conventional handpiece and prophy angle systems having drive shafts that break-off in the handpiece. In such systems, the user normally needs to return the handpiece to the manufacturer or distributor for repair service.

[0047] The above-described interlocking system prevents the prophy angle from disengaging while it is being used to clean and polish the teeth of a patient. At the same time, a dental professional can remove the old prophy angle easily when the assembly is not being used, dispose of it, and substitute a new prophy angle in place thereof to treat a new patient.

[0048] To remove the prophy angle (40) from the handpiece (85), the user pinches the prophy angle (40) slightly and pulls on it outwardly. The force applied to the prophy angle (40) causes the extension tabs (55, 57) to snap over the annular member (94). The prophy angle (40) is pulled in a linear direction and removed easily from the handpiece (85). In this manner, the dental professional can remove the prophy angle after treating a patient, dispose of it, sterilize the handpiece, and place a new prophy angle onto the handpiece.

[0049] Workers skilled in the art will appreciate that various modifications can be made to the illustrated embodiments and description herein without departing from the spirit and scope of the present invention. For example, the protruding locking annular member (94) of the handpiece (85) (as shown in FIGS 2-9D) could be modified so that it is a recessed groove. Conversely, the grooves (undercut areas) adjacent to the locking tabs (55, 57) (as shown in FIGS. 2-9D) on the

prophy angle (40) could be modified so that they are protruding rings. It is also recognized that the locking member in the handpiece could have a different structure than the protruding annular locking member (94) shown in **FIGS 2-9D**. For example, ball detents or dimples could be used as the locking member in the handpiece (85). It is also recognized that the locking annular member (94) could be positioned above or below the locking extensions (54, 56) and could be a continuous (360 degree) or segmented feature on the prophy angle (40) or the handpiece (85). It is also recognized that the prophy angle (40) could have one or multiple locking extensions (54, 56) that slide into the nesting cut-outs (95a, 95b) on the handpiece (85). The prophy angle (40) could have a different number of locking extensions (54, 56) than nesting cut-outs (95a, 95b) on the handpiece (85). For example, two locking extensions (54, 56) on the prophy angle (40) and four (4) nesting cut-outs (95a, 95b) on the handpiece (85). It is also recognized that the configuration of the locking extensions (54, 56), which creates a keying or anti-rotation mechanism, could be symmetrical or asymmetrical in design.

[0050] The foregoing are only some examples of modifications that can be made to the illustrated embodiments and description herein without departing from the spirit and scope of the present invention. It is intended that all such modifications within the spirit and scope of the present invention be covered by the appended claims.

CLAIMS

What is claimed is:

1. A dental handpiece and prophylaxis angle assembly, comprising:

(i) a dental prophylaxis angle having an elongated tubular body with proximal and distal end portions, the tubular body containing a central bore extending therethrough, the proximal end portion including a hollow head member for mounting a driven gear therein, the distal end including a first locking extension with first locking tab and a second locking extension with second locking tab, the distal end being open-ended so that the prophylaxis angle can be removably attached to a dental handpiece, and the central bore including a drive shaft having forward-facing and rear-facing end portions,

the forward-facing end of the drive shaft including a driving gear for driving the driven gear and the rear-facing end of the drive shaft having a piloting tip for guiding the prophylaxis angle onto the handpiece, the drive shaft further having first and second protruding self-aligning tabs to form a recessed locking surface located there between for receiving an interlocking drive member located in the handpiece; and

(ii) a dental handpiece comprising a forward-facing tubular nose portion and a rear-facing handle portion, the nose portion including a central aperture therein for receiving the piloting tip of the drive shaft and a locking annular member for engaging the first and second locking tabs to lock the prophylaxis angle in place, and

the handpiece including an interlocking drive member, the drive member having first and second self-aligning forward-facing extension prongs to form a locking slot located there between so that the extension prongs may slide into the recessed locking surface of the drive shaft.

2. The dental handpiece and prophylaxis angle assembly of claim 1, wherein the axis of the driven gear of the prophylaxis angle is angled at 90 degrees with respect to the axis of the driving gear of the prophylaxis angle.

3. The dental handpiece and prophylaxis angle assembly of claim 1, wherein the axis of the driven gear of the prophylaxis angle is angled at an angle in the range of about 90 to about 130 degrees with respect to the axis of the driving gear of the prophylaxis angle.
4. The dental handpiece and prophylaxis angle assembly of claim 1, wherein the axis of the driven gear of the prophylaxis angle is angled at an angle of 108 degrees with respect to the axis of the driving gear of the prophylaxis angle.
5. The dental handpiece and prophylaxis angle assembly of claim 1, wherein the driven gear and driving gear of the prophylaxis angle each include beveled gear teeth.
6. The dental handpiece and prophylaxis angle assembly of claim 5, wherein the gear teeth of the driven gear and driving gear are staggered in relation to each other.
7. The dental handpiece and prophylaxis angle assembly of claim 1, wherein the head member of the prophylaxis angle includes a hinged closure.
8. The dental handpiece and prophylaxis angle assembly of claim 7, wherein the hinged closure is secured to the prophylaxis angle by locking detents on the head member that snap into slots in the hinged closure.
9. The dental handpiece and prophylaxis angle assembly of claim 7, wherein the prophylaxis angle includes a handle portion at its distal end, the handle portion having a textured external surface.
10. The dental handpiece and prophylaxis angle assembly of claim 1, wherein a prophylaxis cup is supported by the driven gear of the prophylaxis angle.
11. The dental handpiece and prophylaxis angle assembly of claim 1, wherein a prophylaxis brush cup is supported by the driven gear of the prophylaxis angle.

12. The dental handpiece and prophy angle assembly of claim 1, wherein the nose portion of the dental handpiece further includes nesting cut-out portions and the locking extensions located on the distal end of the prophy angle mate with the nesting cut-out portions.

13. The dental handpiece and prophy angle assembly of claim 1, wherein the distal end of the prophy angle further includes locking recessions and the nose portion of the dental handpiece further includes nesting surfaces, the locking recessions and nesting surfaces being complementary-shaped so that the locking recessions of the prophy angle mate with the nesting surfaces of the dental handpiece.

14. A dental prophy angle, comprising:

(i) an elongated tubular body with proximal and distal end portions, the tubular body containing a central bore extending therethrough, the proximal end portion including a hollow head member for mounting a driven gear therein, the distal end including a first locking extension with first locking tab and a second locking extension with second locking tab, the distal end being open-ended so that the prophy angle can be removably attached to a dental handpiece; and

(ii) a drive shaft positioned within the central bore, the drive shaft having forward-facing and rear-facing end portions, the forward-facing end of the drive shaft including a driving gear for driving the driven gear and the rear-facing end of the drive shaft having a piloting tip for guiding the prophy angle onto the handpiece, the drive shaft further having first and second protruding self-aligning tabs to form a recessed locking surface located there between for receiving an interlocking drive member located in the handpiece.

15. The dental prophy angle of claim 14, wherein the axis of the driven gear of the prophy angle is angled at 90 degrees with respect to the axis of the driving gear of the prophy angle.

16. The dental prophy angle of claim 14, wherein the axis of the driven gear of the prophy angle is angled at an angle in the range of about 90 to about 130 degrees with respect to the axis of the driving gear of the prophy angle.

17. The dental prophylaxis angle assembly of claim 14, wherein the axis of the driven gear of the prophylaxis angle is angled at an angle of 108 degrees with respect to the axis of the driving gear of the prophylaxis angle.

18. The dental handpiece and prophylaxis angle assembly of claim 14, wherein the driven gear and driving gear of the prophylaxis angle each include beveled gear teeth.

19. The dental handpiece and prophylaxis angle assembly of claim 18, wherein the gear teeth of the driven gear and driving gear are staggered in relation to each other.


20. The dental prophylaxis angle of claim 14, wherein the head member of the prophylaxis angle includes a hinged closure.


21. The dental prophylaxis angle of claim 20, wherein the hinged closure is secured to the prophylaxis angle by locking detents on the head member that snap into slots in the hinged closure.

22. The dental prophylaxis angle of claim 14, wherein the prophylaxis angle includes a handle portion at its distal end, the handle portion having a textured external surface.

23. The dental prophylaxis angle of claim 14, wherein a prophylaxis cup is supported by the driven gear of the prophylaxis angle.

24. The dental prophylaxis angle of claim 14, wherein a prophylaxis brush cup is supported by the driven gear of the prophylaxis angle.

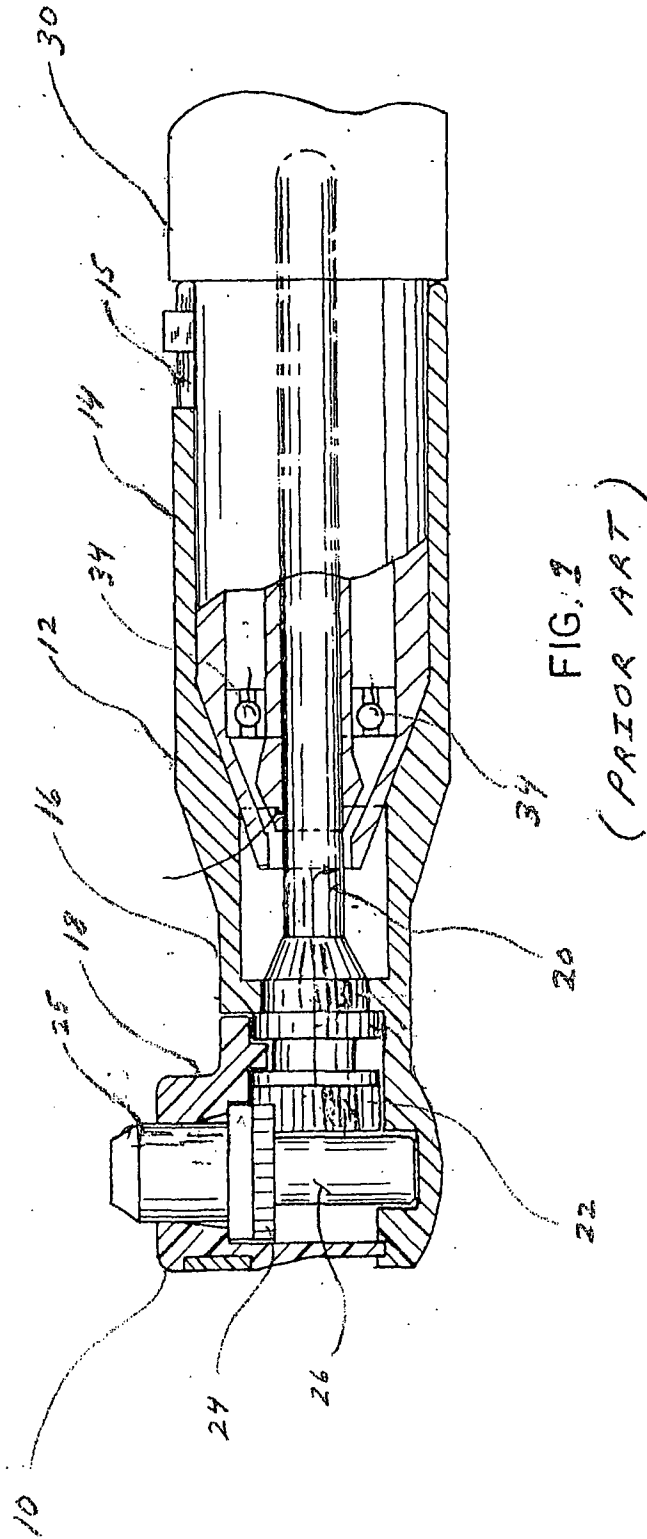

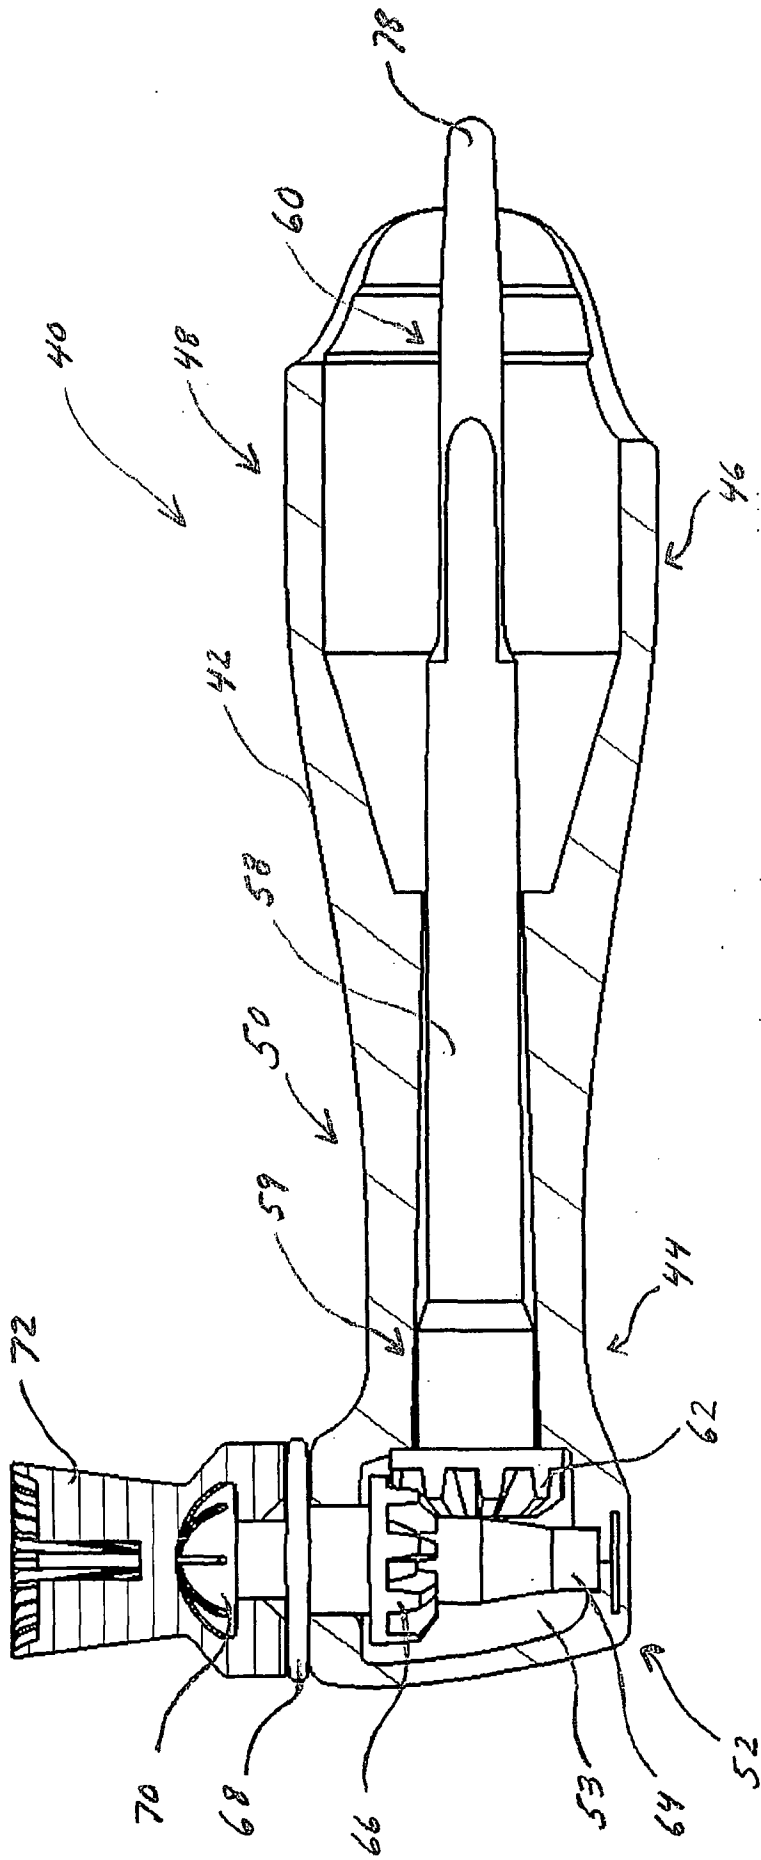

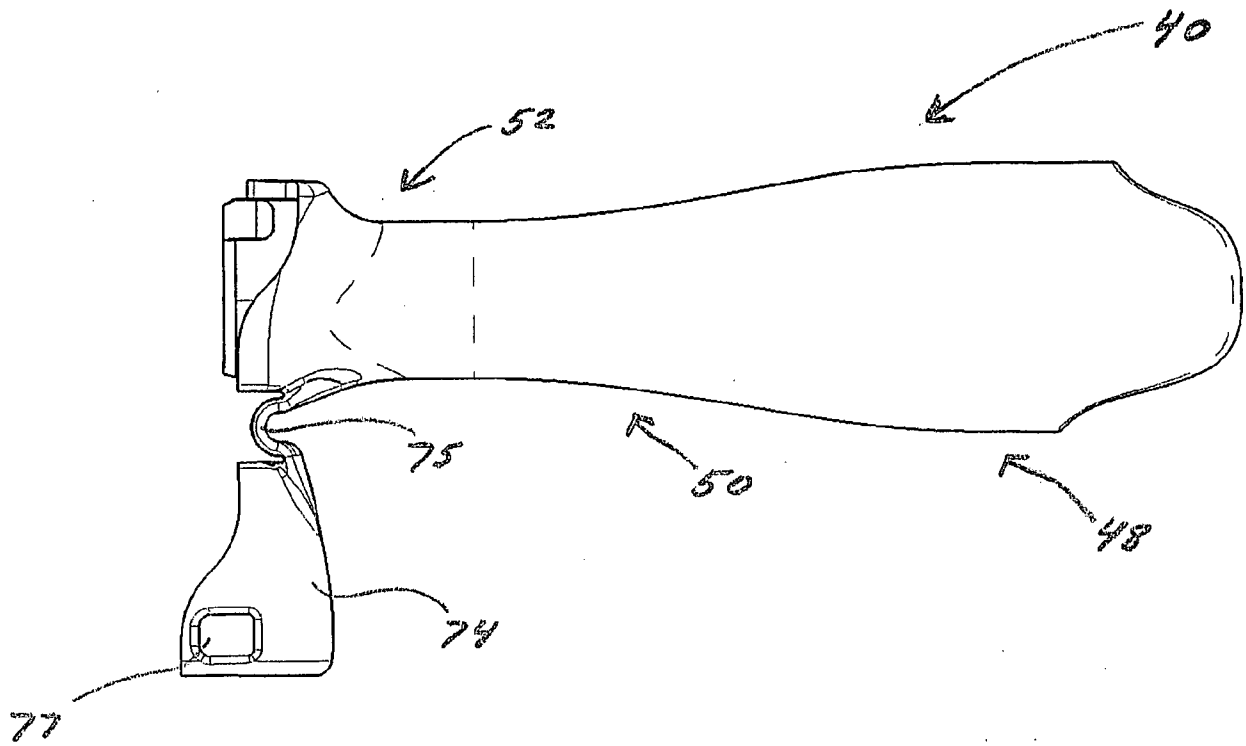


FIG. 3

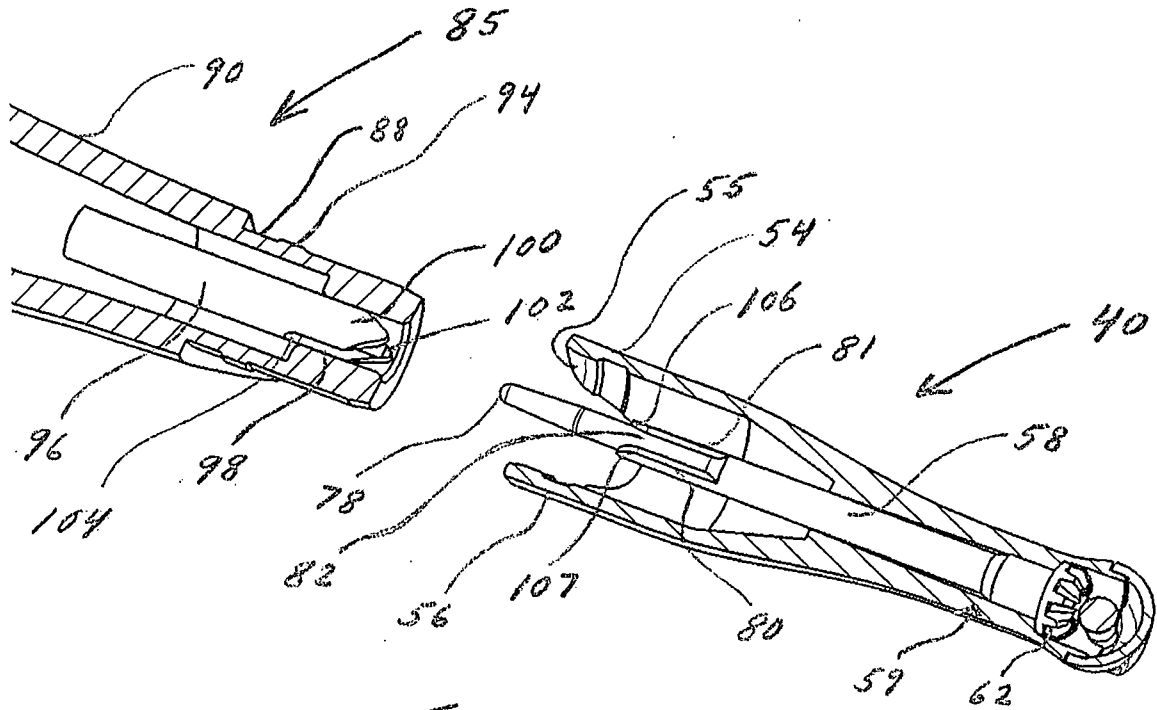


FIG. 4

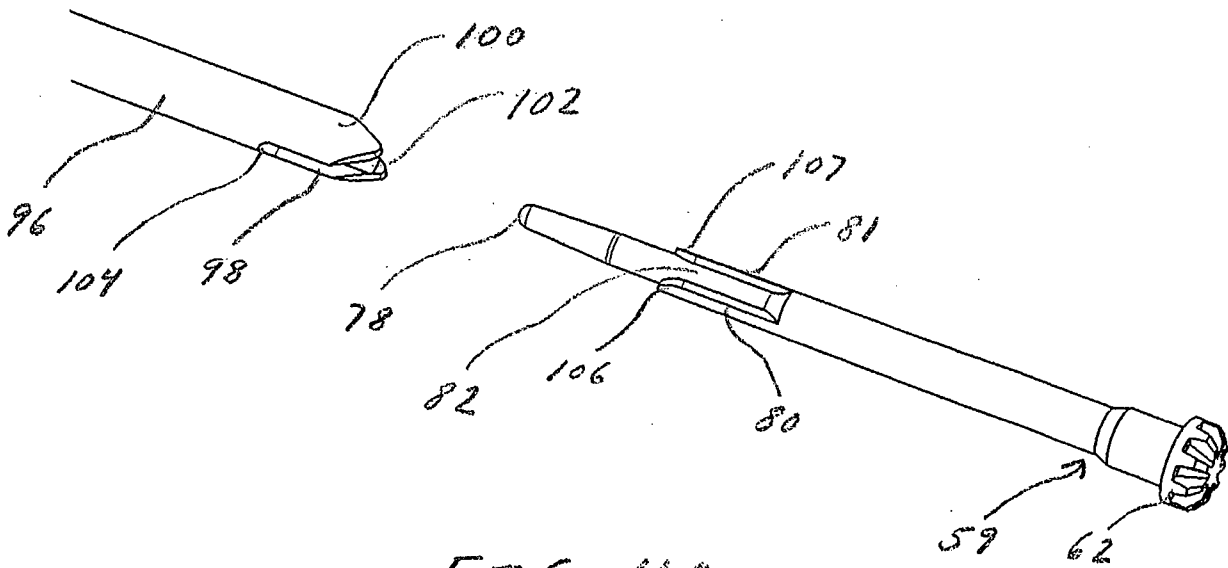
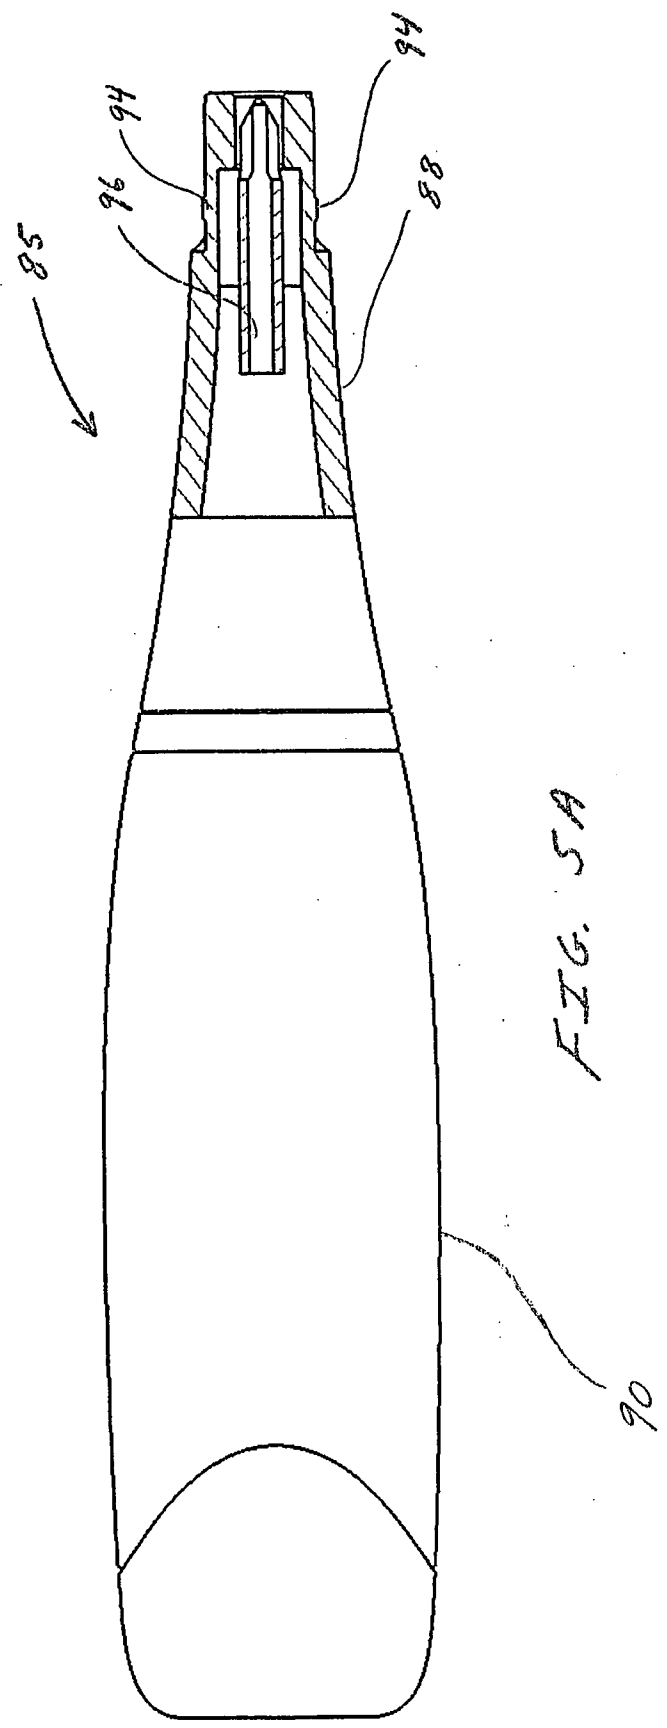
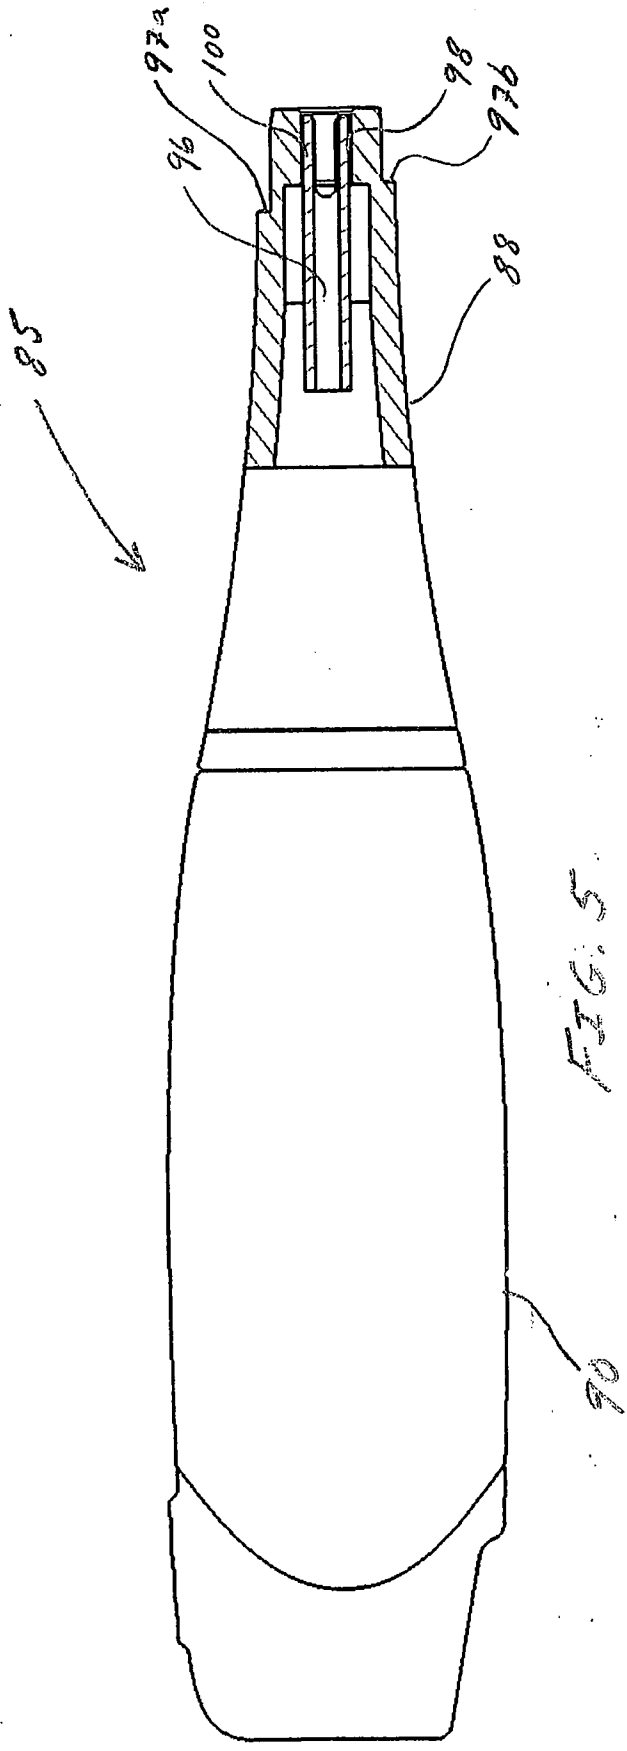


FIG. 4A



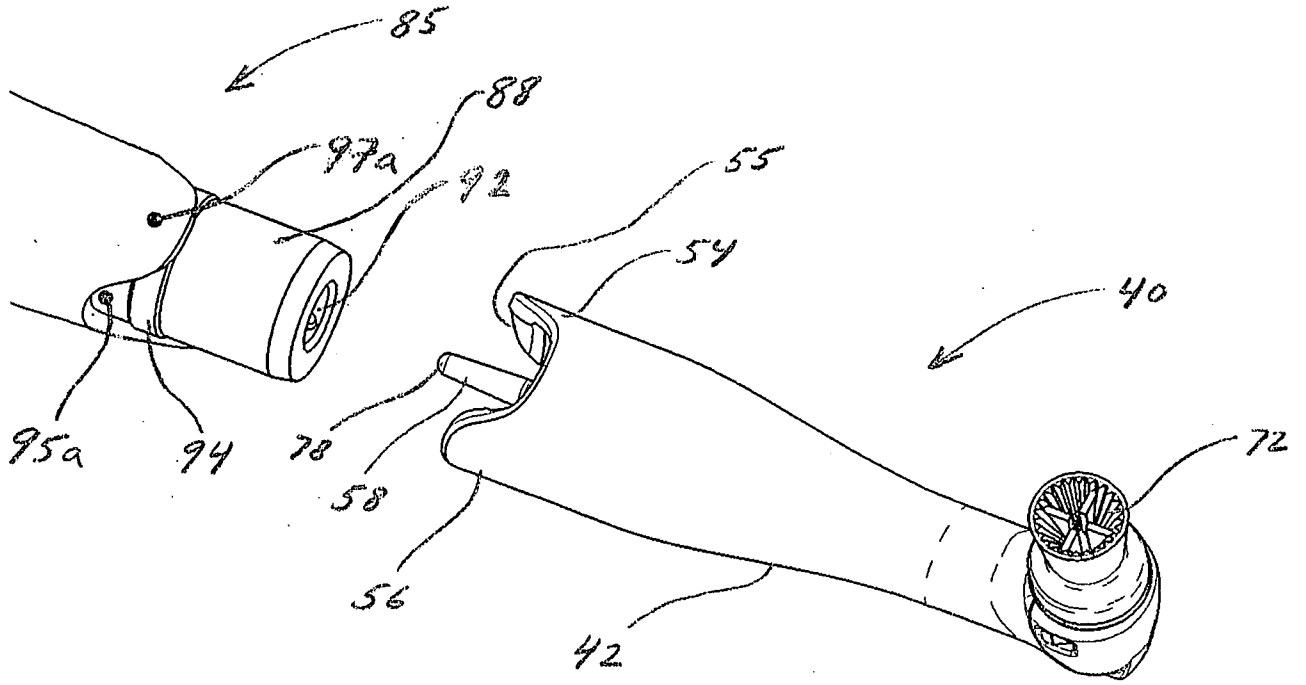


FIG. 6

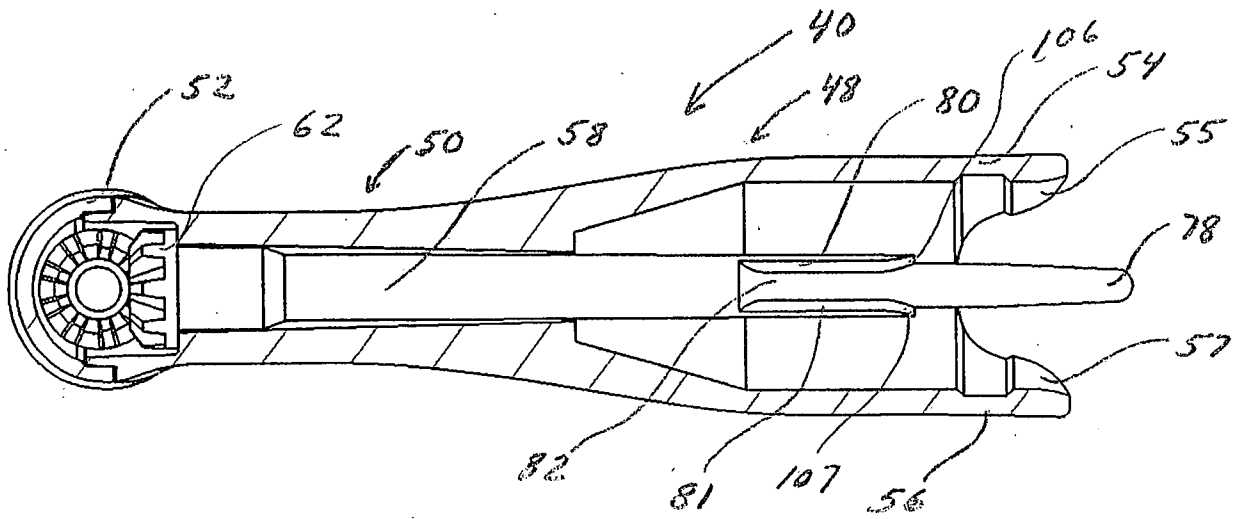


FIG. 6A

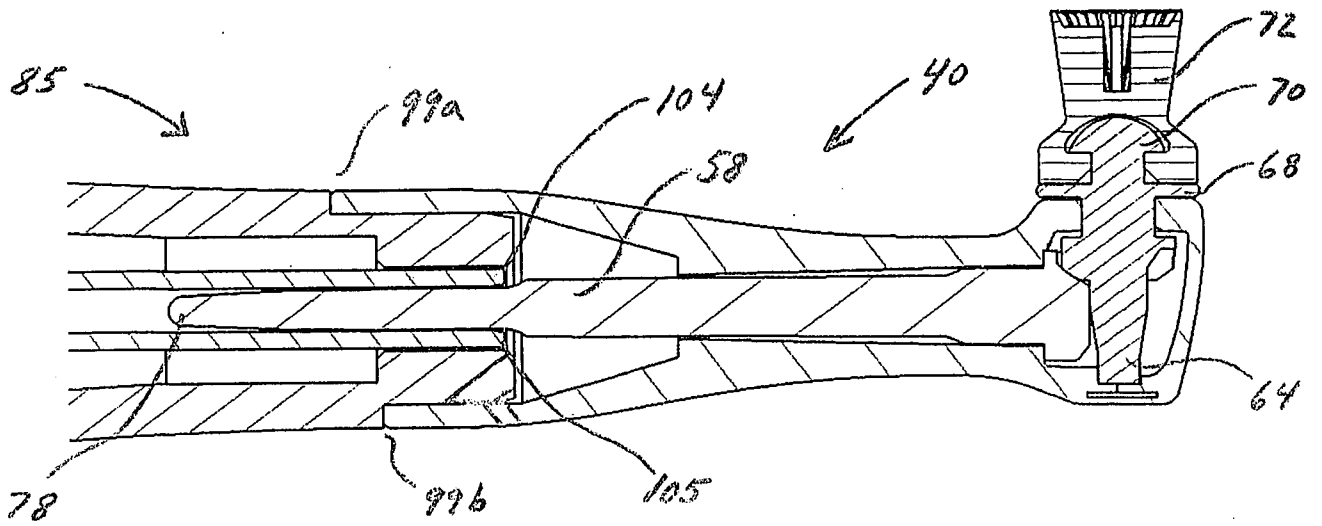


FIG. 7

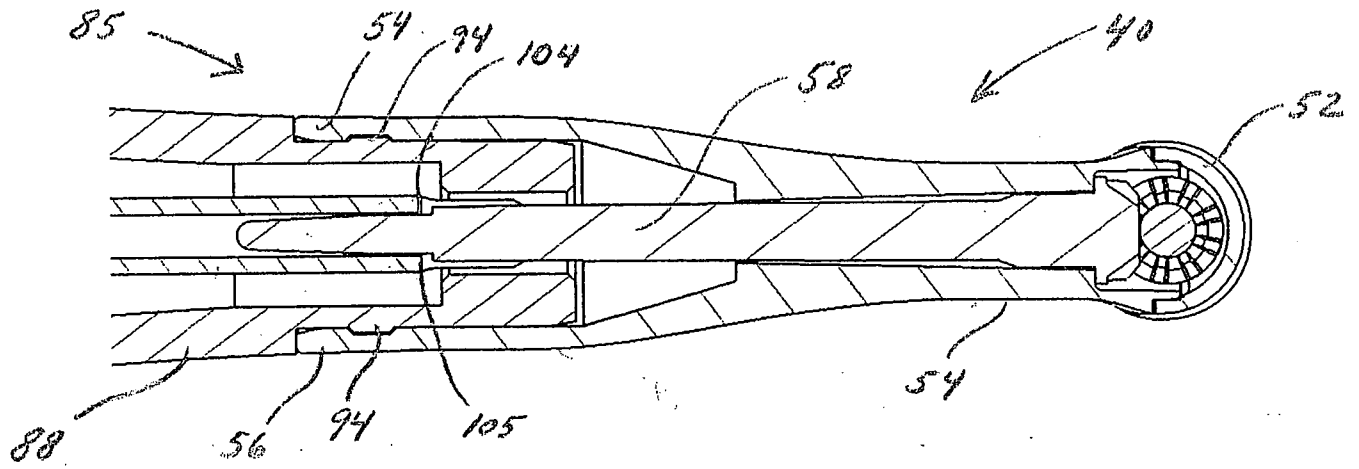


FIG. 7A

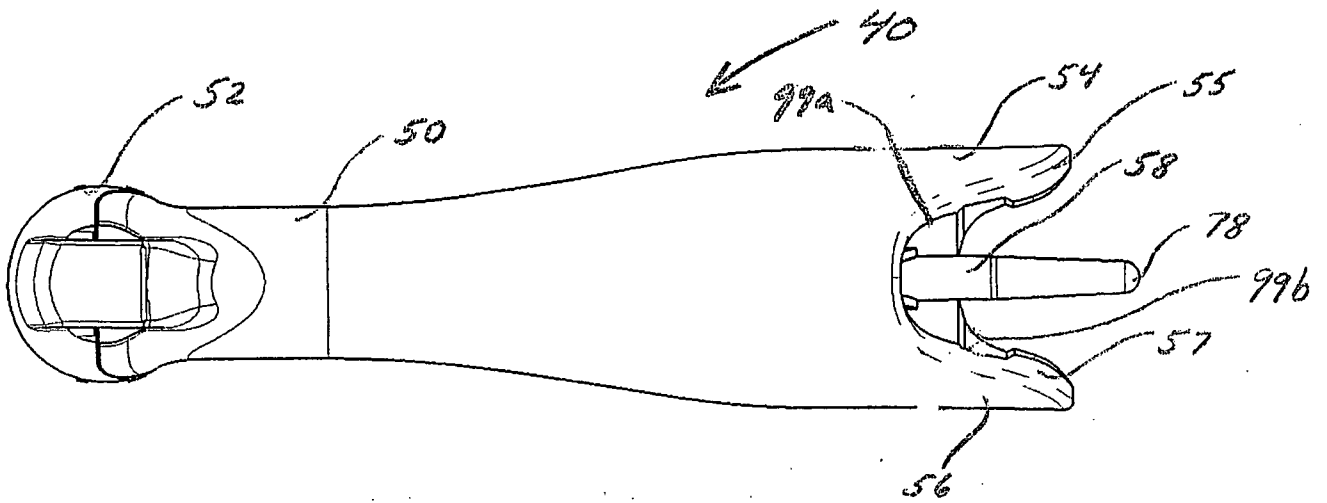
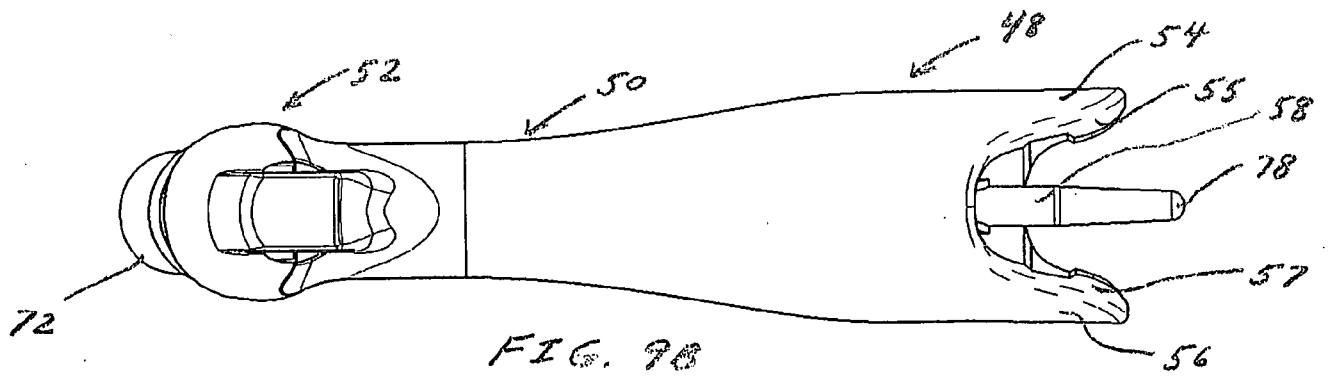
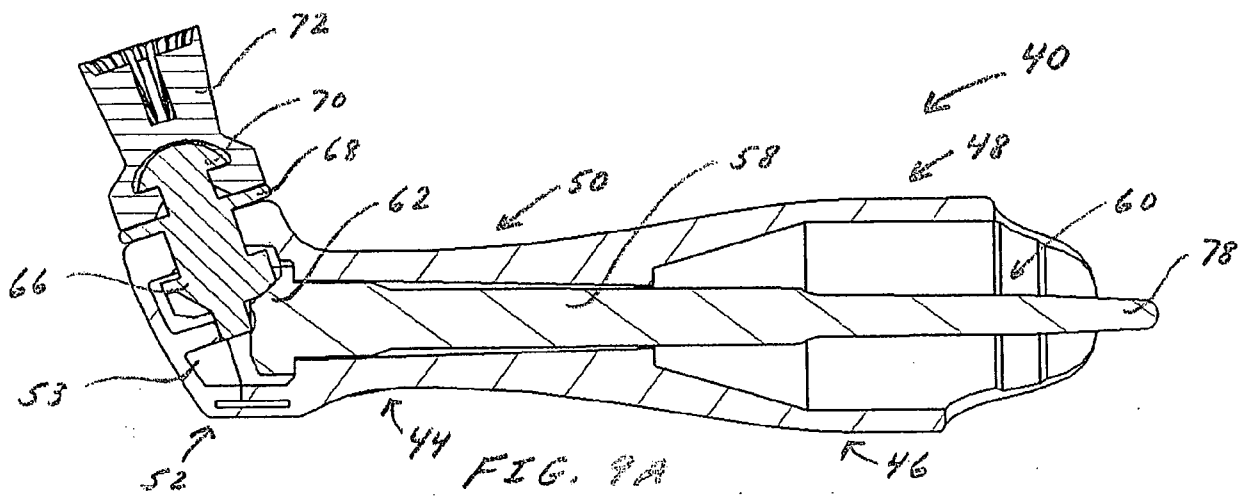
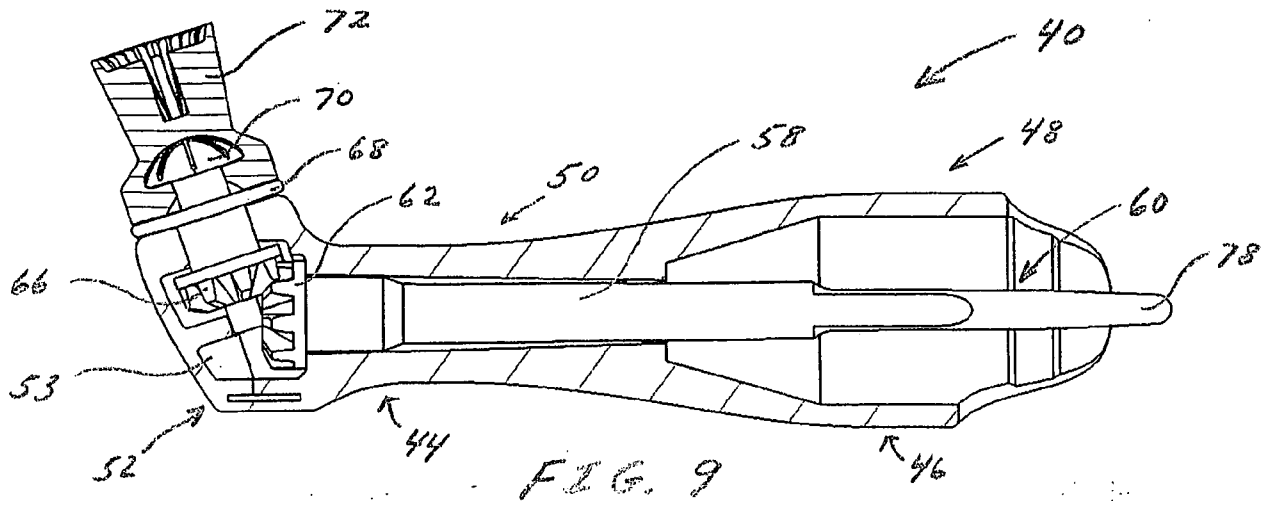


FIG. 8



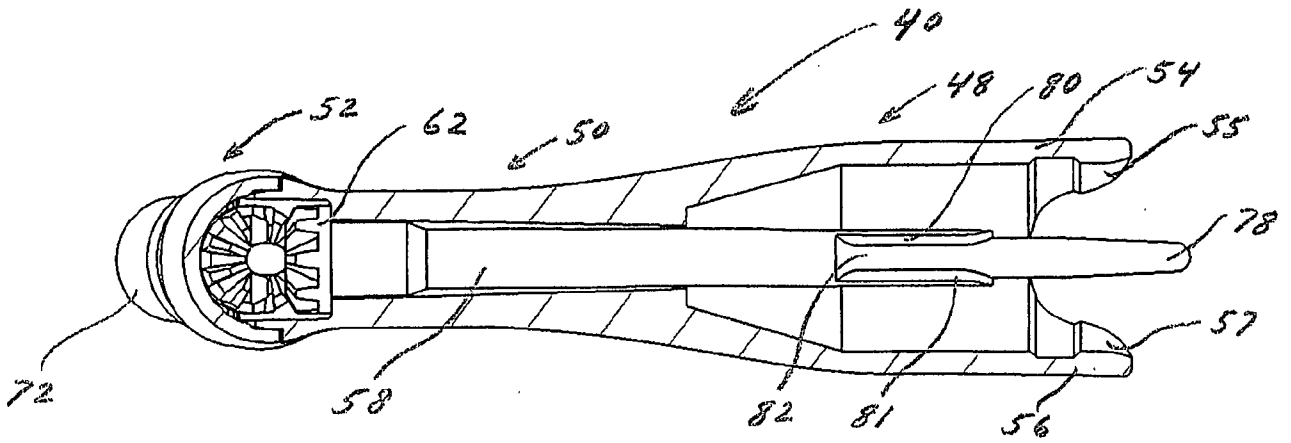


FIG. 9C

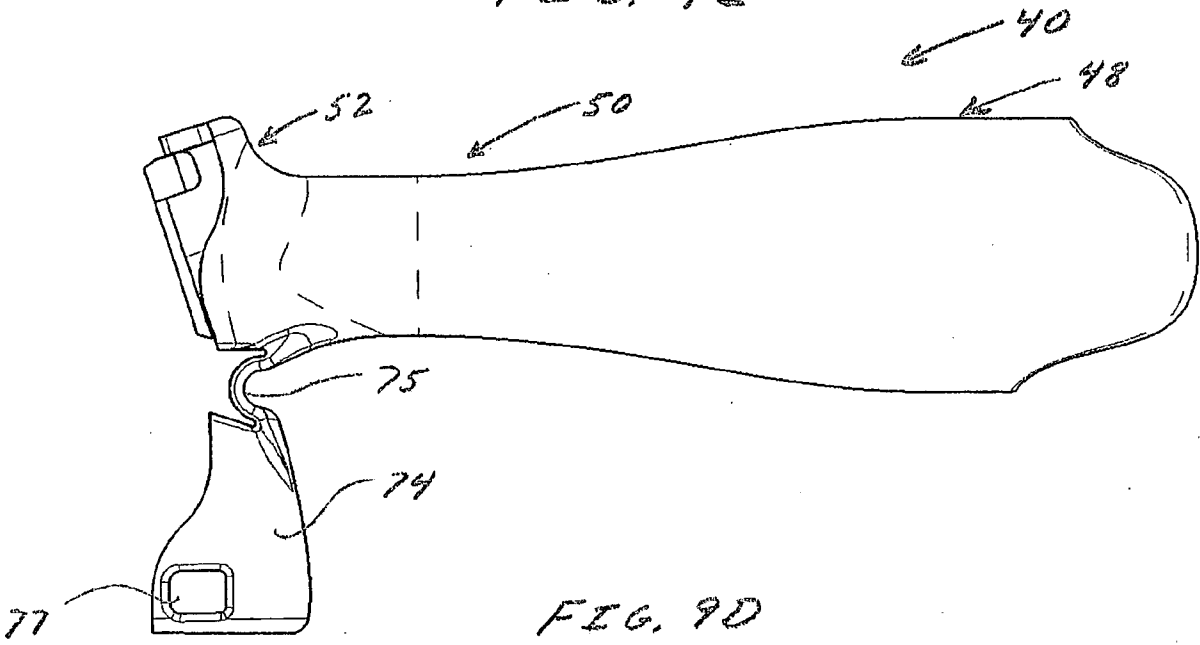


FIG. 9D

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2008/013983

A. CLASSIFICATION OF SUBJECT MATTER

INV. A61C17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	FR 1 575 113 A (KALTENBACH & VOIGT) 18 July 1969 (1969-07-18) page 2, lines 25-37 page 3, lines 1-8 page 3, line 40 - page 4, line 12; figures 1-5	1-24
Y	US 5 020 994 A (HUANG JERRY T [US]) 4 June 1991 (1991-06-04) column 3, lines 10-18; figure 3	1-24
A	US 5 348 473 A (KIVLIGHAN JR MICHAEL F [US]) 20 September 1994 (1994-09-20) cited in the application column 2, line 68 - column 3, line 22; figure 3	1-24
	----- -/--	

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

8 document member of the same patent family

Date of the actual completion of the international search

4 May 2009

Date of mailing of the international search report

13/05/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Roche, Olivier

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/013983

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 478 433 A (RICHMOND GEORGE E) 18 November 1969 (1969-11-18) figure 2	5, 6, 18, 19
A	US 6 203 322 B1 (KRAENZLE DAVID [US]) 20 March 2001 (2001-03-20) cited in the application the whole document	7-9, 20-22
A	US 5 584 690 A (MAASSARANI SAMI [US]) 17 December 1996 (1996-12-17) figures 1, 2, 5	10, 11, 23, 24
A	WO 99/12491 A (MIDWEST DENTAL PRODUCTS INC [US]) 18 March 1999 (1999-03-18) the whole document	1, 14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2008/013983

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
FR 1575113	A	18-07-1969	CH 494022 A DE 1625749 A1	31-07-1970 13-08-1970
US 5020994	A	04-06-1991	NONE	
US 5348473	A	20-09-1994	US 5507644 A	16-04-1996
US 3478433	A	18-11-1969	NONE	
US 6203322	B1	20-03-2001	NONE	
US 5584690	A	17-12-1996	NONE	
WO 9912491	A	18-03-1999	CA 2302740 A1 EP 1011513 A1 US 6012922 A	18-03-1999 28-06-2000 11-01-2000