



(19) **United States**

(12) **Patent Application Publication**  
**Hart et al.**

(10) **Pub. No.: US 2008/0043711 A1**

(43) **Pub. Date: Feb. 21, 2008**

(54) **COMMUNICATION SYSTEMS**

**Publication Classification**

(75) Inventors: **Michael Johns Beems Hart**,  
London (GB); **Yuefeng Zhou**,  
Haywards Health (GB)

(51) **Int. Cl.**  
**H04B 7/212** (2006.01)  
(52) **U.S. Cl.** ..... **370/348**

(57) **ABSTRACT**

Correspondence Address:  
**BAKER BOTTS L.L.P.**  
**2001 ROSS AVENUE, SUITE 600**  
**DALLAS, TX 75201-2980**

A transmission method for use in a multi-hop wireless communication system is provided. The system includes a source apparatus, a destination apparatus and one or more intermediate apparatuses. The system has access to at least one predetermined transmission introduction sequence and also having access to a time-frequency format for use in assigning available transmission frequency bandwidth during a discrete transmission interval, said format defining a plurality of transmission windows within such an interval. The method for use in this system includes, when transmitting a message with a preamble in a particular transmission interval, transmitting the preamble in a first transmission window of that transmission interval. The method further includes transmitting the transmission introduction sequence in a second transmission window of that transmission interval other than the first transmission window as control information for use by at least one said intermediate apparatus.


(73) Assignee: **Fujitsu Limited**, Kawasaki-shi (JP)

(21) Appl. No.: **11/840,644**

(22) Filed: **Aug. 17, 2007**

(30) **Foreign Application Priority Data**

Aug. 18, 2006 (GB) ..... GB 0616474.3

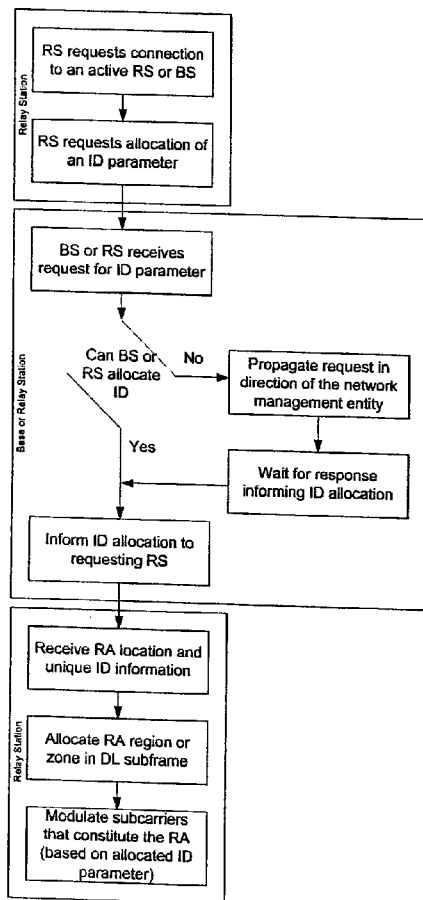

Interaction between a network associating RS and the already operational network.

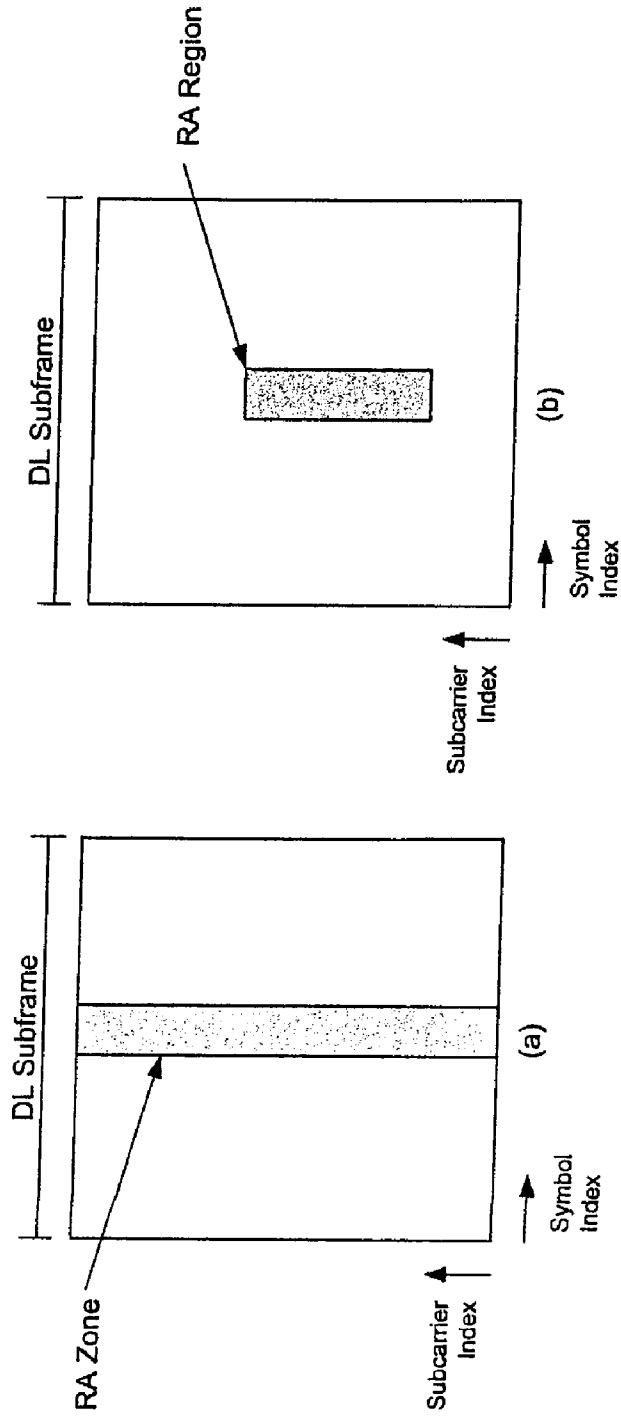


Figure 1: RA zone and RA region definition.

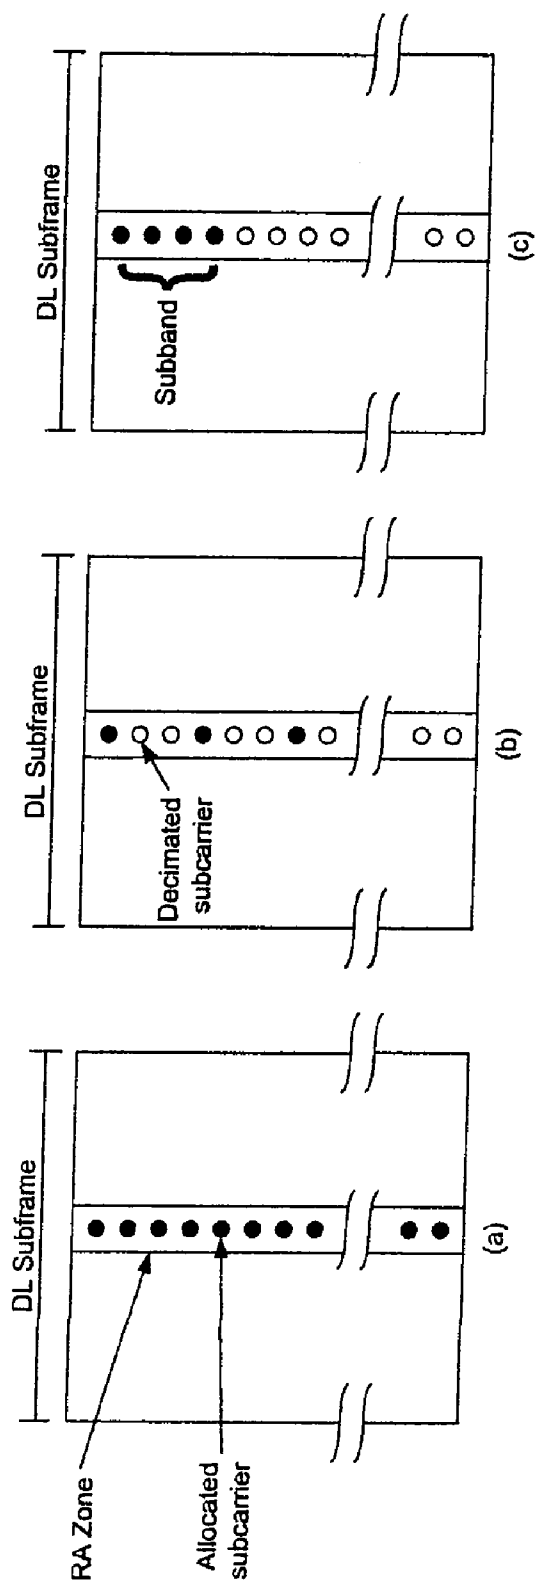


Figure 2: Usage of transmission resource in an RA zone.

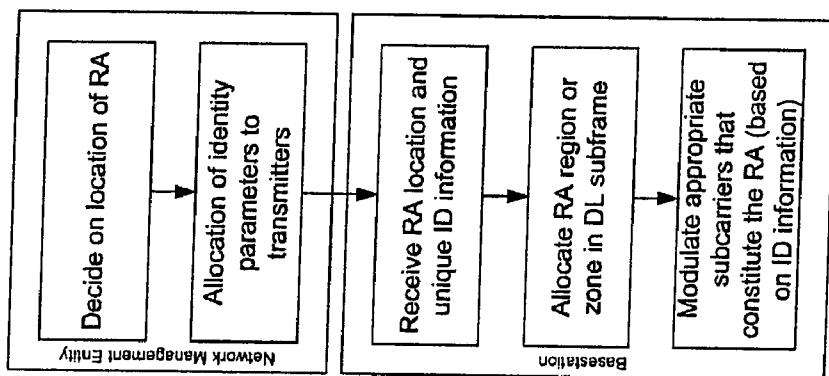


Figure 3: Interaction between the transmitters and the network management entity.

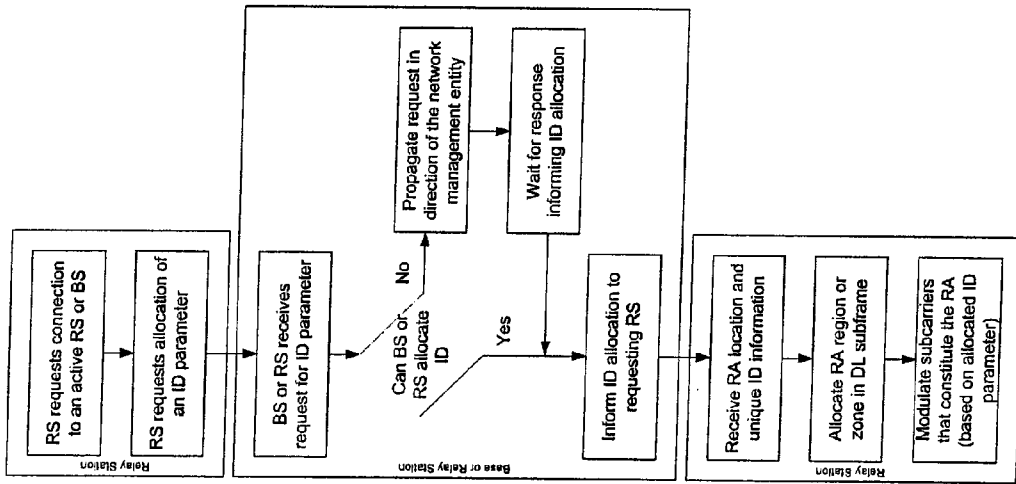


Figure 4: Interaction between a network associating RS and the already operational network.

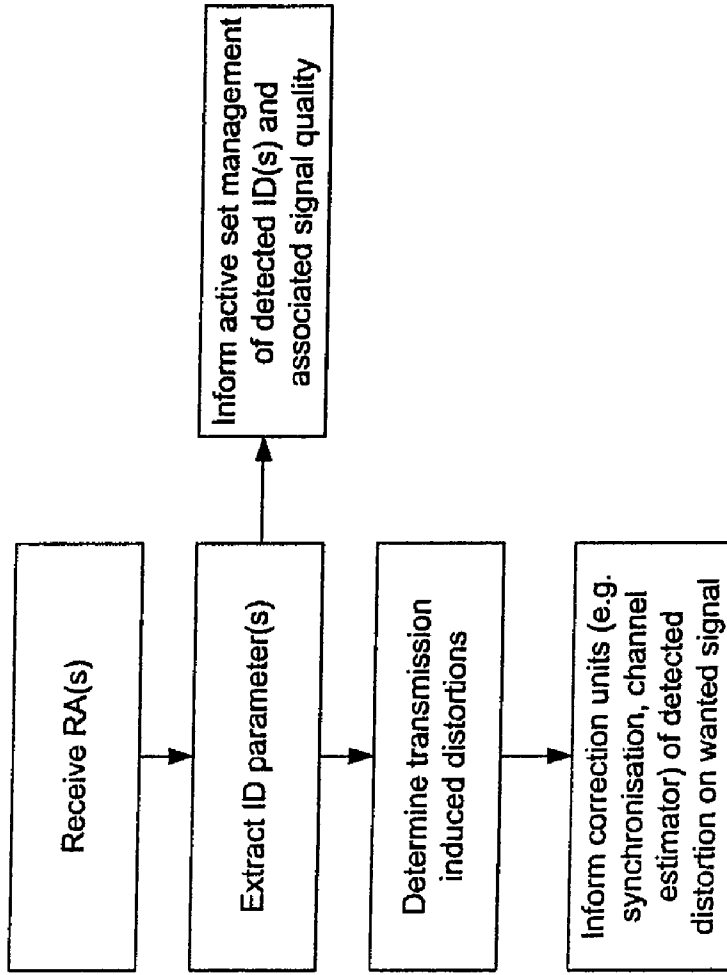


Figure 5: RA reception and processing procedure in the receiver.

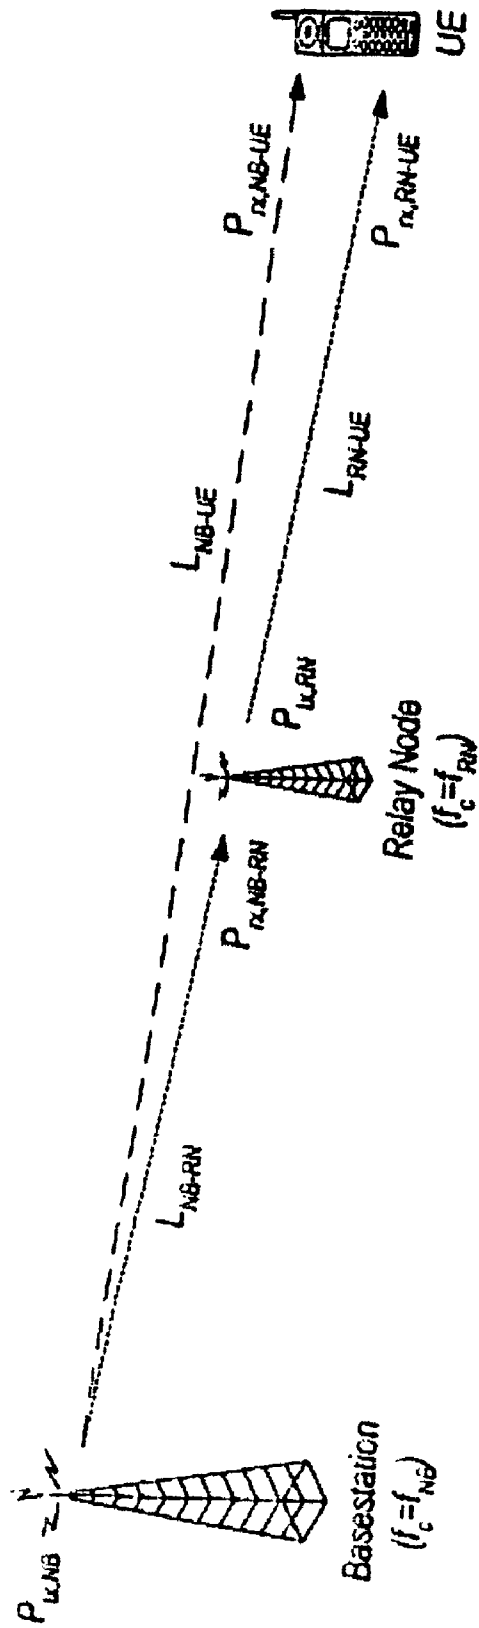


Figure 6

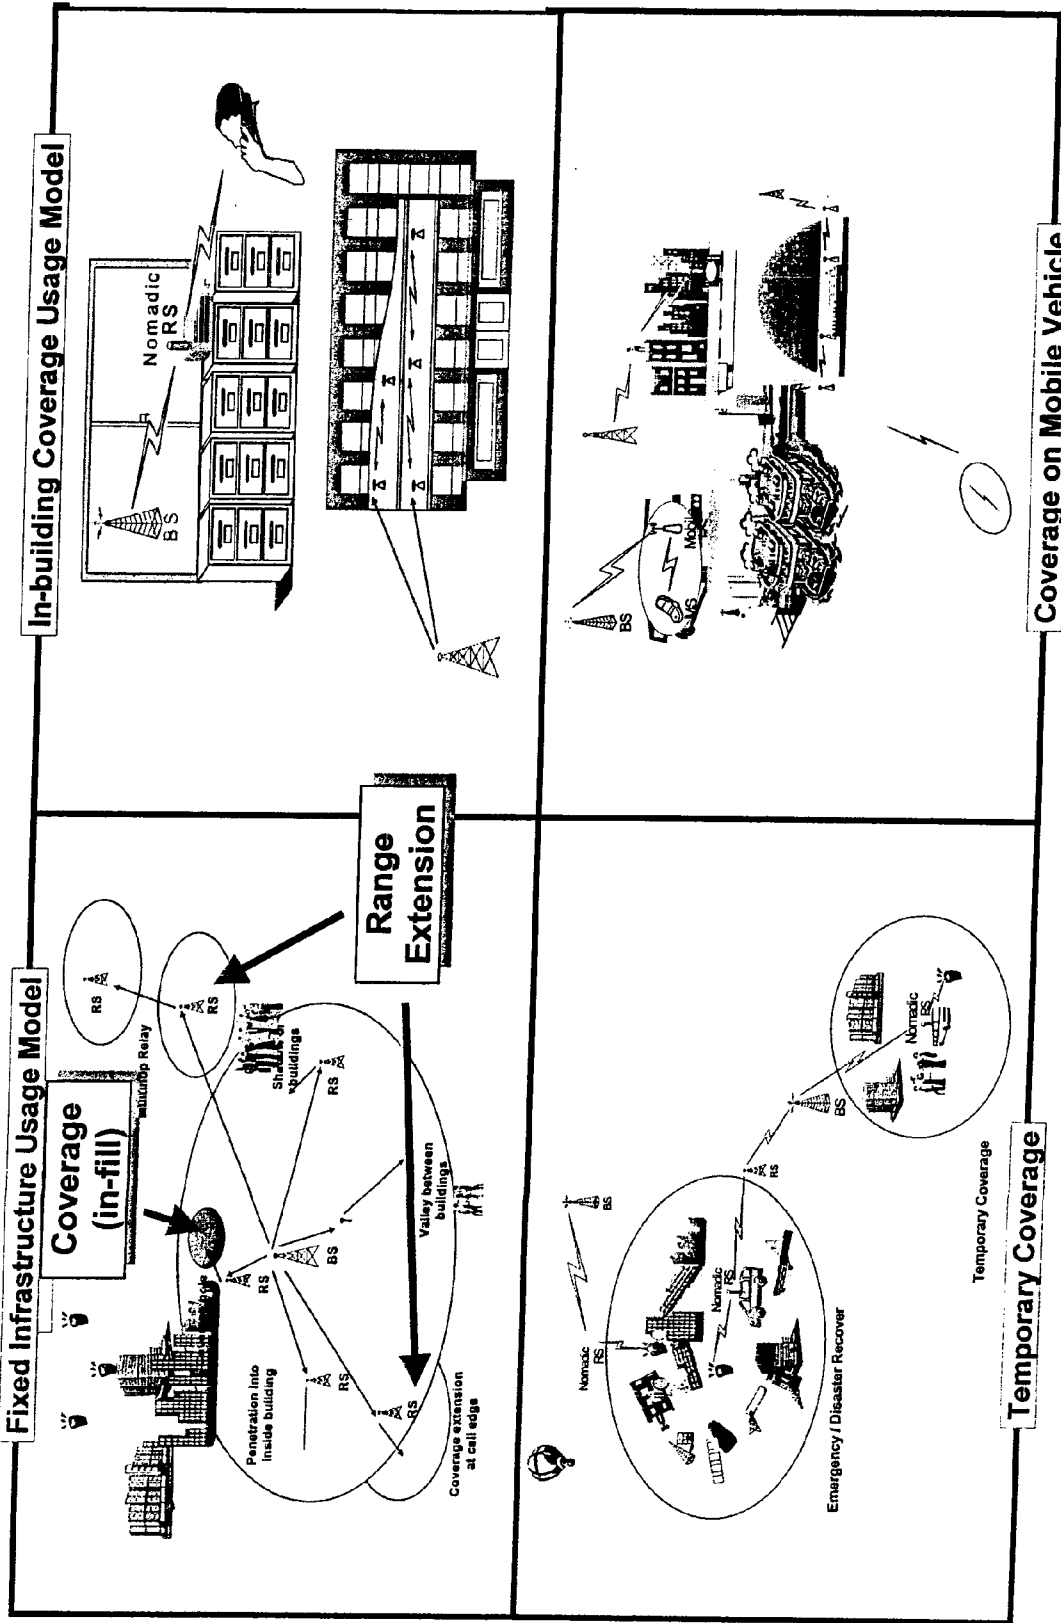


Figure 7



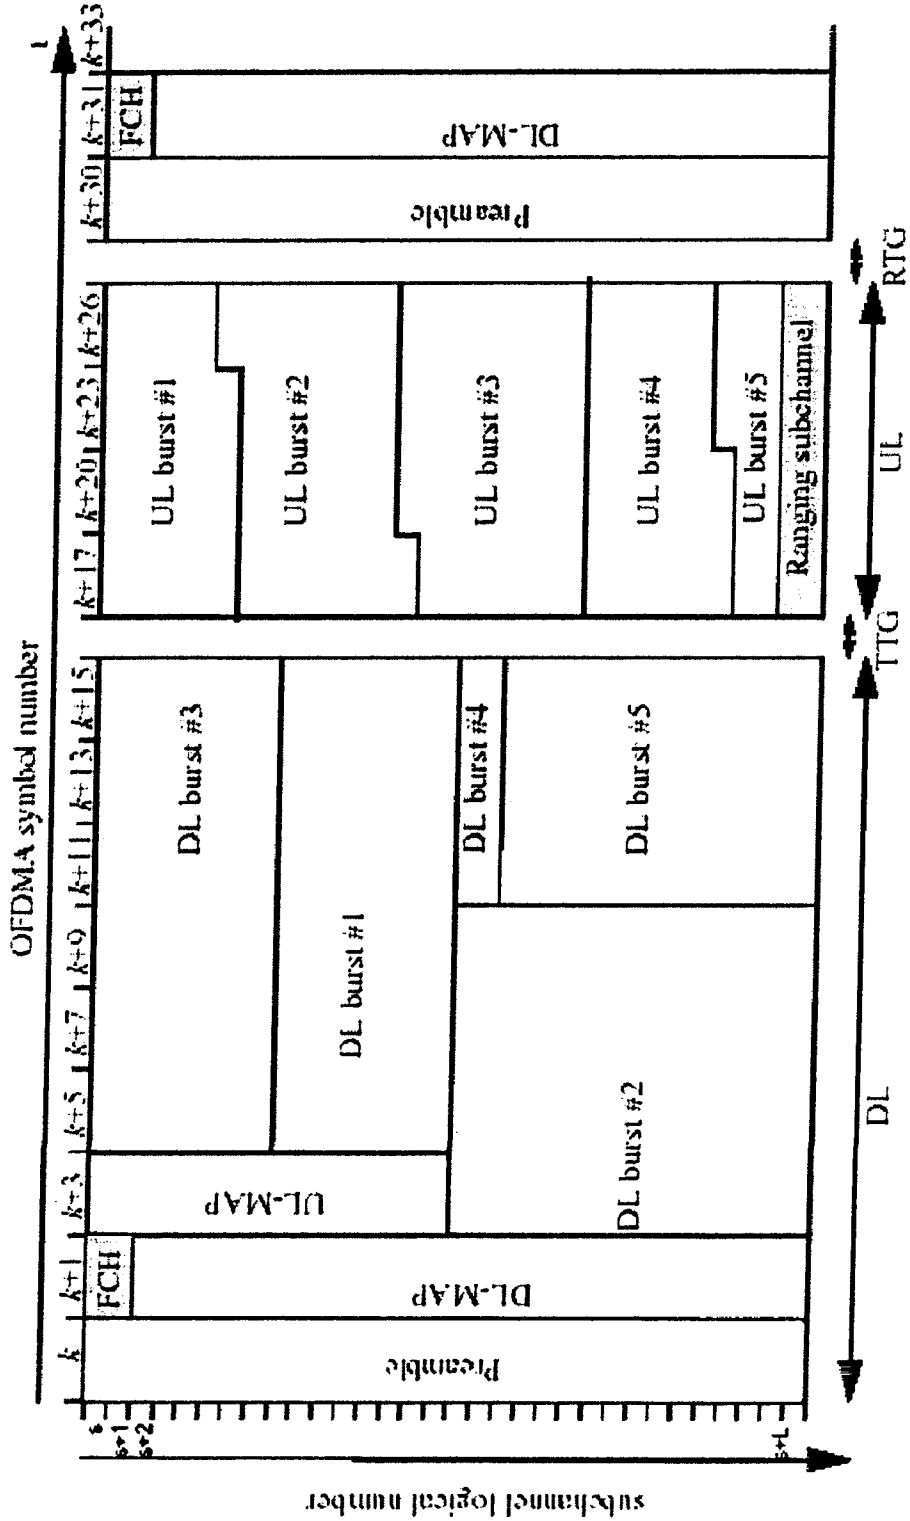


Figure 8: Example TDD frame structure from OFDMA physical layer of the IEEE802.16 standard

**COMMUNICATION SYSTEMS**

**RELATED APPLICATION**

**[0001]** This application claims foreign priority benefits under 35 U.S.C. §119 of United Kingdom Application No. GB 0616474.3, filed on Aug. 18, 2006, entitled “Communication Systems”.

**CROSS-REFERENCE TO RELATED APPLICATIONS**

**[0002]** This application relates to the following applications, each of which is incorporated herein by reference:

**[0003]** COMMUNICATION SYSTEMS, Attorney Docket 017071.0125, application Ser. No. \_\_\_\_\_, filed Aug. 17, 2007 and currently pending;

**[0004]** COMMUNICATION SYSTEMS, Attorney Docket 017071.0126, application Ser. No. \_\_\_\_\_, filed Aug. 17, 2007 and currently pending;

**[0005]** COMMUNICATION SYSTEMS, Attorney Docket 017071.0127, application Ser. No. \_\_\_\_\_, filed Aug. 17, 2007 and currently pending;

**[0006]** COMMUNICATION SYSTEMS, Attorney Docket 017071.0128, application Ser. No. \_\_\_\_\_, filed Aug. 17, 2007 and currently pending;

**[0007]** COMMUNICATION SYSTEMS, Attorney Docket 017071.0129, application Ser. No. \_\_\_\_\_, filed Aug. 17, 2007 and currently pending;

**[0008]** COMMUNICATION SYSTEMS, Attorney Docket 017071.0130, application Ser. No. \_\_\_\_\_, filed Aug. 17, 2007 and currently pending;

**[0009]** COMMUNICATION SYSTEMS, United Kingdom Application No. GB 0616478.4, filed on Aug. 18, 2006;

**[0010]** COMMUNICATION SYSTEMS, United Kingdom Application No. GB 0616475.0, filed on Aug. 18, 2006; and

**[0011]** COMMUNICATION SYSTEMS, United Kingdom Application No. GB 0616476.8, filed on Aug. 18, 2006.

**TECHNICAL FIELD**

**[0012]** This invention relates in general to communication systems, and more particularly to a relay-able in a communication frame.

**OVERVIEW**

**[0013]** Currently there exists interest in the use of multi-hop techniques in packet based radio and other communication systems, where it is purported that such techniques will enable both extension in coverage range and increase in system capacity (throughout).

**[0014]** In a multi-hop communication system, communication signals are sent in a communication direction along a communication path (C) from a source apparatus to a destination apparatus via one or more intermediate apparatuses. FIG. 6 illustrates a single-cell two-hop wireless communication system comprising a base station BS (known in the context of 3G communication systems as “node-B” NB) a relay node RN (also known as a relay station RS) and a user equipment UE (also known as mobile station MS). In the case where signals are being transmitted on the downlink (DL) from a base station to a destination user equipment (UE) via the relay node (RN), the base station comprises the source station (S) and the user equipment comprises the destination station (D). In the case where communication

signals are being transmitted on the uplink (UL) from a user equipment (UE), via the relay node, to the base station, the user equipment comprises the source station and the base station comprises the destination station. The relay node is an example of an intermediate apparatus (I) and comprises: a receiver, operable to receive data from the source apparatus; and a transmitter, operable to transmit this data, or a derivative thereof, to the destination apparatus.

**[0015]** Simple analogue repeaters or digital repeaters have been used as relays to improve or provide coverage in dead spots. They can either operate in a different transmission frequency band from the source station to prevent interference between the source transmission and the repeater transmission, or they can operate at a time when there is no transmission from the source station.

**[0016]** FIG. 7 illustrates a number of applications for relay stations. For fixed infrastructure, the coverage provided by a relay station may be “in-fill” to allow access to the communication network for mobile stations which may otherwise be in the shadow of other objects or otherwise unable to receive a signal of sufficient strength from the base station despite being within the normal range of the base station. “Range extension” is also shown, in which a relay station allows access when a mobile station is outside the normal data transmission range of a base station. One example of in-fill shown at the top right of FIG. 7 is positioning of a nomadic relay station to allow penetration of coverage within a building that could be above, at, or below ground level.

**[0017]** Other applications are nomadic relay stations which are brought into effect for temporary cover, providing access during events or emergencies/disasters. A final application shown in the bottom right of FIG. 7 provides access to a network using a relay positioned on a vehicle.

**[0018]** Relays may also be used in conjunction with advanced transmission techniques to enhance gain of the communications system as explained below.

**[0019]** It is known that the occurrence of propagation loss, or “pathloss”, due to the scattering or absorption of a radio communication as it travels through space, causes the strength of a signal to diminish. Factors which influence the pathloss between a transmitter and a receiver include: transmitter antenna height, receiver antenna height, carrier frequency, clutter type (urban, sub-urban, rural), details of morphology such as height, density, separation, terrain type (hilly, flat). The pathloss L (dB) between a transmitter and a receiver can be modeled by:

$$L=b+10n \log d \tag{A}$$

Where d (meters) is the transmitter-receiver separation, b(db) and n are the pathloss parameters and the absolute pathloss is given by  $l=10^{(L/10)}$ .

**[0020]** The sum of the absolute path losses experienced over the indirect link SI+ID may be less than the pathloss experienced over the direct link SD. In other words it is possible for:

$$L(SI)+L(ID)<L(SD) \tag{B}$$

**[0021]** Splitting a single transmission link into two shorter transmission segments therefore exploits the non-linear relationship between pathloss verses distance. From a simple theoretical analysis of the pathloss using equation (A), it can be appreciated that a reduction in the overall pathloss (and

therefore an improvement, or gain, in signal strength and thus data throughput) can be achieved if a signal is sent from a source apparatus to a destination apparatus via an intermediate apparatus (e.g. relay node), rather than being sent directly from the source apparatus to the destination apparatus. If implemented appropriately, multi-hop communication systems can allow for a reduction in the transmit power of transmitters which facilitate wireless transmissions, leading to a reduction in interference levels as well as decreasing exposure to electromagnetic emissions. Alternatively, the reduction in overall pathloss can be exploited to improve the received signal quality at the receiver without an increase in the overall radiated transmission power required to convey the signal.

**[0022]** Multi-hop systems are suitable for use with multi-carrier transmission. In a multi-carrier transmission system, such as FDM (frequency division multiplex), OFDM (orthogonal frequency division multiplex) or DMT (discrete multi-tone), a single data stream is modulated onto N parallel sub-carriers, each sub-carrier signal having its own frequency range. This allows the total bandwidth (i.e. the amount of data to be sent in a given time interval) to be divided over a plurality of sub-carriers thereby increasing the duration of each data symbol. Since each sub-carrier has a lower information rate, multi-carrier systems benefit from enhanced immunity to channel induced distortion compared with single carrier systems. This is made possible by ensuring that the transmission rate and hence bandwidth of each subcarrier is less than the coherence bandwidth of the channel. As a result, the channel distortion experienced on a signal subcarrier is frequency independent and can hence be corrected by a simple phase and amplitude correction factor. Thus the channel distortion correction entity within a multicarrier receiver can be of significantly lower complexity of its counterpart within a single carrier receiver when the system bandwidth is in excess of the coherence bandwidth of the channel.

**[0023]** Orthogonal frequency division multiplexing (OFDM) is a modulation technique that is based on FDM. An OFDM system uses a plurality of sub-carrier frequencies which are orthogonal in a mathematical sense so that the sub-carriers' spectra may overlap without interference due to the fact they are mutually independent. The orthogonality of OFDM systems removes the need for guard band frequencies and thereby increases the spectral efficiency of the system. OFDM has been proposed and adopted for many wireless systems. It is currently used in Asymmetric Digital Subscriber Line (ADSL) connections, in some wireless LAN applications (such as WiFi devices based on the IEEE 802.11a/g standard), and in wireless MAN applications such as WiMAX (based on the IEEE 802.16 standard). OFDM is often used in conjunction with channel coding, an error correction technique, to create coded orthogonal FDM or COFDM. COFDM is now widely used in digital telecommunications systems to improve the performance of an OFDM based system in a multipath environment where variations in the channel distortion can be seen across both subcarriers in the frequency domain and symbols in the time domain. The system has found use in video and audio broadcasting, such as DVB and DAB, as well as certain types of computer networking technology.

**[0024]** In an OFDM system, a block of N modulated parallel data source signals is mapped to N orthogonal parallel sub-carriers by using an Inverse Discrete or Fast

Fourier Transform algorithm (IDFT/IFFT) to form a signal known as an "OFDM symbol" in the time domain at the transmitter. Thus, an "OFDM symbol" is the composite signal of all N sub-carrier signals. An OFDM symbol can be represented mathematically as:

$$x(t) = \frac{1}{\sqrt{N}} \sum_{n=0}^{N-1} c_n \cdot e^{j2\pi n \Delta f t}, \quad 0 \leq t \leq T_s \quad (1)$$

where  $\Delta f$  is the sub-carrier separation in Hz,  $T_s=1/\Delta f$  is symbol time interval in seconds, and  $c_n$  are the modulated source signals. The sub-carrier vector in (1) onto which each of the source signals is modulated  $c_n$ ,  $c=(c_0, c_1 \dots c_{N-1})$  is a vector of N constellation symbols from a finite constellation. At the receiver, the received time-domain signal is transformed back to frequency domain by applying Discrete Fourier Transform (DFT) or Fast Fourier Transform (FFT) algorithm.

**[0025]** OFDMA (Orthogonal Frequency Division Multiple Access) is a multiple access variant of OFDM. It works by assigning a subset of sub-carriers, to an individual user. This allows simultaneous transmission from several users leading to better spectral efficiency. However, there is still the issue of allowing bi-directional communication, that is, in the uplink and download directions, without interference.

**[0026]** In order to enable bidirectional communication between two nodes, two well known different approaches exist for duplexing the two (forward or download and reverse or uplink) communication links to overcome the physical limitation that a device cannot simultaneously transmit and receive on the same resource medium. The first, frequency division duplexing (FDD), involves operating the two links simultaneously but on different frequency bands by subdividing the transmission medium into two distinct bands, one for forward link and the other for reverse link communications. The second, time division duplexing (TDD), involves operating the two links on the same frequency band, but subdividing the access to the medium in time so that only the forward or the reverse link will be utilizing the medium at any one point in time. Both approaches (TDD & FDD) have their relative merits and are both well used techniques for single hop wired and wireless communication systems. For example the IEEE 802.16 standard incorporates both an FDD and TDD mode.

**[0027]** As an example, FIG. 8 illustrates the single hop TDD frame structure used in the OFDMA physical layer mode of the IEEE 802.16 standard (WiMAX). Each frame is divided into DL and UL subframes, each being a discrete transmission interval. They are separated by Transmit/Receive and Receive/Transmit Transition Guard interval (TTG and RTG respectively). Each DL subframe starts with a preamble followed by the Frame Control Header (FCH), the DL-MAP, and the UL-MAP. The FCH contains the DL Frame Prefix (DLFP) to specify the burst profile and the length of the DL-MAP. The DLFP is a data structure transmitted at the beginning of each frame and contains information regarding the current frame; it is mapped to the FCH.

**[0028]** Simultaneous DL allocations can be broadcast, multicast and unicast and they can also include an allocation

for another BS rather than a serving BS. Simultaneous ULs can be data allocations and ranging or bandwidth requests.

#### SUMMARY OF EXAMPLE EMBODIMENTS

**[0029]** In accordance with one embodiment of the present invention, a transmission method for use in a multi-hop wireless communication system is provided. The system includes a source apparatus, a destination apparatus and one or more intermediate apparatuses. The source apparatus is operable to transmit information along a series of links forming a communication path extending from the source apparatus to the destination apparatus via the intermediate apparatus. Each intermediate apparatus is operable to receive information from a previous apparatus along the path and to transmit the received information to a subsequent apparatus along the path. The system has access to at least one predetermined transmission introduction sequence and also having access to a time-frequency format for use in assigning available transmission frequency bandwidth during a discrete transmission interval, said format defining a plurality of transmission windows within such an interval. Each window occupies a different part of that interval and having a frequency bandwidth profile within said available transmission frequency bandwidth over its part of that interval, each said window being assignable for such a transmission interval to at least one of said apparatuses for use in transmission. The method for use in this system includes, when transmitting a message with a preamble in a particular transmission interval, transmitting the preamble in a first transmission window of that transmission interval. The method further includes transmitting the transmission introduction sequence in a second transmission window of that transmission interval other than the first transmission window as control information for use by at least one said intermediate apparatus.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0030]** For a more complete understanding of the present invention and its advantages, reference is now made to the following description, taken in conjunction with the accompanying drawings, in which:

**[0031]** FIG. 1 shows RA zone and RA region definition;

**[0032]** FIG. 2 shows Usage of transmission resource in an RA zone;

**[0033]** FIG. 3 shows Interaction between the transmitters and the network management entity;

**[0034]** FIG. 4 shows Interaction between a network associating RS and the already operational network;

**[0035]** FIG. 5 shows RA reception and processing procedure in the receiver;

**[0036]** FIG. 6 shows a single-cell two-hop wireless communication system;

**[0037]** FIG. 7 shows applications of relay stations; and

**[0038]** FIG. 8 shows a single hop TDD frame structure used in the OFDMA physical layer mode of the IEEE 802.16 standard.

#### DETAILED DESCRIPTION

**[0039]** The process of modulation, transmission, reception and demodulation of an information signal, as performed in a communication system, will cause typically the original signal to experience some distortion. These distortions may include delay, frequency offset and phase rotation and can

result in the reception of multiple independently distorted replicas of the original signal. In order to correct for these distortions in the receiver, it is common for a communication system to make use of special training sequences, transmitting them through the channel so that they undergo the same distortion as the information signal. As these training sequences are known in the receiver, it is possible to estimate the distortion introduced by the transmission process and then correct the received information signal so that the distortion is minimized or completely removed. Thus such a training signal can be used in both the synchronization (time & frequency) and channel estimation and equalization stages of the receiver.

**[0040]** It is possible to form a set of a number of known training sequences for transmission within the communication system. Each sequence in the set is distinct from all other sequences such that it is possible at the receiver to distinguish the identity of a transmitter in a communication network where multiple transmitters exist. This allows the receiver to ascertain certain properties possessed by the transmitter as well as estimate the transmitter and channel induced distortion that will be experienced on a signal that is received from that particular transmitter.

**[0041]** In single hop communication systems (e.g. IEEE 802.16e-2005) one such transmission signal that can be used for the purposes of identification and training is the preamble sequence. As its name suggests, it is transmitted at the start of every frame prior to the transmission of data. A 802.16e-2005 single hop subscriber or mobile station (SS or MS) will utilize the preamble to perform a number of tasks, including transmitter identification to determine the IDCell parameter and segment number. It will also use it to synchronize (i.e. correct timing and frequency offsets) to the transmitter.

**[0042]** Thus to support legacy MS or SS, a relay station may be required to transmit a preamble to enable the MS or SS to identify, synchronize and communication with it. As all the preamble transmissions from all of the transmitters (BS & RS) should be time synchronized in a cellular style network, such a requirement precludes an active RS from being able to receive the preamble sequence from a BS or another RS due to the physical limitation that it cannot transmit and receive on the same transmission resource at the same time.

**[0043]** Particular embodiments involve devising a new signal for transmission by the BS or RS which can be received by the RS to enable it to both transmit a standard preamble sequence and receive the new signal to enable it to perform transmitter identification, synchronization and channel estimation.

**[0044]** As an example, FIG. 8 illustrates the single hop TDD frame structure used in the OFDMA physical layer mode of the IEEE 802.16 standard indicating the location of the standard mandatory preamble sequence that can be used by an MS for BS identification and training of the distortion correcting elements of the receiver.

**[0045]** Particular embodiments introduce a new signal that is transmitted in another region of the DL sub-frame (other than the region where the preamble is located). This signal could be in the middle of the DL sub-frame, thus forming a mid-amble or at the end of the sub-frame, thus forming a

post-amble. From here on, for the sake of generality, the new signal is referred to as the relay-amble (RA).

#### RA Signal Design

**[0046]** The requirements for the RA, similar to those of the preamble, are that it can be used by the receiver to identify and distinguish the transmitter from potentially a number of other transmitters in the communication network. It must also enable the receiver to estimate, or update an existing estimate, of the transmitter and channel induced distortion. It must not be accidentally identified by an MS as a normal preamble sequence, as this may confuse a legacy MS that is not aware of the existence of relay-ambles.

**[0047]** In order to meet these requirements, it is possible to envisage that a number of different well-known mathematical sequences could be used to generate the relay-amble or set of relay-ambles used in a communication network.

In general, the properties of the transmitted RA signal may therefore be:

**[0048]** Good auto-correlation properties: To enable the determination of time/frequency offsets induce in the transmission process;

**[0049]** Possible to form a set of unique sequences: To enable different sequences to be used to identify different transmitters (i.e. provide an identification parameter that can be further used in the receiver);

**[0050]** Good cross-correlation properties: To prevent false detection of time/frequency offsets;

**[0051]** Low peak to average power ratio (PAPR) in the time domain: Enables the use of non-linear amplifiers or transmit power boosting above the standard data transmission power due to the difference in PAPR between the RA and the data signal;

**[0052]** Near-constant or constant amplitude in the frequency domain: Provides uniform sounding of the transmission channel and thus improves the accuracy that can be achieved by the channel estimator in the receiver;

**[0053]** Low correlation with all of the normal preamble sequences: Prevents false detection of the RA as a normal preamble by a legacy MS.

**[0054]** Based on these requirements it could be possible to use either: PN (pseudo-noise) sequences as used in the IEEE 802.16 standard; Golay sequences [4] [5]; or CAZAC sequences (Constant Amplitude & Zero Auto Correlation) (see [3] for more information on use of CAZAC sequences for training) such as Chu [2] and Frank-Zadoff [1] sequences to construct the relay-amble. All of these sequences are known to exhibit some or all of the required properties and hence have been previously proposed for use in forming such training or identification sequences.

**[0055]** However, depending on the sequence types used for the normal preamble and the ability to provide a set of sequences with the properties listed above, it might not be possible to consider use of any of the sequence types. For example, if PN sequences are used for the normal preamble, then it could be found that it is not possible to generate a sufficient number of further PN sequences with the properties listed (for example low PAPR) for the relay-amble set. In which case, it would be more appropriate to use a set of sequences of a different type, ensuring that the selected set

of relay-ambles maintain the required properties of low correlation with all the normal preamble sequences.

#### Transmission Process of RA at the BS or RS

**[0056]** The BS or RS that is transmitting an RA will first decide on the location of the RA transmission within the downlink sub-frame. As mentioned earlier, the transmission could be located anywhere within the frame. However, it is possible to envisage that certain formal frame structures may be required to support relaying that limit the flexibility afforded to the transmitter in placement of the RA.

**[0057]** Once the location of the RA within the frame is determined, the transmitter then determines the amount of transmission resource that will be allocated to the RA. Various factors will have an effect on this decision including: the effective frequency reuse to be achieved at a multi-sector transmitter; the requirement to reduce interference; the amount of transmission resource that will be utilized by the BS to RS or RS to RS data transmission; the method used for separating different transmitters operating on the same frequency in a cellular network; and also the type of sequence used to form the RA.

**[0058]** One solution is to form an RA zone in the downlink sub-frame, as shown in FIG. 1(a). Here a whole OFDM symbol is reserved for RA transmission. An alternative approach is to allocate a sub-band or region of the downlink sub-frame to the RA transmission, as shown in FIG. 1(b).

**[0059]** The former is appropriate if the whole band is available for BS to RS or RS to RS data transmission, whilst the latter could be adopted to minimize the amount of transmission resource required if a full symbol is not required as could be the case if the set of RAs is small or the BS to RS or RS to RS data transmission is only utilizing a part of the total frequency transmission resource (i.e. a sub-band).

**[0060]** Once a zone or region is defined within the transmitter, the transmitter then determines the usage of the transmission resource within the zone or region. Numerous usage scenarios can be envisaged, including: all tones are allocated for RA transmission; the total number of tones are decimated so that the RA is allocated to every second, third, fourth, etc, tone; a contiguous sub-band of tones is allocated. Each of these mechanisms is illustrated in FIG. 2 for the case of an RA zone. It is also possible to extend the proposed methods to the case of an RA region.

**[0061]** The benefit of the first approach is that it enables accurate channel estimation as each tone is illuminated with a known transmission enabling distortion to be determined on each individual subcarrier. The benefit of the second approach is that in a frequency reuse 1 scenario, by decimating the tones and using different offsets of decimated sequences at different transmitters it is possible to achieve an effective frequency reuse of greater than 1. An example could be a three sector site, where a decimation factor of three is employed at each sector using an incrementing offset of the starting subcarrier number on each sector (i.e. sector 1 uses subcarriers {0, 3, 6, etc}, sector 2 uses {1, 4, 7, etc} and sector 3 uses {2, 5, 8, etc}). The benefit of the third approach is that similar to the case above, it is possible to achieve an effective frequency reuse of greater than 1 by assigning different sub-bands to different sectors.

**[0062]** Now that the number and location of the available tones for the transmitter is decided, the final stage is to generate the training and identification sequence to be

transmitted on the identified tones. As discussed previously, it is possible to make use of a number of different well known sequences for this purpose.

**[0063]** It is worth noting that in a synchronous cellular network, it is likely that the zone or region allocation will be performed in some network management entity (this could be located within the core network or within one of the transmitters). Also the same situation may exist for the case of allocation of a particular sequence to a transmitter, especially if the sequence is conveying inherent identification parameters. This network management entity will then ensure that the location of the zone or region across all transmitters in the cellular network is harmonized. This then prevents interference between RA transmissions from one transmitter and data transmissions from another, which could be significant especially if the RA transmission power is boosted due to its lower PAPR properties. It will also ensure that the allocation of identification parameters ensures that from a receiver point of view, it will never experience receiving the same identification from two visible transmitters (i.e. there is sufficient spatial separation between the reuse of the same identification sequence).

**[0064]** Finally, the transmitter (RS/BS) may include some signaling information in the broadcast message to indicate the existence and location of the RA zone or region to the RS, alternatively it may also include signaling information in a multicast or unicast message specifically directed towards the RS to inform it of the RA existence.

**[0065]** In summary, FIG. 3 provides a flowchart that describes the interaction between the network management entity and the base stations which are to transmit an RA. FIG. 4 provides a flowchart that describes the interaction between an RS that has entered into an already operational network and the BS or RS to which it is attempting to associate. Finally, FIG. 5 outlines the RA reception and processing procedure in the receiver.

**[0066]** In summary, the benefits of particular embodiments may include:

**[0067]** Enabling an RS to maintain synchronization (time & frequency) with a BS or another RS in the case that it cannot receive the identification and training information generated for use by the MS.

**[0068]** Enabling an RS to use the sequence to update its estimate of the channel state information.

**[0069]** Preventing the operation of a legacy MS (that is not being designed to operate in a relay system) from being disturbed by the transmission of a further training and identification signal.

**[0070]** Enabling an RS to scan and monitor the quality of the received signal from other neighboring BSs or RSs to which it could potential associate with.

**[0071]** Embodiments of the present invention may be implemented in hardware, or as software modules running on one or more processors, or on a combination thereof. That is, those skilled in the art will appreciate that a microprocessor or digital signal processor (DSP) may be used in practice to implement some or all of the functionality of a transmitter embodying the present invention. The invention may also be embodied as one or more device or apparatus programs (e.g. computer programs and computer program products) for carrying out part or all of any of the methods described herein. Such programs embodying the present invention may be stored on computer-readable media, or could, for example, be in the form of one or more signals.

Such signals may be data signals downloadable from an Internet website, or provided on a carrier signal, or in any other form.

**[0072]** Although the present invention has been described with several embodiments, a myriad of changes, variations, alterations, transformations, and modifications may be suggested to one skilled in the art, and it is intended that the present invention encompass such changes, variations, alterations, transformations, and modifications as fall within the scope of the appended claims.

#### References

- [0073]** [1] Frank R L, Zadoff S A. Phase shift codes with good periodic correlation properties. *IEEE Transactions on Information Theory* pp. 381-2; October 1962.
- [0074]** [2] Chu D C. Polyphase codes with good periodic correlation properties. *IEEE Transactions on Information Theory* pp. 531-2; July 1972
- [0075]** [3] Milewski A. Periodic sequences with optimal properties for channel estimation and fast start-up equalization. *IBM Research and Development Journal* pp. 426-31; September 1983.
- [0076]** [4] M. J. E. Golay, "Multislit spectroscopy," *J. Opt. Soc. Amer.*, 39, pp. 437-444, 1949.
- [0077]** [5] M. J. E. Golay, "Complementary series," *IRE Trans. Inform. Theory*, IT-7, pp. 82-87, April 1961.

What is claimed is:

1. A transmission method for use in a multi-hop wireless communication system, the system comprising a source apparatus, a destination apparatus and one or more intermediate apparatuses, said source apparatus being operable to transmit information along a series of links forming a communication path extending from the source apparatus to the destination apparatus via the intermediate apparatus, and the intermediate apparatus being operable to receive information from a previous apparatus along the path and to transmit the received information to a subsequent apparatus along the path, the system having access to at least one predetermined transmission introduction sequence and also having access to a time-frequency format for use in assigning available transmission frequency bandwidth during a discrete transmission interval, said format defining a plurality of transmission windows within such an interval, each window occupying a different part of that interval and having a frequency bandwidth profile within said available transmission frequency bandwidth over its part of that interval, each said window being assignable for such a transmission interval to at least one of said apparatuses for use in transmission, the method comprising:

when transmitting a message with a preamble in a particular transmission interval, transmitting the preamble in a first transmission window of that transmission interval; and

transmitting the transmission introduction sequence in a second transmission window of that transmission interval other than the first transmission window as control information for use by at least one said intermediate apparatus.

2. A transmission method according to claim 1, wherein the second transmission window is assigned to the source apparatus for transmission to at least one said intermediate apparatus.

3. A transmission method according to claim 1, wherein the second transmission window is assigned to at least one

said intermediate apparatus for transmission to at least one other said intermediate apparatus.

4. A transmission method according to claim 1, wherein the transmission introduction sequence is a preamble-type sequence identifying its transmitting apparatus and providing training information.

5. A transmission method according to claim 1, wherein the transmission introduction sequence is a sequence that is easily distinguished from the preamble, to avoid false detection of the transmission introduction as the preamble.

6. A transmission method according to claim 1, wherein the second transmission window has a fixed transmission frequency bandwidth which occupies the entire said available transmission bandwidth over its entire part of the transmission interval.

7. A transmission method according to claim 1, wherein the second transmission window has a fixed transmission frequency bandwidth which occupies a fraction of said available transmission bandwidth over its part of the transmission interval.

8. A transmission method according to claim 1, wherein a single said transmission introduction sequence is transmitted in said second transmission window.

9. A transmission method according to claim 8 wherein said single transmission sequence is transmitted by said source apparatus and at least one said intermediate apparatus and said transmission introduction sequence comprises a spreading code allowing separate identification of said source apparatus and said at least one intermediate apparatus.

10. A transmission method according to claim 1, wherein more than one said transmission introduction sequence is transmitted in said second transmission window.

11. A transmission method according to claim 10 wherein said source apparatus and at least one said intermediate apparatus each transmit an individual transmission introduction sequence using an individual allocation of the transmission frequency bandwidth to that apparatus.

12. A transmission method according to claim 11, using a multi-carrier transmission technique, wherein the individual bandwidth allocations are assigned using decimation.

13. A transmission method according to claim 11, using a multi-carrier transmission technique, wherein the individual bandwidth allocations are assigned using sub-bandwidth.

14. A transmission method according to claim 1, including transmitting signaling information indicating the existence of the second window.

15. The transmission method according to claim 1, wherein the time-frequency format is a format for a downlink or uplink sub-frame in a time-division-duplex communication system.

16. The transmission method according to claim 1, wherein said system is an OFDM or OFDMA system, and wherein the time-frequency format is a format for an OFDM or OFDMA downlink or uplink sub-frame of an OFDM or OFDMA time-division-duplex frame.

17. The transmission method according to claim 1, wherein each said discrete transmission interval is a sub-frame period.

18. The transmission method according to claim 1, wherein each said transmission window comprises a region in an OFDM or OFDMA frame structure.

19. The transmission method according to claim 1, wherein each said transmission window comprises a zone in an OFDM or OFDMA frame structure.

20. A multi-hop wireless communication system, the system comprising:

a source apparatus, a destination apparatus and one or more intermediate apparatuses, said source apparatus being operable to transmit information along a series of links forming a communication path extending from the source apparatus to the destination apparatus via the intermediate apparatus, and the intermediate apparatus being operable to receive information from a previous apparatus along the path and to transmit the received information to a subsequent apparatus along the path;

access means operable to access at least one predetermined transmission introduction sequence and to access a time-frequency format for use in assigning available transmission frequency bandwidth during a discrete transmission interval, said format defining a plurality of transmission windows within such an interval, each window occupying a different part of that interval and having a frequency bandwidth profile within said available transmission frequency bandwidth over its part of that interval, each said window being assignable for such a transmission interval to one of said apparatuses for use in transmission; and

transmission means for, when transmitting a message with a preamble in a particular transmission interval, transmitting the preamble in a first transmission window of that transmission interval, and for transmitting the transmission introduction sequence in a second transmission window of that transmission interval other than the first transmission window as control information for use by at least one said intermediate apparatus.

21. A network management entity operable to manage a multi-hop wireless communication system, the system comprising a source apparatus, a destination apparatus and one or more intermediate apparatuses, said source apparatus being operable to transmit information along a series of links forming a communication path extending from the source apparatus to the destination apparatus via the intermediate apparatus, and the intermediate apparatus being operable to receive information from a previous apparatus along the path and to transmit the received information to a subsequent apparatus along the path, the network management entity comprising:

access provision means operable to provide the communication system with access to a time-frequency format for use in assigning available transmission frequency bandwidth during a discrete transmission interval, said format defining a plurality of transmission windows within such an interval, including a first window for preamble transmission and a second window other than said first window for transmitting at least one predetermined transmission introduction sequence, each window occupying a different part of that interval and having a frequency bandwidth profile within said available transmission frequency bandwidth over its part of that interval, each said window being assignable for such a transmission interval to at least one of said apparatuses for use in transmission; and

transmission introduction sequence allocation means operable to provide at least one said transmission introduction sequence for use by at least one said

intermediate apparatus for transmission in said second transmission window of such a transmission interval.

22. A source apparatus for use in a multi-hop wireless communication system, the system comprising the source apparatus, a destination apparatus and one or more intermediate apparatuses, said source apparatus being operable to transmit information along a series of links forming a communication path extending from the source apparatus to the destination apparatus via the intermediate apparatus, and the intermediate apparatus being operable to receive information from a previous apparatus along the path and to transmit the received information to a subsequent apparatus along the path, the source apparatus comprising:

transmission introduction sequence means operable to access or produce at least one predetermined transmission introduction sequence;

format access means to access a time-frequency format for use in assigning available transmission frequency bandwidth during a discrete transmission interval, said format defining a plurality of transmission windows within such an interval, each window occupying a different part of that interval and having a frequency bandwidth profile within said available transmission frequency bandwidth over its part of that interval, each said window being assignable for such a transmission interval to one of said apparatuses for use in transmission; and

transmission means operable, when transmitting a message with a preamble in a particular transmission interval, to transmit the preamble in a first transmission window of that transmission interval, and to transmit the transmission introduction sequence in a second transmission window of that transmission interval other than the first transmission window as control information for use by at least one said intermediate apparatus.

23. An intermediate apparatus for use in a multi-hop wireless communication system, the system comprising a source apparatus, a destination apparatus and one or more intermediate apparatuses, said source apparatus being operable to transmit information along a series of links forming a communication path extending from the source apparatus to the destination apparatus via the intermediate apparatus, and the intermediate apparatus being operable to receive information from a previous apparatus along the path and to transmit the received information to a subsequent apparatus along the path, the intermediate apparatus comprising:

transmission introduction sequence means operable to access or produce at least one predetermined transmission introduction sequence;

format access means operable to access a time-frequency format for use in assigning available transmission frequency bandwidth during a discrete transmission inter-

val, said format defining a plurality of transmission windows within such an interval, each window occupying a different part of that interval and having a frequency bandwidth profile within said available transmission frequency bandwidth over its part of that interval, each said window being assignable for such a transmission interval to one of said apparatuses for use in transmission; and

transmission means operable, when transmitting a message with a preamble in a particular transmission interval, to transmit the preamble in a first transmission window of that transmission interval, and to transmit the transmission introduction sequence in a second transmission window of that transmission interval other than the first transmission window as control information for use by at least one said intermediate apparatus.

24. Software embodied in a computer-readable medium and operable, when executed on a computing device of a multi-hop wireless communication system causes the system, to carry out a transmission method, the system comprising a source apparatus, a destination apparatus and one or more intermediate apparatuses, said source apparatus being operable to transmit information along a series of links forming a communication path extending from the source apparatus to the destination apparatus via the intermediate apparatus, and the intermediate apparatus being operable to receive information from a previous apparatus along the path and to transmit the received information to a subsequent apparatus along the path, the system having access to at least one predetermined transmission introduction sequence and also having access to a time-frequency format for use in assigning available transmission frequency bandwidth during a discrete transmission interval, said format defining a plurality of transmission windows within such an interval, each window occupying a different part of that interval and having a frequency bandwidth profile within said available transmission frequency bandwidth over its part of that interval, each said window being assignable for such a transmission interval to at least one of said apparatuses for use in transmission, the method comprising:

when transmitting a message with a preamble in a particular transmission interval, transmitting the preamble in a first transmission window of that transmission interval; and

transmitting the transmission introduction sequence in a second transmission window of that transmission interval other than the first transmission window as control information for use by at least one said intermediate apparatus.

\* \* \* \* \*