

(12) **UK Patent Application** (19) **GB** (11) **2 385 845** (13) **A**

(43) Date of A Publication 03.09.2003

(21) Application No 0204208.3

(22) Date of Filing 22.02.2002

(71) Applicant(s)  
**G W Pharma Limited**  
**(Incorporated in the United Kingdom)**  
**Porton Down, Science Park, SALISBURY,**  
**Wiltshire, SP4 0JQ, United Kingdom**

(72) Inventor(s)  
**Rajiv Bobby Dave**

(74) Agent and/or Address for Service  
**Boult Wade Tennant**  
**Verulam Gardens, 70 Gray's Inn Road,**  
**LONDON, WC1X 8BT, United Kingdom**

(51) INT CL<sup>7</sup>  
**A61J 7/04 , A61M 15/00**

(52) UK CL (Edition V )  
**B8N NKB NKG N503**  
**A5T TED**

(56) Documents Cited  
**GB 2368061 A** **WO 1994/016755 A**  
**US 5694919 A**

(58) Field of Search  
UK CL (Edition T ) **A5T TBD TBE TED, B8N NHCB NKD**  
**NKG NN NP**  
INT CL<sup>7</sup> **A61J, A61M, G01F**  
Other: **Online:WPI, EPODOC**

(54) Abstract Title  
**Dose dispensing apparatus**

(57) A dispensing system arranged to dispense medication from a dispenser. The dispenser having a locking mechanism to selectively prevent dispensing, and a means to monitor its location. The system having a control means to activate the locking mechanism if the dispenser is not at or within a fixed location.

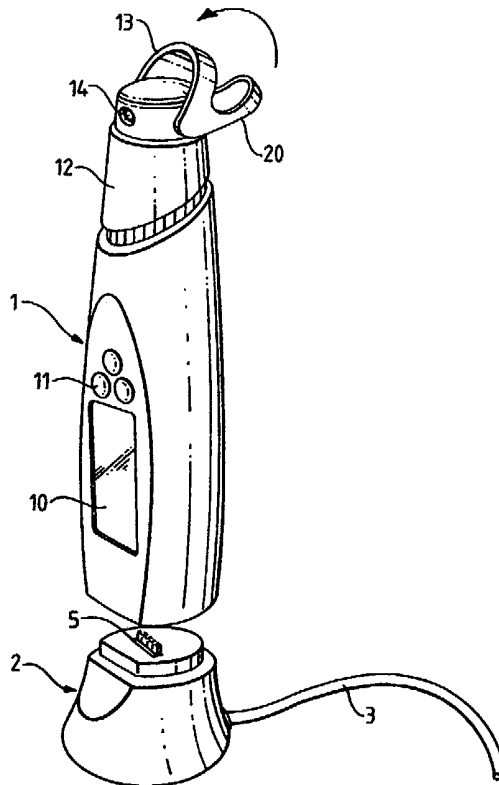


FIG. 1

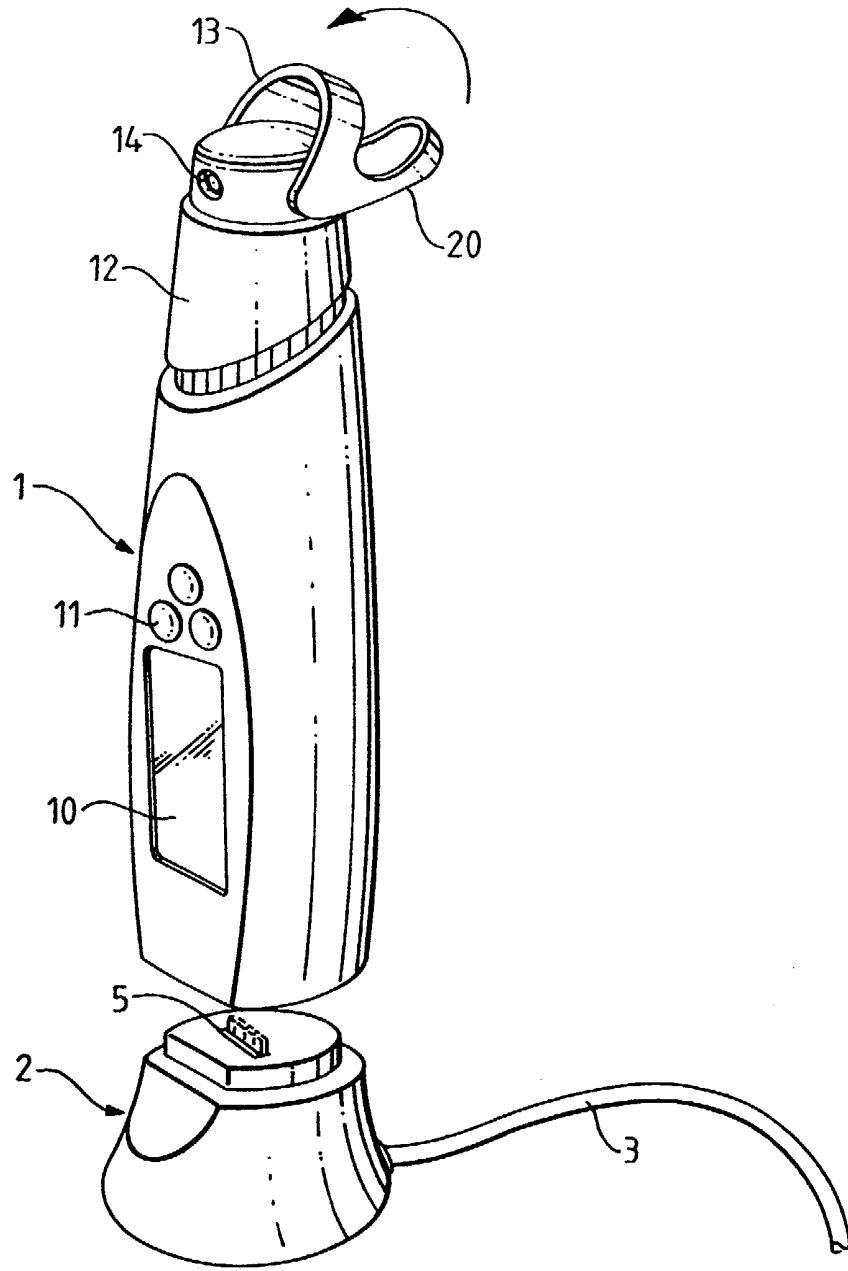


FIG. 1

FIG. 2

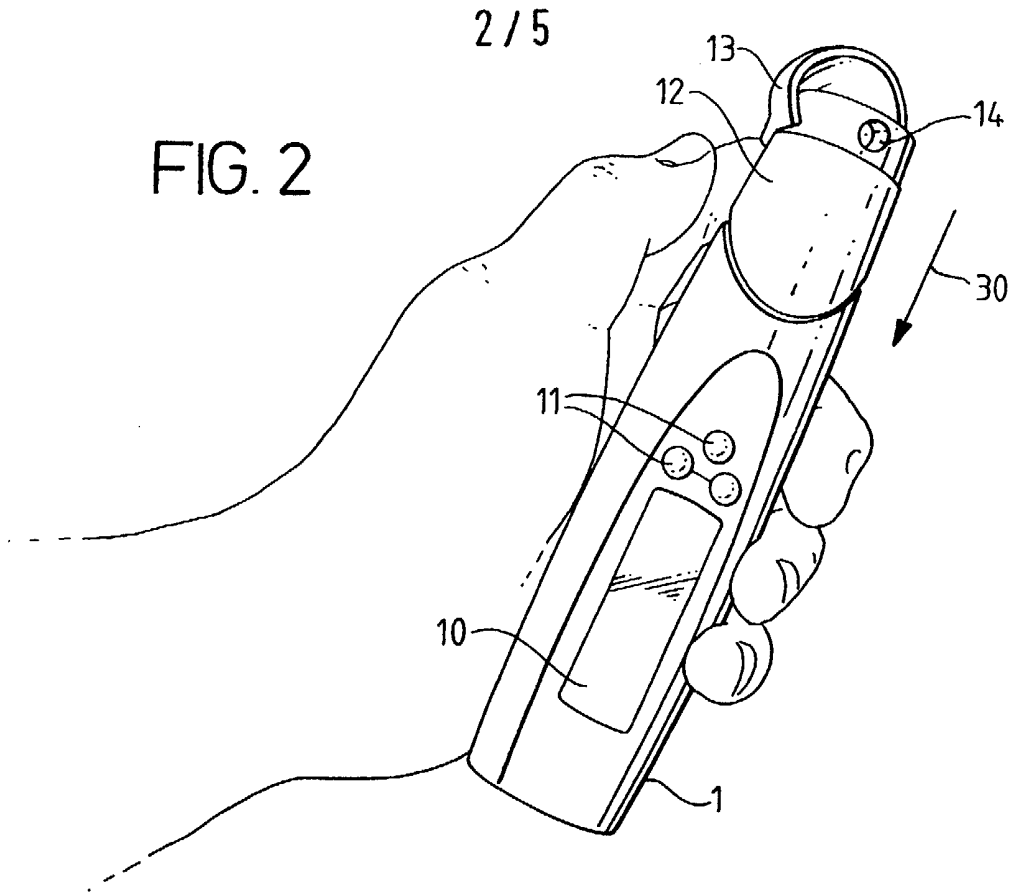
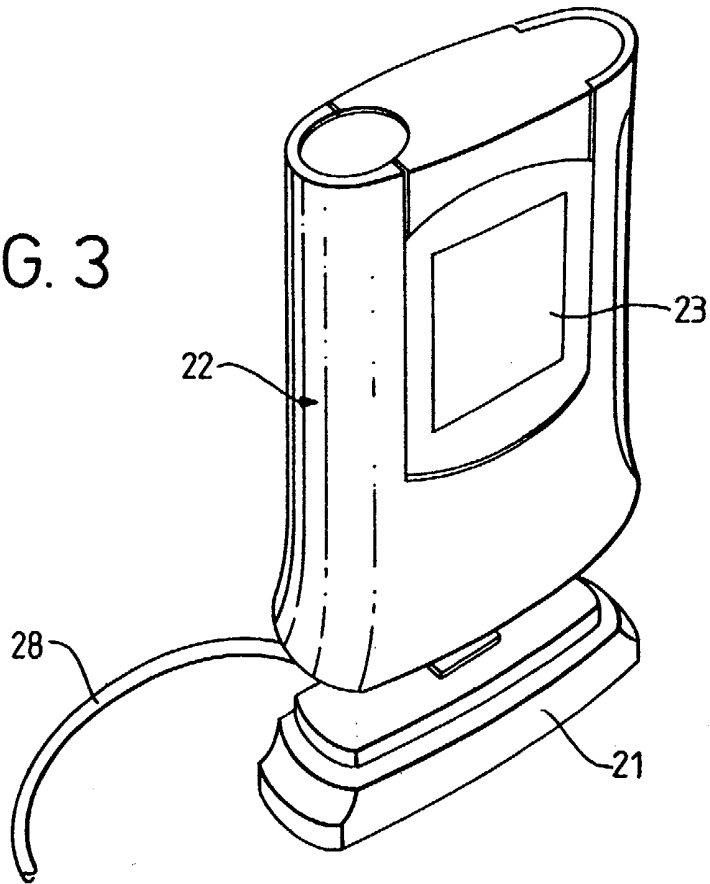


FIG. 3



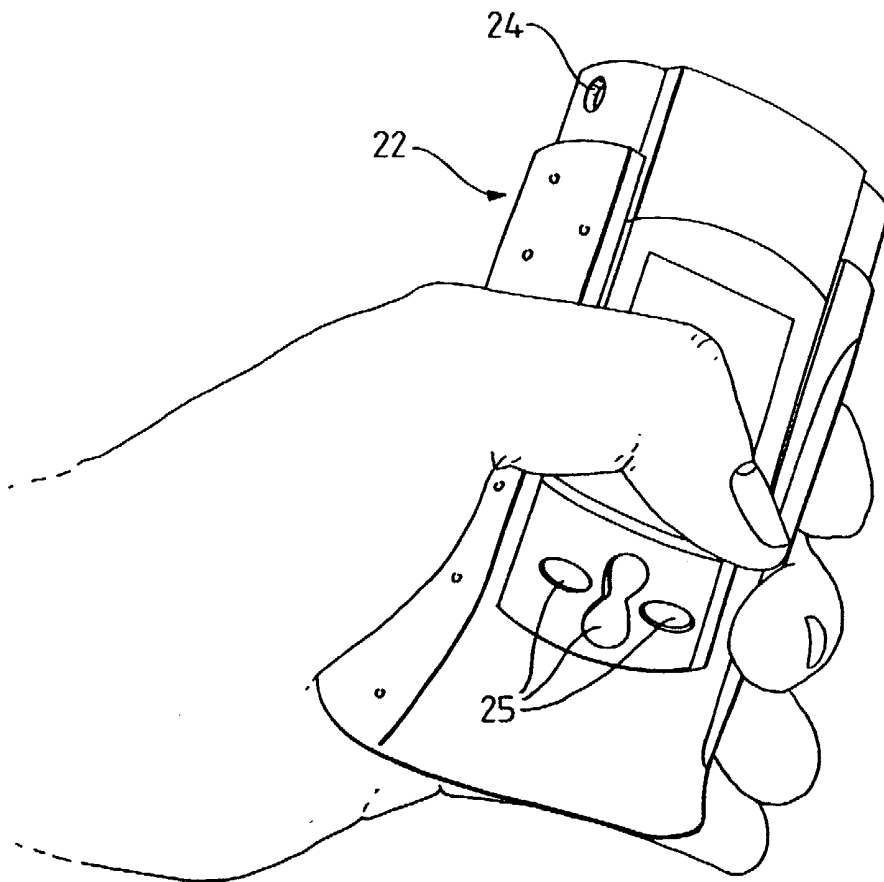


FIG. 4

FIG. 5a


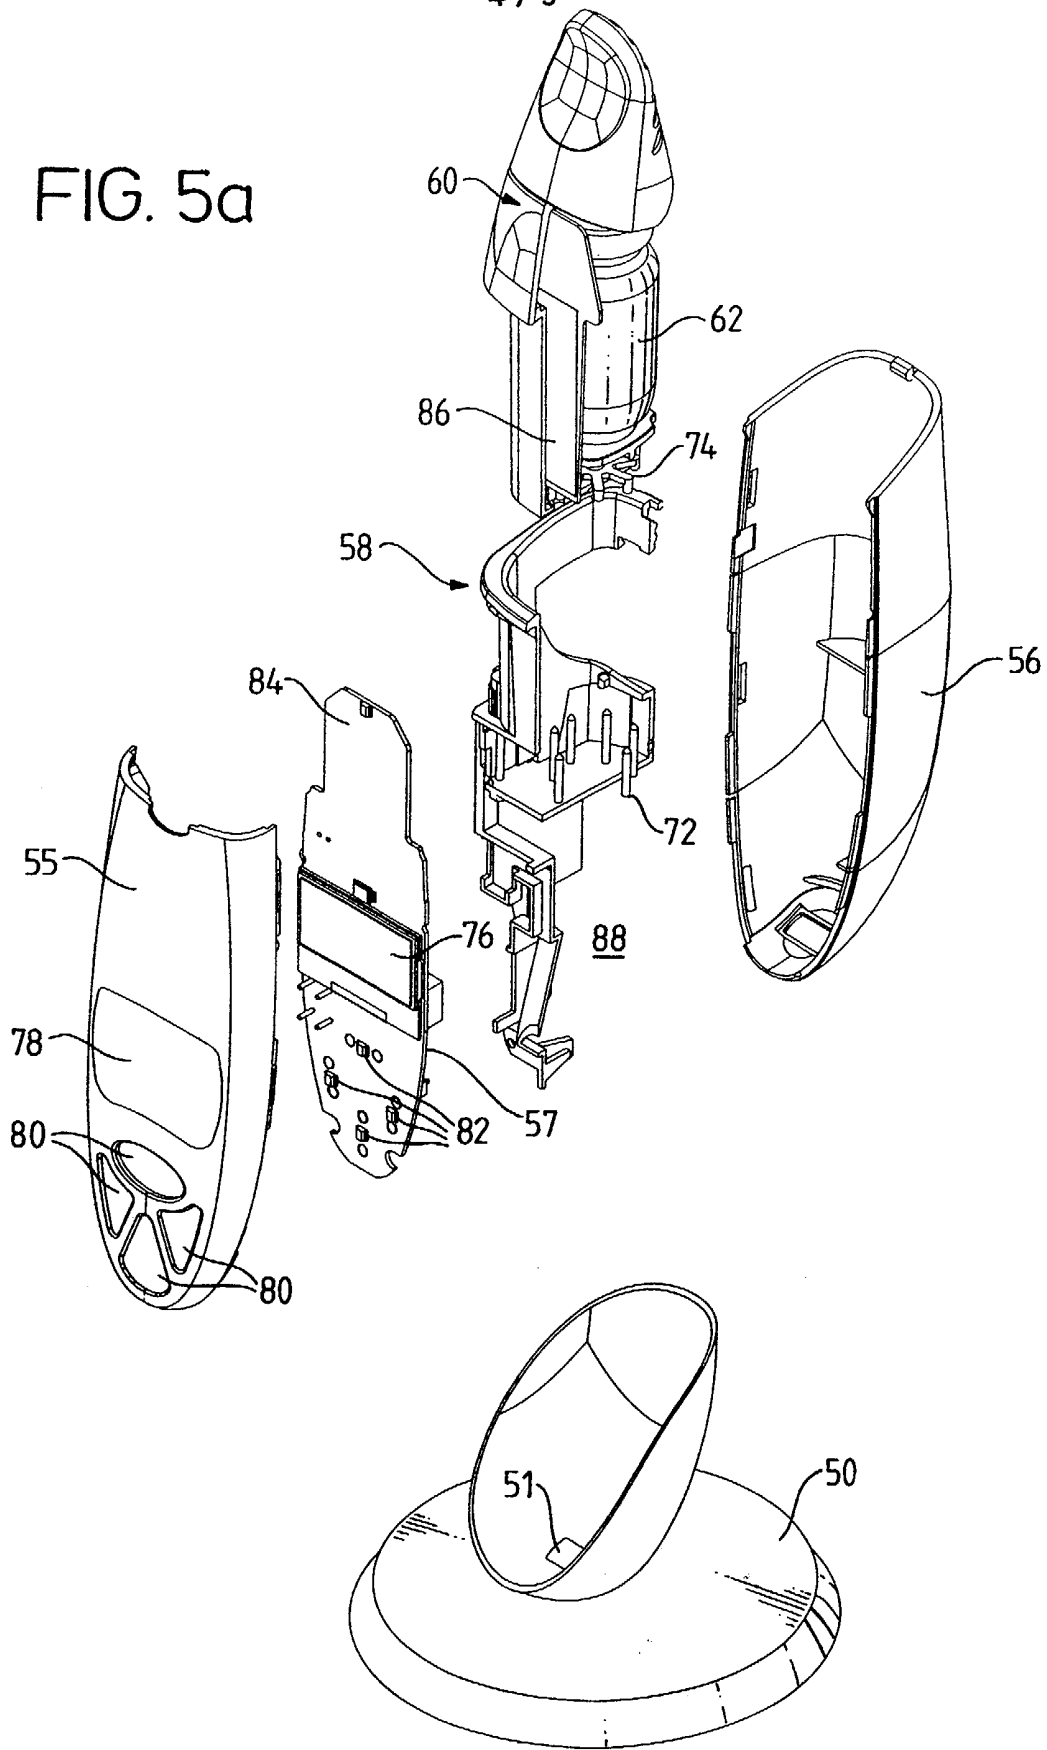


FIG. 5b

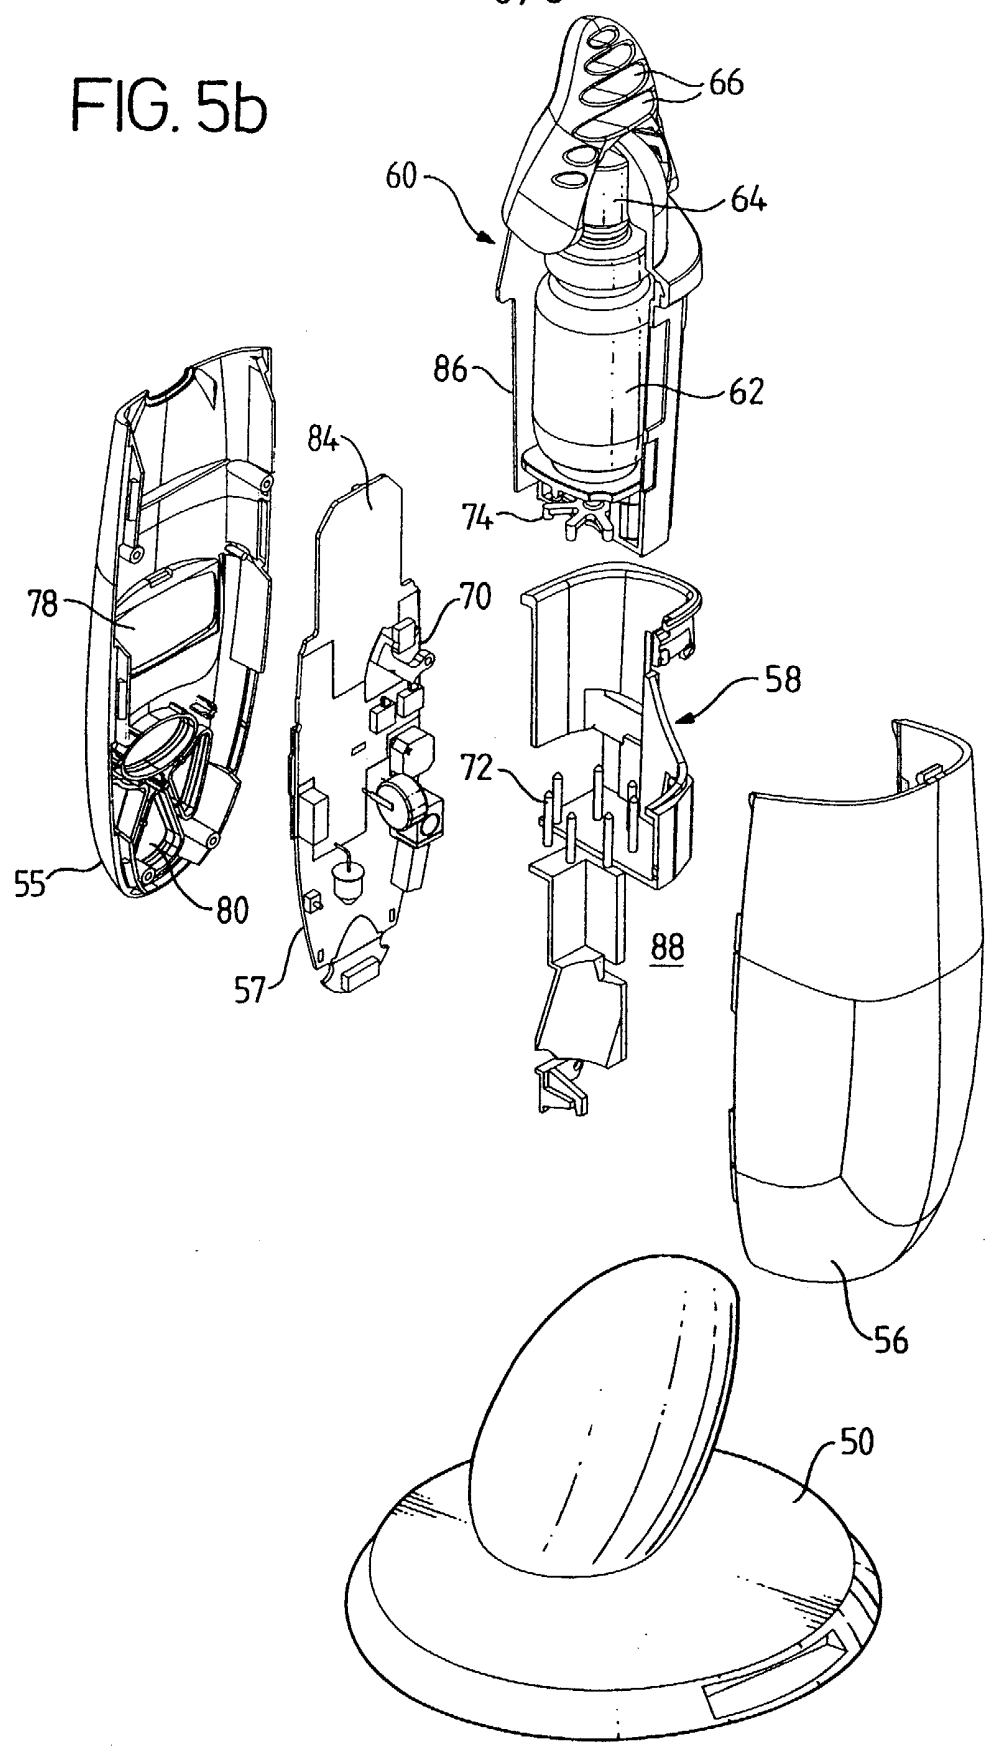

DOSE DISPENSING APPARATUS

5 This invention relates to dose dispensing apparatus,  
particularly though not exclusively for dispensing  
doses of drugs and other like medicaments. It can,  
however, be used in analogous areas where controlled  
dispensing of materials is desired. It is of  
particular value for dispensing measured doses of  
fluent medication from a storage container containing  
10 a reservoir of such medication, although it can also  
be used to dispense unit dosages of solids each as,  
for example, tablets.

15 Pharmaceutical packaging is normally designed to make  
access by the patient easy and unrestricted. There  
are, however, situations where considerations of  
safety and security make it necessary to control and  
record the usage of medicines by patients.  
Additionally, supervision of dosage by medical,  
20 nursing and care staff is time-consuming and costly,  
particularly if the patient is not in hospital or  
other care facility. This is especially the case if  
the patient needs to take a combination of medicines  
with a strict regime of medication. Also, while in  
25 the case of many medicaments and pharmaceuticals the  
dosage regime may be subject to wide variation without  
potential danger to the patient on the one hand or  
loss of effectiveness of the medication on the other,  
it is well understood that medication is desirably  
30 effected using a regular dosage regime. It is found  
that this is not always easiest achieved simply by  
relying on a patient to follow written instructions.  
Attempts have accordingly been made to develop devices  
which are themselves essentially "programmed" to  
35 dispense medicament at the correct intervals, but such  
systems have tended to be of narrow applicability and  
complex and, indeed, to be easily defeated. Thus,

suggestions have been made in the case of multiple pill-based medication regimes, to provide automated dispensing devices. US-A-5,752,621 and US-A-5,472,113 both disclose apparatus which can be used to dispense, at appropriate times, various pills in appropriate combinations. Further prior art dispensing apparatus is referred to in each of these specifications.

Devices for dispensing fluent materials such as drugs and medicaments are known in a wide variety of forms. Generally they consist of a container which is sealed and from which a suitable dose of material may be ejected. One particular widespread presentation for drugs, particularly the treatment of asthma, is that of a small pressurised canister having a valve at one end and a dispensing tube fitted with a nozzle. So-called inhalers are well-known and widely used by asthmatics. In principle, however, such a presentation is not in any sense restricted to drugs for use in treating asthma, but can be used for a wide variety of medicaments and pharmaceuticals. The mode of administration additionally does not always have to be by way of an aerosol spray. For example, it is entirely conceivable to dispense pasty or creamy formulations from a canister with some form of pump valve on it. Even discrete dosage forms such as pills may be presented in container from which pills may be released one at a time. This is a particularly preferred dosage approach presentation for homeopathic remedies where it is believed highly desirable that the pill may be taken without being handled by the person taking it more than strictly necessary. Alternatively, pills may be incorporated into a strip or ribbon which may be fed out from a cassette or the like one by one, and released from the strip for administration.



A separate consideration in connection with the administration of medicaments arises in the case of controlled clinical trials, or even, though to a lesser extent, patient monitoring. It is particularly  
5 important in a controlled clinical trial to ensure not only that the dosage regime is followed, but that a positive record is secured which enables that to be verified. Any such system should, of course, not be capable of being falsified by the patient.

10

A further separate consideration which applies in some cases is the strong desirability of avoiding overdosing. This can be of particular importance in the case of medicaments used in diabetes treatment  
15 where they can have extremely adverse effects if not used in the right quantity at the right time.

Yet a further problem which arises in connection with the controlled administration of medicaments in  
20 unsupervised conditions is to ensure that the right medicament is being administered, and in the case of controlled or prescription medicines, that no diversion occurs.

25 We have now found that substantial advantages may be obtained, but in cost-effective fashion, by providing improved dispensing systems which enable a dose of medicament or the like to be dispensed from a sealed or sealable container in accordance with a pre-  
30 programmed regime and which are so arranged that the regime must essentially be adhered to.

In our earlier PCT/GB01/04689 there is provided a dispensing system consisting of a programmable  
35 dispensing mechanism adapted to receive a sealed or resealable container containing multiple doses of material to be dispensed, and including a mechanical

actuation mechanism which, when actuated, causes a measured dose of material to be dispensed from the material container, and wherein the mechanism may be inhibited from operation by a locking mechanism which, when actuated, locks the device against the further dispensing of a dose of material until released in accordance with a desired dispensing programme, and wherein the container and dispensing mechanism are provided with means enabling the authenticity of the container placed in the dispensing mechanism to be checked.

Such release may be effected, for example, merely by the passage of sufficient time or, and this is generally preferred, by means of the release of a suitable latching mechanism which acts to lock the device against dispensing until such release is effective. The latching mechanism may be mechanical, electrical or electromechanical, but, in every case, must be as a whole programmable with the desired dosage regime. The release may be effected by suitable actuation locally or by remote control.

Preferably the container has an identification tag associated therewith and containing information about its content, and the dispensing mechanism includes means for addressing the tag and validating the dosage regime in accordance with a preset programme. The tag may take the form of a simple marking on the face of the container such as a barcode, or it may be a more sophisticated form of tag including data about the medicament and even being in the form of a "smart card" which enables information not only to be extracted from the tag but also written to the tag.

It is particularly preferred to provide a dispensing system in two parts, one of which can be envisioned as

a hand-held hand-actuated dispensing mechanism and the other as a base or docking station into which the hand-held unit may be placed in order to release the latch. Such a docking or base station may be more or less sophisticated and may be self-standing, or alternatively it may operate in cooperation with a remote overall control system, for example a remote computer. In one specific aspect of the present invention, the docking station may contain transmitter/receiver means for communicating with a central control computer enabling exchange of signals/data between the remote computer and the base or docking station and accordingly, if the dispensing device is placed in the base or docking station, between the remote computer and the dispensing device. In such a system, it is entirely possible to arrange by means of suitable programming and suitable easily implemented electronics that the dispensing history of the hand-held device can be uploaded to a central remote computer at the same time or adjacent in time to the remote computer sending the hand-held device appropriate control signals.

The means of communication between a base or docking station and a remote computer can be any appropriate means, for example using cellular telephony techniques, via the Internet or via any other appropriate communications mechanism.

It is also possible to provide, in the hand-held dispensing device, means for communicating with a separate standard computer device, for example a personal computer, palm-top, PDA or WAP telephone. By including an infra-red communications port in the hand-held device, once communication is established by placing the device in or near the docking station and actuating communication, a dialogue may be established

between the patient and a host computer or even with a  
physician or other adviser. Thus, it is possible, at  
the same time as dealing with the basic reporting of  
past use of the device, to enable the patient to fill  
5 in a questionnaire, or to enter into the system a  
query about their condition or a report of current  
state of health. This "telemedicine" aspect to the  
dispensing system of the present invention provides  
very substantial flexibility of communication between  
10 patient and doctor, and enhances clinical care  
opportunities.

The present invention aims to provide an improved  
dispensing system. In particular, the present  
15 invention aims to provide an additional degree of  
control of the dispensing operation.

In accordance with the present invention, there is  
provided a dispensing system consisting of a  
20 programmable dispensing mechanism adapted to receive a  
sealed or resealable container containing multiple  
doses of material to be dispensed, and including a  
mechanical actuation mechanism which, when actuated,  
causes a measured dose of material to be dispensed  
25 from the material container, and wherein the actuation  
mechanism may be inhibited from operation by a locking  
mechanism which, when actuated, locks the device  
against further dispensing of a dose of material until  
the release in accordance with a desired dispensing  
30 programme: further comprising means to monitor the  
location of the dispensing mechanism and actuate the  
locking mechanism if the dispensing mechanism is not  
at or within an authorised location.

35 Thus, the invention allows those prescribing  
medication to be able to control the location where  
the medication is taken. For example, the dispensing

system can be configured such that it will only dispense medication in a specific clinic or hospital.

5 In its simplest form, the means to monitor the location of the dispensing mechanism may be a means to monitor when the dispensing mechanism is beyond a given radius from a fixed point. For example, a docking station may be provided with an RF link to the dispensing mechanism. In this case, the means to  
10 monitor the location is able to determine the distance between the docking station and the dispensing system and to actuate the locking mechanism if the dispensing mechanism is further than a given distance from the docking station.

15 For a more sophisticated system the absolute position of the dispensing mechanism may be detected, for example using a global positioning (GPS), cellular positioning (CPS) or triangulation system. This will  
20 provide operators with greater flexibility to limit the dispensing of material to certain regions.

Preferably, the container and dispensing mechanism are provided with means enabling the authenticity of the  
25 container placed in the dispensing mechanism to be checked.

Preferably, the dispensing mechanism is a portable, hand-held device. The device preferably includes the  
30 locking mechanism, and a separate base or docking station is provided into or near which the hand-held unit must be placed in order to release the locking mechanism.

35 In the case of clinical trials or similar procedures, operating in this way enables a substantial degree of control and monitoring to be easily and cost-

effectively carried out without the ease of use of the medicament for the user or patient being compromised.

5 The invention is illustrated by way of example with reference to the accompanying drawings in which:

Figure 1 shows a drug dispensing unit and base station in accordance with the present invention,

10 Figure 2 shows the unit of Figure 1 about to be used,

Figure 3 shows an alternative general view of an alternative dispensing unit and base station,

15 Figure 4 shows the unit of Figure 3 in use, and

20 Figures 5a and 5b show in exploded view from front and back respectively a third embodiment of a drug-dispensing unit and base station in accordance with the invention.

Referring to the drawings, Figure 1 shows a dispensing unit generally denoted 1 which can be placed on top of a base unit generally denoted 2. The base unit is  
25 connected via a power and signal cable 3 with appropriate related apparatus, for example to a telephone socket or to a PC interface card. The upper face of the docking station 2 carries a row of connector terminals 5 which can, when the dispensing  
30 unit 1 is placed on the docking station, electrically contact corresponding members (not shown in Figures 1 and 2) located on the underside of the dispensing unit 1.

35 The dispensing unit itself is provided with a liquid crystal display screen 10 and some function buttons 11, and has at its upper end a nozzle actuation cap 12

with a lowerable closure tab 13 which can be used to cover an aerosol outlet 14 in cap 12, thus preventing the aerosol outlet being clogged with dust, dirt or other contamination.

5

Cap 12 may be releasable from the upper end of the main body of the dispensing device as shown in the drawings to enable a pressurised canister with a standardised outlet tube to be located within it, the outlet tube being registered with an appropriate aerosol nozzle 14. By pressing the cap 12 down into the main body of dispensing device 1, the aerosol valve may be actuated and a dose of material expelled, whereafter an electromechanical latch within the main body of the dispensing device 1 may act to prevent the cap 12 being pushed into the body of dispensing device 1 a second time until release occurs. Release may occur merely following the passing of a given period of time, but it is highly desirable more positively to control the ability of the device to dispense. For this purpose, it is straightforward to arrange that the latch within the main body of dispensing device 1 will remain locked to prevent a further depression of cap 12 until appropriate steps are taken to release it. For example, release may be effected remotely in accordance with a pre-programmed regime by placing the dispensing unit 1 on to the base station 2 and thereafter having the dispensing station and the base station communicate with one another, whereon, if appropriate, the internal latching may be released. The status of the dispensing device 1 may be shown on screen 10, both before and after placing on the base station. A number of push buttons 11 are provided in order to control input from the user, for example to enable the user to set up a communication link with the remote computer via the base station 2.

10

15

20

25

30

35

Once such a link has been established and e.g. the latch released so that a second dose may be dispensed, the dispensing device 1 may be removed from the base station, held in the hand as shown in Figure 2, and  
5 the cap again depressed in the direction of arrow 30 shown on Figure 2. It is easy to arrange that when such actuation occurs, the latch within the dispensing unit 1 re-engages to prevent a second dispensing action and separately the status of dispensing unit  
10 may change, the change being displayed in window 10.

Alternatively, the device may include suitable control circuitry internally, such circuitry acting to release locking and enable a further dose to be dispensed  
15 after a suitable period of time, and preferably including a rewritable memory store to maintain a record of when doses were in fact administered. The content of such a store may be automatically transferred to a store in the docking station when the  
20 device is docked, or transferred direct to a remote computer if desired.

As shown in Figure 1, the closure tab 13 which acts to shield ingress of dirt into the dispensing outlet 14  
25 has an angled out portion 20 which can be engaged by the forefinger of the left hand as shown in Figure 2 of the drawings in order to achieve dispensing.

Such an approach is not always desirable, or, indeed,  
30 convenient, and it may be particularly awkward for people with arthritis. Accordingly, Figures 3 and 4 show an alternative construction where dispensing is achieved by means of a lateral grip across a generally oval cross-section elongate housing which covers the  
35 dispensing device. Referring to Figures 3 and 4, the system consists again basically of a docking station 21 connected via cable 28 and a squeezable dispensing



unit 22. The latter has a display screen 23 in a  
slidable central section which can be slid up to  
reveal the nozzle of an aerosol dispensing nozzle 24  
which is visible in Figure 4, but not in Figure 3.  
5 Likewise visible in Figure 4 but not in Figure 3 is  
the set of control buttons 25 which enable the unit to  
be controlled by the user.

10 The mechanical construction enabling a squeezing  
movement exerted as shown in Figure 4 to be converted  
into an axial compression to release a dose from a  
pressurised container via the aerosol nozzle may be  
simply effected using appropriate standard mechanical  
constructions, and the mechanical arrangements for  
15 latching the device against an immediate second use  
can likewise be simply and appropriately constructed.  
Located within the housings of the respective  
dispensing devices 1 and 22 shown in Figures 1 and 3  
respectively are also appropriate electronics and a  
20 power supply or back-up power supply, for example one  
or more battery cells. If desired, the electronics  
may be rechargeable and recharging can take place when  
the respective dispensing unit is located on its  
docking station 2 or 21. This can obviously be  
25 effected automatically by appropriate design and  
programming.

30 Figures 5a and 5b show a further embodiment of the  
dispensing system, in each case in exploded view from  
front and back respectively. Referring to these  
figures, from which detail has been omitted for the  
sake of clarity, the system consists of a base station  
50 into which a hand-held dispenser can be set when  
needed. A contact pad 51 enables signals to be sent  
35 to and from the hand-held unit when it is placed in  
base station 50.

The hand-held unit consists basically of front and rear casing shells 55, 56 respectively which clip together round a circuit board 57 and an internal moulded receptacle unit 58. Shown above unit 58 in  
5 the drawing is a removable cartridge housing 60 which may be locked into place in the assembled housing or released therefrom as and when necessary. Cartridge housing 60 is designed to receive a container of medicament 62, here in the form of an aerosol spray  
10 canister with a dispensing nozzle 64 which lies in the upper part of housing 60 which is suitably configured to enable a dose of medicament to be dispensed sub-lingually via apertures 66.

15 Circuit board 57 bears a latch assembly 70 designed to interact with portions of housing 60 to enable the housing to be latched in place or removed upwardly from the rest of the device. The latching assembly also allows, at appropriate intervals controlled by  
20 programming, the housing 60 to be pushed down in the upper half of moulding 58 to enable a set of pins 72 to press on the ends of the arms of a spider 74 and so cause the container 62 to be pressed towards the nozzle 64, so dispensing a dose of medicament  
25 therefrom. After one (or if programmed appropriately more) such compressions, the latch assembly may lock the housing 60 against further such movement until released when the next dose of medicament is due to be  
30 dispensed. The exact nature of the operation of the spider 74 and associated components is described in more detail in our copending application filed on even date and claiming the priority of GB patent application 0025811.1

35 Circuit board 57 carries a display screen 76 visible through a window 78 in casing front 55. In use of the device, this screen can carry a message to the user,

for example indicating the state of the device, ready to dispense or locked. Casing front 55 also has four apertures 80 which, when the device is assembled, are filled with rubbery press buttons (not shown in the drawing), which enable actuation of four switches 82 set in circuit board 57. The upper end 84 of board 57 carries a printed RF antenna which enables the checking of a so-called RF tag 86 which forms part of the cartridge assembly. This enables the system to check just what medicament has been loaded into it when a fresh container 62 and associated tag 86 are inserted into the upper housing 60 and that housing latched into position in moulding 58.

The hand-held unit may be powered by a suitable battery which can fit in the area denoted 88 in the drawing.

It will be readily appreciated that using devices as shown in Figures 1, 4 and 5a/5b, the degree of control of dosage can be very high and the ease of recording and monitoring of the dosage regime is substantial. If, for example, the base station 2, 21 or 50 is connected into the normal telephone system, a central controlling computer can monitor the operation of the device by the user remotely, and any anomalous or undesired administration can be detected rapidly and appropriate immediate action taken. A further advantage is that, for example, a sounder is easily incorporated into the base unit which can be programmed by the central computer to emit an audible signal, e.g. to remind a user that dosage is overdue. The operating rules may provide that if within say 5 minutes of the emission of such an audible signal the user does not acknowledge having heard it, an appropriate record can be made of this event.

As noted above, the device may itself include appropriate control circuitry including a memory device. In such a case, it is possible to programme that circuitry (and a remote computer) so that when the device is first docked, it starts by establishing a communication link with the remote computer, which can then initially set-up the device with appropriate parameters for a patient. These could, for example, govern the length of a PIN No required to access the docking station and details of the proposed dosage regime, for example initially loading an expected running average based on the prior doctor/patient experience. This false average could form the foundation for a continuing running average that is calculated with time and use. This data would constitute a benchmark, enabling the device thereafter to monitor usage levels and to detect any incidence of deviation. The time and frequency of use, and other events such as opening of the casing or tampering with it, may be stored and uploaded to a central system as desired. The system may be programmed to issue restrictive orders on the patient's medication, or it may simply be programmed to report data, so as to highlight areas of concern and alert the appropriate GP or specialist for attention at the patient's next appointment.

As noted above with reference to Figures 5a/5b, in place of or supplementary to the downloading of data via a remote link, data may be stored with the container for the material to be dispensed. In some areas, there is already a requirement for a form of tagging on medicinal canisters that can be read or written to. This tag carries information as to the medication type, use-by dates, etc. and when used with a device according to the present invention, the tag may be accessed by the device (and/or via the docking

station), and the device could be programmed to write to the tag the number of doses left in case of removal from the device. The tag could have a large memory capacity free for other uses. On return of the  
5 canister to the pharmacist, the usage data written to the canister can then be interrogated. Data as to when the canister was used and by whom, would remain with the canister of medication that was dispensed. This method of data management may prove to be more  
10 convenient and effective in some cases than online monitoring with the device (including the canister) being mated with the docking station.

It can be seen that a wide variety of modifications  
15 may be made to the overall general construction and design described above, many of them easily made simply by changing computer programmes. Such changes could be made "online" when the hand-held unit is in the docking or base station and in communication with  
20 a host computer. The system is of particular value in the monitoring and analysis of administration during a controlled trial, enabling it to be highly automated and reliable. In particular, detection of activity outside the instructions or constraints of the trial  
25 can be immediately and automatically achieved.

In order to provide the ability to prevent the dispenser from dispensing when it is not an authorised location, a number of approaches may be adopted.  
30

Most simply, the dispensing unit 1 and base unit 2 of the example of Fig. 1 may be provided with an RF transmission mechanism. Signals received by the base unit 2 from the dispenser 1 are analysed by the  
35 control circuitry to determine whether or not the dispensing unit 1 is within an authorised radius of the docking station. If so, the control circuitry

will release the locking mechanism. If not, the locking mechanism will remain in place. Similar considerations apply to the example of Figs. 5a and 5b, where distance from the base station 50 can be monitored.

Alternatively, the location of a dispenser may be monitored using global positioning (GPS), cellular positioning (CPS) or a triangulation system.

5

10

15

20

25

**CLAIMS**

1. A dispensing system consisting of a programmable  
dispensing mechanism adapted to receive a sealed or  
5 resealable container containing multiple doses of  
material to be dispensed, and including a mechanical  
actuation mechanism which, when actuated, causes a  
measured dose of material to be dispensed from the  
material container, and wherein the actuation  
10 mechanism may be inhibited from operation by a locking  
mechanism which, when actuated, locks the device  
against further dispensing of a dose of material until  
the release in accordance with a desired dispensing  
programme:

15 further comprising means to monitor the location  
of the dispensing mechanism and actuate the locking  
mechanism if the dispensing mechanism is not at or  
within an authorised location.

20 2. A system according to claim 1, wherein the means  
to monitor the location of the dispensing mechanism is  
a means to monitor when the dispensing mechanism is  
beyond a given radius from a fixed point.

25 3. A system according to claim 1, wherein the means  
to monitor the location of the dispensing mechanism is  
a means to monitor the absolute position of the  
dispensing mechanism.

30 4. A system according to any one of the preceding  
claims, wherein the container and dispensing mechanism  
are provided with means enabling the authenticity of  
the container placed in the dispensing mechanism to be  
checked.

35 5. A system according to any one of the preceding  
claims, wherein the dispensing mechanism is a

portable, hand-held device.

6. A system according to claim 5, wherein includes  
the locking mechanism, and a separate base or docking  
5 station is provided into or near which the hand-held  
unit must be placed in order to release the locking  
mechanism.

10

15

20

25

30





INVESTOR IN PEOPLE

Application No: GB 0204208.3  
Claims searched: all

Examiner: R C Squire  
Date of search: 27 November 2002

### Patents Act 1977 Search Report under Section 17

#### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:  
UK CI (Ed.T): B8N (NKD, NKG, NN, NP, NHCB); A5T (TBE, TBD, TED)  
Int CI (Ed.7): A61M; A61J; G01F  
Other: Online: WPI, EPODOC

#### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	GB 2368061A      GW PHARMA	
X	WO 94/16755A      MIRIS (see particularly page 33 lines 20-28)	1 at least
X	US 5694919      RUBSAMEN (see particularly col.32 lines 47-54)	1 at least

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.