




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : H03J 1/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/08757 (43) International Publication Date: 17 February 2000 (17.02.00)</p>
<p>(21) International Application Number: PCT/EP99/05503 (22) International Filing Date: 27 July 1999 (27.07.99) (30) Priority Data: 09/128,839 4 August 1998 (04.08.98) US (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (72) Inventor: VAN EE, Jan; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: SCHMITZ, Herman, J., R.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).</p>		<p>(81) Designated States: CN, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i></p>

(54) Title: REMOTE CONTROL WITH ANIMATED GRAPHICAL USER INTERFACE

(57) Abstract

A remote control device for remote control of home theater equipment has a display with a touch screen representing a GUI. User-activation of the GUI causes its appearance to change. The change is effected through animation. Animation is the simulation of movement created by displaying a series of bitmaps. The animation lets the user perceive the change as a smooth transition. Thus the impression is avoided of an abrupt confrontation with a new lay-out.

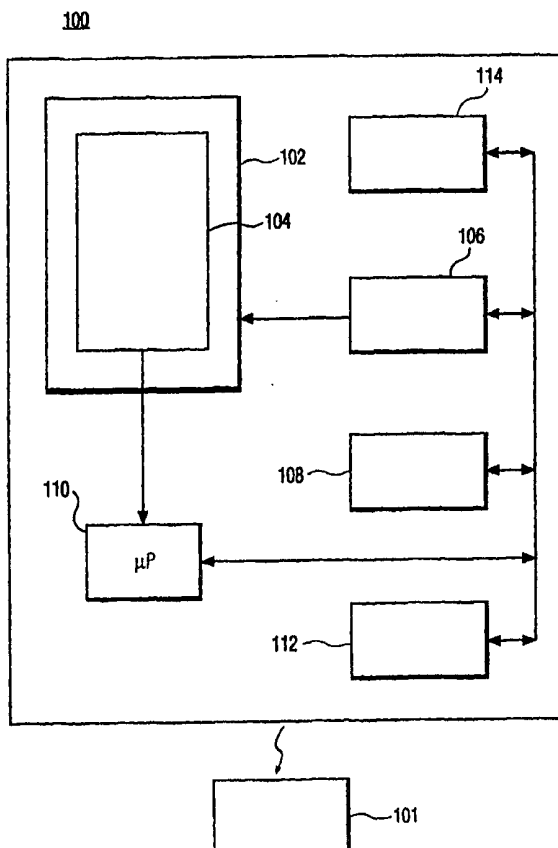

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

REMOTE CONTROL WITH ANIMATED GRAPHICAL USER INTERFACE

The invention relates to a handheld remote control device, in particular for control of consumer electronics or home theater equipment. The device has a GUI (graphical user-interface) with graphical representations for soft keys or icons that enable the user to control the equipment.

5

An interactive user-interface with graphical representations is commonly referred to as a GUI. Icons are well known in the art of graphical user-interfaces for control of a computer. An icon is a small pictorial representation of some larger set of information. An icon provides graphical information in a condensed format about contents or status of the underlying system. Icons are designed to trigger, through visual perception, operator concepts that communicate the contents or operation of the system in a quick manner. The system is accessed or operated upon through actuation of the icon.

An example of a controller unit for a home entertainment system is the Stage 3 Controller unit of Kenwood, described in Kenwood's publicly available manual "STAGE 3/ Setting up your KC-Z1 Controller", 1996. The control unit includes a hand-held controller with a touch screen functionality for the GUI. The GUI provides a large number of icons that correspond to a large number of system functionalities. The functionalities are activated through the icons on the touch screen. The GUI is user-programmable to select the icons that should be present in the main menu and those that should not. In addition, the control modes (e.g., IR control codes, balancing audio speaker system) of the components thus selected can be programmed.

Icons in general are meant to convey information to the user in a quick manner through an appropriate graphical representation. However, if a large number of icons are presented at any of a variety of levels in a hierarchy of icons, the user has to actually read, i.e., decipher, the screen's information content to locate the desired functionality. As a result, the user-friendliness of the system control aspects can easily be degraded if too much information is presented in too many different icon-arrangements.

The above emphasizes that the graphical design of a GUI, its lay-out and its icons, is crucial to the user-friendliness of the remote. Another aspect of GUI user-friendliness to be considered is the dynamics of the navigation among the panels of icons. The term
5 “panel” refers to the organization of one or more clusters of icons and soft keys. When the user activates a specific icon in the panel shown on the GUI of the known remote, the GUI changes to a next panel. The transition, however, is abrupt in the sense that the successive panels can be perceived by the user as unrelated until he/she actually reads the icons. The user may thus experience a lack of familiarity with the guidance throughout navigation among the
10 panels and a feeling of being confronted with information that is first to be interpreted anew to determine the context before the user can make a selection from the new panel’s menu. Especially in a home theater environment this distraction from the entertainment aspect is undesirable.

It is therefore an object of the invention to provide a remote control device that
15 has a user-friendly GUI with ergonomically designed panel visualization, more so than that of the prior art.

To this end, the invention provides a remote control device for remote control
20 of equipment such as a home theater. The remote has a display for display of a GUI that enables a user to interact with the device. User-interaction with the device causes the GUI to undergo a change in appearance. The change is effected through animation. Animation is the simulation of movement created by displaying a series of pictures, or frames, e.g., bitmaps. For example, a panel with clustered control options slides out of view and a next one slides
25 into view, or displayed icons slide to new positions while new icons appear, etc. Through the animation, the user perceives the development from one panel to the other as a continuous transition. The impression is created of a gradually changing lay-out, of scrolling panels, of sliding, rotating, expanding or contracting icons, etc. Thus, the animation avoids the impression of an abrupt confrontation with a new lay-out.

30

The invention is explained by way of example and with reference to the accompanying drawings, wherein:

Fig.1 is a diagram of a remote control device in the invention;

Figs.2-7 show a sequence of frames that give the impression of scrolling panels on the GUI of the remote when displayed at a proper rate; and

Figs. 8-12 show a sequence of frames to give the impression of a rotating icon on the GUI of the remote.

5 Throughout the figures, same reference numerals indicate similar or corresponding features.

Fig.1 is a block diagram with main components of a remote control device 100
10 in the invention for control of home theater equipment 101 through a wireless protocol in IR or RF. Remote 100 comprises a display 102 for display of a GUI and a touch screen 104 for activating a user-selectable option of the GUI. Display 102 comprises an LCD. Touch screen 104 is, for example, a resistive tablet. For more background on such input devices, see, for example, U.S. patents 5,402,151; 5,231,381; 5,777,607 and 5,767,458 of Philips Electronics,
15 all incorporated herein by reference. In the preferred embodiment, LCD 102 and touch screen 104 are physically integrated, and the combination has screen dimensions of about 77 x 58 mm for the active area, and about 81 x 62 mm for the visible area. The screen resolution is about 4 pixels per mm. Remote 100 comprises a frame buffer 106, an off-screen memory 108, a microprocessor 110, an object store 112 and a non-volatile memory 114. Frame buffer 106 is
20 coupled to display 102 and stores the information content shown on display 102. Off-screen buffer 108 stores bitmaps that are mapped into frame buffer 106 under control of a software bitblitter run on microprocessor 110. Microprocessor 110 receives user-input via touch screen 104 and translates the input into associated GUI actions via framebuffer 106 and off-screen buffer 108. Object store 112 lists the data to be rendered in off-screen buffer 108 and/or in
25 frame buffer 106 by microprocessor 110. Non-volatile memory 114 stores data files that describe the GUI. The description of the GUI is in a universal format, e.g., <"panel"; "parameters">, so that it can be interpreted platform-independently. Interpretation creates objects, e.g., in C++, for object store 212, or creates bitmaps for buffers 206 and 208, all under program control. The description is converted into objects, e.g., in C++, for object store 112,
30 or directly into bitmaps for buffers 106 and 108, all under program control. Buffers 106 and 108, and object store 112 can be parts of the same physical memory device. In the preferred embodiment, processor 110 is a MC68328 of Motorola. Buffers 106 and 108, together with object store 112 are implemented in a 512 kbyte SRAM, e.g., a KM616Y4000BLT-7L of

Samsung. Non-volatile memory 114 is, for example, a 1Mbyte flash memory TE28F800B3B90 of Intel.

The GUI has user-selectable menu options that are arranged in various panels and sections of panels. A panel is, for example, a cluster of options displayed together. Selecting a particular one of the options in a particular one of the panels through touch screen 104 causes the GUI to change its appearance, e.g., to another one of the sections or another one of the panels. Animation is used to visualize that another panel or section of the GUI is activated. These animations are implemented, for example, by using a combination of copying parts of bitmaps in off-screen buffer 108 to one or more areas in frame buffer 106, and filling other areas of frame buffer 106 with copies of some regions in frame buffer 106 in case a graphical representation is shifted across display 102. This is explained in more detail further below with reference to the examples of Figs.2-6.

Figs. 2-7 illustrate a sequence of images creating animation to give the impression that control panels 202 and 204 are scrolled in and out of view by actuating soft keys 206 for scroll up and 208 for scroll down. Panel 202 is, for example, a clustering of numerical soft keys for channel selection on a TV. Panel 204 is, for example, a cursor control menu with soft keys to move a cursor on a menu in an on-screen display of the TV (not shown) and to make a selection among the items. The scrolling is implemented by rendering a new panel 204 into off-screen buffer 108, and by a sequence of copy actions in frame buffer 106 to scroll new panel 204 into view and the old panel 202 out of view.

Figs.8-12 illustrate how animation is being used to indicate a specific state of a controlled piece of equipment. For example, a graphical representation of icon 700 is being rotated to indicate that remote 100 will not transmit an IR code in order to switch sources for a pre-amplifier (as in the DVX8000 of Philips Electronics, not shown) when a new device in the system has been activated. This is explained in more detail as follows. During normal operation of remote 100, selecting an apparatus of the home theater equipment, e.g., a TV, causes the preamplifier to switch to the apparatus selected. However, there are circumstances wherein the user should be able to control an apparatus without causing the pre-amplifier to switch to the apparatus newly selected. For example, the user has the DVD player (not shown) connected to the display of a TV apparatus (not shown) and is watching a DVD movie. The user now wants to rewind a video tape of the VCR (not shown). In normal operation, the user would go to the menu and select the VCR. However, this causes the tape in the VCR to be shown on the TV because the source would be switched. Remote 100 has been designed to allow the user to select an apparatus from the apparatus-menu without switching sources. A

hard key (not shown) on remote 100 is to be held depressed during selection from the menu in order to prevent source switching. To communicate to the user that selecting does not result into the undesired switching, i.e., the remote assumes a "no action" phase, icon 700 is rotated on its back. This animation has a number (here 5) of bitmaps, each displaying the
5 representation of remote 100, i.e., icon 700, from a different angle. The bitmaps are stored in off-screen buffer 108. Icon 700 is being rotated by copying consecutive bitmaps to frame buffer 106.

CLAIMS:

1. A remote control device (100) for remote control of equipment (101), wherein:
 - the device has a display (102) for display of a GUI;
 - the GUI enables a user to interact (104) with the device;
 - user-interaction with the device causes the GUI to undergo a change in appearance; and
 - 5 - the change is effected through animation.

2. The device of claim 1, comprising:
 - a frame buffer (106) coupled to the display;
 - an off-screen buffer (108) for storage of bitmap data; and
 - 10 - a bitblitter functionality (110) to copy data from the off-screen buffer to the frame buffer.

3. The device of claim 2, comprising:
 - an object store (112) for storing object data and
 - a rendering functionality (110) for rendering the object data in at least the off-screen buffer
 - 15 or the frame buffer.

4. The device of claim 1, wherein the animation creates an impression of scrolling a panel.

- 20 5. The device of claim 1, wherein the animation creates an impression of sliding a graphics element.

6. The device of claim 1, wherein the animation creates an impression of rotating a graphics element.
- 25

7. The device of claim 1, wherein the animation creates an impression of changing a size of a graphics element.

- 8 The device of claim 1, comprising a touch screen (104).

9. The device of claim 1, wherein the GUI comprises control information for control of consumer electronics equipment.
- 5 10. A method of enabling a user to interact with electronic equipment (101) through a hand-held remote control device (100), the method comprising:
- enabling the device to present a GUI for user-activation; and
 - changing the GUI through animation upon a user-interaction with the GUI.

100

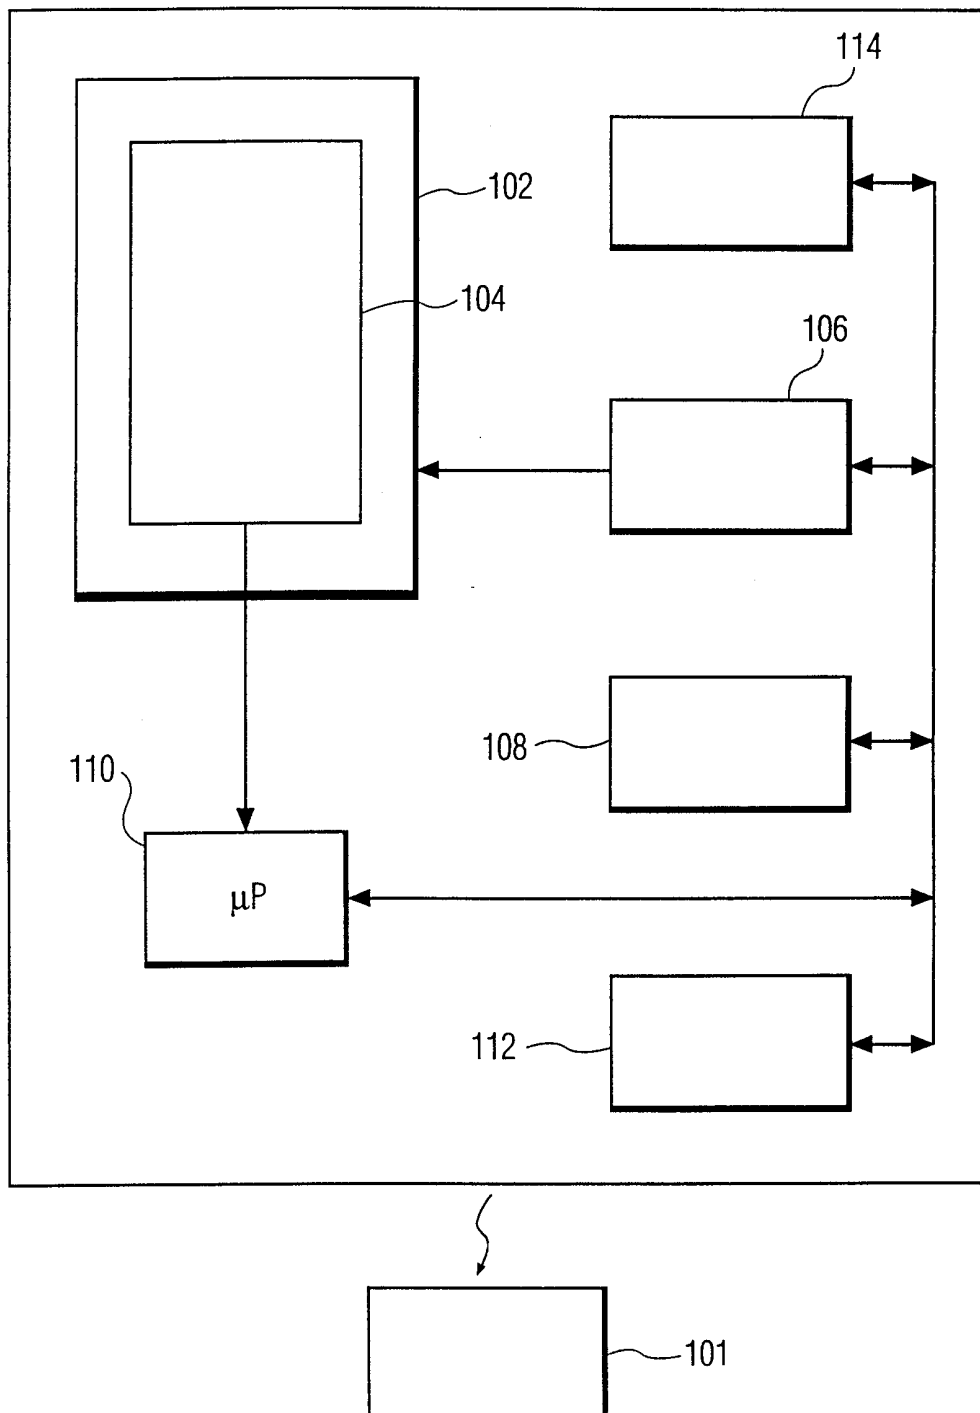


FIG. 1

2/5

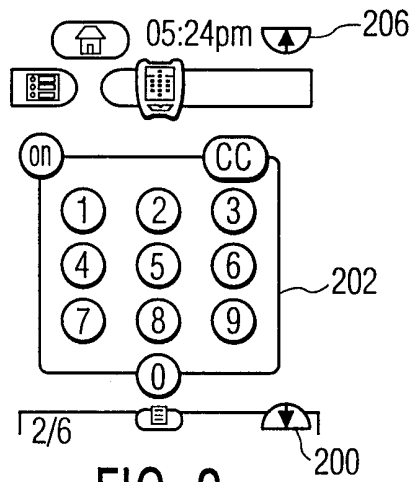


FIG. 2

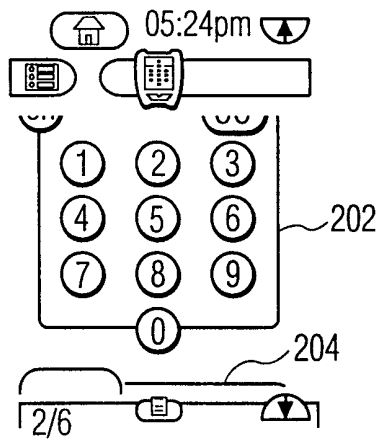


FIG. 3

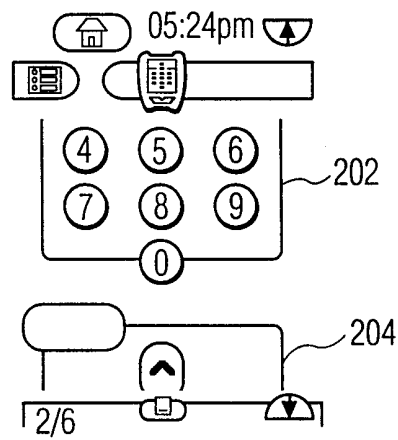


FIG. 4

3/5

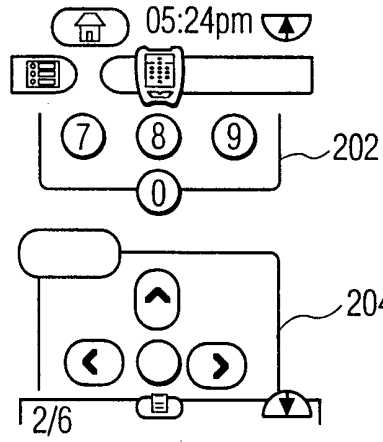


FIG. 5

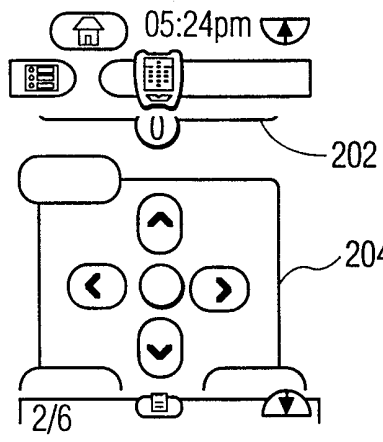


FIG. 6

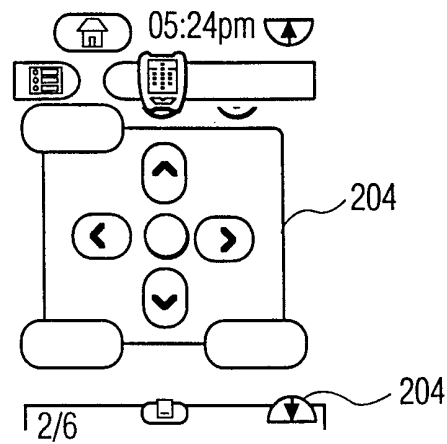


FIG. 7

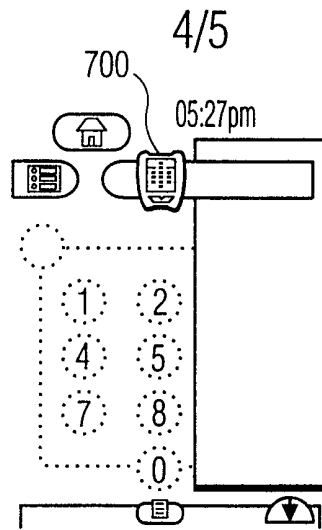


FIG. 8

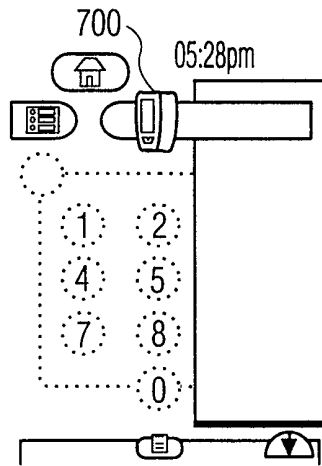


FIG. 9

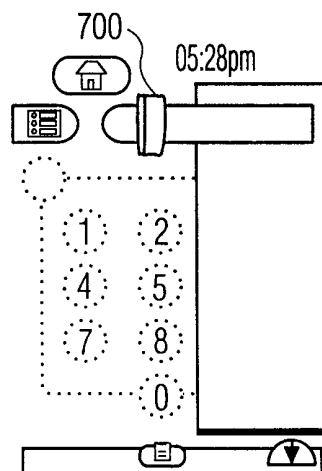


FIG. 10

5/5

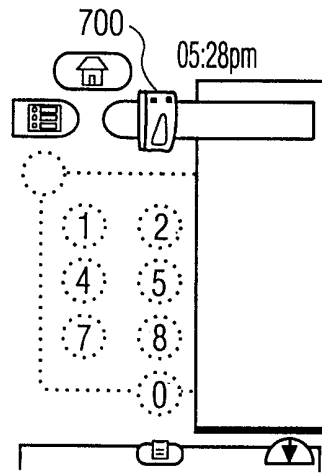


FIG. 11

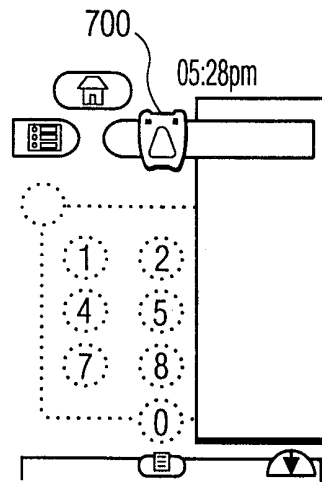


FIG. 12

INTERNATIONAL SEARCH REPORT

Internat Application No PCT/EP 99/05503
--

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H03J1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H03J G09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 626 635 A (FIRSTPERSON INC) 30 November 1994 (1994-11-30) column 15, line 37 - line 51 column 16, line 28 - line 57 column 20, line 5 - column 21, line 22 column 24, line 1 - line 53 column 33, line 39 - column 35, line 15 ---	1,4,5, 7-10
A	US 5 745 739 A (CHENG CHUN-YANG ET AL) 28 April 1998 (1998-04-28) column 4, line 17 - line 51 ---	2,3
A	US 5 185 599 A (DOORNINK DOUGLAS J ET AL) 9 February 1993 (1993-02-09) column 5, line 19 - line 62 ---	2,3
	-/--	

Further documents are listed in the continuation of box C.
 Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
---	---

Date of the actual completion of the international search 19 November 1999	Date of mailing of the international search report 25/11/1999
--	---

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Peeters, M
--	---

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/05503

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 678 015 A (GOH ENG LIM) 14 October 1997 (1997-10-14) column 2, line 33 - line 42 -----	6

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/05503

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0626635 A	30-11-1994	JP 7098640 A	11-04-1995
		US 5524195 A	04-06-1996
		US 5745710 A	28-04-1998
		US 5886697 A	23-03-1999

US 5745739 A	28-04-1998	NONE	

US 5185599 A	09-02-1993	GB 2211706 A,B	05-07-1989
		GB 2245129 A,B	18-12-1991
		GB 2245130 A,B	18-12-1991
		JP 1129371 A	22-05-1989
		JP 2007102 C	11-01-1996
		JP 7027571 B	29-03-1995

US 5678015 A	14-10-1997	NONE	
