

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199854144 B2
(10) Patent No. 760316

(54) Title
Gaming machine having a reel on which, along a circumference, symbols are applied

(51)⁷ International Patent Classification(s)
G07F 017/32

(21) Application No: **199854144**

(22) Application Date: **1997.11.20**

(87) WIPO No: **WO99/27506**

(43) Publication Date : **1999.06.15**

(43) Publication Journal Date : **1999.08.12**

(44) Accepted Journal Date : **2003.05.15**

(71) Applicant(s)
Orion Casino Technology B.V.

(72) Inventor(s)
Antonius Laurentius Gerardus Maria De Leijer

(74) Agent/Attorney
PHILLIPS ORMONDE and FITZPATRICK,367 Collins Street,MELBOURNE VIC 3000

(56) Related Art
US 4711451
EP 338743
GB 2193025




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : G07F 17/32</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/27506 (43) International Publication Date: 3 June 1999 (03.06.99)</p>
<p>(21) International Application Number: PCT/NL97/00636 (22) International Filing Date: 20 November 1997 (20.11.97) (71) Applicant (for all designated States except US): ORION CASINO TECHNOLOGY B.V. [NL/NL]; Kastanjelaan 169a, NL-4621 HL Bergen op Zoom (NL). (72) Inventor; and (75) Inventor/Applicant (for US only): DE LEIJER, Antonius, Laurentius, Gerardus, Maria [NL/NL]; Deutersstraat 10, NL-5266 AX Vught (NL). (74) Agent: VAN DER AREND, A., G., A.; Van Exter Polak & Charlouis B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. In English translation (filed in Dutch).</p> <div style="border: 1px dashed black; padding: 10px; margin: 20px auto; width: fit-content;"> <p style="text-align: center;">IPA AUSTRALIA 15 JUN 1999 RECEIVED</p> </div>	

(54) Title: GAMING MACHINE HAVING A REEL ON WHICH, ALONG A CIRCUMFERENCE, SYMBOLS ARE APPLIED

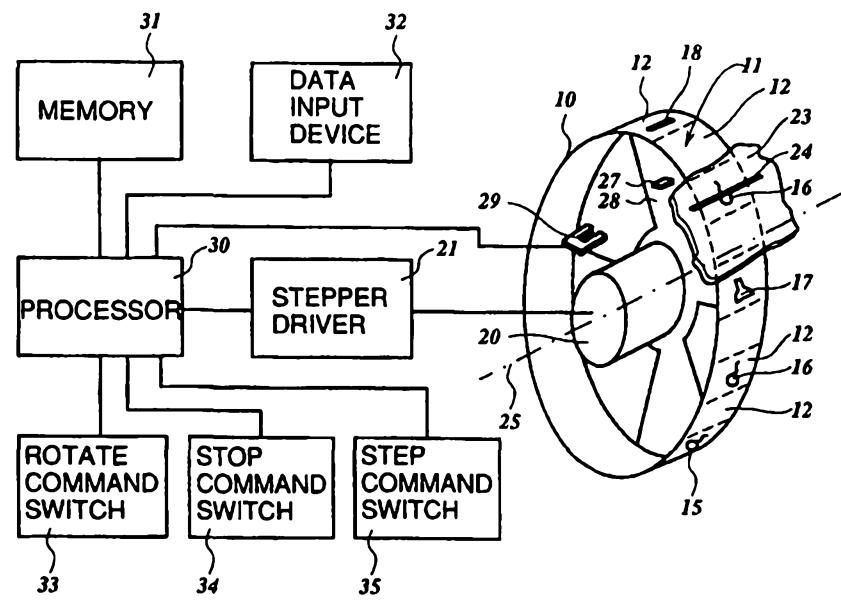

(57) Abstract

Gaming machine, comprising a reel, of which a circumferential surface is divided into a number of fields, each suitable for bearing a symbol (which is also understood to include a blank), a microstep drive unit (20, 21), which is suitable for positioning the reel (10) within each field in a number of angle positions and maintaining it therein, a memory with a table whose locations contain enabled stop positions, and random generator means which generate a random number within the address range of the table, for addressing the table therewith, in order to read out the enabled stop position stored in the addressed memory location, and in order to rotate the reel (10) to the read-out enabled stop position.

Short title: gaming machine having a reel on which, along a circumference, symbols are applied

The invention relates to a gaming machine according to the preamble of claim 1.

US-A-4 711 451 discloses three types of prior art gaming machines, i.e. a standard gaming machine, a multiple
5 stop gaming machine and a virtual reel gaming machine.

A standard gaming machine typically employs reels which have one stop position for each symbol (or indicia) on the reel, each stop position having one random number associated with it. To stop a reel in a standard gaming machine, a
10 random number is generated and the reel stopped at the stop position associated with the random number.

A multiple stop gaming machine employs reels having multiple stop positions for many of the symbols on the reel and fewer to one stop position for higher paying symbols.
15 Each stop position has only one random number associated with it. To stop the reel a random number is generated and the reel is stopped at the stop position associated with the random number. Because of the different numbers of stop positions for the symbols the odds of winning can be differentiated.
20

A virtual reel gaming machine employs reels typically having one stop position associated with each symbol and a number of stop positions have multiple random numbers associated with them. A gaming machine of this type is disclosed
25 by US-A- 4 448 419.

With all said prior art machines a random number is generated and the associated reel is stopped at the stop position associated with the generated random number.

The gaming machine proposed by US-A-4 711 451 includes
30 a number of rotating symbol bearing reels, each reel having several stop positions associated with each symbol on the reel. A specially designed reel mapping scheme allows one standard reel stop control software routine to control the



stopping of the reels when the machine is operated as standard gaming machine, multiple stop gaming machine or a virtual reel gaming machine. According to said document, to provide gaming machines to play one out of a standard type game, multiple stop type game or virtual reel type game, gaming machine manufacturers had to develop different reel stop controls including different software routines for each game type, while the software development for the different types of games was considered extremely costly. Therefore, to reduce costs, the machine with selectable play type using one standard reel stop control software routine was proposed.

With the combined gaming machine disclosed by US-A-4711451, for a plurality of reels of the machine a single software routine is used for each of the reels in turn. To make it possible to have the combined machine operate in accordance with one of said prior art individual machines, the combined machine comprises three memory arrays, i.e. a mapping index array, a reel stop map and a single reel map. To have the combined machine to operate according to a multiple stop gaming machine locations of the mapping index array contain a sequence of offset values or indexes referring to physical reel stop positions where the reel is allowed to stop. Said memory locations containing indexes for allowed reel stop positions form a sequence of memory locations without intermediate memory locations of unallowed stop positions. With a sequence of k allowed stop positions a random generator has a random number range of $0-(k-1)$, each referring to a respective memory location of the mapping index array containing said indexes. After having generated a random number the index of the memory location addressed by the random number is read. From the read out index addresses are calculated for a memory location of each of the reel stop map and the symbol reel map. An addressed memory location of the reel stop map contains stop position data for driving means where the reel must stop. An addressed location of the symbol reel map contains symbol data of a specific symbol from $P+1$ different symbols.



To have the combined gaming machine operated as a standard gaming machine or a virtual gaming machine the contents of the mapping index array must be altered and by doing so the addressing schemes for the reel stop map and the symbol reel map are changed. Under all circumstances the reel stop map must comprise a number of memory locations with equals the number $P+1$ of symbols times the number n of possible stop positions per symbol. The symbol reel map must always comprise $P+1$ locations for P symbols. The mapping index array must have the same number of memory locations at the maximum as the reel stop map has, which is the case when operating the machine as a multiple stop gaming machine.

To make it possible for the combined gaming machine to operate according to any of said individual gaming machines the reel stop map must have memory locations for all possible physical stop positions, the number of symbols must be maintained under all circumstances and all symbols must have identical circumferential dimensions under all circumstances. Since the same software routine is used for several reels, the number of symbols for all reels must be identical. In addition, a random number generator must be designed to have a number range which equals the number of allowed stop positions. Therefore, for any change of the number of allowed stop positions the random number generator must be changed too and must be calibrated again, which is very time consuming and costly.

With the combined gaming machine using said one standard software routine, although the number of stop positions associated with each symbol on a reel could be any number, said number is considered to be rather small in practice in view of the requirement of reducing costs mentioned in the document, where a greater number of stop positions would increase the hardware and the complexity of mapping schemes for said one standard software routine. As a result said combined gaming machine is not suitable for having a reel stopped with a very high price paying symbol opposite a winning line with a very small probability.

EP-A-0338743 discloses, in its prior art part, a mul-



5 tiple stop gaming machine having two reel stops located very close together for certain symbols on the reels and one stop for other symbols. The symbols having two reel stops will have twice the probability of being stopped in a winning position, thus effectively decreasing the odds that a symbol will only one reel stop will appear in the winning position. It is not substantiated what is meant by "very close together", how many reel stops are associated with each symbol field where the reel is allowed to stop or not, and how a distribution of allowed stop positions among unallowed stop positions must be.

10 The above discussion of background art is included to explain the context of the invention. It is not to be taken as an admission that any of the material referred to was published, known or part of the common general knowledge in Australia at the priority date of any of the claims of this specification.

15 It would clearly be desirable to provide a multiple stop gaming machine which overcomes or alleviates at least some of the above drawbacks.

According to an aspect of the present invention, there is provided a gaming machine, including:

25 a reel having a circumferential surface divided into a number of fields which each bear a symbol from several symbols, which may include a blank;

drive means for rotating the reel;

30 memory means for storing data representing allowed rotational stop positions of the reel where the reel is allowed to stop, the number of allowed stop positions being greater than said number of fields;

random number generator means for randomly generating an address of a location of said memory means containing data representing an allowed stop position; and

35 stop means for controlling the drive means to stop rotation of the reel opposite a winning line at a rotational stop position which corresponds to said randomly generated memory means address;





wherein adjacent rotational stop positions are less than 0.1° apart from each other and for each field all allowed stop positions are located within an arc of 2° .

The stepping motor can provide a very great number,
 5 which number may be over 10.000, of rotational stop positions of the reel. By allowing only those stop positions to actually stop the reel which are difficult to distinguish with respect to the winning line by the naked eye, if opposite the associated field at stand still of the
 10 reel, the gaming machine appears to the player as a standard gaming machine or virtual reel gaming machine but with the provision of showing few symbols with a much smaller chance for higher prizes.

Other features and advantages of the invention will
 15 emerge from the explanation of an embodiment of the invention which follows with reference to the drawings, in which:

Fig. 1 shows a diagram of a gaming machine according to the invention; and

20 Fig. 2 shows a chart for explaining the operation



of the gaming machine of Fig. 1.

The gaming machine shown diagrammatically in Fig. 1 comprises a reel 10 with a circumferential surface 11 which is divided into a number of fields 12. A symbol, such as a pear 15, a cherry 16, a bell 17 and a bar 18, can be placed in each field 12. In this description an empty field 12 (blank) is also regarded as a symbol, namely as something of significance.

The reel 10 is connected to a shaft of a stepping motor 20. The stepping motor 20 is controlled by a drive circuit 21. The drive circuit 21 and the stepping motor 20 are suitable for driving the reel 10 to and maintaining it in more angle positions (microsteps) than the number of poles or double the number of poles of said stepping motor. For this purpose, use can be made of a geared transmission (not shown) between the motor 20 and the reel 10, in such a way that the motor 20 performs several revolutions for one revolution of the reel 10. However, the stepping motor 20 and the drive circuit 21 preferably form a microstep drive, in which, with a suitable electrical control by the drive circuit 21, the rotor of the stepping motor 20 can assume a relatively large number of stable angle positions between adjacent poles. Such a microstep drive mode is described in SGS-Thomson Microelectronics, "data on disc", compact disc CDDATASH197, 1st edition 1997. By using a microstep drive there is no problem with mechanical play, and the maximum achievable speed of revolution of the reel 10 can be higher.

A window panel 23 of an otherwise closed console (not shown) is fitted opposite a part of the circumferential surface 11 of the reel 10. At least one field 12 of the reel 10 is visible through the window panel 23. The window panel 23 has a marking, such as a "pay-out line" 24 parallel to the axis of rotation 25 of the reel 10 and the motor 20.

On the reel 10, for example on a "spoke" 27 thereof, a mark is placed, for example in the form of a projection or flag 28, which can pass through a slot of, for example, an optical bridge detector 29 during the rota-



tion of the reel 10.

The drive circuit 21 is fed by a processor 30, which is connected to a memory 31, a data input device 32, a rotate command switch 33, a stop command switch 34 and a
5 step command switch 35.

When the rotate command switch 33 or the stop command switch 34 is actuated by a player of the machine or by other means inside the machine, the processor 30 controls the microstep drive unit 20, 21 for rotating or
10 stopping the reel 10 respectively.


The processor 30 operates with a program, the instructions and corresponding data of which are stored in the memory 31 or in a separate memory. A subroutine of the program operates, as known per se, so as to generate one or
15 more random numbers. Of course, instead of such programmatic random generator means, a separate random generator (means), linked to the processor 30, can be connected.

Although only one reel 10 is shown in Fig. 1, a
20 gaming machine will generally have several such reels, each having its own microstep drive unit 20, 21 and a step command switch 35. Depending on the symbol or the combination of symbols visible beneath the pay-out lines 24 of the reels 10, a pay-out or no pay-out is made to a
25 player of the machine.

The operation of the gaming machine shown in Fig. 1 will be explained below with reference to Fig. 2.

As an example, it is assumed that the circumferential surface 11 of the reel 10 is divided into 20 fields
30 and that the microstep drive unit 20, 21 can position and maintain the reel in 10,000 different angle positions. Each angle position or each step of the reel 10 then corresponds to an angle or arc of $360^\circ/10,000 = 0.036^\circ$. Further, in this example each field has a range of $10,000/20 = 500$ angle
35 positions or steps or possible stop positions of the reel 10.

In the example of Fig. 2, three angle positions out of the available 500 angle positions of the field 1 where the reel 10 may come to a standstill are allocated to the



first field. These three enabled stop positions could be distributed randomly within the range of 500 positions. However, these positions are preferably selected close together, so that a difference in the distance from, for example, the centre of the corresponding stationary symbol relative to the pay-out line 24 is imperceptible with the naked eye. Although consecutive numbers can be allocated to the enabled stop positions, for the sake of clarity of the drawing, one is skipped between each pair of adjacent enabled stop positions in Fig. 2.

Fig. 2 shows further that six stop positions are enabled for the second field, two stop positions for the third field, one stop position for the nineteenth field, and seven stop positions for the twentieth field.

If for all twenty fields together 200 of the 10,000 possible positions are enabled as stop positions for the reel 10, the memory 31 contains a table with 200 memory locations, each containing one of the enabled stop positions. In this example, the random generator means are then suitable for selecting a random number from 200 possible numbers and delivering that number to the memory 31 as the address for reading a stop position from the corresponding location of the abovementioned table.

As an alternative, the random generator means can have a range which is greater than the number of enabled stop positions (200 in the example), and the random number generated therefrom represents a number of steps by which an address for the table is increased modulo the number of enabled stop positions from the address belonging to the last standstill onwards. As a result, the random generator means do not have to be changed when the number of locations of the table is changed and/or the same random generator means can be used for several reels with identical or different numbers of enabled stop positions, which is in contrast with known machines.

When, during the rotation of the reel 10, the processor 30, using a generated random number, has read an enabled stop position from the table, the processor 30 controls the microstep drive circuit 21 to make the step-



ping motor 20 stop in this stop position. In order to ensure that no physical angle detection means are necessary, the processor 30 preferably remembers which the last stop position was, calculates the difference between this position and the read-out new position and controls the drive circuit 21 to make the motor 20 take a number of microsteps corresponding to the calculated difference between the stop positions.



The random generator means can be designed to generate a further random number which indicates a number of revolutions of the reel 10 which, after actuation of the stop command switch 34, the reel 10 first has to make before the motor 20 rotates to the stop position read from the table and is brought to a standstill there. The abovementioned number of revolutions can be detected by means of the flag 28 of the reel 10 and the optical bridge detector 29 which is linked to the processor 30.

After the reel 10 has been installed in the gaming machine, a marking point made on the reel, or the centre of a symbol placed in a field 12, can easily be aligned with a fixed mark, for example the pay-out line 24. For this purpose, the stop command switch 35 can be actuated so often that the abovementioned marks appear to coincide to the eye. The number of steps or angle positions which at that moment have been taken since the flag 28 passed through the bridge 29 is subsequently always added as the offset to each read-out angle position, in order to deliver a calibrated read-out angle position. This means that, unlike previously, a laborious mechanical adjustment need not be carried out for the alignment, and additional mechanical means for that purpose can be omitted. Since the offset can be any value of the number of steps or possible angle positions, there is great freedom for applying a new tape with symbols to the reel 10, and the tape can be applied very quickly.

The data input device 32, which is present permanently or otherwise in the gaming machine, can be used for creating and amending the abovementioned table in the memory 31 with enabled stop positions.



It will be clear from the above that the gaming machine according to the invention can be substantially of universal design physically, and yet can still easily be adapted to specific wishes of customers, for example with a different chance distribution for prizes, by enabling more or fewer stop positions for the different fields and/or for changing the number of fields by applying another tape with symbols, without this having to be carried out relative to a specific reference point of the reel 10. Furthermore, the gaming machine according to the invention is simple and maintenance-friendly in particular as far as the mechanical design is concerned.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A gaming machine, including:

5 a reel having a circumferential surface divided into a number of fields which each bear a symbol from several symbols, which may include a blank;

drive means for rotating the reel;

10 memory means for storing data representing allowed rotational stop positions of the reel where the reel is allowed to stop, the number of allowed stop positions being greater than said number of fields;

random number generator means for randomly generating an address of a location of said memory means containing data representing an allowed stop position; and

15 stop means for controlling the drive means to stop rotation of the reel opposite a winning line at a rotational stop position which corresponds to said randomly generated memory means address;

20 wherein adjacent rotational stop positions are less than 0.1° apart from each other and for each field all allowed stop positions are located within an arc of 2° .

2. A gaming machine according to claim 1, wherein all allowed stop positions for each field are located within a 25 circumferential length of the reel which equals the width of the winning line.

3. A gaming machine according to claim 1 or 2, wherein the random number generator means has a number range which 30 is greater than the number of allowed stop positions and the address provided by the generator means is obtained by summing a random number to a previously provided address and taking the sum module the number of allowed stop positions.

35 4. A gaming machine according to any one of the preceding claims wherein the drive means include a stepper motor, and command means are provided for controlling the drive means whereby, during a calibration step, the reel is moved



stepwise through an angle between a fixed reference point provided on the reel and a machine specific marking point provided on the reel to determine the number of stop positions passed along a stationary marking point, and
5 whereby after the calibration step said number is added as offset value to a datum representing an allowed stop position read from an address provided by the random generator means.


10 5. A gaming machine substantially as herein described with reference to the accompanying drawings.

DATED: 14 February, 2003

PHILLIPS ORMONDE & FITZPATRICK

15 Attorneys for:

ORION CASINO TECHNOLOGY B.V.



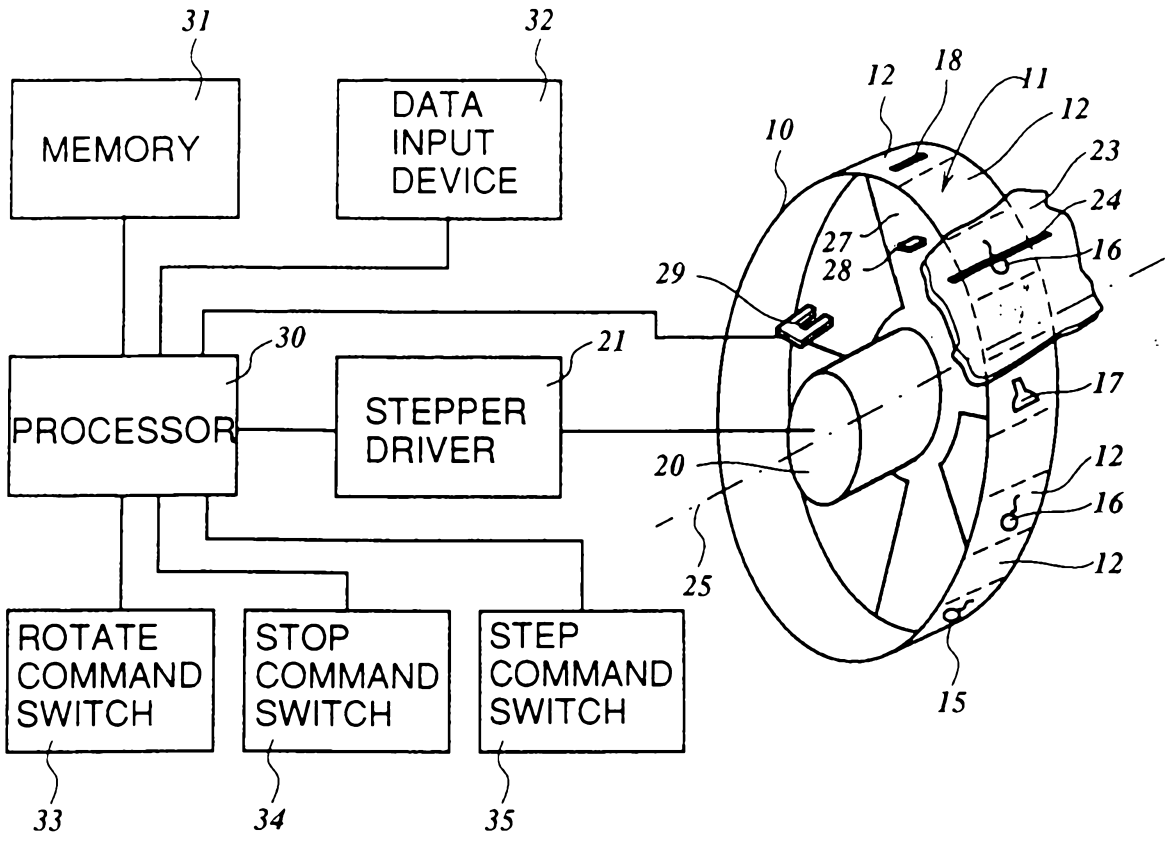


Fig. 1

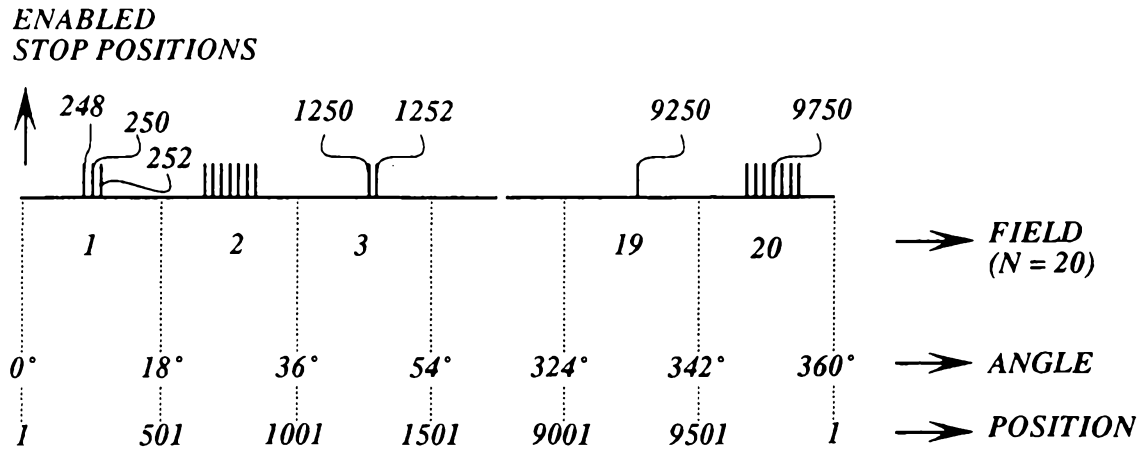


Fig. 2