




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : B05B 7/10</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/48496 (43) International Publication Date: 24 December 1997 (24.12.97)</p>
<p>(21) International Application Number: PCT/US97/10542 (22) International Filing Date: 19 June 1997 (19.06.97) (30) Priority Data: 60/020,177 21 June 1996 (21.06.96) US (71) Applicant: HUGHES TECHNOLOGY GROUP L.L.C. [US/US]; 1934 Sonora Road, Palm Springs, CA 92264 (US). (72) Inventor: HUGHES, Nathaniel; 1934 Sonora Road, Palm Springs, CA 92264 (US). (74) Agent: THIELE, Alan, R.; Vinson & Elkins L.L.P., 2300 First City Tower, 1001 Fannin, Houston, TX 77020-6760 (US).</p>		<p>(81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i></p>

(54) Title: MICRO-ATOMIZING DEVICE

(57) Abstract

The micro-atomizing device (10) of the present invention creates high energy vortices. These high speed vortices are generated simultaneously and synchronously and then merged into a three-dimensional force field. When the high energy vortices are brought together, a large vacuum is produced in a resultant stable vortex force field in a vortex accumulation zone (72). The high vacuum draws the fluid to be atomized through a delivery tube (46) into the vortex accumulation zone (72). The high energy within the vortex accumulation zone (72) either breaks up the fluid to be atomized into very small droplets or gasifies the fluid by the combination of high energy density cold boiling, shockwave generated ultrasound, and centripetal forces.

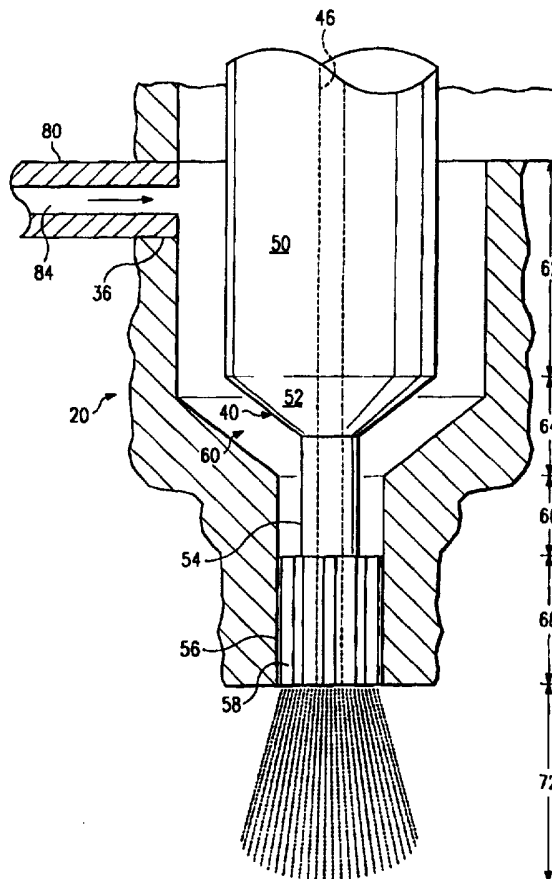

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

MICRO-ATOMIZING DEVICE

This application claims the benefit of U.S. Provisional Application Serial No. 60/020177 filed June 21, 1996.

Field of the Invention

The present invention pertains to micro-atomizers; more particularly, the present invention pertains to highly efficient gas-driven devices which utilize vortex energy in a maximized high energy density, stable force field. Additionally heat may be added to provide additional energy micro-atomize or gasify liquids or to aerosolize flowable solids. Micro-atomization defines very small micron size droplets having a uniform or monodispersed character.

Background

The process of micro-atomization or subdivision of a liquid, gas, or aerosolization or fluidization of a flowable solid is quite complex. In most prior art gas-powered mechanical atomizers, the liquid or gas to be atomized or flowable solids to be dispersed must first be provided with sufficient pressure energy and then caused to jointly pass through the geometry of the mechanical atomizer so that they may be pushed through one or more shear orifices. Such shear orifices are typically formed in a plate having a plurality of small holes, which subdivide or disperse the flow by shear effects caused by high velocity. On the output side of these prior art atomizers, the actual break-up or dispersion of the flowing substance will provide very broad range of droplet sizes or a "bell shaped" droplet distribution curves.

The devices utilizing this invention generally produce monodispersed low micron-size droplets which are a vaporous "gaseous like" cloud having large surface area.

-2-

This is a very desirable condition for most processes where micro-atomization is employed. Most other prior art atomizers have a large droplet size distribution, which may be described by a bell shaped curve spanning a large droplet size range. For example, the micro-atomization of liquids or gases will produce a significant drop in the temperature of the liquid being atomized due to micro-atomization and vortex phenomena as the liquid heat is transferred efficiently and absorbed by the vortex process. The substance being atomized can actually be changed completely into gaseous form. For example, some micro-atomization systems may change a liquid into gas.

Uniquely, as opposed to prior art fluid flow mechanical atomizers, the following is inherent in the process the present invention.

(1) in micro-atomizer, embodiments utilizing the present inventory the gas powerant or propellant only passes through the vortex energy forming geometries, not both the gas and the liquid as in most other prior art designs. This separation of the propellant and the liquid to be atomized prevents clogging, denigration of efficiency and a reduction in the energy burden placed on the micro-atomizer device. The only exception is when the device is used for aerosol duty with liquified gas propellants as is in metered drug delivery devices.

(2) Unlike all other prior art atomization systems, the pressure of the powerant gas is not critical. Heat or thermal energy can be substituted for or added to the process. The vector cross product of pressure times mass flow times BTU, if heat is used, is totally used by the atomizers of the present invention; not just pressure as in prior art mechanical shear atomizers.

(3) Viscosity and density dramatically affect the performance of all other prior art shear atomizers usually in a square law fashion. Viscosity and density have little or no effect on the vortex micro-atomizing process of the present invention.

SUBSTITUTE SHEET (RULE 26)

-3-

The need to micro-atomize a flowing substance is found in many and diverse fields. In health care, respiratory medication must be micro-atomized to effectively reach the alveolar tissue in the lungs. In manufacturing processes, the combination of paints or coatings with reduced solvents or water-based solutions can only be done by the efficient micro-atomization of the paint or coating. In food processing, atomized coatings are applied to both preserve and effectively flavor foods. In the burning of fuel, much more efficient and cleaner combustion can be obtained when fuel is micro-atomized. In electronics, the uniform application of micro-atomized photo-resistive materials in the lithography process used to manufacture integrated circuits and micro-chips is a critical step. In environmental applications, it may be necessary to increase humidity by spraying water into ambient air or to scrub stack gases by injecting a spray of a special chemical into a discharge line. There are few applications where micro-atomization is not beneficial.

Future uses of micro-atomized fluids will permit lubricants to be applied to machine surfaces heretofore unlubricated. Atomizing refrigerants will increase the efficiency of cooling operations; especially with environmentally safe propellants. Pollutants or salt will more easily be removed from water by micro-atomization and fluids heretofore thought to be uncombinable or difficult to combine can be mixed together using the micro-atomization techniques of the present invention.

Prior art efforts to improve and create atomization techniques have included high pressure shear atomizers, air assist atomizers and ultra high pressure hydraulic nozzles. While such devices have improved the state of the art, these prior art devices are still subject to the limitations of the other prior art atomizers already described. Such problems have included a high pressure energy requirement to impart sufficient pressure and

SUBSTITUTE SHEET (RULE 28)

-4-

velocity energy to the substance to be atomized to accomplish the desired atomization; clogging of the passages within the atomizing device guiding the flow of gas and liquid; and variation in size and dispersion of the droplets. In addition, the utilization of all prior art atomizing devices is, as previously noted, severely limited by the viscosity of the fluid to be atomized. Fluid, viscosity has an exponential effect on the difficulty of micro-atomizing fluids in prior art atomizers. Fluid density further lowers the efficiency of most prior art atomizing devices.

Accordingly, there remains a need in the art for micro-atomization devices which can micro-atomize fluids over wide viscosity and density ranges with no penalty, which can produce droplets of substantially uniform size, which are not subject to clogging and have low energy requirements. Such devices should also be inexpensive and easy to manufacture. The devices described herein which utilize the present invention utilize easy to manufacture geometries, which enable simple methods of creating small openings without using high precision drilling techniques or exotic molding techniques.

Summary

The micro-atomization devices including the present invention are useable with fluids over a wide viscosity and density range, do not, in most all cases, place the fluid to be atomized within the passages in the device and are self-cleaning. In most cases, there is no liquid involved in the vortex formation process. The micro-atomization devices including the present invention have universally low power requirements, are inexpensive, are easy to manufacture, and perform over wide ranges which permits the use of broad computerized application design techniques for various applications.

The micro-atomization devices including the present invention operate by creating a three dimensional stable

SUBSTITUTE SHEET (RULE 26)

-5-

vortex shockwave force field. This three dimensional stable vortex shockwave force field is created by using a coherent synchronous family of stable vortex generators and vortex energy concentrators. The fluid or flowable solid to be atomized is drawn through a centrally located flow passage within the family or array of stable vortex generators and vortex energy concentrators into the chamber containing the three dimensional stable vortex force field where the fluid is micro-atomized in an open geometric space and dispersed by the extremely high energies created by the vortex shockwave force field.

Construction of the micro-atomization devices including the present invention is effected by ringing the centrally located flow passage used for fluid transport within an array or a plurality of vortex generators which terminate at a vortex energy concentrator and resonator. The family or array of vortex concentrators is a group of cylindrical or other uniformly geometrically shaped passages. Upstream of the vortex concentrators are the basic vortex generators. Once the vortices are formed by the vortex generators, vorticity is always conserved. The vortices then pass through the vortex concentrators and come together in a highly efficient manner in a prescribed vortex accumulation zone. The high vacuum formed by the confluence of vortices and resultant high speed rotation in the vortex accumulation zone draws the fluid to be atomized through the centrally located flow passage. Shockwaves within the vortices due to supersonic flow enter the vortex accumulation zone and cause the fluid to be atomized to gasify by cold boiling, shockwave energies, and centripetal forces. The Fluid is then micro-atomized by being formed into micron size liquid droplets which are generally monodispersed. Solids can be aerosolized also by the same process.

In the preferred embodiment a "dumbbell" shaped vortex generating rod assembly is mounted within a hollow housing. Stable vortices are formed by these cylindrical

SUBSTITUTE SHEET (RULE 26)

-6-

vortex generators in the space between the vortex rod assembly and the hollow housing. As these vortices pass through the vortex concentration delivery tubes, these vortex concentration delivery tubes which concentrate and substantially enhance the fully formed vortex energy to a significantly higher energy level. These vortices increase rotational energy intensity (i.e. rotational speed) due to conservation of angular momentum and the conservation of vortex energies in such an area change process. These vortices also have vastly increased energy density due to energy availability per unit volume or area. Upon exiting the vortex concentration tubes the vortices come together to form a three dimensional stable vortex force field in the vortex energy accumulation zone. The Vortex energy accumulation zone is a properly designed open space integral to a specially designed vortex accumulator.

The number of vortex generators on the periphery of the vortex rod assembly depends on the mass of gas available to power the micro-atomizer by forming vortices therein, the amount of fluid to be micro-atomized and the energy density desired (watts/cm³) to achieve the desired micro-atomization. There can be three to 100 or more such vortex generators.

The invention is an energy conversion device. It converts modest amounts of mass flow and pressure energies and thermal energy into vortical form in Stage One of the process. In Stage Two of the process, the inventory uniquely concentrates these energies through conservation of angular momentum, preservation of vorticity, and multiple area transformations in very high speed vortices and supersonic shockwaves which are combined in very high energy density, high velocity streams. In Stage Three of the process, the various energy streams are synergistically efficiently combined in the vortex energy accumulation zone. High energy density and the unique combination of energies is the key factor in the energy

SUBSTITUTE SHEET (RULE 28)

-7-

conversion process utilized in the present invention.

Brief Description of the Figures

5 A better understanding of the micro-atomizing device of the present invention may be had by reference to the figures wherein:

Figure 1 is an elevational view in partial section of the operative portion of a micro-atomizer according to the present invention;

10 Figure 2A is an elevational view of the exterior of the micro-atomizer according to the present invention having a straight inlet;

Figure 2B is a right side end view of the micro-atomizer as shown in Figure 2 except for a threaded inlet;

15 Figure 2C is a cross-sectional view of the micro-atomizer shown in Figure 2A;

Figure 3 is a perspective view in partial section of a micro-atomizer having a fluted dumb bell vortex rod assembly;

20 Figure 4 is a perspective view in partial section of a micro-atomizer having a multi-ported dumb bell vortex rod assembly;

Figure 5 is a perspective view in partial section of micro-atomizer having an annular vortex delivery passage;

25 Figure 6 is a cross-sectional view of a micro-atomizer according to the present invention used to enhance the combustion of fuels;

30 Figure 7A is a perspective view of a metered dose inhaler micro-atomizer according to the present invention used to deliver medicaments powered by aerosol or compressed gas propellants and which delivers medicaments and propellant together;

Figure 7B is a cross-sectional view of the atomizer shown in Figure 7A;

35 Figure 7C is an exploded view of the vortex formation zone of the atomizer shown in Figure 7B;

Figure 7D is an end view of the atomizer shown in

SUBSTITUTE SHEET (RULE 28)

-8-

Figure 7C;

Figure 8A is a series of drawings of a micro-atomizer according to the present invention used for mixing at least two fluids;

5 Figure 8B is an end view of the micro-atomizer shown in Figure 8A;

Figure 9A is an elevational view in partial section of a nebulizer resonant chamber according to the present invention;

10 Figure 9B is an enlarged view of the nebulizer shown in Figure 9A except for an inline liquid inlet;

Figure 10 is a perspective view of a micro-atomizer according to the present invention mounted alongside a precision flow meter;

15 Figure 11A is a perspective view of a mask atomizer according to the present invention installed on a patient; and

Figure 11B is a cross-sectional view of the mask atomizer shown in Figure 11A.

20

Operation

The present invention is based upon the creation of a powerful, stable, rotating vortex force field by generating a large number of synchronously concurrent, rotating, small, high energy intense vortices. These small intense vortices are then transported through very small vortex energy density concentration and shockwave generating tubes before being combined into a large powerful vortex force field. The small intense vortices revolve at a very high speed and have a maximum energy density due to their tight geometries and are aided and abetted by a high frequency ultrasonic pulse due to the linear supersonic speeds of the individual vortices, and the resultant shockwaves produced. The frequency of the ultrasonic pulse is inversely proportional to the port diameter and the inlet to outlet area ratio.

30

35

The area ratio between the vortex forming chamber and

SUBSTITUTE SHEET (RULE 28)

-9-

vortex concentration orifices, and the diameter of the vortex concentration tubes determine the energy density magnification, rotation velocities, linear velocity, supersonic shockwave strength, and oscillating frequency.

5 By combining the high speed and supersonic shockwaves of the individual vortices, a powerful ring of vortices is created at the exit of the concentration passageways through which individual vortices are transported. This powerful ring of vortices then turns into a three-
10 dimensional vortex force field which has a high rotational speed and produces a resultant high vacuum. This high vacuum allows for super "cold boiling" of the liquids to be atomized. Micro-atomization begins because all liquids include trapped gases of atmospheric pressure. It is the
15 trapped gases which erupt powerfully when exposed to high vacuums and then liquids to be atomized are further processed by the confluence of the individual vortices and the high velocity shockwave pulses. The process of micro-atomization is regulated and made complete by the
20 supersonic shockwave pulse which is further enhanced as the individual vortices come together. All the fluids to be atomized are then subjected to complete micro-atomization, which further enhanced by the centripetal forces present from rotation of the vortices in the vortex
25 accumulation zone.

Applied Theory

As may be seen in Figure 1, the flow of the vortex forming fluid through inlet 80 impinges on the upstream
30 end of the dumb bell shaped vortex forming rod assembly 50 in the interior 60 of the nozzle body assembly 20. The impingement of the flow of the vortex forming fluid on the large dumb bell shaped nozzle rod assembly 40 and the specialized geometry and the resulting right angle turn
35 of the vortex forming fluid sets the vortex generating action of the high velocity vortex forming fluid into rotational motion within the vortex formation zone 62.

SUBSTITUTE SHEET (RULE 26)

-10-

A large multiplicity of smaller vortices are thus generated. The generated smaller vortices then pass into a vortex concentration zone 64 where they are intensified and unified before traveling through the vortex organization zone 66. From the vortex organization zone 66, the smaller vortices pass into the vortex delivery passages or the vortex energy amplification and concentration channels 58, in the vortex energy concentration zone 68. Within the channels 58 the vortices intensify in rotational and linear velocity. In addition, supersonic flow occurs and shockwaves are formed. When the vortical flows exit the vortex delivery passages 58 they come together in the vortex accumulation zone 72. In the vortex accumulation zone 72 a three dimensional powerful rotating vortex force field is created. Vorticity is always preserved, and the vortex and shockwave energies commingle with high efficiency and integration.

The intensification of the vortex action and the accompanying high vacuum and supersonic shockwaves in the vortex accumulation zone 72 results from the following four factors:

First, the conservation of angular momentum within the vortex forming fluid makes the speed of the individual vortices very much faster as they each enter the vastly smaller volume of the individual vortex delivery tubes 58. Specifically, a 50 to 100-fold increase in the rotational speed of each individual vortex may occur in each of the vortex delivery tubes 58, due to area ratios between the two zones, and preservation of vorticity.

Second, since energy must be conserved, the vastly reduced volume of the individual vortex delivery tubes 58 acts as a fluidic motion amplifier for any existing vortices. This fluidic motion amplification produces a much higher energy density vortex flow in each tube 58 than in the vortical flows which exist upstream, before the vortex forming fluid passes through the individual

-11-

vortex delivery tubes 58.

Third, the supersonic shockwaves found within each vortex tube 58 are produced by the efficient acceleration of the gas to supersonic speeds and the absence of boundary layer separation expansion of the jets to these
5 supersonic speeds due to the centripetal force support created by the high speed vortical activity in each tube 58. Thus, increased vorticity and high frequency shockwaves are produced by the small volume of the
10 multiple vortex delivery tubes 58 in concert with the energy conservation of angular momentum, and vorticity conservation. This increase in vorticity and shockwave frequency and intensity and the vacuum induced cold boiling of the liquid to be atomized produces an enhanced
15 liquid disintegration action within the vortex accumulation zone 72. This enhanced liquid disintegration thus enables the formulation of small droplets or complete change of phase gasification of liquids and/or the dispersion of fluidized solids.

Fourth, the vortex assembly and accumulation zone 72
20 at the end of the vortex energy concentration zone 68 efficiently unites the energy in each of the individual vortex flow tubes 58 into one massive three dimensional vortex force field. This vortex force field rotates
25 around the axis of symmetry of the chamber. The effective total assembled atomizing power of the vortex formed in the vortex accumulation zone 72 is much greater than the sum of each of the smaller contributing vortices themselves. Therefore, a three dimensional vortex field
30 of great intensity is created from a series of individual vortices within individual flow tubes 58 which surround a fluid passage 46. The fluid passage 46 delivers the fluid to be atomized to the vortex accumulation zone 72 because of the resultant high vacuum generated.

35 In the vortex accumulation zone 72, downstream from the individual vortex tubes 58, a high vacuum is created. This high vacuum is created by generating a large rotating

SUBSTITUTE SHEET (RULE 28)

-12-

vortex energy field around its axis of symmetry. A needle valve or electronic flow control device or any other liquid flow control assembly (not shown) on the back end of the vortex rod assembly 40 may be used to precisely control the amount of fluid to be processed by the micro-atomizer. This valve assembly positions the vortex rod assembly 40 within the nozzle body assembly 20. The control of the amount of vortex forming fluid and its characteristic pressure and mass flow passing through the inlet 80 fluid determines the ultimate size of the droplets to be produced by the micro-atomizer of the present invention, as modulated by the amount of fluid to be atomized.

The combination of the coherent vortices in the vortex accumulation zone 72 creates a very large three dimensional rotating stable vortex force field in the open space of this member. This three dimensional vortex field produces the vacuum used to draw the fluid to be atomized into the vortex accumulation zone 72 and further includes the shockwaves used to break up the fluids to be atomized into small droplets or disperse fluidized solids.

The volume of the vortex formation zone 62, the number of vortex delivery-tubes 58 and the available flow of the vortex forming fluid ultimately determine the amount of fluid that can be micro-atomized as well as the size of the droplets. It has been found that the number of vortex delivery tubes used depends on the mass flow and pressure of the vortex generating fluid, the amount of fluid to be micro-atomized, its density, and the needed energy density of the vortex field to achieve the desired droplet sizes, and resultant terminal velocity etc.

By this combination of the coherent axial rotation of individual vortices in the vortex accumulation zone 72, vacuums between twenty and several hundred inches of water or higher, depending on driving energy (2-20 p.s.i.g.) can be created. The vacuum created is directly proportional to the total mass flow of vortex forming fluid passing

SUBSTITUTE SHEET (RULE 26)

-13-

through the micro-atomizer as well as the geometry of the zones in which the vortices form and travel. The vacuum created can be used in conjunction with modern solid state pressure sensors to indicate mass flow of the gas powerant.

As may be seen in Figure 1, each vortex generating delivery tube 58 fires a high speed vortex into the vortex accumulation zone 72. In addition the high speed vortex includes high frequency shockwaves in the order of 0.1 to 1 MHz. These high frequency shockwaves work together with vortical energies and the high vacuum in the vortex accumulation zone to literally explode the gases entrapped within the fluid and then further to chop liquids into micron size particles regardless of the viscosity of the fluid being atomized. In fact, viscosity which seriously affects prior art mechanical shear atomizers, has no effect at all on microatomizers including the present invention.

As previously indicated, the terminal energy density of the forces working to microatomize a fluid are increased because of a substantial reduction in the area and-volumes through which the vortices must travel and the unique properties of vortical flow and conservation of angular momentum. For example, if there were 24 watts total vortex energy to be divided into eight passages, that would result in 3 watts per passage. However, since the diameter of the passage is 1/8; therefore, there is actually only 1/64 of the area available for the vortex and 1/512 the volume. Therefore, the energy area density is actually 24 watts per unit area of passage or nearly eight times the previous area energy density. More significantly, the volumetric energy density is 192 times higher. Additionally, the amount of vortex forming fluid to be processed per unit area is 1/8th the total amount of liquid. Therefore, there is 1/8th the amount of fluid to be atomized multiplied by the increased energy density per watt per area. This indicates that there is eight

SUBSTITUTE SHEET (RULE 26)

-14-

times the magnification factor of 8, or 64 times the gram
watts per unit area potential. Even more dramatic and
significant is the increase in volumetric energy density -
the key performance parameter. This significant increase
5 in vortex energy density happens simply by changing the
volume available for vortex travel and the chamber to
chamber area ratio and having successful multiple vortices
which rotate at much higher rotational velocity. All this
depends on the successful symbiotic attendant combination
10 of multiple vortices in the vortex accumulation resonant
chamber. The use of 8 or 10 or more vortex concentrators
considerably enhances the energy coupling efficiency by
decade factors. Further, the enhanced rotation impacts
the energy process by the square of the rotational
15 velocity increase.

It will be understood that there is no limit to the
number, size or shape of individual vortex delivery tubes
that can be put together except a physical size
requirement associated with a particular application, and
20 the availability of sufficient mass flow in the
atomization pressurant fluid. These phenomena and energy
couplings are dependent on the generation of stable
controlled vortex streams, and the preservation of
vorticity.

Referring to Figure 4, it has been found that the
geometry of both a single stable vortex created by an
individual vortex delivery tube 158 and the ring
combination is similar to "a Gatling gun", machine gun in
physical appearance. Each barrel 158 generates a vortex
30 as a measured amount of vortex forming fluid passes
through the barrel. The use of this multiple vortex
concentration arrangement provides several other
significant utilities.

First, the micro-atomizer can be custom programmed
35 for various liquids or flows by changing the size and
number of the vortex forming and focusing rod assembly.

Second, the vortex rod assembly can be moved in a

SUBSTITUTE SHEET (RULE 26)

-15-

single axis by a small servomotor to change the rate of flow over to the point of developing a positive pressure to pump a liquid to be atomized back into the container from where the liquid originates and also control the size of the micro-atomized droplets.

Third, any specific application in terms of pressure or mass flow of fluid to be atomized can be quickly and easily customized by modifying the dimensions of the vortex zones to change the energy level.

Fourth, an easily measured and high amplitude vacuum signal is produced by the flow of the vortex forming fluid. This vacuum signal can provide the necessary mass flow information to control the flow rate of the fluid being atomized and gas pressurant mass flow rates. Thus by precise adjustment of a servo motor coupled to a controllable needle valve, predetermined flow rate can be provided. Accordingly, the micro-atomizer of the present invention is also a mass flow meter, since the process is mass flow driven.

It has been found that relative to other devices, relatively low energy is required to activate the micro-atomization device of the present invention regardless of the flow rate of atomized fluid required. Specifically, the energy required in terms of pressure times volume or mass of material necessary per mass of liquid to be atomized by any comparison to other prior art atomizers is quite low. Pressure and mass are to a large extent interchangeable. It has been found that the amount of energy required to produce effective micro-atomization is from 1 /10 to 1 /100 of prior art atomizers, particularly since prior art microatomizers rely on pressure energy primarily. Similarly, thermal energy or heating can supplement or take the place of pressure and mass flow in terms of energy. Thermal energy is relatively inexpensive and easy to apply to the microatomizer of the present invention especially with current technologies, involving film heaters.

SUBSTITUTE SHEET (RULE 26)

Description of the Embodiments

The operational aspects of the micro-atomizer of the present invention have already been described with respect to Figure 1. The embodiments which are illustrated in the remaining figures all incorporate the operative principals described with respect to Figure 1.

Figures 2A and 2B illustrate the exterior of the micro-atomizer 10 of the present invention. Note that the operative portions of the micro-atomizer 10 are contained within a nozzle body assembly 20. Intersecting the nozzle body assembly 20 is an inlet tube 80. As may be seen by comparing Figure 2A and Figure 2B the inlet tube 80 may either have a straight end portion 81 or a threaded end portion 82. The inlet tube 80 intersects the cylindrical section 22 of the nozzle body assembly 20. Located on one end of the nozzle body assembly 20 is an adjustment knob 42 that may be used to turn the vortex rod assembly 40 by the threadable engagement of the rod displacement threads 44 (Figure 2C) with the threads that are formed on the interior of the cylindrical section 22 of the nozzle body assembly 20. On the opposite end of the nozzle body assembly 20 from the adjustment knob 42 is a vortex accumulator - resonator assembly 70 whose function will be explained below. By specific reference to Figure 2B it may be seen that by looking into the micro-atomizer through the resonator assembly 70, the individual vortex delivery passages or energy density concentration channels 58 may be seen on the end of vortex rod assembly 40.

The inside the micro-atomizer 10 of the present invention may be understood by reference to Figure 2C. As shown in Figures 2A and 2B, an inlet tube 80 intersects the cylindrical section 22 of nozzle body assembly 20. An adjustment knob 42 appears on one end of the cylindrical section 22 of nozzle body assembly 20 and a resonator assembly 70 appears on the opposite end. Moving within the interior of the cylindrical section 22 of

-17-

nozzle body assembly 20 is a vortex rod assembly 40. The vortex rod assembly 40 is moved by interengagement of the rod displacement threads 44 with the internally threaded section 24.

5 Within the cylindrical section 22 of nozzle body assembly 20 are formed several distinct sections. In the midst of the cylindrical section 22 is a central cylindrical portion 26. This central cylindrical portion 26 ends in a taper 28. Downstream from the taper 28 is
10 a forward cylindrical section 30. The forward cylindrical section 30 continues into the vortex concentration passage section 32. The vortex concentration passage section 32 continues into the resonator mounting section 34. Intersecting the central cylindrical portion 26 is a bore
15 36 for the positioning of an insert mounting 86 which positions the inlet tube 80 on the nozzle-body assembly 20. The inlet tube 80 allows for fluid communication of the hollow portion 84 of the inlet tube 80 with the central cylindrical portion 26 of the nozzle body assembly
20 20.

The vortex rod assembly 40 has a rear taper 48 formed adjacent the rod displacement threads 44. Downstream from the rear taper 48 is a large cylindrical section 50 which terminates at forward taper 52. Following the forward
25 taper 52 is a reduced cylindrical portion 54. Following the reduced cylindrical portion 54 is a fluted section 56. The fluted section 56 fits snugly within the vortex concentration passage section 32. Downstream from the fluted section 56 is the vortex accumulation chamber -
30 resonator assembly 70 which includes a cylindrical bore 74 and a tapered bore 76.

Proceeding on to Figure 3 it may be seen how the vortex rod assembly 40 moves within the nozzle body assembly 20. By axially moving the vortex forming
35 adjustment knob 42 the vortex rod assembly 40 may be moved axially within the bore of nozzle body assembly 20. This movement of the vortex rod assembly 40 changes the size

SUBSTITUTE SHEET (RULE 26)

-18-

of the chamber 60 which is formed between the vortex rod assembly 40 and the nozzle body assembly 20. The change in the shape of the chamber 60 effects the formation of the vortices around the large cylindrical section 50 of the vortex rod assembly 40. The movement of the rod 40 also changes the pressure drop through the chamber and thus the gas mass flow, resultant energy generation and vortex vacuum, thus liquid flow rate. As fluid pressure causes the vortices to pass from the vortex formation zone 62 into the vortex concentration zone 64 and then into the vortex organization zone 66, the vortices encounter the flutes 55. This causes the individual vortices to then be channeled through the individual vortex delivery passages 58 through entry port 57 where their energy density is substantially concentrated. After exiting the individual vortex delivery passages 58 through the exit port 59 the vortices come together in the vortex accumulation zone 72 formed within the vortex accumulation chamber - resonator assembly 70. Note that in Figure 3 the vortex accumulation chamber - resonator assembly is made a part of the nozzle body assembly 20. It is in the vortex accumulation zone 72 that the high vacuum is created which draws the fluid to be atomized through the fluid passage 46 and out through the outlet port of the fluid passage 47. Shockwaves formed within the individual vortex delivery passages 58 proceed into the vortex accumulation zone 72 and the combination of shockwaves, high speed vortex dynamics, centripetal forces come together synergistically to make small droplets or gasify the fluid to be atomized or disperse a flowable solid. The illustrated embodiment has been found to work best with a broad variety of flows of the vortex forming fluid.

In Figure 4 a second embodiment or a "gatling gun" version 110 of the microatomizer of the present invention is shown. Note that the micro-atomizer nozzle body assembly 20 is essentially the same as shown in Figure 3 but for having a separate vortex accumulation chamber -

SUBSTITUTE SHEET (RULE 26)

-19-

resonator assembly 70. Accordingly, the same reference numbers are used to describe the nozzle body assembly 20. However, as the vortex rod assembly 140 is different a "1" has been inserted in the hundreds place. The remainder
5 of the reference numbers relate to items having a similar function and location as in Figure 3.

The difference between the embodiment with the individual flutes 55 shown in Figure 3 and the embodiment shown in Figure 4 is the configuration and shape of the
10 individual vortex delivery passages 158. Note that instead of having "u"-shaped channels as shown in Figure 3, each vortex delivery passage is a hollow cylinder. While circular passage have been shown, it will be understood that a broad variety of different shaped
15 passages may be used. Because a broad variety of different shaped passages may be used, the problem of using laser drilling or exotic molding techniques to make small holes is effectively eliminated. The vortex rotation tends to center itself in any geometrically
20 shaped passage such as a cylinder, triangle or rectangle, a unique property of vortical flows. Thus, as vortices are formed alongside the large cylindrical section 150 of the vortex rod assembly 140 in front of the rear taper 148 they pass along the forward taper 152 of the vortex rod
25 assembly 140 on their way to the exterior of the reduced cylindrical portion 154. It is there they pass through entry port 157 into the individual vortex delivery passages 158 in the cylindrical passageway section 156 of the vortex rod assembly 140. The vortices exit the
30 individual vortex delivery passages 158 through the exit port 159. From there they pass into the vortex accumulation zone 72 in the resonator assembly 70. The fluid to be atomized enters the vortex accumulation zone 72 through a higher volume outlet port 147. This
35 embodiment works best with higher mass flows of vortex forming fluid. It can also be delivered through several tubes as well.

SUBSTITUTE SHEET (RULE 26)

-20-

In Figure 5 yet another embodiment 210 of the micro-atomizer device of the present invention is shown. Note that there are several differences between this embodiment and the embodiments shown in Figures 3 and 4. However, items having a similar location and function have the same reference number as in earlier figures but for the "2" in the hundreds place.

On the nozzle body assembly 220 the inlet for liquid or powder 237 to be atomized is substantially perpendicular to the long axis of the nozzle body assembly 220. Additionally, multiple radial passages 277 and an intersecting axial passages, 279 are formed in the rear of the resonator assembly.

The vortex rod assembly shown in Figure 5 also has several distinct differences. At its rear portion a reduced rear cylindrical portion 243 is included. This reduced rear cylindrical portion 243 is in fluid contact with the hollow portion 238 of the liquid or powder inlet 237. A liquid inlet bore 245 is formed in the reduced rear cylindrical portion 243 to allow the passage of the liquid or powder to be atomized into the fluid passage 246 which runs through the center portion of the vortex rod assembly 240. To stop fluid leakage the reduced rear cylindrical portion 243 is sealed against the inside of the nozzle body assembly 220 by packing rings 249 which are adjacent the guide sections 244.

It will be noted that as the small vortices are formed in the chamber 260 formed between the vortex rod assembly 240 and the nozzle body assembly 220 these small vortices travel as in the prior embodiments. Specifically, the vortices form in the large cylindrical section 250 in the central cylindrical section 226. The vortices are then concentrated over taper 252 in the taper section 228. Next, the vortices are organized over reduced cylindrical portion 254. The vortices are then concentrated by proceeding through one of a plurality of axial passageways 279 and then through the intersecting

SUBSTITUTE SHEET (RULE 26)

-21-

radial passageways 277. The vortices then proceed through the annular vortex delivery passage 258 into the vortex accumulation zone formed in the resonator assembly 270. The fluid to be atomized or flowable solid to be dispersed is drawn through outlet port 246.

In Figure 6 an adaptation 310 of the instant invention used to atomize fuel for burning is shown. Items having a similar location and function have the same reference numbers as in the earlier figures but for a "3" in the hundreds place. A blower 312 is placed at the inlet 380 to the nozzle body assembly 320. Fuel enters the central passage 346 through fuel inlet 314. A mounting flange 316 allows the combustion atomizer 310 of the present invention to be utilized in a fixed installation. An extension is formed at the downstream end of the vortex accumulation chamber - resonator assembly 370. A flame is propagated in the area designated by reference number 319.

Shown in Figures 7A, 7B, 7C and 7D is a somewhat different micro-atomizer 410 according to the present invention in a configuration to be an aerosol powered utilizing a pressurized liquid propellant driven medicament atomizer. Those items which have similar characteristics and placement to those items found in prior embodiments have the same numbers but for the number "4" placed in the hundreds place.

In this special version of the multipart micro-atomizer, the liquid to be atomized and the gas powerant are both uniquely moved through the vortex forming, shockwave geometries. Such devices are applicable to pressurized liquid propellant applications only, be they for delivery of medicaments or for use in aerosol delivery systems. The amount of fluid to be micro-atomized is small. The operation usually is pulsed.

In addition, this device incorporates a special vortex accumulation chamber and special additional geometries to uniquely and substantially reduce the

SUBSTITUTE SHEET (RULE 28)

-22-

existing velocity of the exiting micro-atomized fluid to 1/8 to 1/10 its normal speed to efficiently allow the delivery of drugs to the alveolar lung tissue.

5 In addition, due to the limited mass of gas available per actuation of the device, a unique three-part vortex intensifier is employed. Again, two large members, male and female, with unique triangular geometry are used.

10 The medicament metered dose inhaler micro-atomizer is shown in its complete form in Figure 7A. Note that an aerosol metered vial 412 is contained in a shell 413 at the rear end of the micro-atomizer 410. It contains pressurized liquid propellant and medicine. Medicament passes through a mouthpiece or nasal adapter 416 into the patient. In this embodiment, both the propellant, in this case a pressurized high density freon propellant, and the medicament both flow together through the vortex forming and intensifying geometries.

15 By reference to Figure 7B it may be seen that the aerosol metered dose valve vial 412 feeds a pressurized gas combined with and containing medicament into the rear end of the micro-atomizer 410. The pressurized gas and medicament then exits the microatomizer 410 through a resonator assembly 470 before passing through a special geometry to cause a material deceleration which is 1/8- 20 1/10 of prior art device speeds, in passing through zone 418 on its way to a mouthpiece adapter 419. If desired, a nasal adapter 411 may be attached over the mouthpiece 419. The deceleration zone and attendant geometry 418 is vital for proper drug delivery. It prevents normal 25 uncomfortable cold blast, inertial impaction, or the failure of drug to round the right angle turn in the larynx and reach the alveolar lung tissue generated by prior art medicament atomizers, which produce high speeds, cold blast, inertial impaction, patient discomfort, and 30 difficulty in patient inhalation and drug synchronization.

35 The actual arrangement of the three passage vortex system concentration may be seen by reference to Figures

SUBSTITUTE SHEET (RULE 28)

-23-

7C and 7D. Therein the vortex rod assembly 440 is shown in the midst of a nozzle body assembly 420. As in all other vortex micro-atomizers where in vortex concentrators, the vortices are formed and concentrated in the vortex accumulation zone, but in this case where the medicament to be atomized is also combined with the powerant fluid, the contents of the aerosol metered vial containing both 412 are caused to pass through multiple individual vortex delivery passages 458. It is in these individual passages 458 that the energy density of the flowing fluid is concentrated. For low flows, an equilateral triangle-shaped passage 458 has proven to be the most effective. Prior art devices always feature a single passage or delivery port. As the medicament enters the resonator zone 470 a vortex force field and a vacuum will be formed which micro-atomizes and draws additional outside entrainment air through the micro-atomizer 410. The vortex field and the shockwaves therein form small droplets or gasify the medicament and reduce its speed for administration at a substantially slow rate to allow proper medicine absorption in the lungs not in the back of the throat. It has been found that this embodiment produces much more uniform microdispersed droplets and much lower speed delivery to the lungs, and not to the larynx, stomach, or other undesirable areas in the patient as do the prior art atomizers of this type. All of the design geometries are necessary to achieve this goal.

In Figures 8A and 8B an embodiment 510 of the present invention is shown which mixes two or more liquids as they are being atomized. Items which have a similar location and function have the same reference numbers as in the earlier figures but for a "5" in the hundreds place. The nozzle body assembly 520 includes passageways 537a and 537b for the entry of multiple liquids to be atomized or powders to be dispersed. Inlets 537a and 537b are in contact with liquid paths 541a and 541b respectively which are formed on the exterior of flow separator 543. In the

SUBSTITUTE SHEET (RULE 26)

-24-

embodiment shown, a third path 541c is also shown for the combination of three fluids. The remainder of the operation of this embodiment is shown in the prior figures but for the fact that three separate substances pass into
5 the vortex accumulation zone. The high speed vortices and shockwaves within the vortex accumulation both micro-atomize and disperse the various fluids as well as intermixing the atomized and dispersed substances together, or react them chemically.

10 In Figures 9A and 9B a nebulizer assembly 610 is shown. Items having a similar location and operation bear the same reference numbers as in earlier embodiments but for the "6" in the hundreds place. By specific reference to Figure 9A it is seen that fluid is drawn out of a
15 liquid storage area, through liquid inlet 614, and past liquid flow adjustment valve 616 on its way to operative portion of the micro-atomizer of the present invention. The fluid is then drawn through the micro-atomizer of the present invention as shown in previous embodiments by the
20 vortices formed in the vortex forming liquid which enters the micro-atomizer through inlet 680. The nebulizer of the present invention is mounted in a housing 613 having an outlet 615. A closer view of the micro-atomizer, as utilized in the nebulizer assembly 610 shown in Figure 9A,
25 appears in Figure 9B. Note that a vortex accumulation - resonator chamber 678 is formed downstream from the resonator zone 670. Note also that in Figure 9B the entry of the fluid to be atomized does not enter the micro-atomizer radial to the long axis of the micro-atomizer as
30 shown in Figure 9A but rather enters axially. Prior art medical nebulizers produce both large and small droplets which must be separated or baffled. No such separation is required in the nebulizer incorporating the micro-atomizer of the present invention. In many cases, prior
35 art nebulizers require high pressure.

In Figure 10 yet another embodiment 710 of the present invention is shown. Items having a similar

SUBSTITUTE SHEET (RULE 28)

-25-

location and function bear the same reference number as in prior embodiments but for the "7" in the hundreds place. Herein the micro-atomizer of the present invention 710 is shown in conjunction with a precise mass flowmeter 790 similar to that described in my copending application which is incorporated by reference herein. The liquid to be atomized enters through inlet 745. Precise control of the vortex forming liquid is obtained by utilization of the flowmeter output control 792 which causes a precise amount of vortex forming liquid to be passed through conduit 796 into the micro-atomizer of the present invention. A signal from the precision flowmeter 790 may also be sent to a servo motor to control the position of the nozzle rod assembly in the nozzle body assembly. By such precise control of fluid flow a very precise micro-atomization pattern and quantity delivered can be obtained.

Figures 11A and 11B show a patient mask mounted atomizer 810. Items having a similar location and function bear the reference numbers as in prior embodiments but for the number "8" in the hundreds place. The mask mounted atomizer 810 is also used in conjunction with a precise vortex mass flowmeter assembly 890 as in Figure 10. Within the flowmeter assembly 890 are flow rods 898 which precisely monitor the flow through the flowmeter assembly 890. In this embodiment 810, oxygen may be used as a vortex forming fluid as it enters through inlet 880. If desired, a flow signal indicating liquid delivery may be obtained from a probe as shown in reference number 816. An oxygen flow signal can be obtained from another probe as shown at reference number 815. If desired, the gas may be heated by a heater inserted as shown at reference number 897. The exiting micro-atomized fluid passes through a mask 819 into the mouth and nasal passages of a patient. This device can also be used with breathing aid devices, respirators, ventilators and apnea devices such as B-PAP devices.

SUBSTITUTE SHEET (RULE 26)

Key Advantages

5 The micro-atomizer of the present invention does not utilize mechanical fluid shearing caused by high pressure gases or liquids and high velocity flow used in almost all current atomizers which thus reduces the possibility of damage to the atomized product and has eliminated clogging. None of the fluid to be atomized flows in the vortex forming passages. The exception is this invention's metered dose inhaler version in which the small amount of medicament and vortex action maintain cleanliness. This is particularly important where a genetically engineered material or delicate chemical compounds are to be atomized. In chemical processes micro-atomized catalysts will enable faster more efficient reactions because of the greater dispersion of catalysts (catalysts are generally expensive) in the reacting chemicals. Also in combining chemical compounds, both microatomization and the dynamic motion of the vortex force field aides and abets these processes materially.

10
15
20
25
30
35 The micro-atomization device of the present invention may also be utilized without concern with fluids having a wide variety of densities and viscosities. Typically, prior art atomizers have difficulty or fail when atomizing fluids with high densities and viscosities requiring square law increases in pressure proportional to these two parameters. In addition, such fluids need to be forced through small holes with the resultant shear atomization effect to be atomized at all. No such tortuous passage of the fluid to be atomized occurs through small holes or passages is required in the present invention, nor does the fluid to be atomized have to pass through these small passages or holes. In this invention, atomization uniquely occurs in three dimensional force fields in open space.

The high vacuum created in the vortex accumulation zone aside from the transport of fluid and the effects of

-27-

5 cold boiling also provides usable signals which can readily be used for mass flow measurement of and thus electronic control of the input of vortex forming fluids or the fluid to be atomized and thus control the entire micro-atomizing process.

10 Because there is no liquid flow in the energy generation portion of the microatomizer of the present invention except for metered dose inhalers, there is no opportunity for clogging of the flow passages within the micro-atomizer or conflict with the vortex generating process. Additionally, there is no atomizing product accumulation or any requirement to clean the device. The device is self-cleaning, in most applications, as well as due to the cleaning action of the rotating vortex.

15 Precise mass flow information can be provided inherently by generating mass related signals as the micro-atomizer of the present invention operates, since all vortex devices are mass driven and responsive.

20 Very low forward speed micro atomization flows are possible. Additionally, the flow of fluid can be softened and changed to a variety of different patterns as shown in medicament atomizer illustrated in Figures 7A, 7B, 7C and 7D.

25 Fuels may be turned directly into gaseous or near gaseous states. A gaseous state is particularly desirable when injecting fuel directly into combustion chambers with its vastly enhanced ability to entrap air for combustion. Greater efficiencies can be obtained if engine exhaust gases are used to power the vortices to micro-atomize and mix the mixture of fuel and air gases. And if the fuel is additionally injected directly into combustion chambers, emissions can be cut substantially Engine heat may be used to add substantive efficiency to the process as well.

35 Water based paints or coatings may be micro-atomized easily as the powerful shockwaves and cold boiling used to form droplets have enough force to break through the

SUBSTITUTE SHEET (RULE 26)

-28-

high surface tension of water droplets. In addition, highly viscous fluids used in coating processes such as primers or adhesives may be micro-atomized, with no concern about viscosity.

5 Intersecting arrays of vortices may be established to mix fluids as shown in Figures 8A and 8B or intensify the energy process by multiplying microatomization devices.

10 In still other embodiments in the present invention, servo mechanisms may be incorporated to precisely move the dumbbell shaped vortex rod assembly within the nozzle body assembly to adjust liquid and gas flow rates or droplet size of the micro-atomized liquid.

15 Thermal energy may be added to the vortex forming fluids with simple film heating devices to substantially increase the energy output of the micro-atomizing devices. Products of combustion and steam can be used to intensify and power more powerful devices.

20 The major heat transfer cooling effects of the micro-atomizer of the present invention allows it to be used in dispensing heated fluids or liquified metals into powders, or in the manufacture of polyester material or in the manufacture of metalized powders. It can also be used to augment modern air conditioning processes and enhance the effectiveness of the new lower efficiency refrigerants.

25 The utility of the present invention with water is of particular significance. Heated water may be rapidly cooled thus permitting higher efficiencies when first stage water cooling is used in new generation air conditioning systems. Contaminants may be easily separated from water during the micro-atomization process. Sea water may also be desalinated by the micro-atomization of the present invention, with less energy due to efficient energy coupling, and greater surface area of the vapo-
30 rous output.
35

Experimental use has shown that the size of the droplets produced by the microatomizer of the present

SUBSTITUTE SHEET (RULE 26)

-29-

invention has a significantly more uniform distribution than that available with the prior art microatomizers, namely monodispersed droplets (limited size range) versus the usual bell shaped distribution curve of droplet size.

5 The concentrated high energy field produced by the micro-atomizer of the present invention also has use in situations characterized by extraordinary heat transfer capabilities, such as are found in normal industrial heating and cooling systems. Heat can also be used as the
10 primary power source as is mass flow and pressure normally. Steam is an ideal vortex forming fluid. In addition the micro-atomizer of the present invention may be used for the fluidization of powders and hybrid liquids, the activation of catalysts, the activation of
15 both chemical and organic catalysts, in multi-component chemical reactors, the spray drying and flavoring of foods, and the spray drying of chemicals and pharmaceutical powders for drug manufacture.

 The unusual nature of vortex and shockwave energy
20 provided by the microatomization system of the present invention allows it to be used not only for the atomization of liquids but also the dispersal of particles of solid matter to include fluidized powders such as powdered coal, powdered paints or coatings, powdered drugs
25 and/or hybrid compounds.

 Either steam or compressed air may be used as the vortex forming fluid for the liquid to be micro atomized. Because of the thermal energy in steam and because of its higher mass density and viscosity, steam is a preferred
30 working fluid, particularly for industrial applicators. Heat also enhances gas viscosity and thus the efficiency of the vortex formation process.

 The nozzle body and vortex rod may be formed from metal, plastic or ceramic.

35 While the invention has been described by reference to its preferred and alternate embodiments, those of ordinary skill in the art will understand that numerous

SUBSTITUTE SHEET (RULE 26)

-30-

other embodiments are possible. Such numerous other embodiments shall fall within the scope of the appended claims.

SUBSTITUTE SHEET (RULE 26)

-31-

WHAT IS CLAIMED IS:

1. A micro-atomizing device comprising:

a fluid conduit having an outer chamber and an inner channel;

5 means for forming moving vortices in a first fluid in said outer chamber of said fluid conduit;

at least one vortex passage within said fluid conduit constructed and arranged to geometrically reduce the areas and volumes intensify the moving vortices, and create shockwaves in said moving vortices;

10 said at least one vortex passage being in fluid communication with a vortex accumulation zone;

said inner channel being constructed and arranged to conduct a second fluid through said fluid conduit to said vortex accumulation zone;

15 whereby the accumulation of said moving vortices in said vortex accumulation zone creates a force field having a high vacuum and shockwaves such that said high vacuum draws said second fluid through said inner channel and said shockwaves causes said second fluid to gasify or form into uniform droplets.

2. The micro-atomizing device as defined in Claim 1 wherein said fluid conduit is a nozzle body assembly having:

25 an inlet for the passage of said first fluid into said outer chamber;

said outer chamber forming:

a vortex formation zone;

30 a vortex concentration zone downstream from said vortex formation zone;

a vortex organization zone downstream from said vortex concentration zone;

35 said vortex organization zone being upstream from said at least one vortex passage.

SUBSTITUTE SHEET (RULE 26)

-32-

3. The micro-atomizing device as defined in Claim 2 wherein said nozzle body assembly further includes a large central section for the formation of said moving-vortices, a tapered section for the concentration of said moving vortices and a second cylindrical section for the organization of said moving vortices and a section for placement of said at least one vortex passage.

4. The micro-atomizing device as defined in Claim 3 wherein said vortex accumulation zone is formed in a resonator assembly portion of said nozzle body assembly.

5. The micro-atomizing device as defined in Claim 4 wherein said nozzle body assembly further includes a vortex rod assembly constructed and arranged to mount within said nozzle body assembly and in conjunction with said nozzle body assembly, to form said vortex formation zone, said vortex concentration zone and said vortex organization zone.

6. The micro-atomizing device as defined in Claim 5 wherein said vortex rod assembly is adjustably positioned within said nozzle body assembly.

7. The micro-atomizing device as defined in Claim 6 wherein the flow of fluid to be atomized is controlled by adjusting the position of the vortex rod assembly within said nozzle body assembly.

8. The micro-atomizing device as defined in Claim 7 wherein the position of said vortex rod assembly within said nozzle body assembly is controlled by a servo motor.

9. The micro-atomizing device as defined in Claim 5 wherein said vortex rod assembly includes said inner channel.

SUBSTITUTE SHEET (RULE 26)

-33-

10. The micro-atomizing device as defined in Claim
5 wherein said vortex rod assembly includes a large
cylindrical section which in conjunction with said large
5 cylindrical section of said nozzle body assembly forms
said vortex formation zone.

11. The micro-atomizing device as defined in Claim
10 wherein said vortex rod assembly further includes a
10 tapered section which in conjunction with said tapered
section of said nozzle body assembly forms said vortex
concentration zone.

12. The micro-atomizing device as defined in Claim
15 11 wherein said vortex rod assembly includes a reduced
cylindrical portion which in conjunction with said second
cylindrical section of said nozzle body assembly forms
said vortex organization zone.

13. The micro-atomizing device as defined in Claim
20 12 wherein said at least one vortex channel is formed
between said vortex rod assembly and said nozzle body
assembly.

14. The micro-atomizing device as defined in Claim
25 12 wherein said at least one vortex channel is formed in
said vortex rod assembly.

15. The micro-atomizing device as defined in Claim
30 13 wherein said at least one vortex channel is formed
between flutes formed on said vortex rod assembly.

16. The micro-atomizing device as defined in Claim
35 14 wherein said at least one vortex channel is at least
one substantially cylindrical opening through a
cylindrical section of said vortex rod assembly to
intensify the vortices.

SUBSTITUTE SHEET (RULE 28)

-34-

17. The micro-atomizing device as defined in Claim 12 wherein said at least one vortex channel is an annular space between said vortex rod assembly and said nozzle body assembly.

18. The micro-atomizing device as defined in Claim 1 wherein said droplets are substantially uniform in size.

19. A micro-atomizing device for the micro-atomization or gasification of fuels comprising:

a blower assembly;

a source of liquid or powdered solid fuel;

a hollow nozzle body having an inlet in fluid connection with said air blower;

a vortex rod assembly having a fuel flow passage therethrough, said vortex rod assembly constructed and arranged to mount within said hollow nozzle body;

said hollow nozzle body and said vortex rod assembly forming a vortex formation zone downstream from said substantially radial inlet within said hollow nozzle body:

a vortex concentration zone downstream from said vortex formation zone;

a vortex organization zone downstream from said vortex concentration zone;

at least one vortex energy density concentration zone downstream from said vortex organization zone;

said at least one vortex energy density concentration zone constructed and arranged to increase the rotational speed of said vortices;

a vortex accumulation zone downstream from said at least one vortex energy density concentration zone;

said vortex accumulation zone causing a vacuum force field with shockwaves therein to be formed;

whereby fuel is drawn through said fuel flow passage by said vacuum into said vortex accumulation zone and then caused to form into droplets or gas.

SUBSTITUTE SHEET (RULE 26)

-35-

20. The micro-atomizing device defined in Claim 19 further including a decelerator extension piece following said air vortex accumulation zone.

5

21. A micro-atomizing device for delivering medicaments comprising:

a metered dose aerosol vial containing a medicament and a propellant;

10

a hollow nozzle body having a substantially radial inlet in fluid communication with said aerosol vial;

a vortex rod assembly constructed and arranged to mount within said hollow nozzle body;

15

said hollow nozzle body and said vortex rod assembly forming a vortex formation zone downstream from said substantially radial inlet within said hollow nozzle body;

a vortex concentration zone downstream from said vortex formation zone producing at least three vortex concentrations;

20

a vortex energy density concentration zone downstream from said vortex concentration zone having a substantially triangular geometry;

a vortex accumulation zone downstream from said vortex energy density concentration zone;

25

a declaration zone downstream from said vortex accumulation zone.

22. The micro-atomizing device for-delivering medication as defined in Claim 21 further including a mouthpiece downstream from said deceleration zone.

30

23. The micro-atomizing device for delivering medication as defined in Claim 22 further including an adaptor for fitting into a nasal passage downstream from said deceleration zone.

35

24. The micro-atomizing device for delivering

SUBSTITUTE SHEET (RULE 20)

-36-

medication as defined in Claim 22 wherein the fluid or powder to be micro-atomized is introduced into the vortex forming and vortex concentration zones.

5 25. The micro-atomizing device for delivering medication as defined in Claim 22 in which said propellant flows with the micro-atomized medicament.

10 26. A micro-atomizing device for combining a plurality of liquids comprising: a hollow nozzle body;
a vortex rod assembly constructed and arranged to adjustably mount within said hollow nozzle body;

said vortex rod assembly having a central fluid flow passage therethrough;

15 said central fluid flow passage having a channel and an entry port for each of said plurality of liquids to be mixed;

said hollow nozzle body having an inlet in fluid communication with each of said entry ports;

20 said hollow nozzle body having an inlet for a vortex forming fluid;

said hollow nozzle body and said vortex assembly rod forming a zone for the generation of vortices in said vortex forming fluid downstream from said inlet;

25 said hollow nozzle body and said vortex rod assembly forming a zone for the concentration of vortices in said vortex forming fluid downstream from said zone for the generation of vortices;

30 said hollow nozzle body and said vortex rod assembly forming a zone for the organization of vortices in said vortex forming fluid downstream from said zone for the concentration of vortices;

35 said hollow nozzle body and said vortex rod assembly forming a zone for the energy density concentration of said vortices downstream from said zone for the concentration of vortices;

said hollow nozzle body forming a zone for the

SUBSTITUTE SHEET (RULE 26)

-37-


accumulation of vortices downstream from said zone for the energy density concentration of said vortices;

5 said zone for the accumulation of vortices characterized by having a high vacuum force field and shockwaves;



10 whereby said plurality of fluids may be drawn through said channels by said high vacuum force field into said zone for the accumulation of vortices and atomized by said shock waves and thereby mixed together or chemically reacted.

SUBSTITUTE SHEET (RULE 26)

FIG. 1

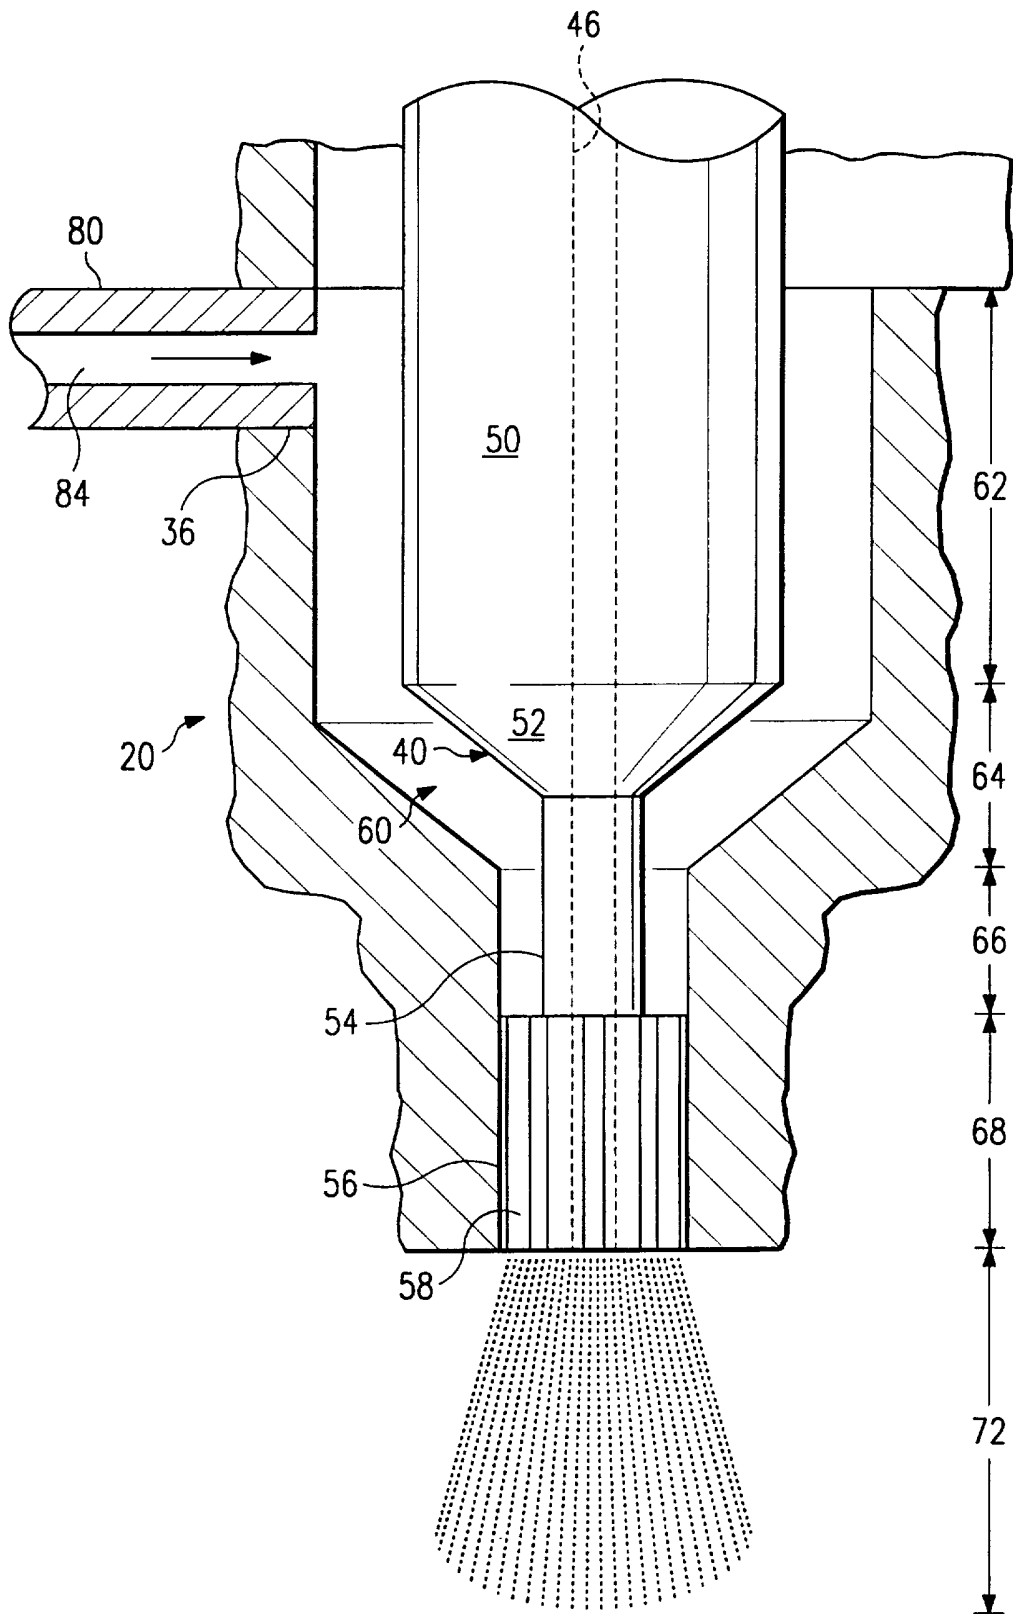

2/10

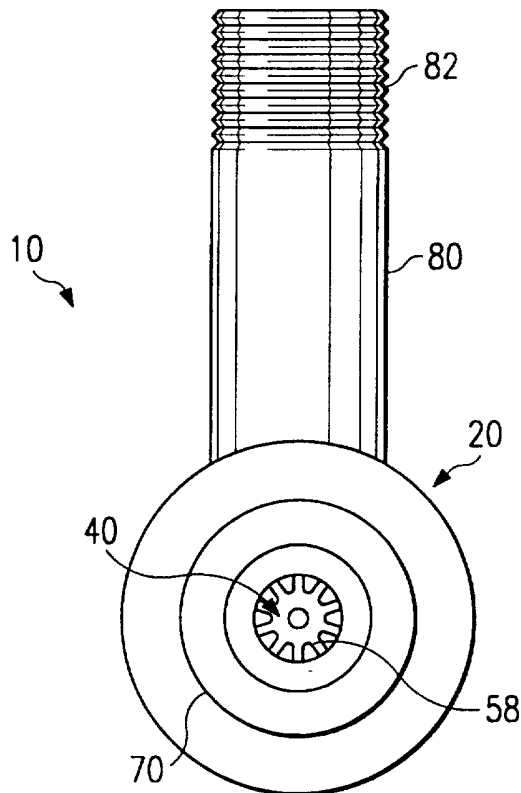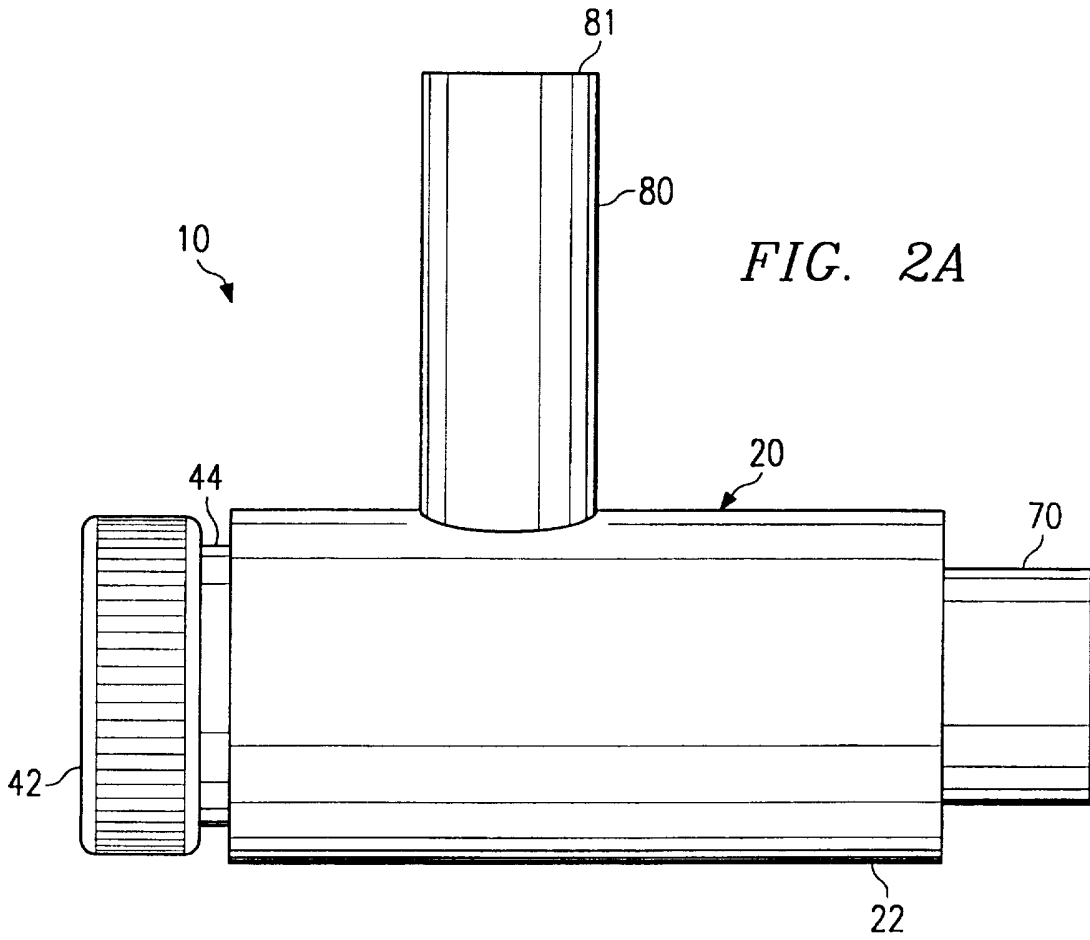

SUBSTITUTE SHEET (RULE 28)

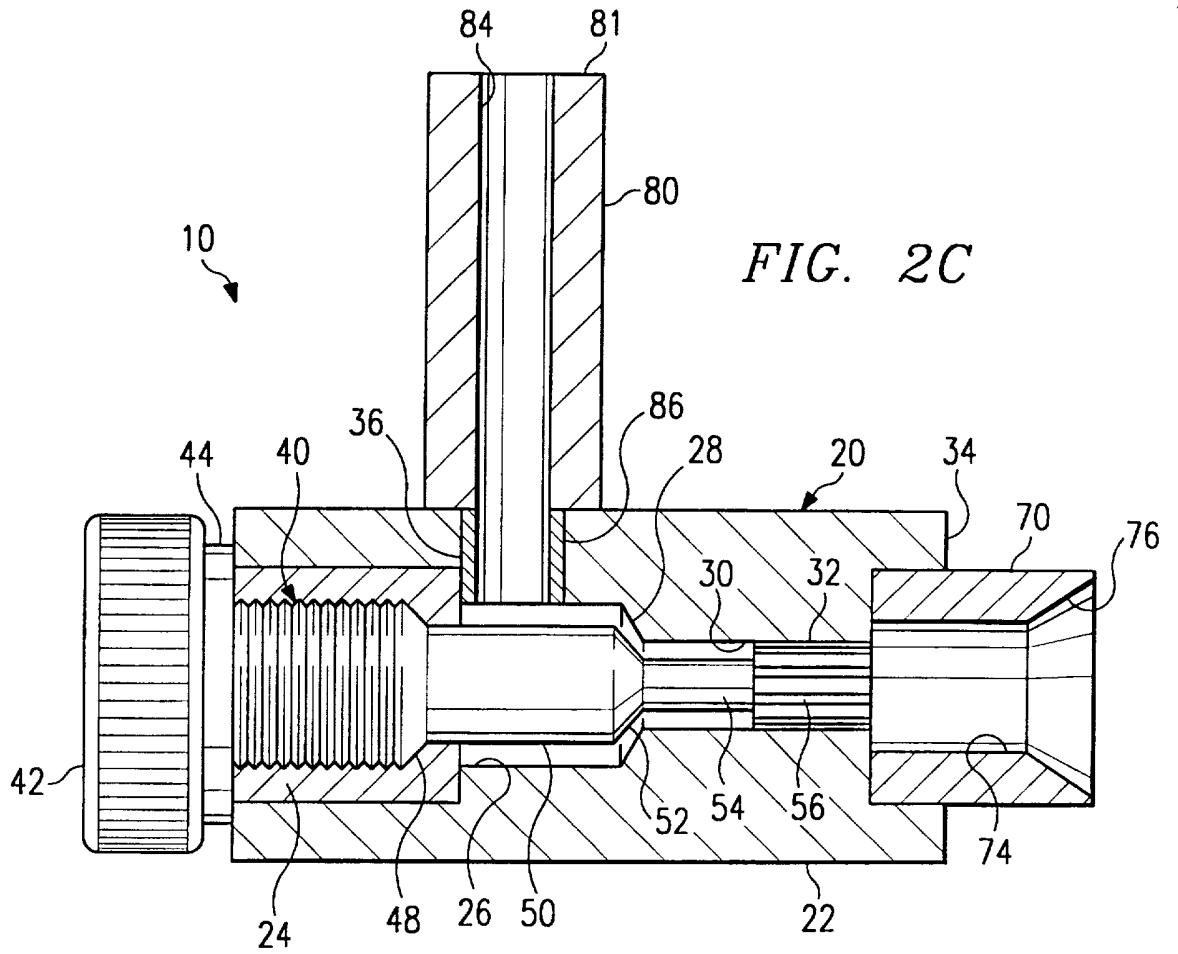


FIG. 2C

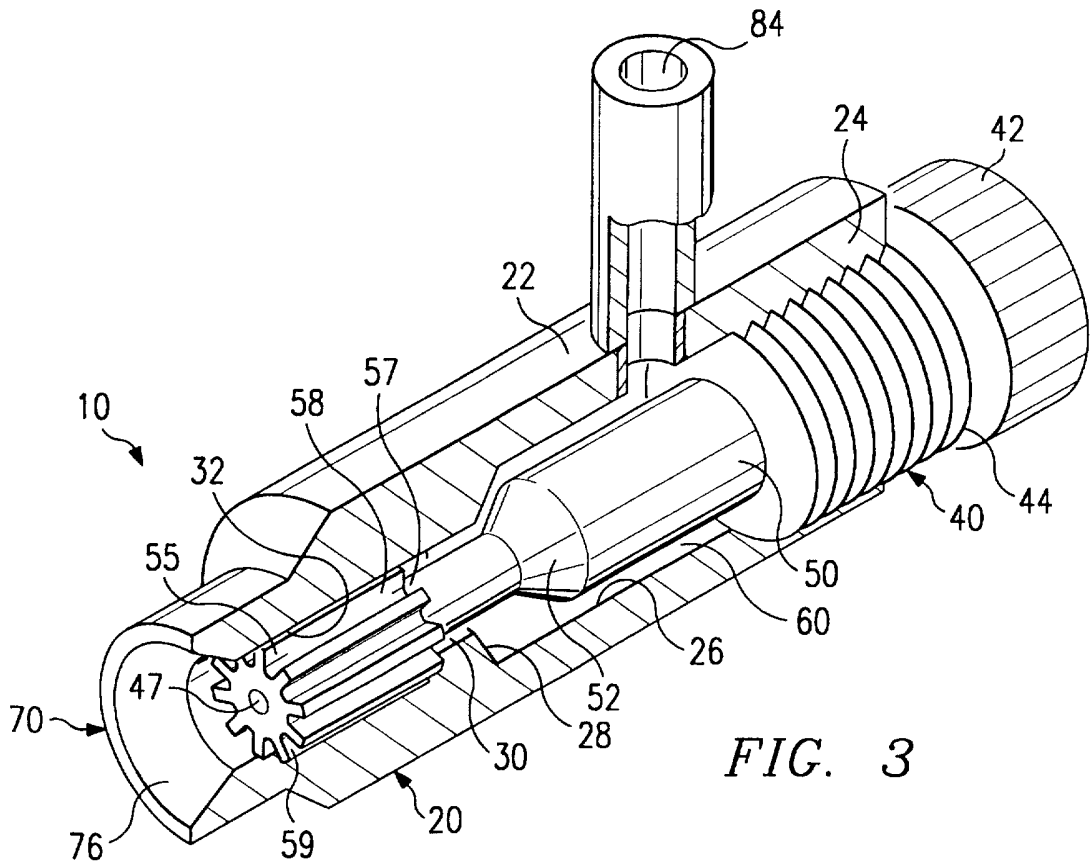


FIG. 3

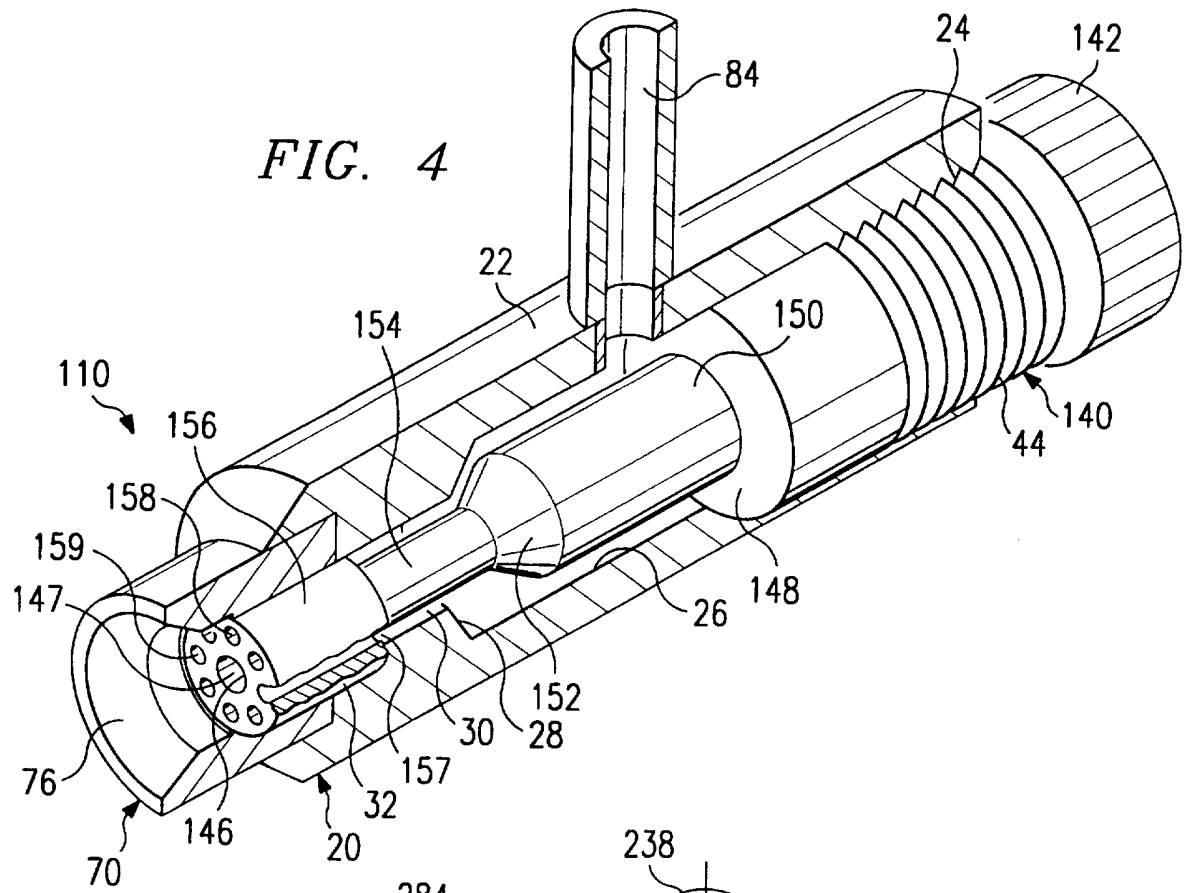


FIG. 4

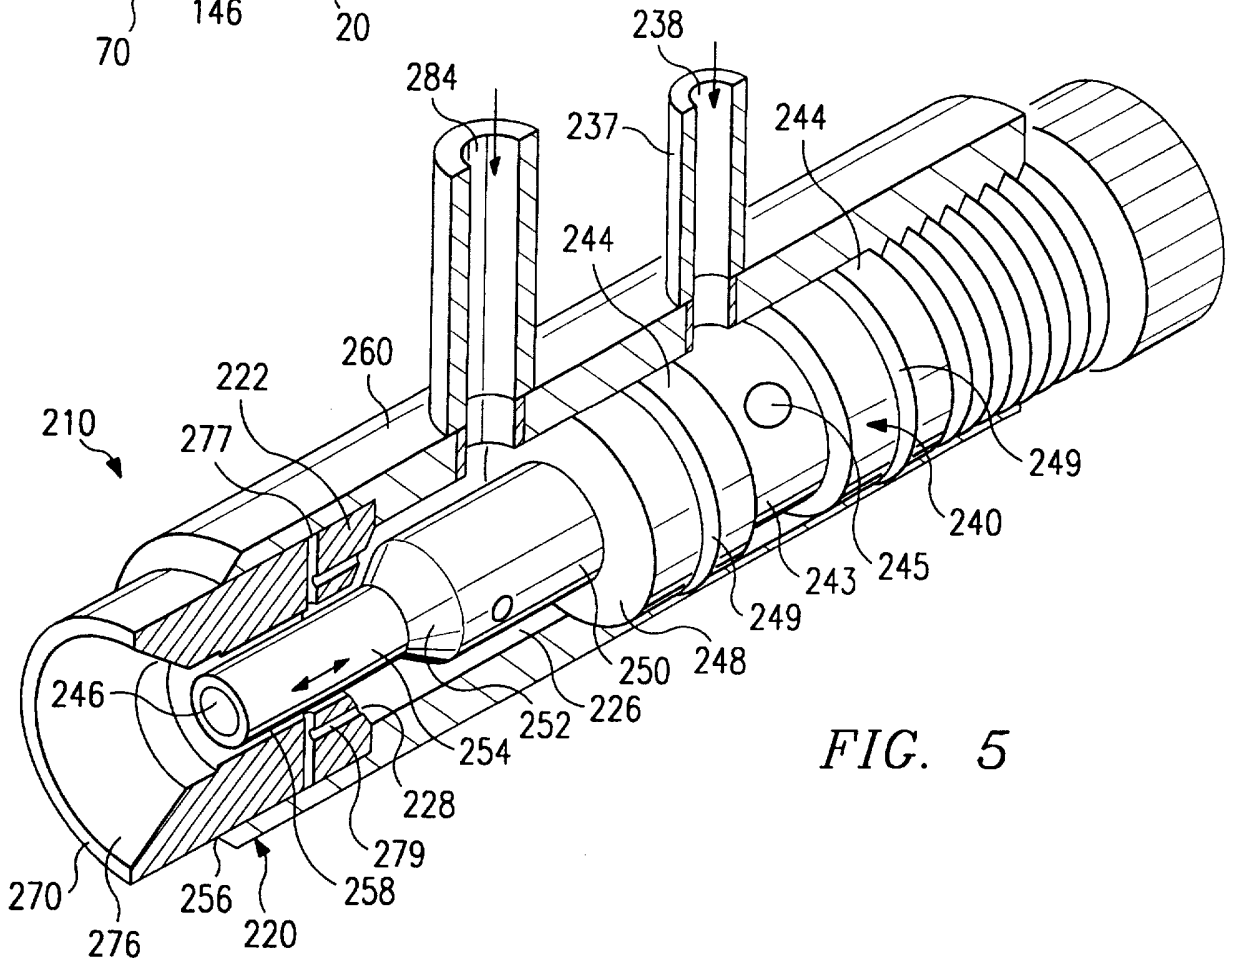


FIG. 5

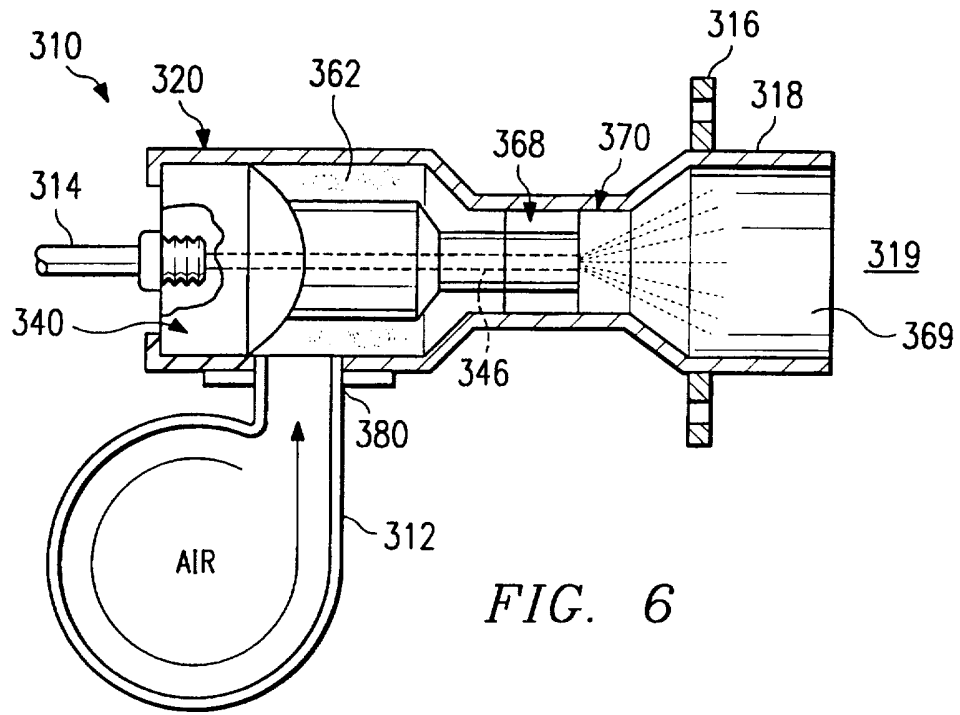
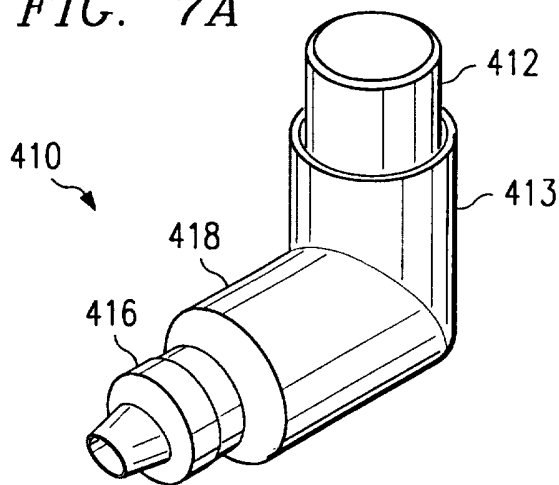
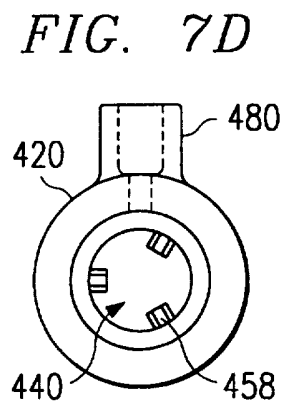
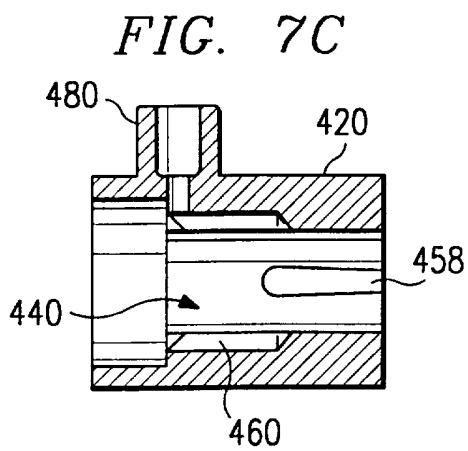
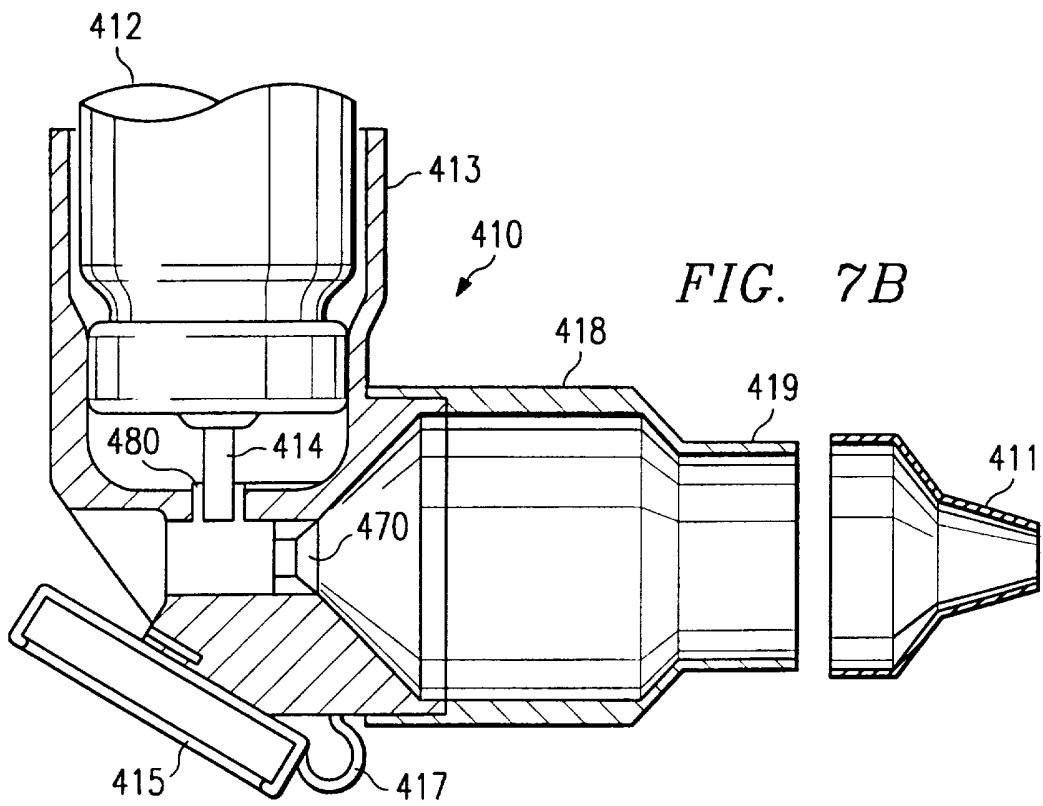


FIG. 6

FIG. 7A





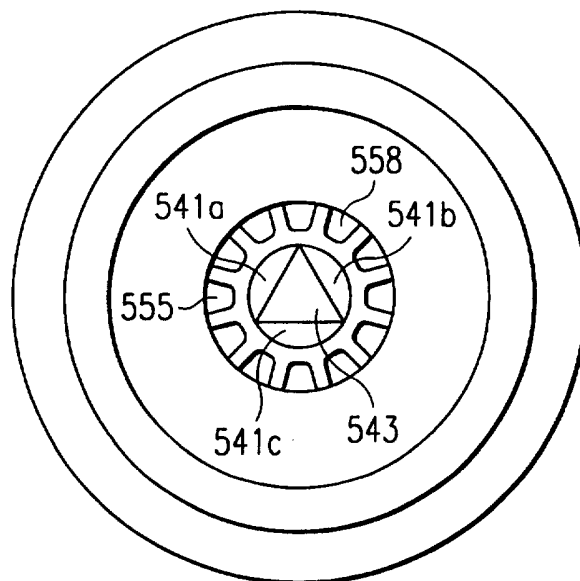
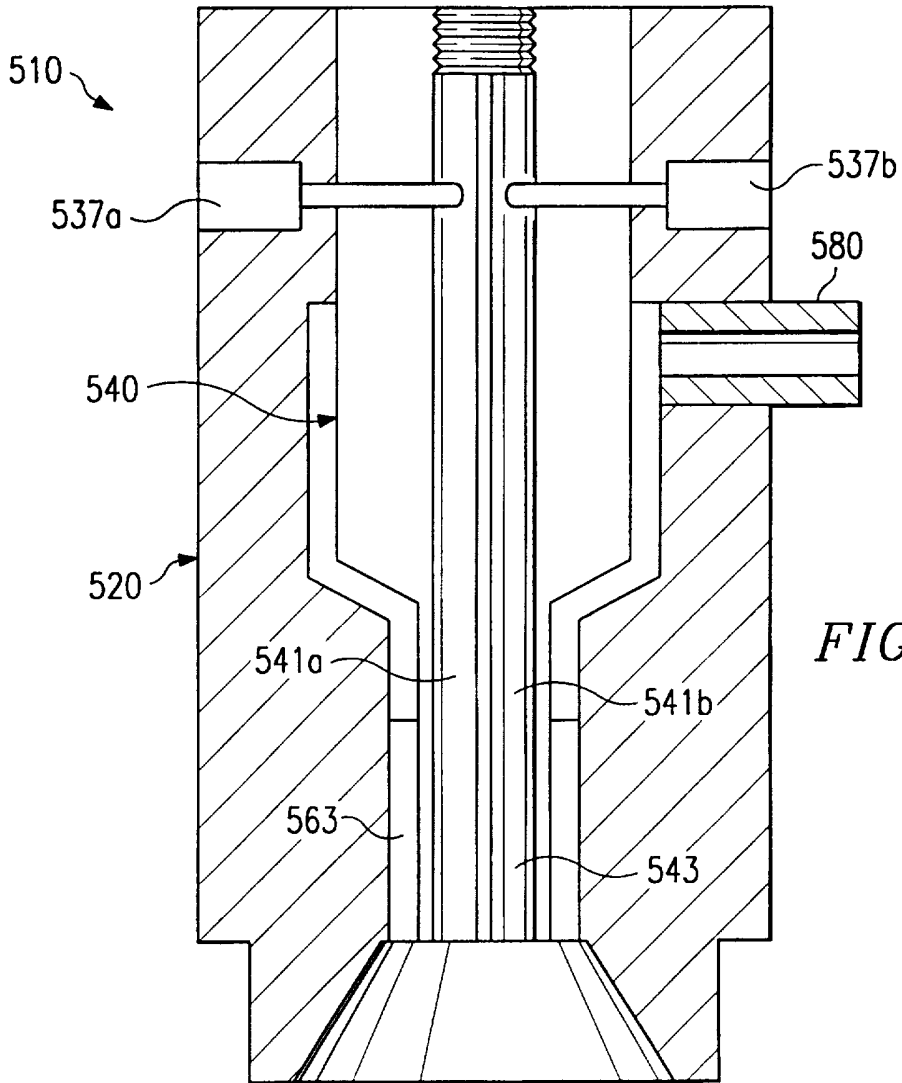


FIG. 9A

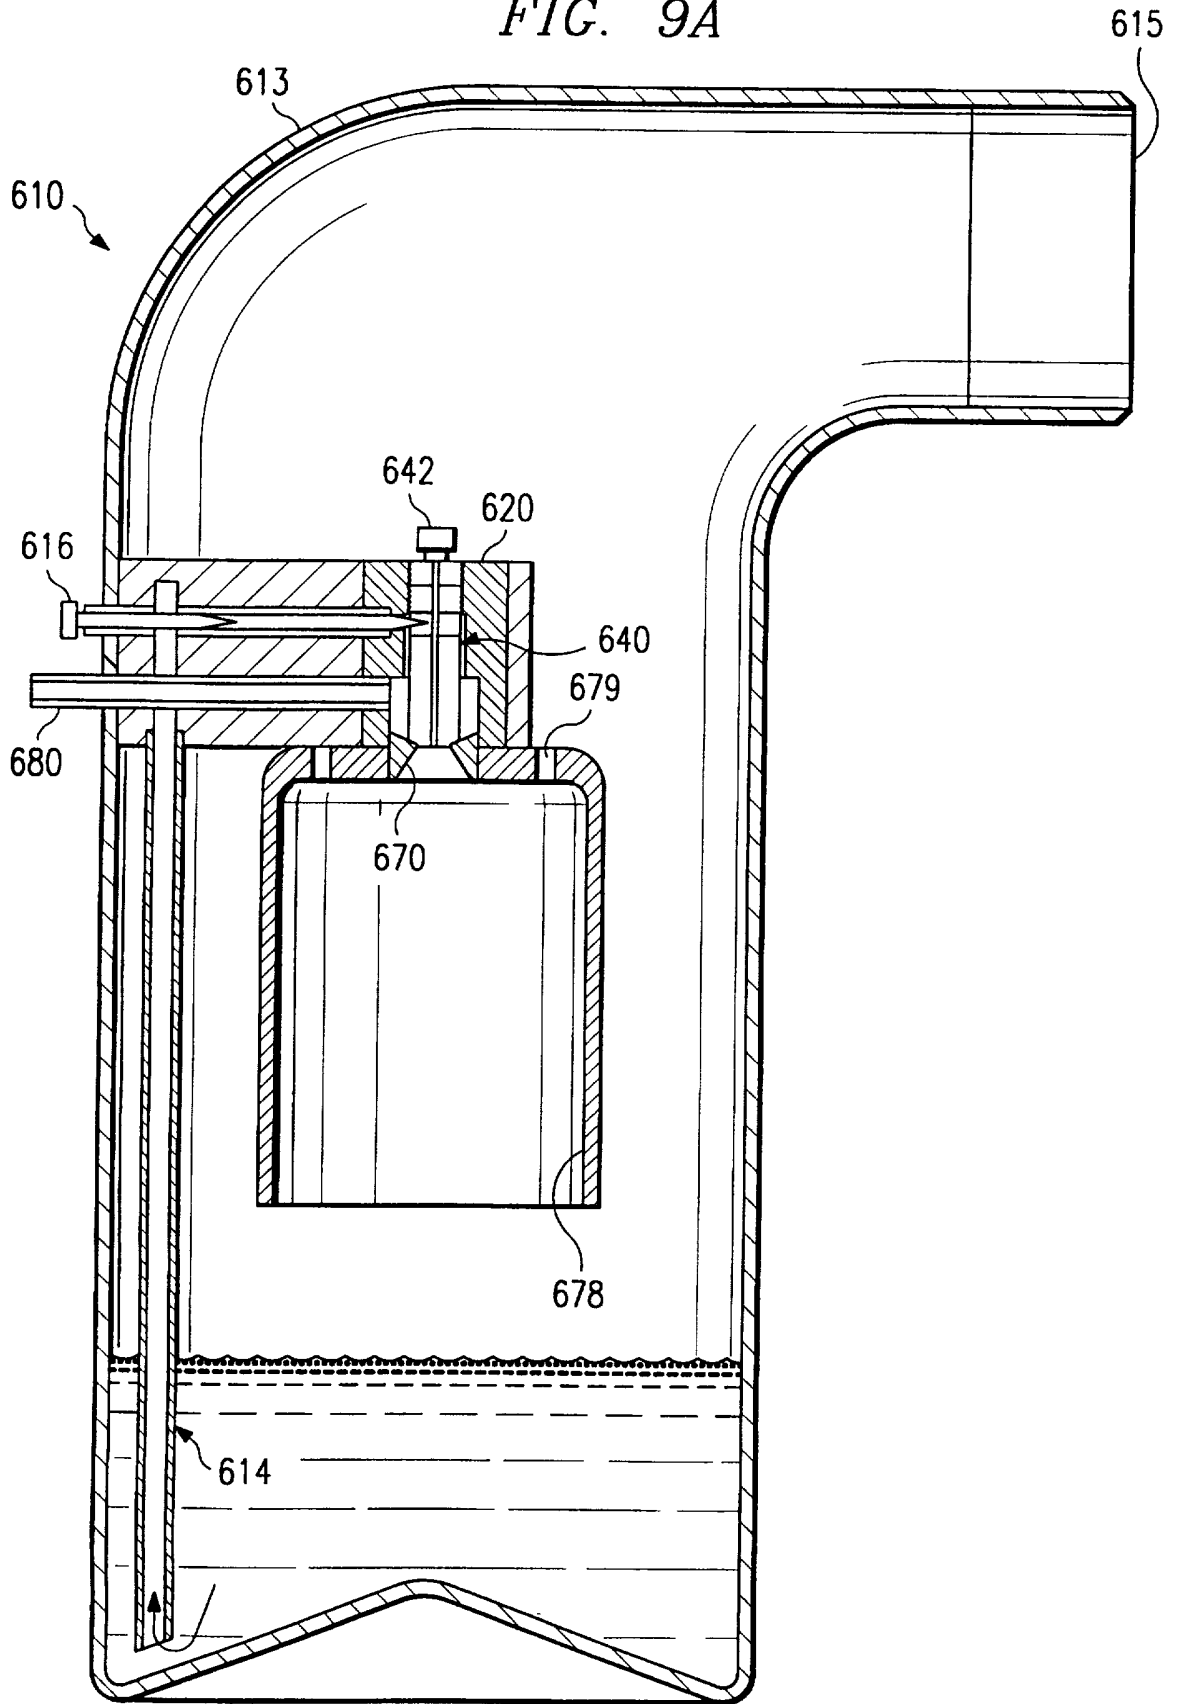


FIG. 9B

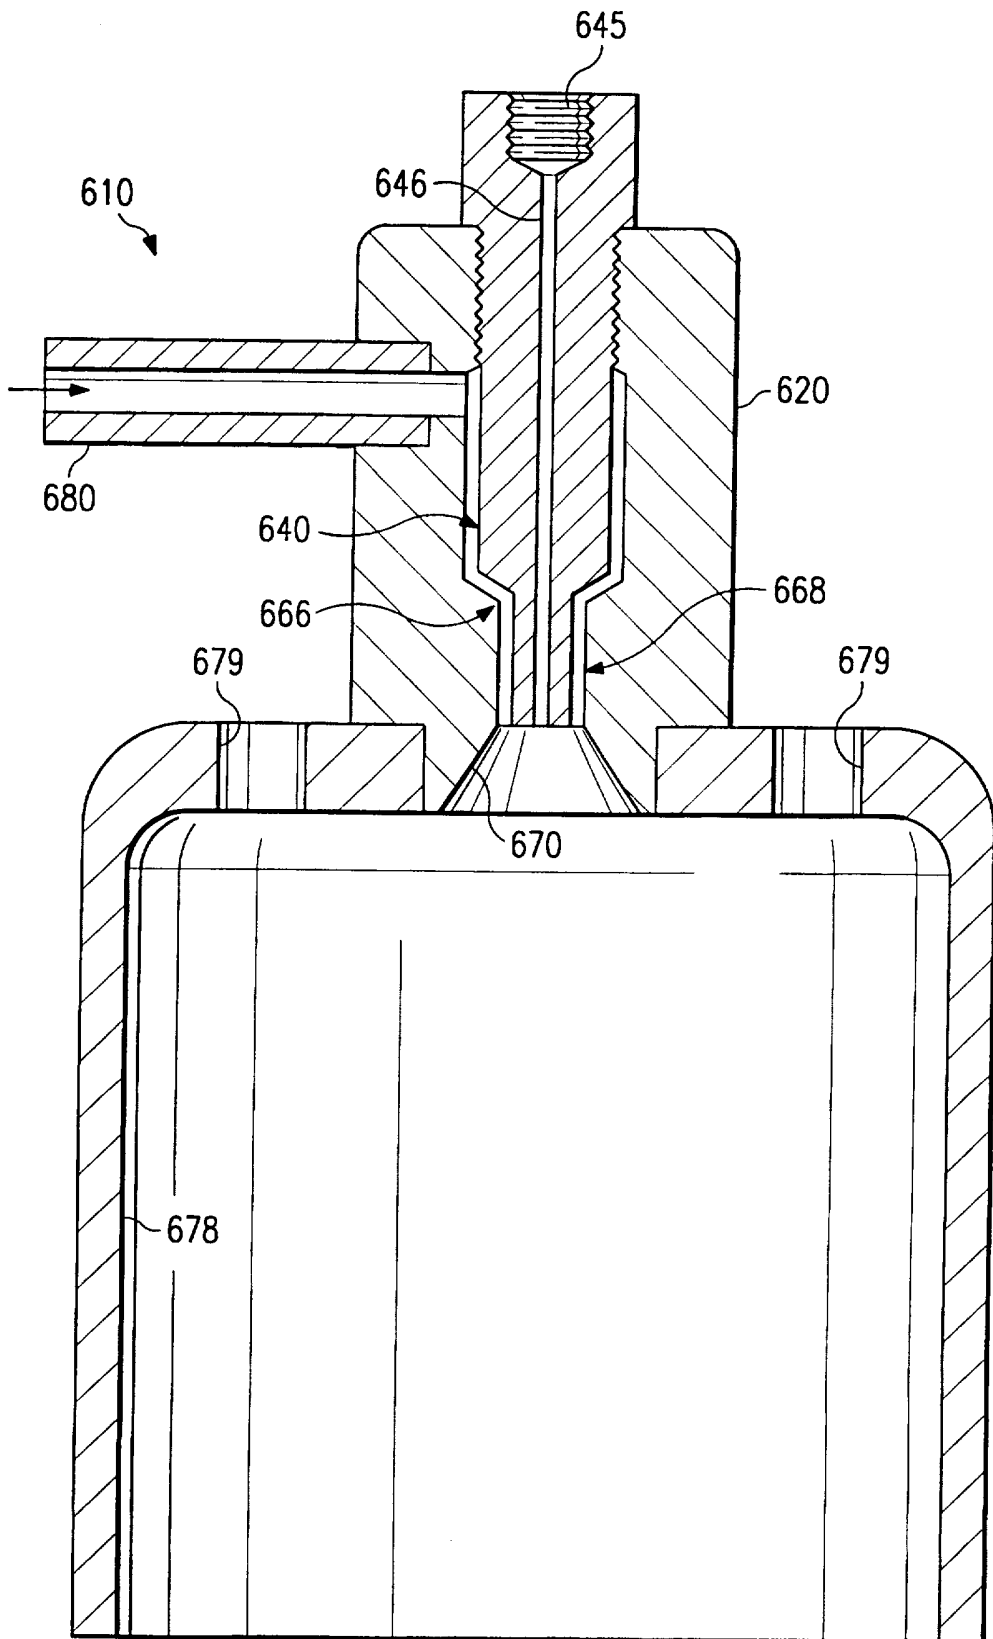


FIG. 10

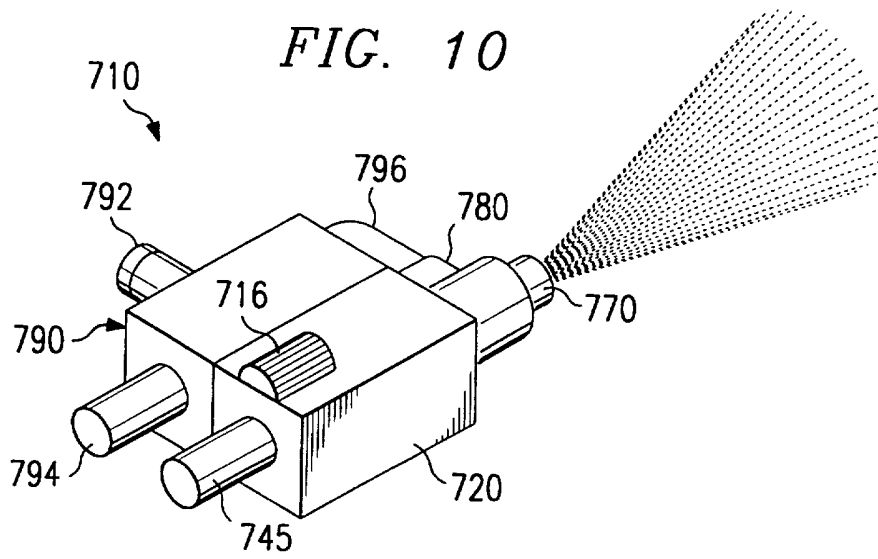


FIG. 11A


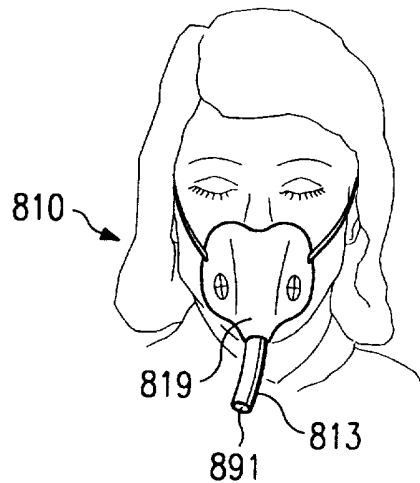


FIG. 11B

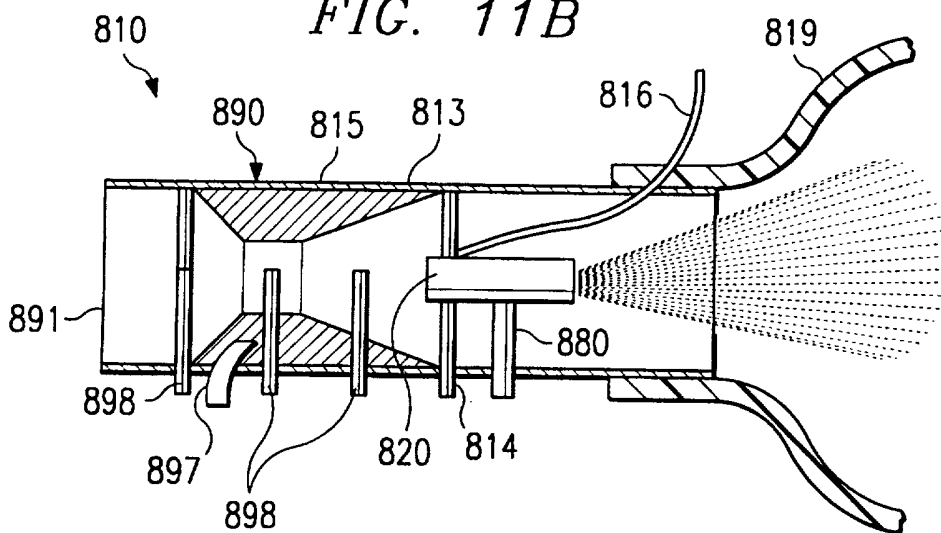

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/10542

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :B05B 7/10
US CL :239/401, 406

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 239/401, 406, 403, 405

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 4,453,542 A (Hughes) 12 June 1984, see figures 2-4.	1-5, 9, 10, 18-25 ----- 15
X ---- Y	US 4,241,877 A (Hughes) 30 December 1980, see figures 1-4 and column 3, lines 3-5.	1-10, 18-25 ----- 15
Y	US 721,900 A (Lassie et al.) 03 March 1903, see figure 5.	15
Y	US 622,245 A (Luttrell) 04 April 1899, see figure 3.	15
A	US 1,770,232 A (Fegley) 08 July 1930.	none

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

04 SEPTEMBER 1997

Date of mailing of the international search report

24 SEP 1997

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C., 20231

Authorized officer

LESLEY D. MORRIS

Facsimile No. (703) 305-3230

Telephone No. (703) 308-0629

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/10542

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3,163,362 A (McFee) 29 December 1964.	none
A	US 4,595,143 A (Simmons et al.) 17 June 1986.	none
A	US 5,513,798 A (Tavor) 07 May 1996.	none