



(86) Date de dépôt PCT/PCT Filing Date: 2014/03/13
 (87) Date publication PCT/PCT Publication Date: 2014/10/02
 (45) Date de délivrance/Issue Date: 2022/08/02
 (85) Entrée phase nationale/National Entry: 2015/09/14
 (86) N° demande PCT/PCT Application No.: US 2014/025896
 (87) N° publication PCT/PCT Publication No.: 2014/160136
 (30) Priorités/Priorities: 2013/03/13 (US61/779,706);
 2014/03/13 (US14/208,820)

(51) Cl.Int./Int.Cl. *A61L 15/12* (2006.01),
C08J 3/24 (2006.01), *C08L 1/08* (2006.01),
C08L 29/04 (2006.01), *C08L 5/04* (2006.01),
C08L 5/08 (2006.01), *C08L 89/04* (2006.01)
 (72) Inventeurs/Inventors:
 DIEHN, KEVIN, US;
 DOWLING, MATTHEW, US;
 RAGHAVAN, SRINIVASA R., US;
 KING, DAVID R., US
 (73) Propriétaires/Owners:
 UNIVERSITY OF MARYLAND, US;
 THE GENERAL HOSPITAL CORPORATION, US;
 REMEDIUM TECHNOLOGIES, INC., US
 (74) Agent: NELLIGAN O'BRIEN PAYNE LLP

(54) Titre : PATE POLYMERE BIOCOMPATIBLE FONCTIONNELLE AVANCEE UTILISEE COMME AGENT
 HEMOSTATIQUE POUR LE TRAITEMENT DE TISSU ET DE CELLULES ENDOMMAGES
 (54) Title: ADVANCED FUNCTIONAL BIOCOMPATIBLE POLYMER PUTTY USED AS A HEMOSTATIC AGENT FOR
 TREATING DAMAGED TISSUE AND CELLS

(57) Abrégé/Abstract:

A hemostatic putty for treatment of a variety of wounds topographies, including but not limited to highly three dimensional wounds, for example gunshot wounds and impalements, is disclosed. The putty is comprised of a matrix polymer weakly crosslinked or not crosslinked such that a viscoelastic matrix is formed. The viscoelastic nature of the putty is tunable by the composition and enables the putty to conform to a variety of wound topographies. Likewise, a hemostatic polymer, for example chitosan or hydrophobically modified chitosan, is included in this matrix to impart hemostatic properties and tissue adhesive on the putty. The hemostatic polymers disclosed prevent microbial infection and are suitable for oxygen transfer required during normal wound metabolism.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2014/160136 A1(43) International Publication Date
2 October 2014 (02.10.2014)(51) International Patent Classification:
C09K 3/00 (2006.01)

(21) International Application Number:

PCT/US2014/025896

(22) International Filing Date:

13 March 2014 (13.03.2014)

(25) Filing Language:

English

(26) Publication Language:


English

(30) Priority Data:

61/779,706 13 March 2013 (13.03.2013) US
14/208,820 13 March 2014 (13.03.2014) US(71) Applicant: UNIVERSITY OF MARYLAND, OFFICE
OF TECHNOLOGY COMMERCIALIZATION
[US/US]; 2130 Mitchell Building, College Park, Maryland
20742 (US).(72) Inventors: DIEHN, Kevin; 512 Greenwood Rd., Towson,
Maryland 21204 (US). DOWLING, Matthew; 387 Tech-
nology Dr., College Park, Maryland 20742 (US).
RAGHAVAN, Srinivasa R.; 12300 Loft Lane, Silver
Spring, Maryland 20904 (US). KING, David R.; Suite
810, 165 Cambridge Str., Cambridge, Maryland 02114
(US).(74) Agents: MORALES, Joseph et al.; Whiteford, Taylor &
Preston LLP, Seven Saint Paul Street, Baltimore, Maryland
21202 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: ADVANCED FUNCTIONAL BIOCOMPATIBLE POLYMER PUTTY USED AS A HEMOSTATIC AGENT FOR
TREATING DAMAGED TISSUE AND CELLS(57) Abstract: A hemostatic putty for treatment of a variety of wounds topographies, including but not limited to highly three di-
mensional wounds, for example gunshot wounds and impalements, is disclosed. The putty is comprised of a matrix polymer weakly
crosslinked or not crosslinked such that a viscoelastic matrix is formed. The viscoelastic nature of the putty is tunable by the com-
position and enables the putty to conform to a variety of wound topographies. Likewise, a hemostatic polymer, for example chitosan
or hydrophobically modified chitosan, is included in this matrix to impart hemostatic properties and tissue adhesive on the putty.
The hemostatic polymers disclosed prevent microbial infection and are suitable for oxygen transfer required during normal wound
metabolism.

WO 2014/160136 A1

**ADVANCED FUNCTIONAL BIOCOMPATIBLE POLYMER PUTTY USED AS A
HEMOSTATIC AGENT FOR TREATING DAMAGED TISSUE AND CELLS**

TECHNICAL FIELD

5 This invention relates to the field of polymer applications for the treatment of wounds.

BACKGROUND ART

10 Around the turn of the new millennium, commercially available hemostatic technologies abruptly changed from ancient to new-age. While cotton gauze had served as the gold standard for treatment of bad bleeds for thousands of years, it was displaced by an arsenal of new materials which had been engineered to rapidly stop bleeding from severe injuries of the extremities. Such technologies were useful to US soldiers in both Operation Iraqi Freedom and Operation Enduring Freedom. The key products contracted to the military include 1) Quikclot[®] (a registered trademark of Z-MEDICA, LLC) Combat Gauze, a gauze impregnated with kaolin nanoparticle powder which absorbs large amounts of water and hence concentrates clotting factors, 2) the Hemcon Patch[®] (a registered trademark of HemCon Medical Technologies, Inc.), a freeze-dried bandage composed of chitosan, a material extracted from shrimp shells, and 3) Woundstat[®] (a registered trademark of TraumaCure, Inc.), a clay mineral-based powder which, like Quikclot, absorbs high volumes of fluid quickly.

15 Although these products typically have done an adequate job of treating bleeding from extremities or superficial wounds in combat, they all have significant drawbacks. For example, Quikclot nanoparticles and Woundstat granules are very difficult to remove once an injured soldier arrives at a medical facility; this can cause permanent tissue scarring and/or peripheral clotting. Furthermore, these powders also pose a liability of blowing into the eyes of soldiers and medics in the field. The Hemcon Bandage is relatively easy to remove, but it offers little flexibility in application due to the preformed shape of the solid bandage. Combat Gauze, and other gauze types, requires significant manual packing and compression times which put the lives of field medics at significant risk, particularly when under fire. Indeed, the salient common denominator among all currently available hemostats is the requirement for sustained compression. It is also worth noting that even with sustained compression on the bleeding site, such products demonstrate only mediocre effectiveness in treating severe life-threatening bleeds on the battlefield.

20 Like the solid, compressible products (gauze, bandage, powder) described above, countless other related technologies have also been developed over the last decade using essentially the same form factors and raw materials, with only incremental (or ambiguous) improvements demonstrated in pre-clinical studies. As such, a need exists for a hemostatic

25
30
35

material which is easily packable and requires no sustained compression time. Of course, this material also should be highly effective, safe, low cost, durable and easily removable for it to be useful to military and civilian emergency medics.

DESCRIPTION OF THE INVENTION

5 A composition of matter for use in healing wounds and stopping hemorrhage is described in this application. The composition of matter has four components: a hemostatic biopolymer, a secondary polymer, an ionic crosslinker, and a solvent. The hemostatic biopolymer may be a chitosan, alginate, cellulosic or a polypeptide capable of assisting in the treatment of wounds and hemorrhage. The hemostatic biopolymer in some instances may be a hydrophobically
10 modified chitosan. The secondary biopolymer may be a large molecular weight polymer, such as polyvinyl alcohol. The crosslinker in some embodiments is sodium borate, a weak crosslinker.

In other embodiments, the hybrid composition of matter is used in a method for controlling bleeding. In yet other embodiments, the composition of matter is part of a kit for
15 application of the composition of matter to a wound.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention. The accompanying drawings illustrate an embodiment of the invention and together with the
20 general description, serve to explain the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other features, aspects, and advantages of the present invention are considered in more detail, in relation to the following description of embodiments thereof shown in the accompanying drawings, in which:

FIG 1 shows a demonstration of viscoelastic form factor of polyvinyl alcohol-borate-chitosan
25 putty is shown. The putty is elastic (solid-like) enough to be held in the hand, but the putty is viscous (liquid-like) enough to be molded and stretched to various shapes to fit wounds and will conform to any wound topography.

FIG 2 shows an example putty (polyvinyl alcohol-borate-chitosan) can be tuned to have specific viscous and elastic properties by modifying polymer concentration, polymer molecular weight,
30 crosslinker type, and crosslinker concentration. Here the polymer concentration is varied from about 12 wt% (a) to 7 wt% (b) with a borate crosslinker at a 1:40 mass ratio of the polymer. The chitosan concentration is 1 wt% in both 2 (a) and 2 (b).

FIG 3 shows (a) dynamic rheology of a viscoelastic putty consisting of polyvinyl alcohol crosslinked with sodium borate (PVA-Borax) blended with hydrophobically-modified chitosan
35

(hmCS) (upper curves) vs. an hmCS sample crosslinked with sodium tripolyphosphate (NaTPP) (lower curves) and (b) dynamic rheology of a polyvinyl alcohol-borate putty (upper curves) and of a PVA-Borax putty with hemostatic polymer, hmCS, added (lower curves).

FIG 4 shows an example putty, polyvinyl alcohol crosslinked with sodium borate (PVA-Borax) blended with hydrophobically-modified chitosan (hmCS), (a) can be easily inserted into a simulated three-dimensional wound (b), holds its own weight (c), and be removed entirely from the cavity (d-e).

FIG 5 shows an *in vivo* application of hemostatic putty to porcine arterial 5-French laceration (gunshot model). In (a), a 60 cc syringe loaded with putty, consisting of polyvinyl alcohol crosslinked with sodium borate (PVA-Borax) blended with hydrophobically-modified chitosan (hmCS), is positioned near an aperture above the artery. In (b), the putty is syringed into the bleeding cavity through the aperture. In (c), the delivered putty is observable at the aperture. Next in (d), the aperture is widened to observe hemostasis in the cavity filled with putty. Finally, in (e) and (f) the putty is removed by hand, with no re-bleeding observed.

FIG 6 shows a diagram of a syringe wherein the composition of matter is contained as a kit for application to a wound.

BEST MODE(S) FOR CARRYING OUT THE INVENTION

The invention summarized above may be better understood by referring to the following description, which should be read in conjunction with the accompanying claims and drawings in which like reference numbers are used for like parts. This description of an embodiment, set out below to enable one to build and use an implementation of the invention, is not intended to limit the invention, but to serve as a particular example thereof. Those skilled in the art should appreciate that they may readily use the conception and specific embodiments disclosed as a basis for modifying or designing other methods and systems for carrying out the same purposes of the present invention. Those skilled in the art should also realize that such equivalent constructs and cell lines do not depart from the spirit and scope of the invention in its broadest form.

Hybrid Composition of Matter of Putty

In this application the term “hemostat” means a composition of matter, such as a polymer putty, that adheres to tissues and forms aggregates with blood cells and blood cell clots, assisting in the clotting process and effectively stopping hemorrhage. As utilized here, the term “aggregate” refers to the hydrophobic interactions between the red blood cells and a hydrophobically modified biopolymer and interactions with other components of the composition of matter that assist in the control of hemorrhage.

The term “hydrophobically modified biopolymer” refers to a synthetic or naturally occurring polysaccharide or peptide; where the hydrophobic modification consists of the covalent binding of hydrophobic substituents to the polymer backbone. The manufacture and composition of the hydrophobically modified biopolymer is described in United State Patents 5 8,664,199 and 8,668,899; and also in United States Application Publication Numbers US2008/0254104A1, US2009/0062849A1, and US2012/0252703A1, all of which are incorporated herein by reference in their entireties.

A hybrid composition of matter that provides a moldable and adhesive hemostatic agent comprises at least four components: (1) a hemostatic biopolymer; (2) a secondary polymer 10 matrix; (3) a crosslinker, and (4) a solvent. The combination of these elements forms a “putty,” which in this application refers to a composition of matter with sufficient viscosity and hemostatic activity to assist in controlling bleeding and hemorrhage.

The hemostatic biopolymer may comprise a hydrophobically modified biopolymer matrix capable of hydrophobically interacting with tissue, particularly hemostatic interaction 15 with damaged tissue. In some embodiments, the hemostatic polymer is comprised of at least one polymer and a plurality of short hydrophobic substituents attached along the backbone of the polymer. In other embodiments, the hemostatic biopolymer is not hydrophobically modified. The polymer is either synthetic or naturally occurring, including for example, water-soluble polysaccharides and water-soluble polypeptides. For example, the polymer is one or more 20 hydrophobically modified polysaccharides selected from the group consisting of chitosans, alginates, celluloses or gelatins.

All four types of materials allow for the transfer of oxygen and moisture required to metabolize the wound healing physiology. Chitosan also has inherent anti-microbial properties; this is a crucial asset for materials covering open wounds because it eliminates the need to 25 constantly change wound dressings in order to disinfect the wound manually between changes. Positive charges along the backbone of chitosan cause it to interact electrostatically with negatively charged blood cells, thus creating a sticky interface between the putty and the wound. Chitosan provides hemostasis for a period of about 30 min before becoming saturated with blood cells and losing adhesion to the wound site. Hydrophobically-modified (hm) - chitosan, in 30 particular, has been shown to increase the tissue adhesion properties of materials in which it is incorporated. Here, too, the addition of hm-chitosan into a PVA-Borax putty increases the overall adhesive properties of the putty. Adhesiveness of the putties can be tuned by the amount of hm-chitosan included in the blend relative to PVA-Borax, or by the level of hydrophobic modified to the hm-chitosan molecule itself.

Chitosans (whether modified or unmodified) include, for example, the following chitosan salts: chitosan lactate, chitosan salicylate, chitosan pyrrolidone carboxylate, chitosan itaconate, chitosan niacinate, chitosan formate, chitosan acetate, chitosan gallate, chitosan glutamate, chitosan maleate, chitosan aspartate, chitosan glycolate and quaternary amine substituted chitosan and salts thereof, etc. Alginates (whether modified or unmodified) include, for example, sodium alginate, potassium alginate, magnesium alginate, calcium alginate, aluminum alginate, etc. Cellulosics include, for example, hydroxyethyl cellulose, hydroxypropyl cellulose, methyl cellulose, hydroxypropyl methyl cellulose, hydroethyl methyl cellulose, etc. In an example, the polymeric component of the hemostat comprises mixtures of polysaccharides between classes, e.g., cellulotics and chitosans, or within the same class, e.g., two different types of alginate.

The polymeric components suitable for use in the hybrid composition can comprise one or more hydrophobically modified polysaccharide selected from the group consisting of cellulotics, chitosans and alginates. Such polysaccharide starting materials from which the hydrophobically modified polysaccharides can be made are known to those skilled in the art. Cellulosics, chitosans and alginates are all abundant, natural biopolymers. Cellulosics are found in plants, whereas chitosans and alginates are found in the exoskeleton or outer membrane of a variety of living organisms. All three types of materials allow for the transfer of oxygen and moisture required to metabolize the wound healing physiology.

Gelatins are polypeptides derived from the skin and bones of mammals. These polypeptides are degraded forms of their pre-cursor protein, collagen. Gelatin is a thermo-reversible biopolymer which undergoes a phase transition from solid to liquid above 32°C at concentrations of 3 wt% or greater in water. Preferred sources of gelatin include gelatin from bovine skin, gelatin from bovine bones, gelatin from porcine skin and gelatin from porcine bones. These polypeptides display excellent biocompatibility and resorption characteristics.

The second component of the putty is a secondary polymer matrix. In a preferred embodiment, the secondary polymer matrix is a polyvinyl alcohol (PVA) in the molecular weight range of 125,000 Da to 140,000 Da. In a further embodiment, the PVA is in the molecular weight range of 50,000 Da to 125,000 Da. In another further embodiment, the PVA is in the molecular weight range of 140,000 Da to 300,000 Da. In such exemplary embodiment, the secondary polymer can be included in concentration of between 5 wt% and 15 wt%. In a preferred embodiment, the level of hydrolysis of the PVA is in a range from 70% to 100% hydrolyzed. In a further embodiment, the level of hydrolysis of the PVA is in a range from 30% to 70%. A crosslinker, sodium tetraborate decahydrate, is included in the blend at a concentration of between 0.1 wt% and 1.0 wt%. The hemostatic polymer, chitosan or

hydrophobically-modified chitosan, is included in the putty blend a concentration of between 0.1 wt% and 3 wt%. It is contemplated that the crosslinker may include sodium tetraborate decahydrate, or other borate salts, such as sodium perborate or sodium metaborate.

5 When a crosslinker is present, the crosslinker interacts with the secondary polymer based upon hydrogen bonding or ionic weak interactions. For example, when borate salts are used as a crosslinker, di-diol interactions with the matrix polymer assist in enhancing the viscoelasticity of the hybrid composition. Such interactions are present in compositions without a crosslinker, but addition of the crosslinker helps enhance these properties. The weak interaction between the polymer chains results in the viscoelastic character of the putty that enables it to conform to highly three-dimensional wounds. Likewise, the viscoelastic character may be tuned by varying 10 polymer molecular weight, polymer concentration, crosslinker type, or concentration of crosslinker. The putty may be comprised of entirely matrix polymer with the hemostatic polymer as an additive or it may be comprised of the matrix polymer in a solvent, for example water or organic solvents.

15 The ratio of the liquid and solid-like character of the putty can be tuned through the use of different polymer concentrations, polymer molecular weights, type of ionic cross linker, or concentration of ionic cross linker. For example, the putty may be in the form of a very viscous fluid, but one that is still capable of being injected from a medical syringe into very narrow wounds, such as gunshot or impalement wounds. Likewise, the putty may take the form of a higher modulus, solid-like pad for shallower wounds. Note that the solid-like putty will still 20 deform over time to conform to the three-dimensional topography of the wound. Additionally, the weak crosslinking nature of the putty enables it to swell when in contact with wound exudate. This swelling action of the putty can provide a compressive force normal to the wound surface when placed into a confined wound cavity. In a preferred embodiment the compressive force is between 5 and 15 N. In a further embodiment the compressive force is between 15 and 25 30 N. In a further preferred embodiment, the compressive force is between 0.1 and 5 N.

The weakly cross-linked polymer matrix has both *viscous* properties of a liquid (i.e. it flows if left for long times on a surface) and *elastic* properties of a solid (i.e. it can be bounced off of a surface like a rubber ball) and thus can be termed viscoelastic (having both liquid and 30 solid character). This viscoelastic character enables the putty to conform to the three-dimensional topography of wounds to ensure intimate contact of the hemostatic polymer agent and the surface of the wound. Likewise, the solid-like nature of the material enables the putty to transmit external compressive force to the interior surfaces of the wound.

The fourth component of the hybrid composition of matter consists of a solvent. In some 35 preferred embodiments, the solvent is water.

In one preferred embodiment, the composition of matter, putty, is composed of a (1) hydrophobically modified biopolymer matrix capable of hydrophobically interacting with tissue, particularly hemostatic interaction with damaged tissue, (2) polyvinyl alcohol (PVA) or polyvinyl acetate, (3) a borate salt, such as sodium tetraborate decahydrate, and (4) water.

5 **Method of Manufacturing Hybrid Composition of Matter of Putty**

The putty, or hybrid composition, is manufactured by adding the hemostatic polymer to the secondary matrix polymer, in some cases one or both may be dissolved in solvent, and adding the crosslinker to the polymer mixture. In a preferred embodiment, the secondary matrix polymer is PVA. The PVA is dissolved in water by heating at 95°C for 15 minutes under stirring. The PVA is then cooled to room temperature and mixed with the hemostatic polymer and the crosslinker. This mixture is then stirred or kneaded for 15 minutes to 60 minutes to mix the components and entangle the matrix polymer chains until yielding a viscoelastic putty.

In another embodiment, the putty material may be made of such viscosity that it can be used as a hemostatic pad for topical application on wounds. The putty should be soft enough that it can be shaped to appropriate size and may conform closely to the three dimensional topography of the wound, but solid enough that it can withstand the force of compression from the individual administering treatment to the wound and that it can transmit this compressive force to the surface of the wound.

In one exemplary method, the hydrophobically modified polymer is manufactured, where the hydrophobic modifications consist of the addition of hydrophobic substituents to the polymer's backbone. In one example, a hydrophobic substituent comprising a hydrocarbon group having from about 8 to about 18 carbon atoms is attached to the backbone of the at least one polysaccharide. In an example, the hydrocarbon group comprises an alkyl or arylalkyl group. As used herein, the term "arylalkyl group" means a group containing both aromatic and aliphatic structures. Procedures for hydrophobically modifying the above mentioned polysaccharides are described in United State Patents 8,664,199 and 8,668,899; and also in United States Application Publication Numbers US2008/0254104A1, US2009/0062849A1, and US2012/0252703A1.

In one embodiment of the present hemostatic composition, the degree of substitution of the hydrophobic substituent on the polysaccharide is from about 1 to about 100 moles of the hydrophobic substituent per mole of the polysaccharide. In an example, more than one particular hydrophobic substituent is substituted onto the polysaccharide, provided that the total substitution level is substantially within the ranges set forth above. In a further preferred embodiment, the degree of substitution of the hydrophobic substituent on the polysaccharide is from about 40 to 65 moles of the hydrophobic substituent per mole of the polysaccharide. In

another preferred embodiment, the molecular weight of the polysaccharides used as the hemostatic polymer range from about 50,000 to about 1,500,000 grams per mole. In examples, the molecular weight of the polysaccharides comprising the spray ranges from about 50,000 to about 25,000 grams per mole. As used herein, the term "molecular weight" means weight average molecular weight. The preferred methods for determining average molecular weight of polysaccharides are low angle laser light scattering (LLS) and Size Exclusion Chromatography (SEC). In performing low angle LLS, a dilute solution of the polysaccharide, typically 2% or less, is placed in the path of a monochromatic laser. Light scattered from the sample hits the detector, which is positioned at a low angle relative to the laser source. Fluctuation in scattered light over time is correlated with the average molecular weight of the polysaccharide in solution. In performing SEC measurements, again a dilute solution of polysaccharide, typically 2% or less, is injected into a packed column. The polysaccharide is separated based on the size of the dissolved polysaccharide molecules and compared with a series of standards to derive the molecular weight.

In an example, the putty material is mixed with a variety of water-soluble reagents that result in faster and more efficient healing of the wound. A first class of reagents that is mixed with the hydrophobically modified polysaccharide is comprised of those reagents that contribute to the hemostatic integrity of the clot such as for example human thrombin, bovine thrombin, recombinant thrombin, and any of these thrombins in combination with human fibrinogen. Other examples of the first class of reagents include fibrinogen, Factor VIIa, and Factor XIII. A second class of reagents that is mixed with the hydrophobically modified polysaccharide is comprised of those reagents that prevent microbial infection such as norfloxacin (anti-microbial), silver (anti-microbial), ampicillin (antibiotic) and penicillin (antibiotic) Reagents from both classes, e.g. recombinant thrombin and norfloxacin, or reagents from the same class, e.g. recombinant thrombin and fibrinogen, may be mixed with the polysaccharide.

The hydrophobically modified polymer is combined with the secondary polymer matrix and a solvent. In a preferred embodiment, the secondary polymer matrix is a polyvinyl alcohol (PVA) in the molecular weight range of 125,000 Da to 140,000 Da. In such exemplary embodiment, the secondary polymer can be included in concentration of between 5 wt% and 15 wt%. The level of hydrolysis of the PVA may range from 70% to 100% hydrolyzed. A crosslinker, sodium tetraborate decahydrate, is included in the blend at a concentration of between 0.1 wt% and 1.0 wt%. The hemostatic polymer, chitosan or hydrophobically-modified chitosan, is included in the putty blend a concentration of between 0.1 wt% and 3 wt%.

Methods of Utilizing the Hybrid Composition of Matter of Putty

In one embodiment of the present invention, a hemostatic composition and delivery system is used for treating both compressible and non-compressible hemorrhages effectively. Many different types of materials and syringe devices can be used. For surgical or medical field use, however, it can be desirable to sterilize the composition and the syringe device using autoclave, gamma-irradiation, electron beam irradiation or sterile ultrafiltration.

The composition can be used in a method for treating compressible and non-compressible hemorrhages through use of a hemostat. The putty is applied to a wound to stop bleeding and hemorrhage. The hemostatic putty, or polymer dough, is suitable for use in mammals. As used herein, the term "mammals" means any higher class of vertebrates that nourish their young with milk secreted by mammary glands, e.g. humans, rabbits and monkeys.

It is contemplated that this putty may be included as part of a syringe delivery system as may be known by those skilled in the art. The hemostatic interaction occurs through application of the moldable putty into an injured tissue site and subsequent process wherein a plurality of short hydrophobic substituents, that are attached with the biopolymer backbone, interact with and adhere to blood and tissue upon swelling of the putty.

In another embodiment, the putty material may be made of such viscosity that it may be pumped through a syringe into a deep wound cavity, such as a gunshot wound or impalement wound. The syringe here refers to any device that applies pressure to the viscoelastic fluid such that it flows out of the narrow tip of the device, thus enabling application of the putty to the wound. The putty, having been applied the wound, may be left alone to swell in the wound or may receive additional compression from the external part of the wound to aid in clot formation. After achieving hemostasis, the putty may be removed from the cavity as a single wound dressing

Kits Comprising the Hybrid Composition of Matter of Putty

One embodiment of the present invention, a kit for treating wounds is provided comprising a container with a hybrid composition described herein and an applicator. The applicator can be a syringe or any other type of apparatus known to a person of ordinary skill in the art to apply a semiliquid to an intended area, such as a wound. In one example, the kit consists of a pre-packed syringe containing a particular formulation of the putty and ready for use as shown in Figure 6.

Example 1.

As shown in Figure 1, the hybrid composition putty described here has viscoelastic properties that are useful in treating acute wounds. The Figure shows how the composition can

be manipulated easily to change its shape and be stretched significantly. The example in Figure 2 shows the change in elasticity of the putty depending on the concentration of polymer used. Here the polymer concentration is varied from about 12 wt % (a) to 7 wt% (b) with a borate crosslinker at a 1:40 mass ratio of the polymer. The chitosan concentration is 1 wt% in both 2 (a) and 2 (b).

Rheological Experiments: Steady shear rheological experiments were performed on a Rheometrics AR2000 stress-controlled rheometer. A cone-and-plate geometry of 40 mm diameter and 4° cone angle was used and samples were run at the physiological temperature of 37°C. Data on the same samples via dynamics rheology are shown in Figure 3 where the elastic (G') and viscous (G'') moduli are plotted as a function of frequency (rad/s) of oscillatory shear. Here, we note that the putty sample has a transition in elastic-like behavior ($G' > G''$) to viscous-like behavior ($G'' > G'$) over long time scales.

The putty or hybrid composition of described in here has been shown to work in simulated three-dimensional wounds as shown in Figure 4. The putty has been shown to be easily applied and removed from such simulated wounds. The putty has also been used in vivo as shown in Figure 5. The experimental design for this in vivo application is as follows. Female Yorkshire pigs, weighing 39.2 ± 2.3 kg (n=3) were obtained from the Knight Surgical Lab at Massachusetts General Hospital (Boston, MA). All animals were maintained in a facility accredited by the Association for Assessment and Accreditation of Laboratory Animal Care, and all experiments were performed in accordance with the National Research Council's Guide for the Care and Use of Laboratory Animals. The protocol was approved by the IACUC at Massachusetts General Hospital. The swine were anesthetized with 6 mg/kg of telazol and 0.01 mg/kg of glycopyrrolate that were given intramuscularly. They were incubated and placed on mechanical ventilation at a tidal volume 12 mL/kg, a rate of 10 respirations per minute, and 100% oxygen. Anesthesia was maintained using isoflurane, and ventilatory parameters were maintained to attain an end-tidal CO₂ partial pressure of 40 mm Hg.

To create a hemorrhage in the groin area, approximately 5 cm of the right femoral artery was dissected free from surrounding tissues and the overlying abductor muscle was removed. A 5 French catheter was inserted into the artery. Next, the skin above the artery was sutured closed, with the exception of a small aperture approximately 2 cm in diameter. Finally, the catheter was pulled from the artery to create hemorrhage.

In (a), a 60 cc syringe loaded with putty, consisting of polyvinyl alcohol crosslinked with sodium borate (PVA-Borax) blended with hydrophobically-modified chitosan, is positioned near an aperture above the femoral artery. Once the catheter was removed from the artery, significant

bleeding within the cavity occurred. A small hole in the skin remained the only access point to the bleed. Compressible devices such as bandages and gauze were not able to be applied through the hole. In (b), the putty is syringed into the bleeding cavity through the aperture after 1 minute of free bleeding. In (c), the delivered putty is observable at the aperture. Next in (d), the aperture
5 is widened to observe hemostasis in the cavity filled with putty. Finally, in (e) and (f) the putty is removed by hand after 30 min, with no re-bleeding observed.

The invention has been described with references to a preferred embodiment. While specific values, relationships, materials and steps have been set forth for purposes of describing concepts of the invention, it will be appreciated by persons skilled in the art that numerous
10 variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the basic concepts and operating principles of the invention as broadly described. It should be recognized that, in the light of the above teachings, those skilled in the art can modify those specifics without departing from the invention taught herein. Having now fully set forth the preferred embodiments and certain
15 modifications of the concept underlying the present invention, various other embodiments as well as certain variations and modifications of the embodiments herein shown and described will obviously occur to those skilled in the art upon becoming familiar with such underlying concept. It is intended to include all such modifications, alternatives and other embodiments insofar as they come within the scope of the appended claims or equivalents thereof. It should be
20 understood, therefore, that the invention may be practiced otherwise than as specifically set forth herein. Consequently, the present embodiments are to be considered in all respects as illustrative and not restrictive.

INDUSTRIAL APPLICABILITY

The present invention is applicable to wound dressings and drug delivery. A
25 composition of matter is disclosed having a hemostatic biopolymer, a secondary biopolymer, an ionic crosslinker and a solvent and a method for its use. The composition of matter can be made in industry and practiced in the wound treatment field.

CLAIMS

What is claimed is:

1. A putty, comprising:
a hemostatic biopolymer selected from hydrophobically modified chitosan,
hydrophobically modified alginate, and hydrophobically modified gelatin,
a secondary polymer, wherein the secondary polymer is polyvinyl alcohol,
an ionic crosslinker, and
a solvent.
2. The putty of claim 1, wherein the hydrophobically modified biopolymer comprises hydrophobic substituents covalently attached to the biopolymer.
3. The putty of claim 2, wherein the hydrophobic substituents comprise from eight to eighteen carbon atoms.
4. The putty of claim 3, wherein the hydrophobically modified biopolymer comprises 1 to 100 moles of hydrophobic substituent per 1 mole of biopolymer.
5. The putty of claim 1, wherein the hydrophobically modified chitosan is selected from the group consisting of hydrophobically modified chitosan lactate, hydrophobically modified chitosan salicylate, hydrophobically modified chitosan pyrrolidone carboxylate, hydrophobically modified chitosan itaconate, hydrophobically modified chitosan niacinate, hydrophobically modified chitosan formate, hydrophobically modified chitosan acetate, hydrophobically modified chitosan gallate, hydrophobically modified chitosan glutamate, hydrophobically modified chitosan maleate, hydrophobically modified chitosan aspartate, hydrophobically modified chitosan glycolate; quaternary amine substituted hydrophobically modified chitosan; and salts thereof.
6. The putty of claim 1, wherein the hydrophobically modified alginate is selected from the group consisting of hydrophobically modified sodium alginate, hydrophobically modified

potassium alginate, hydrophobically modified magnesium alginate, hydrophobically modified calcium alginate, and hydrophobically modified aluminum alginate.

7. The putty of claim 1, wherein the secondary polymer is a polyvinyl alcohol present in a concentration of between 5wt% and 15wt%.
8. The putty of claim 7, wherein the polyvinyl alcohol has a molecular weight of between 50,000Da and 300,000Da.
9. The putty of claim 7, wherein the polyvinyl alcohol is hydrolyzed in a range of 70% to 100%.
10. The putty of claim 1, wherein the crosslinker is a borate salt.
11. The putty of claim 10, wherein the borate salt is selected from sodium tetraborate decahydrate, sodium perborate, and sodium metaborate.
12. The putty of claim 1, wherein the crosslinker is present in a concentration of between 0.1wt% and 1.0wt%.
13. The putty of claim 1, wherein the hemostatic biopolymer is present in a concentration of between 0.1wt% and 3.0wt%.
14. The putty of claim 1, wherein the putty provides a compressing force of between 5 and 15 N, 15 and 30 N, or 0.1 and 5N.
15. The putty of claim 1, further comprising a water soluble reagent.
16. The putty of claim 15, wherein the water soluble reagent is selected from human thrombin, bovine thrombin, recombinant thrombin, and human fibrinogen.
17. The putty of claim 1, further comprising a reagent selected from fibrinogen, factor VIIa, or Factor XIII.
18. The putty of claim 1, further comprising a reagent that prevents microbial infections.

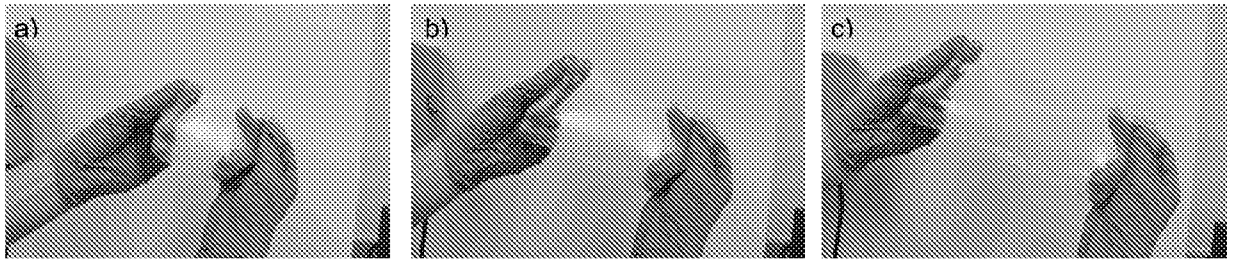


Figure 1.

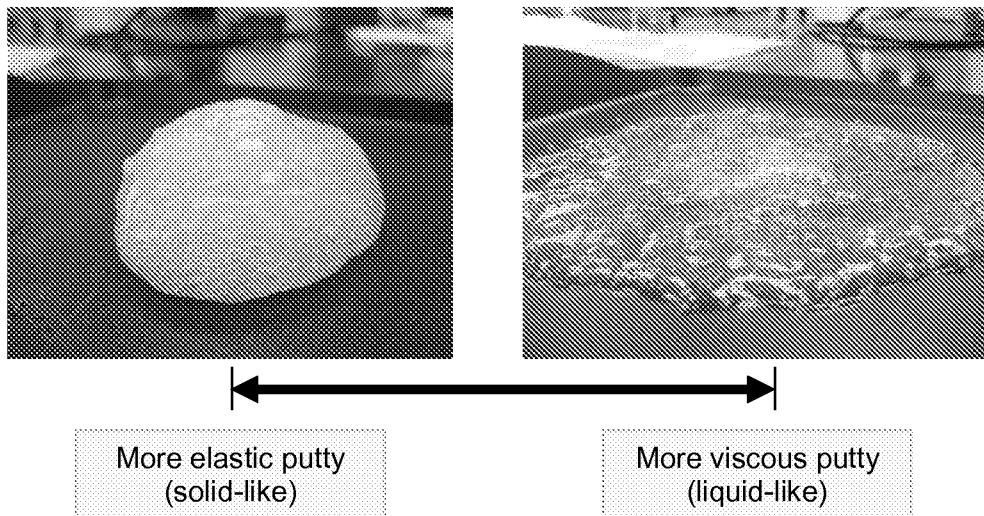


Figure 2.

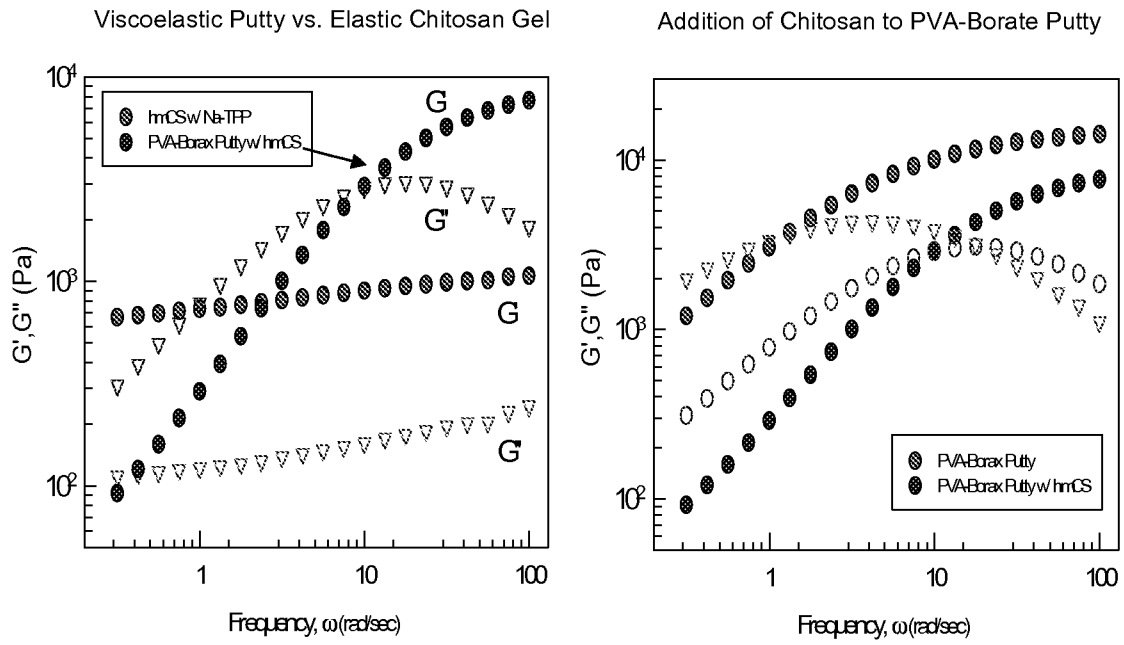


Figure 3.

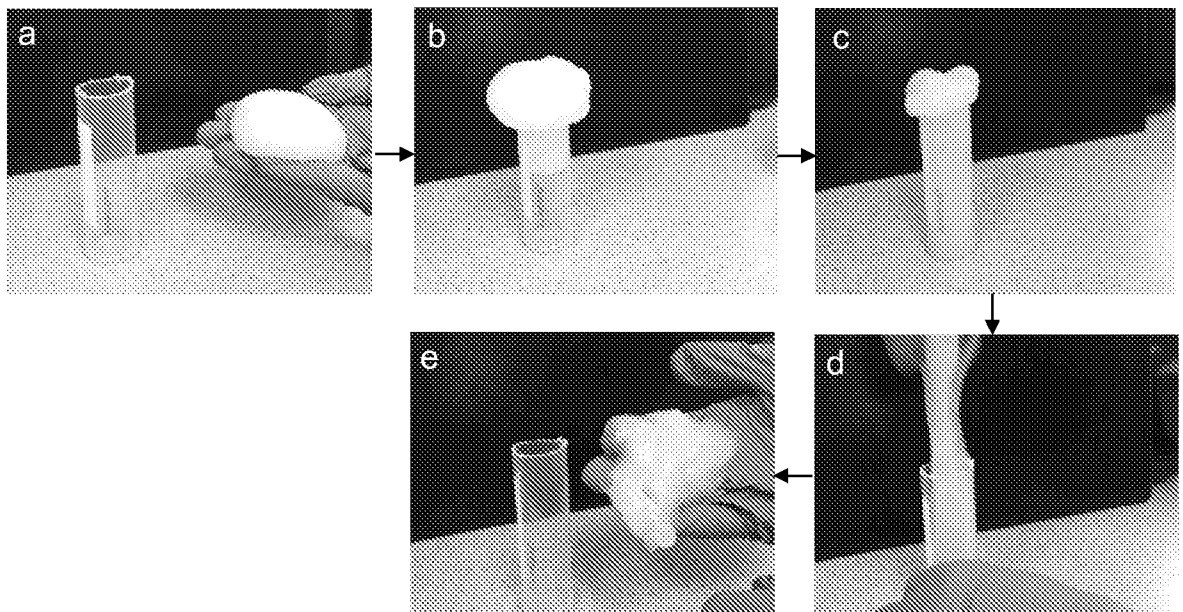


Figure 4.

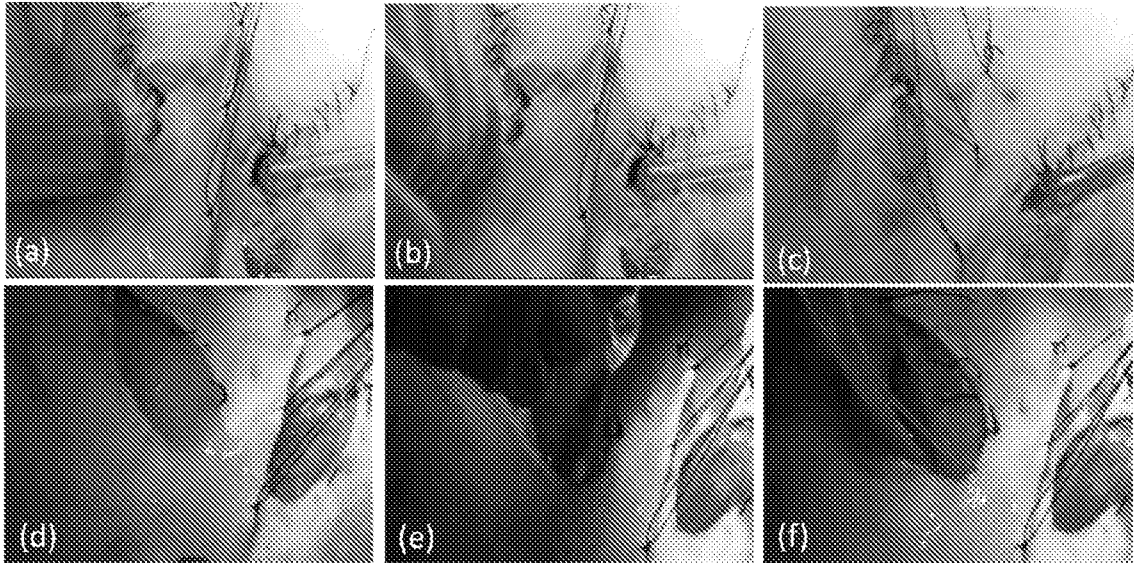


Figure 5.

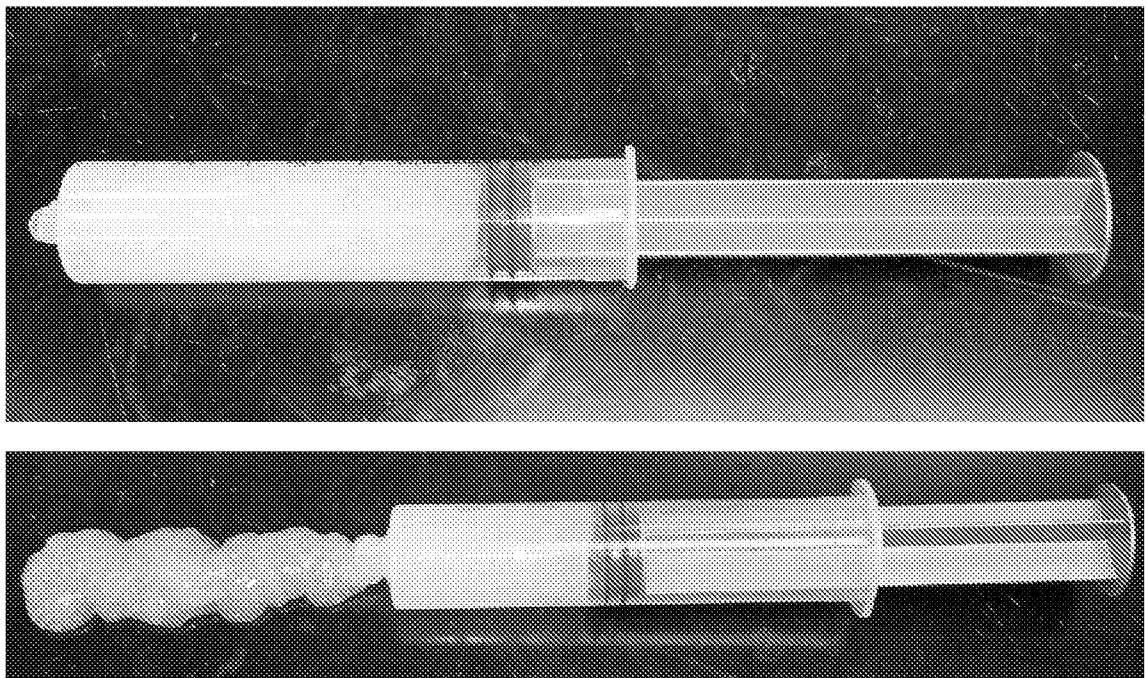


Figure 6