



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2019/03/19
(87) Date publication PCT/PCT Publication Date: 2019/09/26
(85) Entrée phase nationale/National Entry: 2020/09/09
(86) N° demande PCT/PCT Application No.: EP 2019/056843
(87) N° publication PCT/PCT Publication No.: 2019/180021
(30) Priorités/Priorities: 2018/03/19 (US62/644,746);
2018/10/14 (US62/745,370)

(51) Cl.Int./Int.Cl. *G01S 17/02* (2020.01),
G01N 21/21 (2006.01), *G01N 21/47* (2006.01),
H04N 1/00 (2006.01)
(71) Demandeur/Applicant:
OUTSIGHT, FR
(72) Inventeur/Inventor:
BUCHTER, SCOTT, FI
(74) Agent: NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : PROCÉDES ET SYSTÈME D'IDENTIFICATION DE COMPOSITION DU MATÉRIAU D'OBJETS EN MOUVEMENT
(54) Title: METHODS AND SYSTEMS FOR IDENTIFYING MATERIAL COMPOSITION OF MOVING OBJECTS

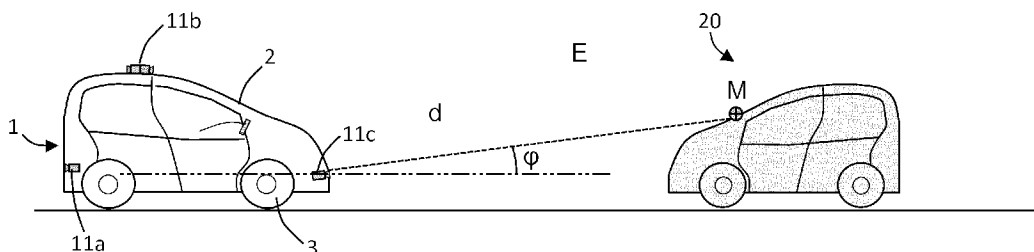


FIG. 1

(57) **Abrégé/Abstract:**

A method for identifying a composition material of an object (20) located in an environment (E) surrounding at least one device (1), the object (20) moving relative to the device (1), in which at least one sensor (11) is mounted on the device (1) and communicates with at least one central processing unit (12).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2019/180021 A1

(43) International Publication Date
26 September 2019 (26.09.2019)

(51) International Patent Classification:

G01S 17/02 (2006.01) H04N 1/00 (2006.01)
G01N 21/21 (2006.01) G01N 21/47 (2006.01)

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/EP2019/056843

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(22) International Filing Date:

19 March 2019 (19.03.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/644,746 19 March 2018 (19.03.2018) US
62/745,370 14 October 2018 (14.10.2018) US

Published:

— with international search report (Art. 21(3))

(71) Applicant: **BEYOND SENSING** [FR/FR]; 141 Boulevard Saint Michel, 75005 PARIS (FR).

(72) Inventor: **BUCHTER, Scott**; Tillinmaanpuisto 3A, 02330 Espoo (FI).

(74) Agent: **CABINET PLASSERAUD**; 66 rue de la Chaussée d'Antin, 75440 PARIS CEDEX 09 (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: METHODS AND SYSTEMS FOR IDENTIFYING MATERIAL COMPOSITION OF MOVING OBJECTS

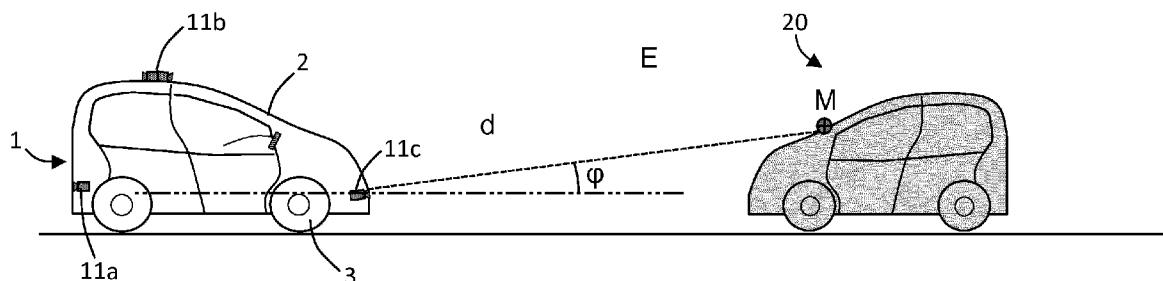


FIG. 1

(57) Abstract: A method for identifying a composition material of an object (20) located in an environment (E) surrounding at least one device (1), the object (20) moving relative to the device (1), in which at least one sensor (11) is mounted on the device (1) and communicates with at least one central processing unit (12).

WO 2019/180021 A1

Description

Title: Methods and systems for identifying material composition of moving objects

Technical field

5 [0001] The disclosure relates to methods and systems for identifying material composition of moving objects in a 3-dimensional (3D) volume or space.

[0002] The disclosure also relates to methods and systems for reconstructing 3-dimensional views of moving objects.

[0003] The disclosure also relates to the field of tridimensional sensors that are
10 mounted on a device, such as a vehicle.

Background art

[0004] Providing a device with sensors that are able to generate tridimensional point clouds of the surroundings of the device has many interesting applications.

[0005] The generated point clouds may for instance be used to map an area
15 travelled by a vehicle.

[0006] The generated point clouds may also be used to assist or to automate the driving system of the vehicle.

[0007] Examples of applications for driving assistance are object detection to trigger collision warning or collision avoidance, but the sensors may also be used
20 in a fully autonomous vehicle, in order to automate the driving system of the vehicle.

[0008] However, in many situations, it may be necessary to determine the type of objects the vehicle may detect or may collide with, in order to control the vehicle with an appropriate driving response.

25 [0009] As an example, the vehicle may operate differently if the detected object is a child inadvertently crossing a street or a trash bin that has been left on the road on the path of the vehicle. Depending on the circumstances, the vehicle may decide or not to avoid a collision.

[0010] In order to differentiate between two different objects, it can be necessary
30 to know the material composition of these objects. In the case of a child, the

detected material composition will likely be the fabrics of his clothes or his skin, whereas in the case of a trash bin, the material composition will be rigid metal or plastic for instance.

5 [0011] To this end, it is known to use sensors that can emit a physical signal at multiple optical wavelengths. The sensors can then receive the signal that is reflected by the object for these different wavelengths. From this reflectivity response, it is possible to identify the material composition of the object by comparing the received reflectivity response with a database comprising reference reflectivity responses for known materials.

10 [0012] This however requires being able to compute the information received in real time, so that the appropriate command of the vehicle can be taken immediately or shortly after the object has been detected, and more particularly while the vehicle is moving.

Technical problem

15 [0013] Some prior art systems operate by emitting simultaneously at multiple optical wavelengths and by receiving successively the reflected response at different wavelengths.

[0014] However, such systems are too slow to be used in dynamic environments. Besides, if the vehicle is moving, each wavelength is received according to a
20 different location of the receiver, and it becomes too complicated to aggregate the reflected signals as the number of wavelengths increases.

[0015] As another variant, some systems comprise a single emitter that can emit simultaneously at multiple wavelengths and a plurality of receivers, each receiver being configured to receive one reflected physical signal at a specific wavelength.
25 In this way, the receivers when taken altogether can receive simultaneously the reflected signals for all the different emitted wavelengths.

[0016] However, such systems are complex since they require a large number of receivers. Besides, to perform effectively, the emitter and receivers must be aligned and positioned with a high degree of accuracy with regard to the vehicle. If
30 one of the emitter or the receivers is inadvertently misaligned, the signal that is received may not be accurate and the vehicle may be unaware of a serious risk situation.

[0017] Having several receivers, each having a dedicated electronics, is a particularly costly solution.

[0018] Besides, each receiver is assigned to a specific wavelength or wavelength range. The system is therefore not easily adjustable, which makes it less flexible if
5 other wavelengths have to be used in the future with the same receivers.

[0019] Finally, this is all the more difficult when the object to be detected moves into the environment of the vehicle. The object can then have a different location or orientation relative to the vehicle when successive physical signals are emitted.

[0020] The present disclosure aims at improving this situation.

10 [0021] The object of the present disclosure is to provide reflectivity response of an object at multiple optical wavelengths in real time of an object that moves into the environment of the device.

Disclosure

[0022] It is proposed a method for identifying a composition material of an object
15 located in an environment surrounding at least one device, the object moving relative to the device, in which at least one sensor is mounted on the device and communicates with at least one central processing unit, wherein:

/A/ the sensor generates a point cloud frame of a continuous stream by emitting a physical signal at a first wavelength, wherein the point cloud frame comprises a
20 set of data points, at least one data point comprising coordinates of the object in a local volume surrounding the sensor at time t_j in a local coordinate system of the sensor, said data point also comprising an intensity value of a reflected physical signal corresponding to the emitted physical signal once reflected on the object,

/B/ the central processing unit receives the point cloud frame and determines the
25 coordinates of each data point of the point cloud frame in a global coordinate system of the environment surrounding the device, the intensity value being associated with the coordinates of each data point in the global coordinate system,

/C/ the central processing unit determine the coordinates of the object at time t_j in the global coordinate system,

30 /D/ the central processing unit stores in a memory the coordinates of the object in the global coordinate system at time t_j ,

steps /A/ to /D/ are repeated with the sensor or another sensor generating another point cloud frame by emitting another physical signal at another wavelength, at time t_{j+1} , so that at least two intensity values are associated to coordinates of the object in the global coordinate system at two different times,

5 /E/ the central processing unit determines a reflectivity response of the object from the at least two intensity values, and

/F/ the central processing unit identifies the composition material of the object.

[0023] The following features, can be optionally implemented, separately or in combination one with the others:

10 **[0024]** The central processing unit determines the coordinates of each data point of the point cloud frame in the global coordinate system of the environment surrounding the device by:

- comparing the point cloud frame with a global cumulated tridimensional map of the environment to determine an aligned point cloud frame in the global coordinate

15 system, and

- updating the global cumulated tridimensional map by merging the aligned point cloud frame with the global cumulated tridimensional map.

[0025] The central processing unit determines the coordinates of the object at time t_j in a global coordinate system by:

20 - comparing the point cloud frame with a global cumulated tridimensional map of the environment to determine an aligned point cloud frame in the global coordinate system, and

- determining a set of data points of the point cloud frame that cannot be aligned in the global coordinate system, so that this set of data points corresponds to the

25 moving object.

[0026] The method comprises an additional step of obtaining a three-dimensional reconstruction of the object from the coordinates of the object in the global coordinate system and generated at least two different times,

30 **[0027]** The sensor comprises at least one emitter and at least one receiver, the emitter being configured to emit a physical signal and the receiver being configured to receive the emitted physical signal once reflected on the object.

[0028] The sensor comprises the emitter and the receiver as a single unit.

[0029] The central processing unit identifies the composition material of the object by comparing the reflectivity response determined at step /E/ with reference reflectivity responses of known materials stored in a library.

[0030] The wavelengths of the physical signals emitted for the point cloud frames
5 are selected in a random manner.

[0031] The wavelengths of the physical signals emitted for the point cloud frames are selected in a predetermined order.

[0032] The device comprises a plurality of sensors, wherein the sensors can respectively generate a point cloud frame by emitting a physical signal at a
10 wavelength comprised in different spectral domains.

[0033] The sensors all communicate wirelessly with the central processing unit.

[0034] A point cloud frame corresponds to a full scan of the local volume of the sensor.

[0035] The coordinates of the object in the local coordinate system of the sensor
15 comprises two angular coordinates and one radial coordinate.

[0036] The radial coordinate corresponds to the distance from the sensor to the data point, the distance being computed by comparing timing of the emitted physical signal and the reflected physical signal.

[0037] Steps /A/ to /D/ are repeated at least four times, so that at least four
20 intensity values are associated to coordinates of the object in the global coordinate system.

[0038] The physical signal is a laser signal.

[0039] The device is a vehicle able to move in the environment.

[0040] In another aspect, it is proposed a system for identifying the composition
25 material of an object located in an environment surrounding at least one device, the object moving relative to the device, the system comprising:

- a plurality of sensors configured to be mounted on said at least one device, each sensor being configured to generate a continuous stream of point cloud frames, in parallel and asynchronously with the other sensors, by emitting a physical signal at
30 a first wavelength , wherein the point cloud frame comprises a set of data points, each data point comprising coordinates of the object in a local volume of the

environment surrounding the sensor at time t_j in a local coordinate system of the sensor, each data point also comprising an intensity value of a reflected physical signal corresponding to the emitted physical signal once reflected on the object,

- a central processing unit configured to communicate with each sensor to
5 continuously receive the continuous streams from the sensors, determine the coordinates of each data point of the point cloud frame in a global coordinate system of the environment surrounding the device, determine the coordinates of the object in the global coordinate system at the time t_j , and store in a memory the intensity value and the coordinates in the global coordinate system, the central
10 processing unit being configured to determine a reflectivity response of the object from the intensity values and to identify the composition material of the object.

[0041] In another aspect, it is proposed an autonomous or semi-autonomous vehicle comprising a system according to the disclosure.

[0042] In another aspect, it is proposed A non-transitory computer readable
15 storage medium, having stored thereon a computer program comprising program instructions, the computer program being loadable into a central processing unit of the system according to the disclosure and configured to cause the central processing unit to carry out the steps of a method according to the disclosure, when the computer program is run by the central processing unit.

20 **Brief Description of drawings**

[0043] Other features, details and advantages will be shown in the following detailed description and on the figures, on which:

Fig. 1

[0044] Figure 1 is a schematic side view of a vehicle in an environment
25 comprising an moving object, illustrated by a car, according to an embodiment of the disclosure.

Fig. 2

[0045] Figure 2 is a schematic top view of the vehicle of Figure 1.

Fig. 3

[0046] Figure 3 is a schematic view of a system of the vehicle of Figure 1 and Figure 2 for identifying the material composition of an object located in the environment of the vehicle.

Fig. 4

- 5 [0047] Figure 4 is a graphic representation of a full scan of a local volume of a sensor of the vehicle of Figure 1 and Figure 2 at several different wavelengths.

Fig. 5

- [0048] Figure 5 is a graphic representation of the reflected signals received for each physical signal emitted at several different wavelengths, the reflected signals
10 being aggregate to obtain a reflectivity response of an object.

Fig. 6

[0049] Figure 6 is a schematic view of the device and an object illustrated by a car, the device generating two point cloud frames at two different times while the object is moving relative to the device.

- 15 **Fig. 7**

[0050] Figure 7 is a flowchart showing a method for dynamically identifying a material composition of an object in the environment of the vehicle according to an embodiment of the disclosure.

Description of an embodiment

- 20 [0051] Figures and the following detailed description contain, essentially, some exact elements. They can be used to enhance understanding the disclosure and, also, to define the disclosure if necessary.

Vehicle

- [0052] The disclosure relates to a device. The device is advantageously movable
25 into an environment E. The device can be any type of device, such as a handheld device, or it can be mounted on a relatively bigger element.

[0053] According to an embodiment, the device can be hand-carried by a person for instance.

[0054] According to another particular and non-limitative embodiment detailed below, the device is a vehicle 1 in an environment E.

[0055] The vehicle can be any type of vehicle configured to move in the environment E. Vehicles includes motor vehicles (motorcycles, cars, trucks, and buses), railed vehicles (trains, trams), watercraft (ships, boats), amphibious vehicles (screw-propelled vehicle, hovercraft), aircraft (airplanes, helicopters, drones) and spacecraft.

[0056] More particularly, Figure 1 and Figure 2 illustrate a vehicle 1 according to one embodiment of the disclosure.

10 [0057] The vehicle 1 is a wheeled vehicle whose direction can be controlled to follow a specific path P. It should be noted that the disclosure can be applied to a wide range of wheeled vehicles, rear-wheel-steering car, trucks, motorcycles and the like.

15 [0058] As illustrated on Figure 1, the vehicle 1 is provided with a body 2, bearing at least one wheel 3, which delimits an inside of the vehicle from the environment E of the vehicle 1.

Sensor

[0059] The vehicle 1 comprises a system 10 for identifying a material composition of an object 20 located in the environment E of the vehicle 1.

20 [0060] The system 10 comprises at least one sensor 11. Advantageously, the system 10 comprises a plurality of sensors 11a, 11b, 11c that are mounted on or inside the body 2 of the vehicle 1.

25 [0061] For instance, the vehicle 1 may be provided with three sensors 11a, 11b, 11c respectively mounted on the back, on the top and the front of the vehicle 1, as illustrated on [Fig; 1]. However, the vehicle 1 may comprise only two sensors 11 or a higher number of sensors 11.

[0062] Each sensor 11 generates a continuous stream of point cloud frames of a local volume L_j surrounding the sensor 11.

30 [0063] By "point cloud frame", it is understood a frame generated at a specific time, or during a short interval of acquisition.

[0064] By “continuous stream of point cloud frames”, it is understood a succession of point cloud frames, periodically generated or not, organized in a stream of data.

[0065] For instance, the sensor 11 is able to periodically generate point cloud frames with a given framerate of the continuous stream. The framerate can be equal or higher than 20 Hz (Hertz). The framerate can also be lower, for instance lower than 20 Hz, even lower than 10 Hz, or even lower than 5 Hz.

[0066] In the specification below, a point cloud frame generated by a sensor 11 is referred to as PCF_j , the time of acquisition of this point cloud frame PCF_j is referred as t_j and a local volume L_j of the sensor 11 at said time t_j is referred as L_j . In these references, the subscript j is the index of the frame in the continuous stream ST , j increasing over time with each newly generated frame.

[0067] The point cloud frames PCF_j can also be generated in parallel and asynchronously with other point cloud frames from other sensors 11.

[0068] By “in parallel and asynchronously”, it is understood that the sensors 11 are in general unaware of each other and the generation of point cloud frames PCF_j by the sensors 11 are not specifically synchronized together.

[0069] Thus, point cloud frames PCF_{ja} , PCF_{jb} , PCF_{jc} of respective continuous streams ST_a , ST_b , ST_c of the sensors 11a, 11b, 11c may be generated at different respective times t_{ja} , t_{jb} , t_{jc} .

Point cloud frame

[0070] Each point cloud frame PCF_j of a stream ST comprises a set of data points M_i in a local coordinate system LCS of the sensor 11. A data point M_i corresponds to a tridimensional portion, such as a voxel, of the local volume L_j .

[0071] A point cloud frame can comprise a high number of data points, such as 10,000 or even 100,000 data points, or even higher. The number of data points can vary, depending on the desired resolution when scanning the environment E of the vehicle 1 with the sensor 11. The number of data points of a point cloud frame may also vary according to the framerate that is used; if the framerate is high, the number of data points of a point cloud frame that is needed may be lower.

[0072] More precisely, a data point M_i can correspond to an object 20, or a part of an object 20, located in the environment E of the vehicle 1.

[0073] The local coordinate system LCS is a coordinate system related to the vehicle 1, and more particularly to the sensor 11, for instance with an origin point located at the sensor location. The local coordinate system LCS may be a cartesian, cylindrical or polar coordinate system.

- 5 [0074] Each data point M_i comprises three-dimensional coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$, in particular in the local coordinate system LCS of the sensor.

[0075] The coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ are representative of the location of the data point M_i in the local volume L_j of the sensor 11 at time t_j .

- 10 [0076] Each data point M_i also comprises an intensity value I_i associated with the coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ of the data point M_i .

[0077] The intensity value I_i is representative of a physical feature associated to the object 20 located at the coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ of the data point M_i , as detailed below.

[0078] The object 20 is movable or moving in the environment E of the vehicle 1.

- 15 [0079] By “movable or moving”, it is understood that the object 20 can move or moves relative to the vehicle 1. Also, the object 20 can move while the vehicle 1 is motionless, or the object 20 can move while the vehicle 1 is also moving. In the latter case, the object 20 moves relative to a reference frame of the vehicle 1.

- 20 [0080] By “movable or moving”, it is also understood that the object 20 can have any path in the environment E. For instance, the object 20 can have a straight or curved path, in any direction. The object can also pivot or change orientation.

[0081] However, given the fact that a point cloud frame is generated during a very short time of acquisition, it is considered that the object remains still relative to the vehicle 1 during such acquisition time.

- 25 [0082] Such object 20 can be of various types. As illustrated on Figure 1, non-limitative examples of objects 20 include animals, pedestrians or vehicles that can move into the environment E of the vehicle 1.

[0083] This list is non-limitative and any object likely to be movable can be part of the present disclosure.

- 30 **Generation of a point cloud frame**

[0084] To generate a continuous stream ST of point cloud frames PCF_j , the sensor 11 comprises at least one emitter 14 and at least one receiver 15.

[0085] Advantageously, the sensor 11 comprises a single emitter 14 and a single receiver 15, preferably as a single unit, as illustrated on Figure 3.

5 [0086] The emitter 14 is configured to emit a physical signal 16.

[0087] The physical signal can be a light beam, an electromagnetic wave or an acoustic wave.

[0088] The receiver 15 is configured to receive a reflected physical signal 17, corresponding to the emitted physical signal 16 once reflected in the environment
10 E of the vehicle 1.

[0089] By “reflected”, it is understood either specular (mirror-like) or diffuse reflection.

[0090] A sensor 11 may for instance comprise a laser rangefinder such as a light detection and ranging (Lidar) module, a radar module, an ultrasonic ranging
15 module, a sonar module, a ranging module using triangulation or any other element able to generate a point cloud frame.

Coordinates

[0091] A point cloud frame PCF_j corresponds to a full scan of the local volume L_j of the sensor 11.

20 [0092] By “full scan of the local volume”, it is understood that the sensor 11 has covered its complete field of view. For instance, the emitter 14 emits a physical signal that is deflected by a moving mirror rotating along two directions. After a full scan of the local volume, the moving mirror of the sensor 11 is back to its original position and ready to start a new period of rotational movement. A full scan of the
25 local volume L_j by the sensor 11 is thus the three-dimensional equivalent of an image acquired by a bi-dimensional camera.

[0093] As illustrated on Figure 1 and Figure 2, the sensor 11 can operate a full scan by moving along two angular directions θ , φ in the local coordinate system LCS of the sensor 11.

30 [0094] According to this embodiment, each data point M_i of a point cloud frame PCF_j thus comprises two angular coordinates θ_i , φ_i .

[0095] The coordinates of a data point M_i in the local coordinate system LCS also comprise a radial coordinate, corresponding to the distance d_i from the sensor 11 to the data point M_i .

[0096] Said distance d_i may be computed by comparing timing of the emitted physical signal 16 and the reflected physical signal 17, for instance by comparing the time or the phases of emission and reception between the emitter 14 and the receiver 15. As an example, a time to digital converter (TDC) can measure the time of flight (TOF) of the physical signal in order to provide the distance d_i to the point M_i .

10 Intensity value

[0097] Each point cloud frame PCF_j of a continuous stream ST is generated at a given wavelength λ_{ej} .

[0098] To this end, the emitter 14 of a sensor 11 can emit the physical signal in various spectral domains. The physical signal 16 can belong to the electromagnetic spectrum, such as ultraviolet, visible or infrared spectrum.

[0099] More particularly, the emitter 14 of the sensor 11 is configured to emit the physical signal 16 at a single wavelength λ_{ej} or around a single wavelength λ_{ej} , for each point cloud frame PCF_j .

[0100] By "around a single wavelength", it is understood that although the physical signal 16 is considered to be emitted at a single wavelength, it can have a certain spectral width or range around said single wavelength λ_{ej} inherent to the emitter 14 used.

[0101] Also, the continuous stream ST can comprise a first point cloud frame PCF_1 generated at a first wavelength λ_1 , a second point cloud frame PCF_2 generated at a second wavelength λ_2 , a third point cloud frame PCF_3 generated at a third wavelength λ_3 , etc.

[0102] According to an embodiment, the wavelengths λ_{ej} of the emitted physical signal 16 for each point cloud frame PCF_j can all be different or not.

[0103] According to an embodiment, the wavelengths λ_{ej} of the emitted physical signal 16 for each point cloud frame PCF_j can be selected in a predetermined order.

[0104] For instance, the wavelength λ_{ej} of the emitted physical signal 16 for a point cloud frame PCF_j can be chosen incrementally when compared with the wavelength λ_{ej-1} of the emitted physical signal 16 for the previous point cloud frame PCF_{j-1} .

5 **[0105]** As a variant, the wavelengths λ_{ej} of the emitted physical signal 16 for each point cloud frame PCF_j can be selected in a random manner.

[0106] The receiver 15 is configured to receive the reflected physical signal 17 for each data point M_i of the point cloud frame PCF_j on a wavelength range $\Delta\lambda_r$.

10 **[0107]** The wavelength range $\Delta\lambda_r$ of the reflected physical signal 17 can for instance be comprised between 10 nm (nanometers) to and 250 nm.

[0108] The reflected physical signal 17 can be received over a time interval.

15 **[0109]** From the reflected signals 17 received by the receiver 15, it is possible to determine the intensity value I_i associated with the coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ of each data point M_i of point cloud frame PCF_j for a physical signal 16 emitted at a given wavelength λ_{ej} .

[0110] The intensity value I_i may correspond to the maximum amplitude of the received reflected physical signal 17 or to the attenuation of the physical signal 16 for a given wavelength. However, other calculations or measures of the intensity values are possible.

20 **[0111]** Also, the intensity value provides information on the reflectivity response at the data point M_i for a physical signal 16 emitted at the wavelength λ_{ej} .

25 **[0112]** Since the sensor 11 is mounted on a moving vehicle 1, the environment E surrounding the vehicle 1 changes over time. A point cloud frame PCF_j generated by a sensor 11 at a time t_j comprises a full scan of a local volume L_j of the sensor 11 that is different from, but may overlap with, another point cloud frame PCF_{j+1} generated by the same sensor 11 at a different time t_{j+1} , or generated by another sensor 11.

30 **[0113]** For instance, as illustrated on Figure 2 and Figure 4, coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ of a the data point M_i in the local coordinate system LCS of the sensor 11 will be different when scanning a same given data point M at two different times t_j, t_{j+1} .

[0114] It is thus possible to obtain different intensity values for a same object 20 when belonging to different point cloud frames, each point cloud frame being generated with physical signals 16 emitted at different wavelengths λ_{ej} .

[0115] However, one needs to ascertain the fact that the intensity values obtained with different point cloud frames correspond in fact to the same moving object 20.

[0116] It is thus necessary to be able to correlate the point cloud frames PCF_j , PCF_{j+1} generated at different times t_j , t_{j+1} by the one or several sensors 11, and to aggregate the intensity values I_i representative of the reflected signals 17 of the same object 20 for physical signals 16 emitted at different wavelengths λ_{ej} .

10 Moving object

[0117] The system 10 is able to determine that a set of data point of a point cloud frame, corresponding to part or the totality of the object 20, is moving in the environment E.

[0118] For instance, the system 10 can observe that a local volume L_j of the sensor 11, that was clear from any object at a time t_j (and thus clear from any data point), now comprises a set of data points at another time t_{j+1} . The system then deduces that the object 20 observed in said local volume L_j at time t_{j+1} is a moving object that has moved between times t_j and t_{j+1} .

[0119] Other means is possible to determine that a set of data points corresponds to a moving object 20. To this end, the system 10 can be used. Alternatively, any other external element, such as another light source, can be used for instance.

Central processing unit

[0120] The system 10 further comprises a central processing unit 12 connected to the sensor 11 or the plurality of sensors 11.

[0121] The central processing unit 12 can be integrated inside the sensors 11 as a single unit or alternatively, can be a distinct unit secured inside a vehicle 1. In some embodiments, the central processing unit 12 may be a part of the vehicle processing unit.

[0122] The vehicle may be able to operate a self-driving or a driving assistance algorithm to drive or assist the driving of the vehicle 10, in particular by using the information provided by the system 10. To this end, the system 10 may control

several actuators 4 connected to several vehicle elements 5a, 5b, 5c, 5c, such as the drivetrain, the brakes, etc.

[0123] The central processing unit 12 may communicate with the sensors 11 by wireless communication, such as radio or optic communications, or by wired communications, for instance if the central processing unit 12 and the sensor 11 are mounted on the same vehicle 1. The central processing unit 12 may communicate with the sensors 11 by using some intermediary element, in particular for long range communication.

[0124] The central processing unit 12 is configured to continuously receive the continuous stream ST from the sensor. 11

[0125] By “continuously receive”, it is understood that every time a sensor 11 has generated a new point cloud frame or a short sequence of point cloud frames, said point cloud frame or short sequence is sent to the central processing unit 12 while the vehicle is moving.

[0126] The central processing unit 12 stores the continuous stream in a memory 13. The memory 13 might be integrated in the central processing unit 12.

[0127] The central processing unit 12 is configured to dynamically determine the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of each data point M_i of a point cloud frame PCF_j in a global coordinate system GCS of the environment E surrounding the vehicle 1.

[0128] The global coordinate system GCS may in particular be independent of the vehicle 1 and of the movement of the vehicle 1. The global coordinate system GCS can for instance relate to an International Terrestrial Reference Frame (ITRF).

[0129] Alternately, the global coordinate system GCS may also be dependent on the local reference frame of the vehicle 1, for instance by being defined from the local coordinate system LCS associated to a sensor 11.

[0130] By “dynamically determine the coordinates”, it is understood that the determination of the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of each data point M_i of a point cloud frame PCF_j in the global coordinate system GCS is performed while the vehicle 1 is moving, advantageously before generating the next point cloud frame by the sensor 11.

[0131] The central processing unit 12 is then configured to determine a reflectivity response 30 of the object 20 and to identify the material composition of the object 20 located in the environment E from the reflectivity response 30.

[0132] By “material composition”, it is understood the composition of the material forming the object 20 or the surface of the object 20.

[0133] Non limitative examples of material composition include metal, plastics, glass, skin, plant material, ice, snow, asphalt, cement, water etc. More generally, material composition can be of any object that is located in the environment E of the vehicle 1.

10 Method for identifying material composition

[0134] The method for identifying material composition of objects in a 3-dimensional volume or space will now be described in more details in relation with Figure 7.

[0135] In a first step A, a point cloud frame PCF_j of a continuous stream ST is generated by emitting a physical signal 16 at a given wavelength λ_{ej} .

[0136] The point cloud frame PCF_j comprises a set of data points M_i , in the local coordinate system LCS.

[0137] A data point M_i comprises coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ of an object 20 in a local volume L_j at time t_j in a local coordinate system LCS.

[0138] The data point M_i also comprises an intensity value I_i representative of the physical signal 17 reflected on the object 20.

[0139] In a second step B, from the point cloud frame PCF_j , the central processing unit 12 dynamically determines the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the data point M_i of the point cloud frame PCF_j in the global coordinate system GCS.

[0140] To this end, the central processing unit 12 determines an aligned point cloud frame $PCF_{j,align}$ in the global coordinate system GCS by comparing the point cloud frame PCF_j with a global cumulated tridimensional map CM.

[0141] The global cumulated tridimensional map CM is also sometimes referred as a global tridimensional map, a global 3D map or a 3D map. These expressions cover the same concept and the same feature of the disclosure.

[0142] The global cumulated tridimensional map CM is a map of the environment E of the vehicle 1 in the global coordinate system GCS.

[0143] If the global cumulated tridimensional map CM of the environment does not exist yet or contain no data, the second step B comprises the operation of
5 creating the global cumulated tridimensional map CM from the point cloud frame PCF_j.

[0144] For instance, the point cloud frame PCF_j may be the first received point cloud frame PCF₁ from a sensor 11. A global coordinate system GCS of the environment may then for instance be defined from the local coordinate system
10 LCS associated to the sensor 11.

[0145] Alternatively, if the global cumulated tridimensional map CM of the environment already exists and contains some data, the second step B comprises the operation of determining an aligned point cloud frame PCF_{j,align} in the global coordinate system GCS of the environment E of the vehicle.

[0146] The alignment may be performed for instance by using image registration, or Simultaneous Localization and Mapping (SLAM) such as the method disclosed
15 in the patent document WO2018/091651.

[0147] According to this method, determining an aligned point cloud frame PCF_{j,align} is performed by comparing the generated point cloud frame PCF_j with the
20 global cumulated tridimensional map CM of the environment E.

[0148] The aligned point cloud frame PCF_{j,align} may be computed only from the point clouds generated by the sensor or the plurality of sensors 11 and without additional positioning information.

[0149] By “without additional positioning information”, it is in particular meant that
25 the computation of the aligned point cloud frame PCF_{j,align} does not require other input data than the point cloud frames generated by the sensors 11 and the global cumulated tridimensional map CM. For instance, no additional positioning or orientation element, such as a GPS or an accelerometer, is required. Moreover, no assumption has to be made on the location or movement of the sensor.

[0150] The central processing unit 12 tries to align said point cloud frame PCF_j so
30 that at least a portion of the aligned point cloud frame matches at least a portion of the global cumulated tridimensional map CM.

[0151] This can be accomplished by comparing said point cloud frame PCF_j with the global cumulated tridimensional map CM of the environment E.

[0152] The global cumulated tridimensional map CM is then updated by merging said aligned point cloud frame $PCF_{j,align}$ with the global cumulated tridimensional map CM.

[0153] More precisely, if the point cloud frame PCF_j can be aligned with at least a portion of the global cumulated tridimensional map CM of the environment E, the aligned point cloud frame $PCF_{j,align}$ is merged with said at least one portion of the global cumulated tridimensional map CM.

10 [0154] From the aligned point cloud frame $PCF_{j,align}$ in the global cumulated tridimensional map CM, the central processing unit can determine the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the data points M_i of the object in the global coordinate system GCS.

[0155] In a third step C, the central processing unit 12 stores in the memory 13 the intensity value I_i and the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the data point M_i in the global coordinate system GCS.

[0156] When aligning the subsequent point cloud frame with the global cumulated tridimensional map CM of the environment E, a portion of data points of the aligned point cloud frame can match the global cumulated tridimensional map CM. This portion of data points corresponds to a part of the environment E that has not move with time (such as mapping of buildings, road, etc.)

20 [0157] However, the set of data points corresponding to the object 20 cannot match the global cumulated tridimensional map CM. This is due to the fact that the global cumulated tridimensional map CM was created from earlier point cloud frames when the moving object was not present, or was located elsewhere, in the environment E. T

[0158] The set of data points corresponding to the object 20 cannot therefore be aligned with the data points from the rest of the environment E.

[0159] It is thus possible to identify in a step D which set of data points for each point cloud frame correspond in fact to the moving object 20.

30 [0160] By doing so for each point cloud frame, the system 10 can then determine the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the set of data points M_i of the object 20 in the global coordinate system GCS at a given time. It is thus possible to know the location

and/or orientation of the object 20 at different times for the respective point cloud frames.

[0161] From these locations and/or orientation, it is possible to derive new kinematic information about the object 20, such as its trajectory, its speed, etc.

5 **[0162]**

[0163] Steps A to D are repeated with one of the sensors 11 generating a second point cloud frame of a continuous stream by emitting the physical signal at a second wavelength λ_{j+1} .

10 **[0164]** More precisely, steps A to D can be repeated several times, and more particularly more than two times, so that several point cloud frames are generated by emitting the physical signal at several other wavelengths.

[0165] Some of the subsequent point cloud frames can be emitted by the same sensors or by several sensors.

15 **[0166]** Given the fact that steps A to D are repeated, at least two, and preferably a higher number of intensity values can be associated to the same object 20 in the global coordinate system GCS.

20 **[0167]** If the point cloud frames are emitted by several sensors, the wavelengths of the corresponding emitted physical signals can belong to different spectral domains, which can be useful to acquire intensity values for various types of physical signals (infrared, visible light, ultraviolet, etc.).

[0168] Also, in a step E, the central processing unit 12 determines the reflectivity response 30 of the object 20 from the intensity values acquired for the object 20 with each point cloud frame PCF_j.

25 **[0169]** As illustrated on Figure 5, the reflectivity response 30 is obtained by aggregating the intensity values I acquired at several different wavelengths λ_{ej} .

[0170] More precisely, in the example of the Figure 5, the reflectivity response 30 is obtained from the reflected physical signals 17₁, 17₂, 17₃, 17₄, 17₅ corresponding to physical signals emitted at several different wavelengths λ_{e1} , λ_{e2} , λ_{e3} , λ_{e4} , λ_{e5} once reflected on the object 20. From this reflected physical signals 17₁, 17₂, 17₃, 30 17₄, 17₅, intensity values I₁, I₂, I₃, I₄, I₅, such as the maximum amplitude value, can be obtained.

20

[0171] In a step F, the central processing unit 12 identifies the material composition of the object 20.

[0172] In this step F, the reflectivity response 30 can then be compared with reference reflectivity responses of known materials stored in a library. The library
5 can be stored in the memory 13 of the central processing unit 12.

Method for 3D reconstructing the moving object

[0173] As the object 20 is moving relative to the vehicle 1, one or several sensors 11 of the vehicle 1 may be able to acquire sets of data points from the object 20 according to different view angles. Several point cloud frames PCF_j permit to
10 obtain these different view angles.

[0174] As an example, Figure 6 illustrates a car 20 that moves relative to the vehicle 1. The vehicle 1 can thus acquire different set of data points of the car 20 for different point cloud frames at different times (two point cloud frames are illustrated with the car 20 and the vehicle 1 respectively in solid lines and in dash
15 lines on Figure 6).

[0175] By acquiring data points of the object 20 according to different views, it is possible to obtain a partial, or even total, three-dimensional (3D) reconstruction of the object 20.

[0176] 3D reconstruction can be useful for obtaining more detailed information or
20 features concerning the object 20.

[0177] Such 3D reconstruction information can thus be combined or compared with material composition of the object 20 obtained thanks to the method described above.

[0178] As an example, if the 3D reconstruction of the object 20 permit to
25 determine that the object is a car, it can be expected the body of this car to be mainly made of metal. It can then be checked whether this information is consistent with the material composition obtained from the reflectivity response of the object.

[0179] Similarly, additional information can be useful to discriminate between the
30 different parts of the object: the tires, the body, the windows and the like, when it comes to a car.

Advantages

[0180] Thanks to the above, it is possible to obtain the composition material of an object 20 although the vehicle 1 is moving relative to the object 20 during the implementation of the method. This allows time-multiplexed, real time and efficient
5 processing of the reflection of multispectral physical signals.

[0181] This is rendered possible even though the object is moving, because the method according to the present disclosure permits to determine the location of the object in a global cumulated map at different times (each time corresponding to the generation of a point cloud frame).

10 **[0182]** The method can be implemented even though the relative positions and orientations between the sensors are unknown.

[0183] The vehicle 1 can implement the method in any known driving conditions, for instance during daytime or night-time, in various weather conditions, in various road conditions, etc.

15 **[0184]** As stated above, the timeframe of the point cloud frames is determined and/or managed by the central processing unit 13. This way, there is no need to communicate with a remote server for instance that would be located outside of the vehicle 1.

20 **[0185]** Besides, the successive physical signals emitted by the sensor 11 for the respective point cloud frames can be selected randomly.

[0186] A random selection permits to prevent any interference with other physical signals 16 that could be emitted by other vehicles or devices in the environment E. The system 10 is thus safer and robust against fake signals that could undermine the security and integrity of the vehicle for instance.

25 **[0187]** As a variant, the successive physical signal 16 emitted by the sensor 11 for the respective point cloud frames can be selected in a predetermined order.

[0188] For instance, the wavelength of the emitted physical signal 16 for a point cloud frame can depend on the reflected physical signal 17 acquired for a previous point cloud frame. As an example, if the reflected response 17 acquired for the
30 previous point cloud frame is characteristic of an object either made of paper or fabric, the wavelength of the emitted physical signal 16 for the point cloud frame should be selected so as to discriminate specifically between these two materials.

[0189] More generally, the wavelengths of the successive emitted signals 16 can be selected so as to converge toward a probability threshold above which material composition of the object 20 is considered to be determined. Such convergence can be implemented by using any classification method, such as a decision tree.

- 5 **[0190]** As will be well understood by those skilled in the art, the several and various steps and processes discussed herein to describe the disclosure may be referring to operations performed by a computer, a processor or other electronic calculating element that manipulate and/or transform data using electrical phenomenon. Those computers and electronic elements may employ various
- 10 volatile and/or non-volatile memories including non-transitory computer-readable medium with an executable program stored thereon including various code or executable instructions able to be performed by the computer or processor, where the memory and/or computer-readable medium may include all forms and types of memory and other computer-readable media.
- 15 **[0191]** The foregoing discussion disclosed and describes merely exemplary embodiments of the present disclosure. One skilled in the art will readily recognize from such discussion and from the accompanying drawings and claims that various changes, modifications and variations can be made therein without departing from the spirit and scope of the disclosure as defined in the following
- 20 claims.

Claims

- [Claim 1]** A method for identifying a composition material of an object (20) located in an environment (E) surrounding at least one device (1), the object (20) moving relative to the device (1), in which at least one sensor (11) is mounted on the device (1) and communicates with at least one central processing unit (12),
 5 wherein:
- /A/ the sensor (11) generates a point cloud frame (PCF_j) of a continuous stream (ST) by emitting a physical signal (16) at a first wavelength (λ_{ej}), wherein the point cloud frame (PCF_j) comprises a set of data points (M_i), at least one data point (M_i)
 10 comprising coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ of the object (20) in a local volume (L_j) surrounding the sensor (11) at time t_j in a local coordinate system (CS) of the sensor (11), said data point (M_i) also comprising an intensity value (I_i) of a reflected physical signal (17) corresponding to the emitted physical signal (16) once reflected on the object (20),
- 15 /B/ the central processing unit (12) receives the point cloud frame (PCF_j) and determines the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of each data point (M_i) of the point cloud frame (PCF_j) in a global coordinate system (GCS) of the environment (E) surrounding the device (1), the intensity value (I_i) being associated with the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of each data point (M_i) in the global coordinate system
 20 (GCS),
- /C/ the central processing unit (12) determine the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the object (20) at time t_j in a global coordinate system (GCS),
- /D/ the central processing unit (12) stores in a memory (13) the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the object (20) in the global coordinate system (GCS) at time t_j,
- 25 steps /A/ to /D/ are repeated with the sensor (11) or another sensor (11) generating another point cloud frame (PCF_{j+1}) by emitting another physical signal at another wavelength (λ_{ej+1}), at time t_{j+1}, so that at least two intensity values (I_{i,j}, I_{i,j+1}) are associated to coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the object (20) in the global coordinate system (GCS) at two different times (t_j, t_{j+1}), ,
- 30 /E/ the central processing unit (12) determines a reflectivity response (30) of the object (20) from the at least two intensity values (I_{i,j}, I_{i,j+1}), and
- /F/ the central processing unit identifies the composition material of the object (20).

[Claim 2] Method according to claim 1, wherein the central processing unit (12) determines the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of each data point (M_i) of the point cloud frame (PCF_j) in the global coordinate system (GCS) of the environment (E) surrounding the device (1) by:

- 5 - comparing the point cloud frame (PCF_j) with a global cumulated tridimensional map (CM) of the environment (E) to determine an aligned point cloud frame ($PCF_{j,align}$) in the global coordinate system (GCS), and
- updating the global cumulated tridimensional map by merging the aligned point cloud frame ($PCF_{j,align}$) with the global cumulated tridimensional map (CM).

10 **[Claim 3]** Method according to claim 1 or 2, wherein the central processing unit (12) determines the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the object (20) at time t_j in a global coordinate system (GCS) by:

- comparing the point cloud frame (PCF_j) with a global cumulated tridimensional map (CM) of the environment (E) to determine an aligned point cloud frame
15 ($PCF_{j,align}$) in the global coordinate system (GCS), and
- identifying a set of data points of the point cloud frame (PCF_j) that cannot be aligned in the global coordinate system (GCS), so that this set of data points corresponds to the moving object (20).

[Claim 4] Method according to anyone of the preceding claims, also comprising an
20 additional step of obtaining a three-dimensional reconstruction of the object (20) from the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the object (20) in the global coordinate system (GCS) and generated at at least two different times (t_j, t_{j+1}),

[Claim 5] The method according to anyone of the preceding claims, wherein the
25 sensor (11) comprises at least one emitter (14) and at least one receiver (15), the emitter (14) being configured to emit a physical signal and the receiver (15) being configured to receive the emitted physical signal (16) once reflected on the object (20).

[Claim 6] The method according to claim 5, wherein the sensor (11) comprises the emitter (14) and the receiver (15) as a single unit.

30 **[Claim 7]** The method according to anyone of the preceding claims, wherein the central processing unit (12) identifies the composition material of the object (20) by comparing the reflectivity response (30) determined at step /E/ with reference reflectivity responses of known materials stored in a library.

[Claim 8] The method according to anyone of the preceding claims, wherein the wavelengths of the physical signals emitted (16) for the point cloud frames (PCF_j) are selected in a random manner.

[Claim 9] The method according to anyone of claims 1 to 7, wherein the
5 wavelengths of the physical signals emitted (16) for the point cloud frames (PCF_j) are selected in a predetermined order.

[Claim 10] The method according to anyone of the preceding claims, wherein the device (1) comprises a plurality of sensors (11), wherein the sensors (11) can respectively generate a point cloud frame (PCF_j) by emitting a physical signal (16)
10 at a wavelength comprised in different spectral domains.

[Claim 11] The method according to claim 10, wherein the sensors all communicate wirelessly with the central processing unit (12).

[Claim 12] The method according to anyone of the preceding claims, wherein a point cloud frame (PCF_j) corresponds to a full scan of the local volume (L_j) of the
15 sensor (11).

[Claim 13] The method according to anyone of the preceding claims, wherein the coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ of the object (20) in the local coordinate system (LCS) of the sensor (11) comprises two angular coordinates (θ_i, φ_i) and one radial coordinate (d_i) .

[Claim 14] The method according to claim 13, wherein the radial coordinate (d) corresponds to the distance from the sensor (11) to the data point (M_i), the distance (d_i) being computed by comparing timing of the emitted physical signal (16) and the reflected physical signal (17).
20

[Claim 15] The method according to anyone of the preceding claims, wherein
25 steps /A/ to /D/ are repeated at least four times, so that at least four intensity values $(I_{i,j}, I_{i,j+1})$ are associated to coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the object (20) in the global coordinate system (GCS).

[Claim 16] The method according to anyone of the preceding claims, wherein the physical signal (16) is a laser signal.

[Claim 17] The method according to anyone of the preceding claims, wherein the
30 device (1) is a vehicle able to move in the environment (E).

[Claim 18] A system (10) for identifying the composition material of an object (20) located in an environment (E) surrounding at least one device (1), the object (20) moving relative to the device (1), the system comprising (10):

- a plurality of sensors (11) configured to be mounted on said at least one device (1), each sensor (11_i) being configured to generate a continuous stream (ST) of point cloud frames (PCF_j), in parallel and asynchronously with the other sensors (11), by emitting a physical signal at a first wavelength (λ_{ej}), wherein the point cloud frame (PCF_j) comprises a set of data points (M_i), each data point (M_i) comprising coordinates $(\varphi_i, \theta_i, d_i)_{LCS}$ of the object (20) in a local volume (L_j) of the environment surrounding the sensor (11) at time t_j in a local coordinate system (CS) of the sensor (11), each data point (M_i) also comprising an intensity value (I_i) of a reflected physical signal (17) corresponding to the emitted physical signal (16) once reflected on the object (20),
- a central processing unit (12) configured to communicate with each sensor (11) to continuously receive the continuous streams (ST) from the sensors (11), determine the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of each data point (M_i) of the point cloud frame (PCF_j) in a global coordinate system (GCS) of the environment (E) surrounding the device (1), determine the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ of the object (20) in the global coordinate system (GCS) at the time t_j , and store in a memory (13) the intensity value (I_i) and the coordinates $(\varphi_i, \theta_i, d_i)_{GCS}$ in the global coordinate system (GCS), the central processing unit being configured to determine a reflectivity response of the object (20) from the intensity values and to identify the composition material of the object (20).

[Claim 19] An autonomous or semi-autonomous vehicle (10) comprising a system (10) according to claim 18.

[Claim 20] A non-transitory computer readable storage medium, having stored thereon a computer program comprising program instructions, the computer program being loadable into a central processing unit (12) of the system (10) according to claim 18 and configured to cause the central processing unit (12) to carry out the steps of a method according to anyone of claims 1 to 17, when the computer program is run by the central processing unit (12).

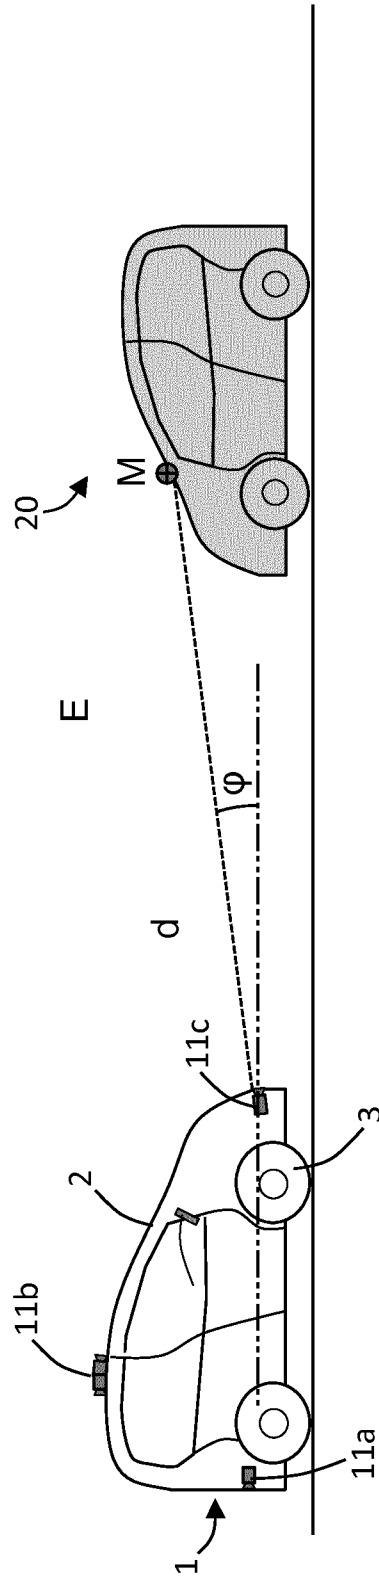
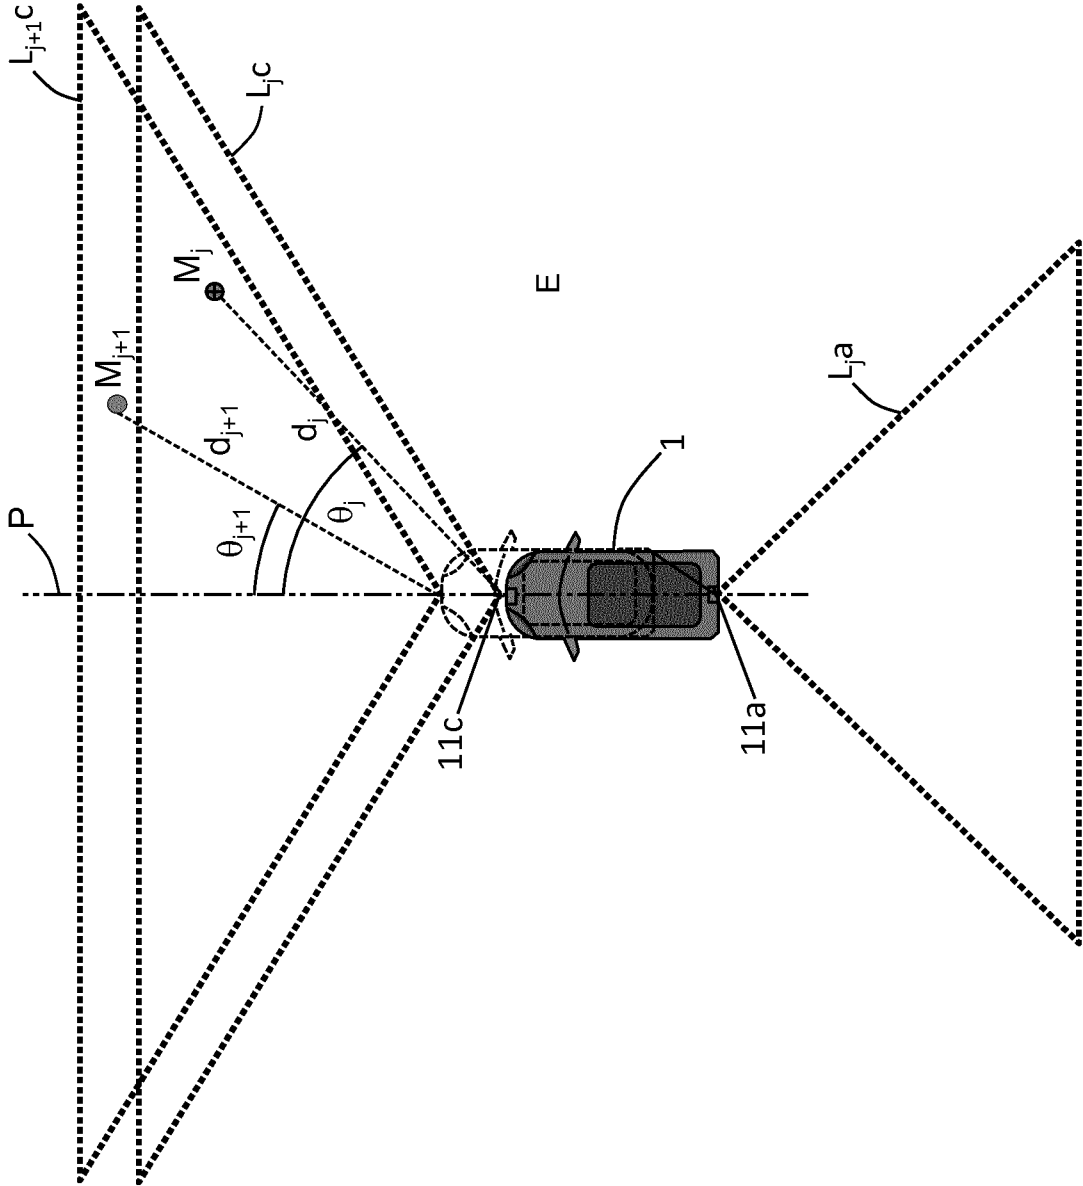


FIG. 1

FIG. 2



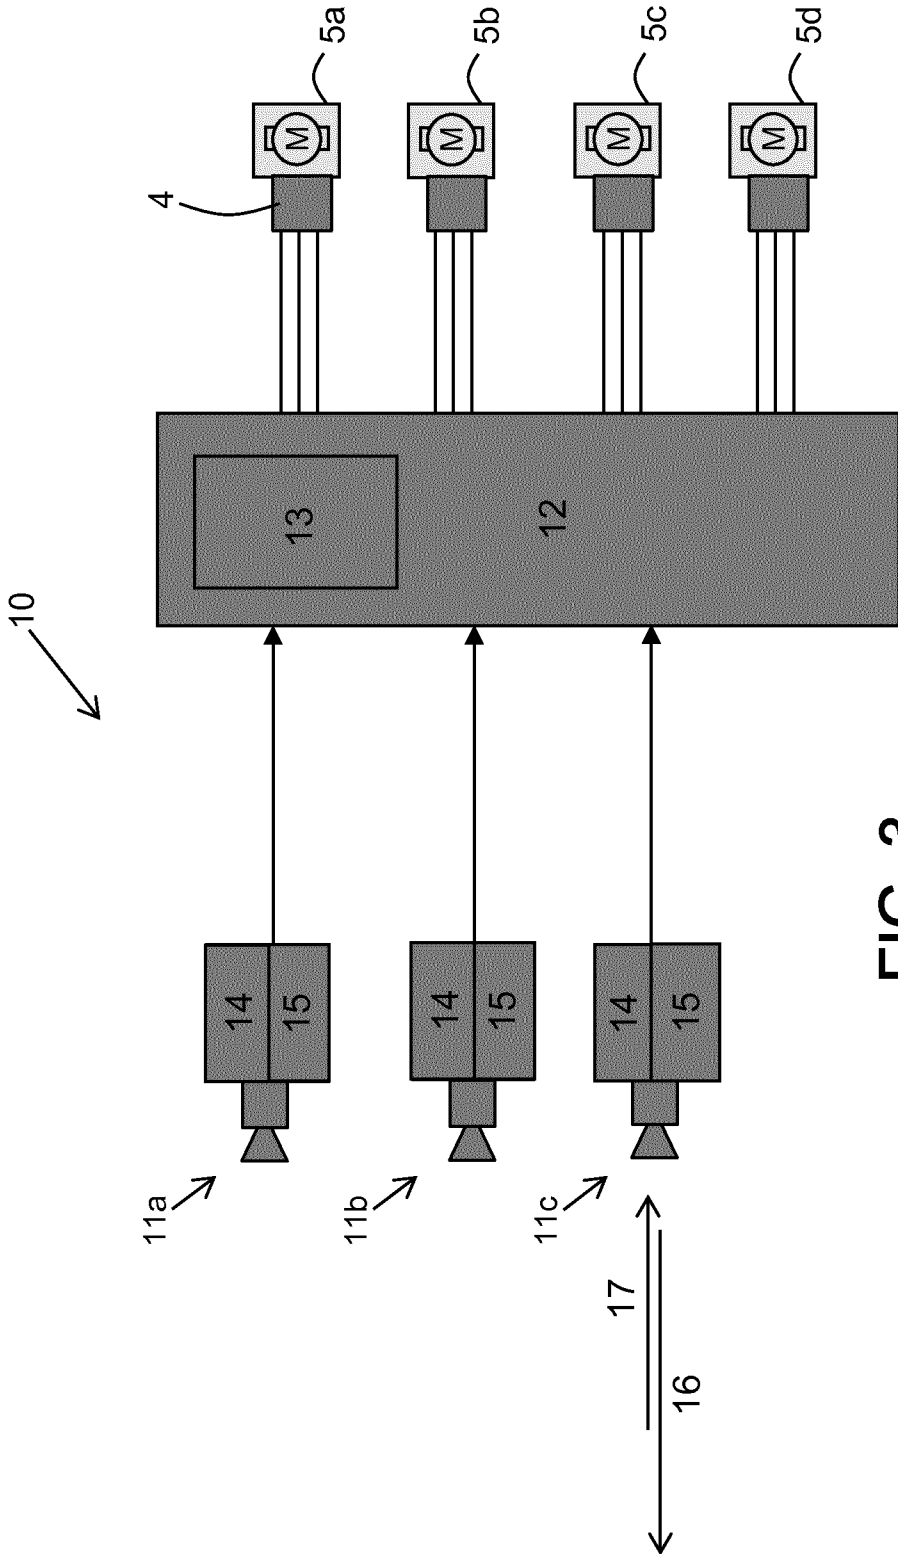


FIG. 3

4/7

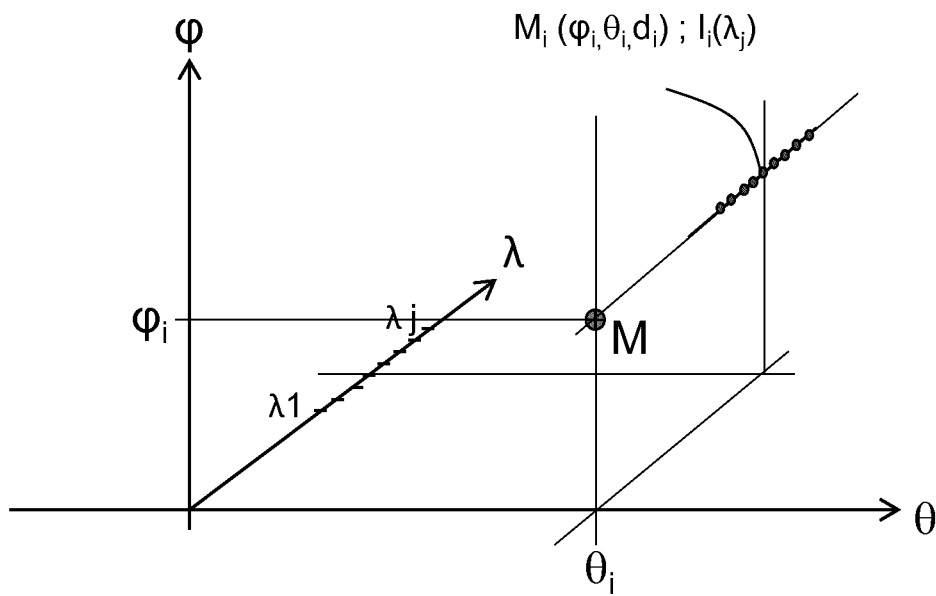


FIG. 4

5/7

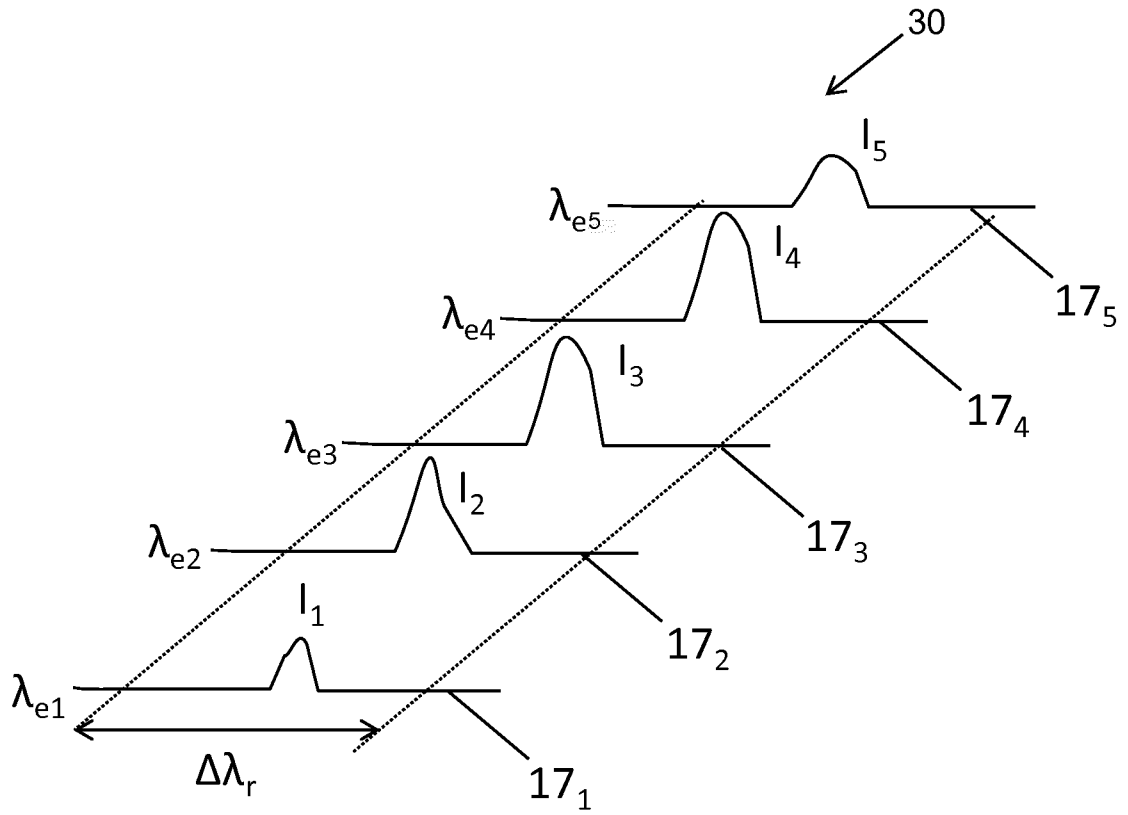


FIG. 5

6/7

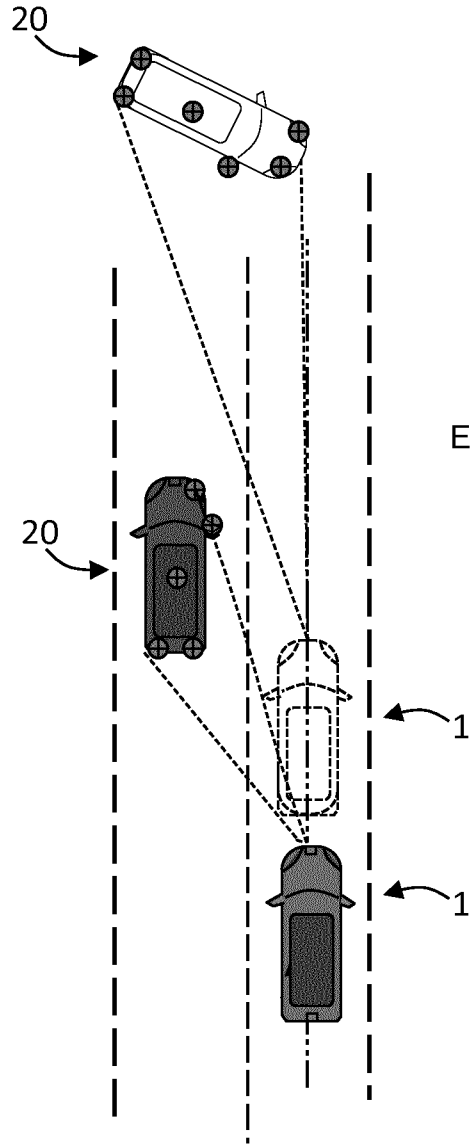


FIG. 6

7/7

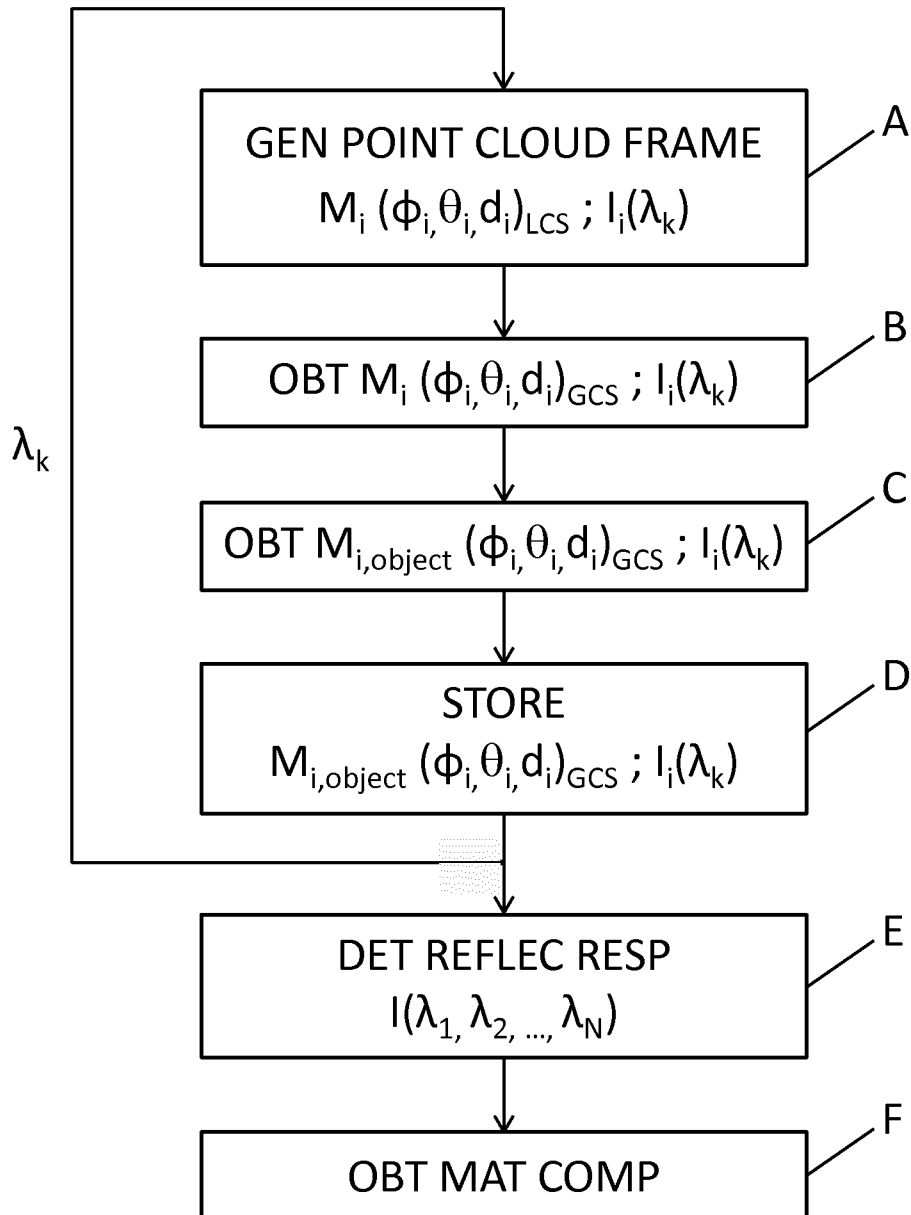


FIG. 7

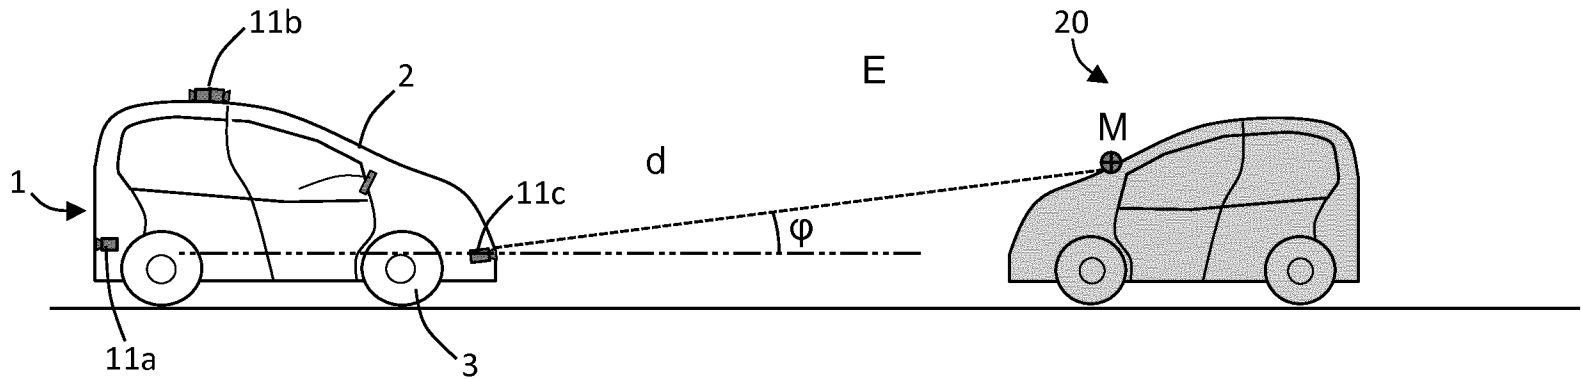


FIG. 1