


UL 83" TANDEM AXLE CHANNEL UTILITY

STANDARD CONFIGURATION SPECS

THESE ARE THE DEFAULT SPECS THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

| | | |
|---------------------------------|---|---|
| Deck Width: 83" | Deck Height: 21" | Axles: Tandem (2 x 3,500 lbs. or 2 x 5,200 lbs.) |
| Length: 12' - 22' | Couplers: Bumper Pull & Pintle | Load Capacity: 4,850 - 7,749 lbs. |
| GVWR: 7,000 - 9,899 lbs. | Weight: 1,500 - 2,150 lbs. | Choose the optional Side Mount ATV Gates for improved loading accessibility and the Blackwood Pro decking for enhanced durability and grip in wet conditions. |

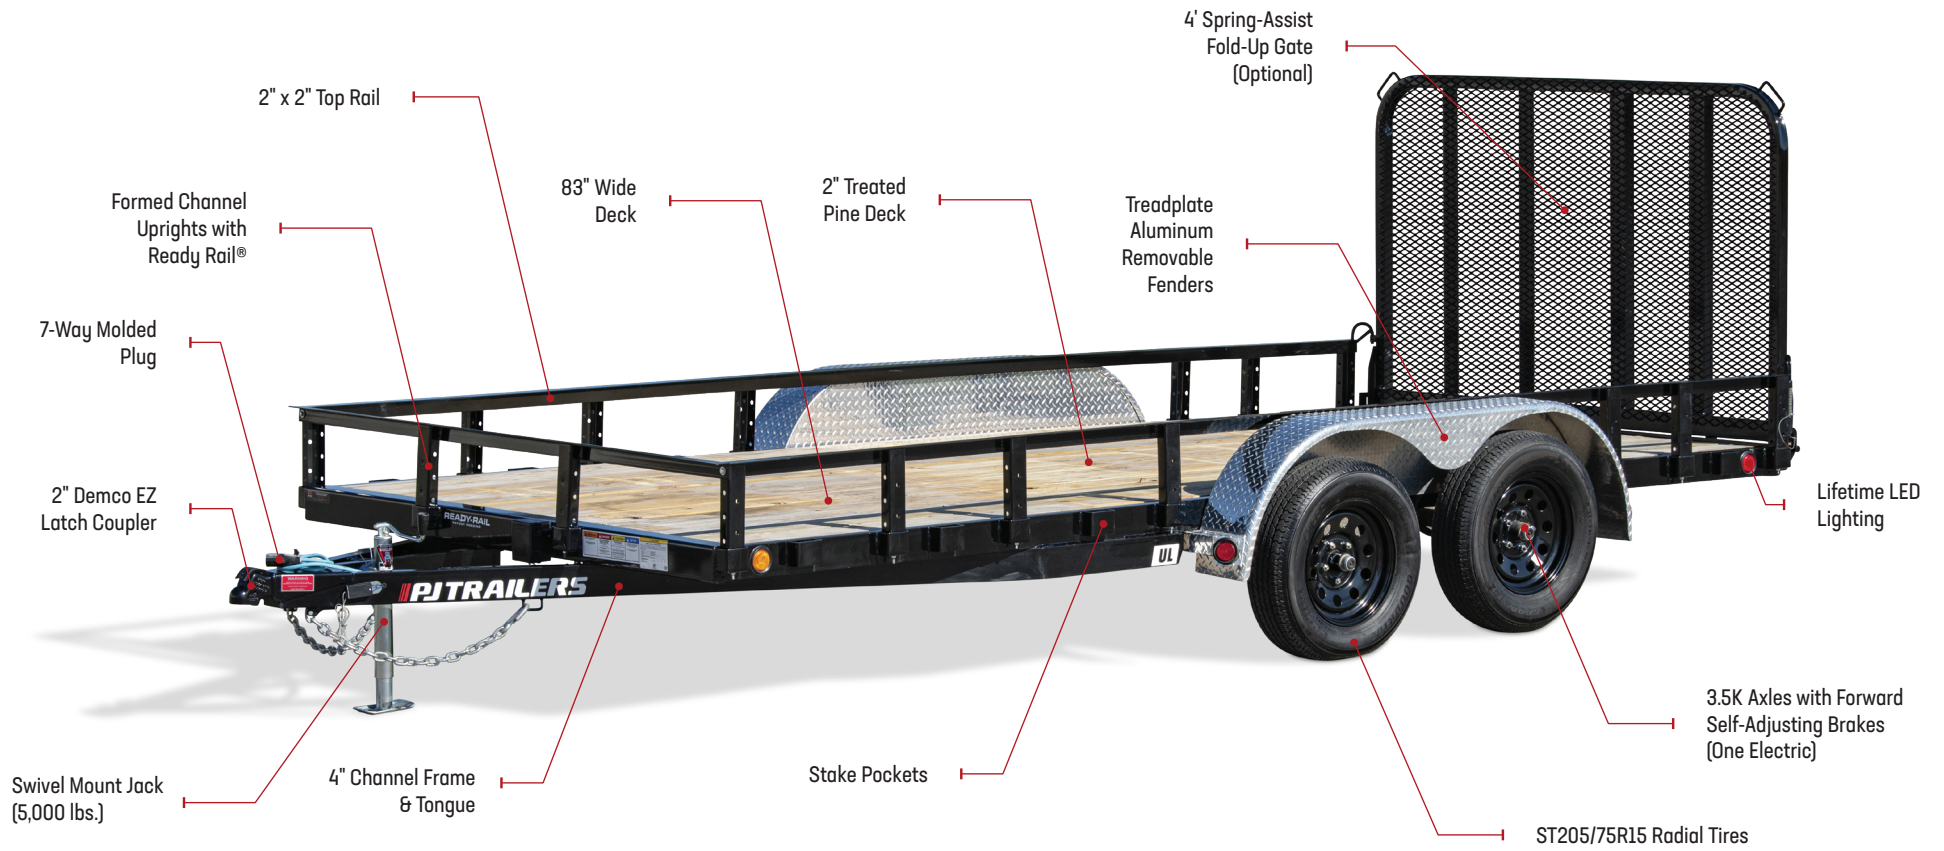

Safely and easily load your equipment or perform maintenance with our Removable Aluminum Treadplate Fenders.

REMOVABLE ALUMINUM TREADPLATE FENDERS



With the Side Mount ATV Ramp option, load an ATV in the front or rear between fenders, utilizing removable frame rail ramps for convenient side access, catering to diverse loading needs.

VERSATILE ATV SIDE RAMP OPTION



Ready Rail®, our patented rail system, empowers users to tailor their trailer with bolt-on accessories, ensuring a versatile solution that evolves with your changing needs. Available exclusively on PJ Trailers.

READY RAIL® - CUSTOMIZABLE & ADAPTABLE



Experience the advantage of additional factory-installed fastening solutions, such as D-Rings, Tie-Downs, and Stake Pockets, ensuring versatile and secure cargo management for all your transport needs.

ADVANCED CARGO SECUREMENT

PJTRAILERS

Visit pjtrailers.com for a complete list of trailer options.