




## Features

- iSMART - for auto-scheduling and power resume
- 7th Gen Intel® Core™ i7/i5/i3/ Processors
- NVIDIA Ampere Architecture MXM GPU cards (Type A/B, up to 115W)
- 2x DDR4 2133 SO-DIMM, dual channel, Max. 32GB
- 1x HDMI 1.4 for console, 4x DP 1.3 output
- 1x Mini PCI-E (full-size) for Wi-Fi, Bluetooth, 4G LTE or capture card options
- 1x M.2 B key (3042) for storage or 4G LTE options
- 2x 2.5" SATA III SSD device
- Compact and rugged design

## Ordering Information

SI-614-AI	Industrial AI Computer with MBD614 with Intel® Core™ i5-7500 processor (8M Cache, up to 3.4 GHz), 1x MXM NV1050 4GB 128bit/GDDR5 GPU card, 2x 8GB DDR4 memory, 2.5" SSD 128GB & 270W PSU.
-----------	---

## Dimensions and Drawing

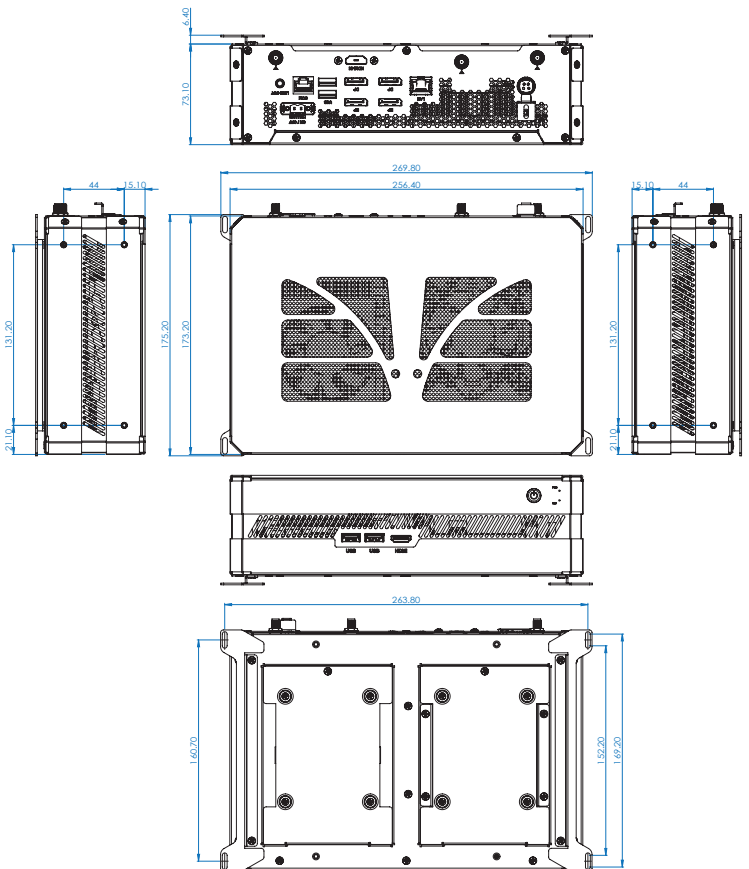

## Specifications

System Mainboard	MBD614
CPU Type	7th Generation Intel® Core™ Desktop processor
System Speed	Up to 4.2 GHz
Memory	2x DDR4 2133 SO-DIMM, Dual Channel, Max. 32GB
Accelerator Card	NVIDIA Ampere Architecture MXM GPU card/ up to 5888 CUDA cores / 17.66 TFLOPS peak FP32 performance / 184 Tensor Cores
LAN	1x Intel® I219V Gigabit LAN controller
Front Panel External I/O	1x HDMI 1.4 for console 2x USB 3.0 1x power button, Power / HDD LED
Rear Panel External I/O	1x RJ45 for Gigabit LAN 1x RJ45 for RS-232 serial port 4x DP 2x USB 3.0 1x Audio connectors for Line out 1x Power jack connector 1x 2-Pin Terminal block for external power button 2x Antenna Hole
Expansion Slot	1x Mini PCI-E (full-size) for Wi-Fi, Bluetooth, 4G LTE or Capture card options 1x M.2 B key(3042) for storage or 4G LTE options 2x 2.5" SATA III SSD for storage 1x SIM card slot
Storage	1x M.2 M-Key (2280)
Auto Control and Monitoring	Watchdog Timer: 256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	+19V DC
Power Supply	270W power adaptor
Construction	SGCC
Chassis Color	Black and white
Mounting	Standard system bracket
Weight	3kg (6.6lbs)
Dimensions	256mm(W) x 173mm(D) x 73mm(H) 10.07"(W) x 6.81"(D) x 2.87"(H)
Others	NA
Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20°C ~ 80°C (-4°F ~ 176°F)
Relative Humidity	5%~90% @45oC (non-condensing)
Vibration	SSD: 5 grms / 5~500Hz / random operation
Shock	Operating : 20G / 11ms Non-operating : 40G / 11ms
Certification	CE, FCC class B, UL & CCC
Operating System	Windows10 / Linux