

# Adaptive VPN Bonding Technique for Enhancing Dual-SIM Mobile Internet Access

Francesco Beritelli\*, Aurelio La Corte\*, Grazia Lo Sciuto<sup>‡</sup>, Corrado Rametta\*, Francesco Scaglione\*

\*Dep. of Electrical, Electronics and Informatics Engineering, University of Catania, Italy

<sup>‡</sup>Department of Engineering, Roma Tre University, Italy

**Abstract**—Mobile Internet access networks are not designed to support real-time data traffic because of several drawbacks concerning the wireless medium such as resource sharing, traffic congestion, radio link coverage etc., which impact directly such parameters as delay, jitter, and packet loss rate that are strictly connected to the quality of user experience. While in a fixed network scenario the gap is reduced arbitrarily by an appropriate dimensioning of the characteristics of ADSL access in terms of guaranteed minimum bandwidth or MCR (minimum cell rate), in a cellular network scenario the quality of service over IP is greatly reduced due to strong current limitations in terms of the requirements regarding delay and guaranteed bandwidth that cannot be arbitrarily decided. The main scope of the present paper is to introduce a dual USIM HSPA access point thanks to which it will be possible to guarantee a QoS suitable for a series of network-centric application such as real-time communications and monitoring, video surveillance, real-time sensor networks, telemedicine, vehicular and mobile sensor networks and so on. The main idea is to exploit multiple radio access networks in order to enhance the available end-to-end bandwidth and the perceived quality of experience. The scope has been reached by combining multiple radio access with dynamic load balancing and the VPN bond technique.

## I. INTRODUCTION

The rapid and continuous consolidation of Mobile Internet access request together with the significant increase of mobile services provided by third and fourth generation (3G, HSPA, LTE) networks, have recently created the conditions for a considerable expansion of mobile IP applications and services. Mobile IP networks are not designed to support real-time and/or time-critical traffic because of several drawbacks concerning the wireless medium [1]: resource sharing, traffic congestion, radio link coverage etc., which impact directly such parameters as delay, jitter, and packet losses. These are the main causes of quality degradation of numerous services over the PSTN. In recent works the authors have introduced a dual streaming (or packet duplication) approach to mitigate the degradation of speech quality [2] in a scenario of dual-SIM VoIP services over 3G-HSPA [3], [4].

In the present paper, the authors propose a multiple SIM Access Point exploiting VPNs bond of two cellular radio access connections coupled with an adaptive load balancing algorithm based on real time evaluation of the available end-to-end bandwidth offered by two different network operators.

The authors propose a trivial prototype in order to evaluate the effectiveness of the proposed solution in terms of the enhancement of both the instantaneous available bandwidth and connection availability between the mobile access point

and a remote command and control and/or monitoring node. As to the costs/benefits balance, the proposed method on the one hand requires a dual RF module, but on the other hand it is also true that nowadays HSPA or LTE modems have become very cheap and common and there are a lot of free and open source operative systems allowing the implementation of advanced networking functions such as load balancing techniques, VPN creation and bonding, network performance evaluation and so on.

The paper is structured as follows: Section II describes the possible applications and contexts where the proposed approach can offer considerable benefits in terms of reliability and efficiency and gives an overview on the overall system; Section III presents the end-to-end bandwidth measurement algorithm and the adaptive weight assignment procedure; Section IV reports the performance results of a real test bed; finally, in Section V conclusions are drawn.

## II. SCENARIO

Wireless sensor networks and internet of things have become very commonly used technologies enabling a large number of applications and services in everyday life. Usually the architecture of the above cited networks is based on a certain number of sensors and devices that communicate among them and towards a critical device called sink that has the scope of collecting data from the devices for monitoring, control, statistics, etc. Often the sink is designed to communicate via Internet to a remote command and control position where a user can operate over the network. With this scope, the sink provides the functionality of gateway with the external IP world. Regarding this aspect, the gateway is equipped with Ethernet, wifi, or 3G/4G interfaces in order to communicate with the IP world according to the applicative scenario for which the ad hoc network has been conceived. In particular, when the sensor network or the IoT network are deployed for command and/or control, monitoring, surveillance or similar use in mobile or vehicular contexts and a fixed wide area network connection is not available, it is mandatory to provide a stable, reliable and effective wireless connection towards the remote server in order to guarantee the required QoS for time-critical and real time applications (see e.g. highly computationally costly applications [5]–[12], or distributed services [13]).

With this aim the authors propose a Dual SIM 3G/4G wireless access point that acts as the sink for the sensor network and, at the same time, acts as gateway towards the IP core network. To guarantee QoS for time critical and real time applications, the proposed device offers two main features:

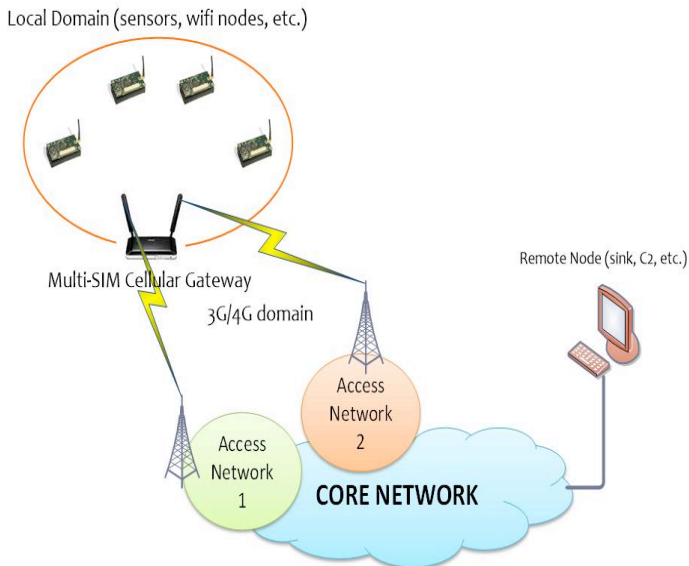


Fig. 1. Scenario overview.

- 1) a VPN bonding between the two radio access connections, thanks to which it is possible to obtain a bandwidth almost equal to the sum of the two available end-to-end bandwidths;
- 2) a dynamic load balancing algorithm, which is a process that establishes the weights the device gives to the two different radio connections during the movement of the mobile sink/gateway on the base of the instantaneous available end-to-end bandwidth offered by the two different network operators.

It has been observed that in this first phase of the present research the weights are established in order to maximize the cumulative bandwidth but as a future work the authors will implement a more complex algorithm able to dynamically calculate the VPN weights based on the traffic typology (voice, file transfer, best effort, etc.) and the related parameters that directly impact on the quality of experience of the end user willing to use the service.

### III. ARCHITECTURE AT A GLANCE

The smart gateway proposed by the authors is based on a well-known technique called VPNs bond, usually employed in the Ethernet switch and extended to the cellular domain to counteract some drawbacks connected to the radio access technology. Due to the application of VPNs bond it is possible to balance the data load among the available network interfaces but, for the sake of clarity, it should be highlighted that this technique is much more flexible if compared to the common load balancing algorithms; in fact, the latter permit to split the data connection between the source and the destination by using the available connections and according to the weights assigned to each interface. In such a way, the effectiveness of the mechanism is obtained only when there are more than one end-to-end connection between the sender and the receiver.

In case there is only a data flow towards the remote server, load balancing permits to assign the data stream to one of the

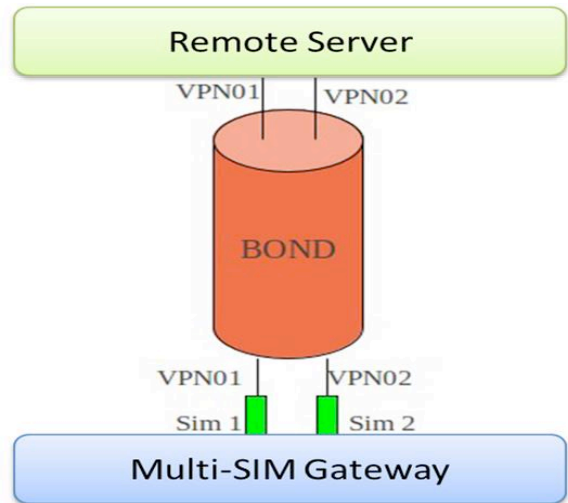


Fig. 2. VPNs bond architecture.

two connections and the perceived end-to-end bandwidth is equal to the one offered by the best network operator. Instead, the use of the VPNs bond technique permits to enhance the available end-to-end bandwidth also in the case of only one data flow from the source node, i.e. the gateway of the ad hoc network, and the destination, i.e. the remote command and control position.

The VPNs bonding consists in unifying two or more layer 2 connections in order to be able to assign to one data flow a bandwidth ideally equal to the sum of the bandwidth offered by single L2 connections. This technique is well known and widely employed in the field of Ethernet switches where it is possible to unify two or more L2 interfaces to guarantee a larger point-to-point bandwidth in the core network.

In the present use case, the procedure consists in the creation of a VPN between each 3G/4G interface and the end point of the communication, i.e. the remote server. Once established the two VPNs it is possible to make the bonding of the latter in order to establish a large bandwidth connection between source and destination nodes (see fig. 2). Usually the VPNs bond technique is coupled with a trivial load balancing algorithm that consists in assigning static and equal weights to each L2 connection.

In case of L2 switches or DSL modem/routers this approach represents a good solution because the network conditions are similar for each interface and they remain almost constant in time. Let us suppose that the two available connections provide a bandwidth equal to 2 Mbps; in such a case a trivial load balancer will assign weights equal to 1 to each connection and the system will provide a bandwidth equal to 4 Mbps.

Now, supposing that at a time  $t$  the connection number 1 provides a bandwidth equal to 2 Mbps whereas the connection number 2 offers a bandwidth equal to 1 Mbps. Under this condition, if the load balancing algorithm maintains constant weights, by using a simple round robin mechanism, the connection 2 will represent a bottleneck for the system because the overall available end-to-end bandwidth will not be equal to the sum of the two bandwidths but it will be equal to twice that of the worst connection.

In a wireless scenario characterized by the high variability

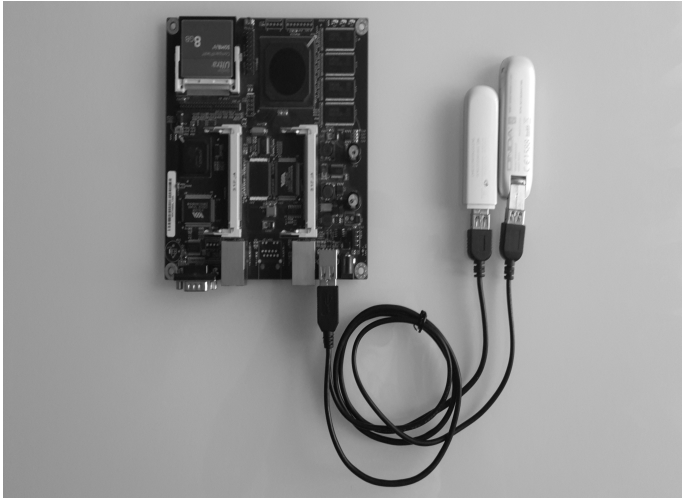


Fig. 3. The prototype employed for our test bed.

of radio coverage, different traffic conditions, handover procedures, and mobility, each radio interface equipped with the related SIM - performs according to the infrastructure and the load conditions set by its operator. Under these conditions, a static weights assignment would result in a drastic reduction in performance where the worst connection would act as a bottleneck for the whole system. With the aim of overcoming this limit, the authors propose a mechanism of real time bandwidth evaluation to establish each time and for each L2 connection the weights to assign to the VPNs bond, thus maximizing the transmission rate towards the destination node.

In the next sections the adaptive load balancing algorithm will be described and the first performance evaluation of a trivial prototype will be presented.

#### A. Description of the prototype

To prove the effectiveness of our proposal we realized a prototype by using a small form factor system boards optimized for wireless routing and network applications, an ALIX2D2 board [14], equipped with a 500 MHz AMD Geode LX800 CPU and 256 MB DDR DRAM on board; two USB Internet keys have been used to provide cellular connectivity and the two devices have been equipped with two SIMs of two different network operators, that we will define as Operator 1 and Operator 2 in the following sections; ZeroShell [15] and OpenVPN [16] has been used as operative system and VPN manager respectively, whereas proprietary scripts has been realized by using bash and python language to evaluate the available end-to-end bandwidth between the couples source-destination and, consequently, to establish the weights to assign to each VPN in order to maximize the overall performance of the prototype.

For the aim of clarity, the same hardware and software have been employed to evaluate the performance of the standard static weights assignment procedure without using, obviously, the scripts for the dynamic evaluation of the VPN weights. A picture of the hardware employed to realize our prototype is shown in fig. 3.

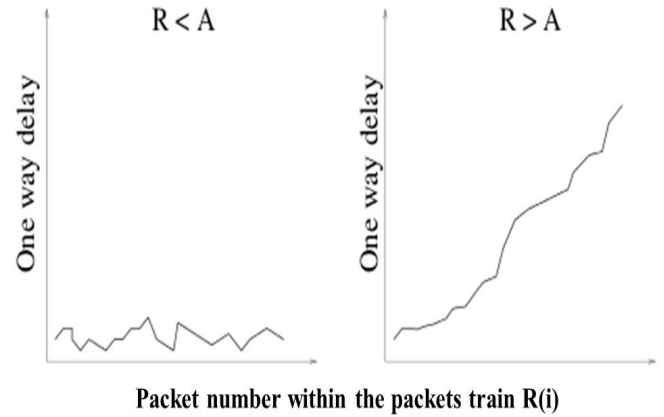


Fig. 4. One way delay values of the  $i$ th packet train in the SLoPS technique

#### IV. ADAPTIVE WEIGHTH ASSIGNEMENT

The proposed algorithm can be summarized in three steps:

- 1) Bandwidth measuremet for each available radio data connection;
- 2) Results analysis and weight evaluation to establish and set up the VPN bond parameters;
- 3) Periodic performance evaluation to determinate the most suitable weight for each mobile connection.

As to the first step, i.e. the end-to-end bandwidth evaluation, it is carried out via the Self Loading of Periodic Streams (SLoPS) technique [17]–[19]. The latter is based on a client-server application: the sender process runs on the multi-SIM access point whereas the receiver process runs on a remote host, which, in the present architecture, is the remote gathering node of the sensor data network.

The above mentioned architecture is suitable in case the mobile hot spot has to send data towards a remote sink collecting sensor data; however, if the time-critical application is based on the transmission from the remote host to the mobile network the upload bandwidth will be taken into consideration.

The working principle of the Self Loading of Periodic Streams is very simple: it is based on the periodic transmission of packet streams from the source to the destination and on the consequent measure of the One Way Delay (OWD), which is the time interval between the transmission of the data packet and its reception at the receiver side.

The number of packets transmitted increases until the growing one way delay; when this happens it means that the packet transmission rate is greater than the available bandwidth provided by the radio access network. Fig. 4 shows the above mentioned procedure: when the transmission rate ( $R$ ) is compatible with the available bandwidth ( $A$ ), i.e.  $R < A$ , the one way delay shows an almost constant trend; however, when the packet rate from the source to the destination is greater than the available bandwidth, i.e.  $R > A$ , the one way delay increases because of the TCP congestion window mechanism.

The measurement is obtained by the iterative sending of a series of  $K$  packets of  $L$  bit each of which is transmitted during an interval of  $T$  seconds. In such a way the transmission

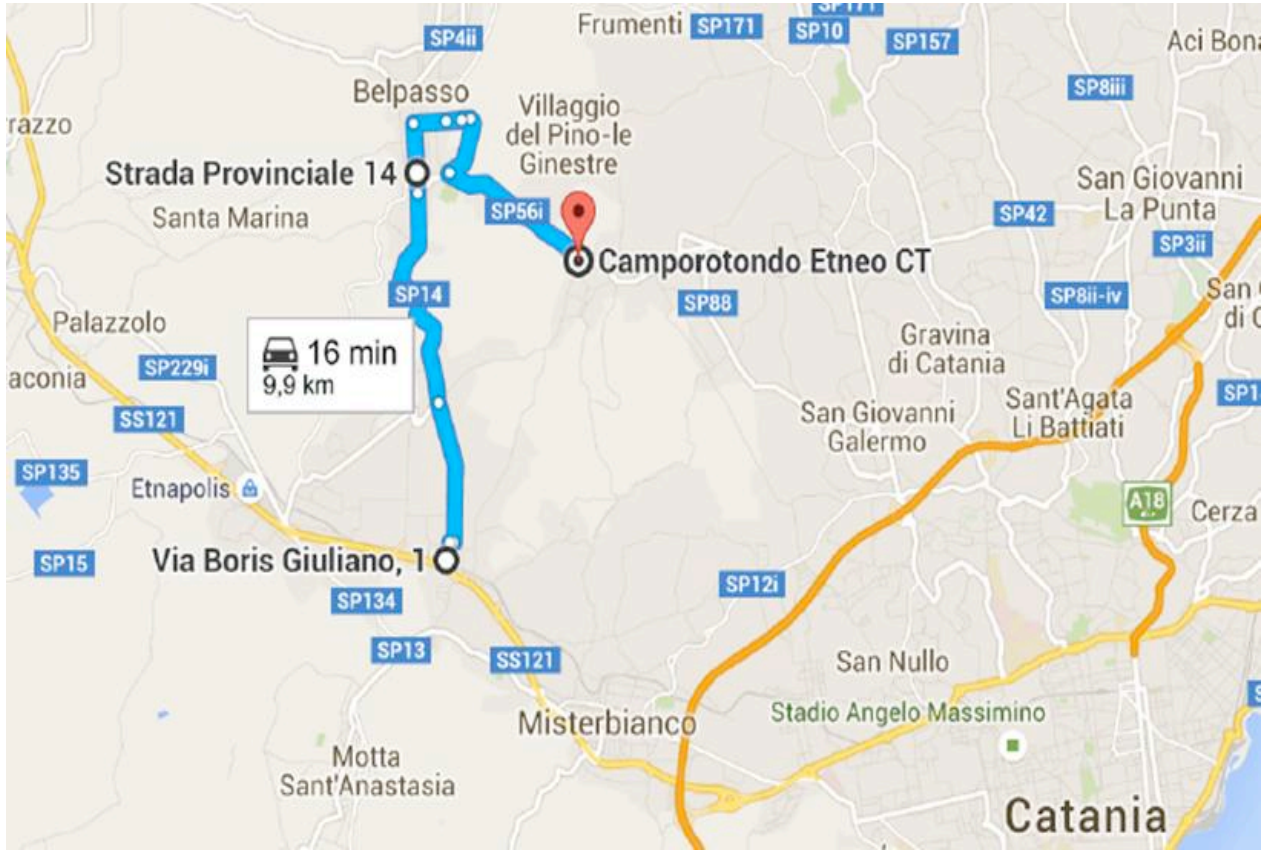


Fig. 5. Countryside route of the test bed.

rate is equal to  $R = L/T[\text{bit}/s]$ . Each packet of the series has a timestamp to indicate when the data packet has been created and sent to the receiver node. Once the destination node receives the packets stream it compares the arrival time ( $A_i$ ) and the sending time ( $S_i$ ) of the packets in order to calculate the one way delay of the  $i$ th stream, i.e.  $D_i = A_i - S_i$ .

The sender and the receiver communicate according to the client-server paradigm in order to establish the available bandwidth. When the one way delay at the destination side increases, in fact, the receiver process notifies the sender that behaves as follows:

- a If  $R(i) < A$ , the source process will send the following packets stream at  $R(i+1) > R(i)$ ;
- b If  $R(i) > A$ , the source process will send the following packets stream at  $R(i+1) < R(i)$ ;

Furthermore, the rate of the stream ( $i+1$ ) is established as follows [10]:

- 1) Two start parameters,  $R_{min}$  and  $R_{max}$ , are initialized equal to zero and equal to the ideal maximum throughput provided by the connection  $R_{max}$ ;
  - o If  $R(i) < A$  then  $R_{min} = R(i)$ ;
  - o If  $R(i) > A$  then  $R_{max} = R(i)$ ;
- 2)  $R(i+1) = (R_{max} - R_{min})/2$ ;

- 3) The iterative process ends when  $(R_{max} - R_{min}) < w$ , where  $w$  indicates the value depending on the precision of the bandwidth evaluation procedure (obviously, the greater the  $w$  the less accurate evaluation but, at the same time, the faster the convergence period required by the algorithm).

The above mentioned algorithm runs for each radio access connection and converges to the actually available end-to-end bandwidth. When the process ends, the bandwidth values are communicated to the *adaptive load balancing* process that updates the VPNs bond weights as follows:

- a the VPN weight of the worst connection is set equal to 1;
- b the VPN weight of the best connection is set equal to  $A_{better}/A_{worst}$ ;

in case the bandwidth offered by one of the two operators is equal to 0, e.g. because of a lack of radio coverage, the whole traffic is routed to the active connection.

## V. PERFORMANCE EVALUATION

In the above sections some problems have been illustrated that arise when a mobile wireless sensor networks have to be connected to a remote command and control server by using the public 3G or 4G radio network.

In order to overcome such drawbacks as connection interruption, lack of bandwidth, delay in performance, jitter and

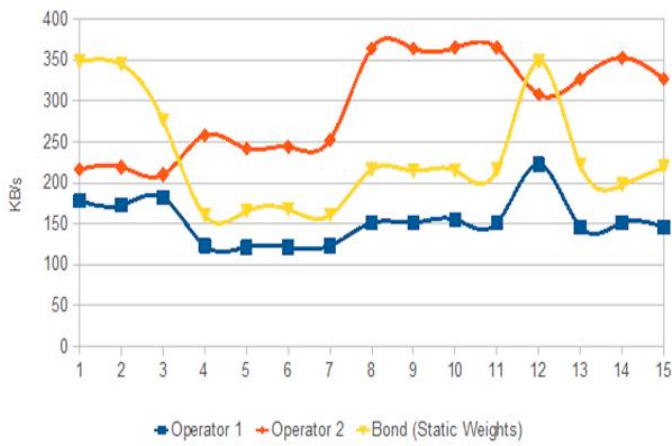


Fig. 6. Throughput comparison Single operators and static bond.

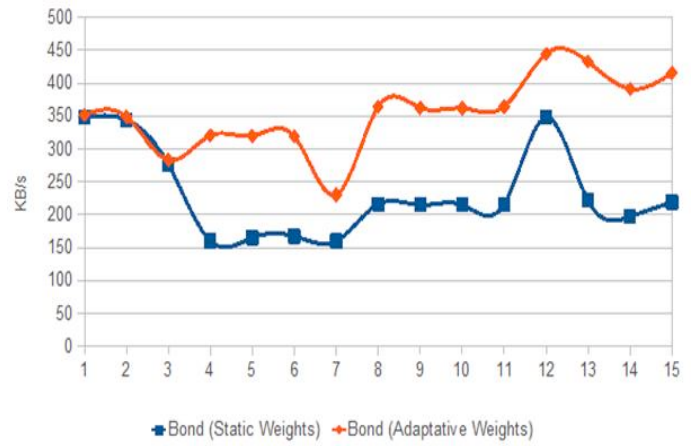


Fig. 8. Static scheme vs. Adaptive scheme.

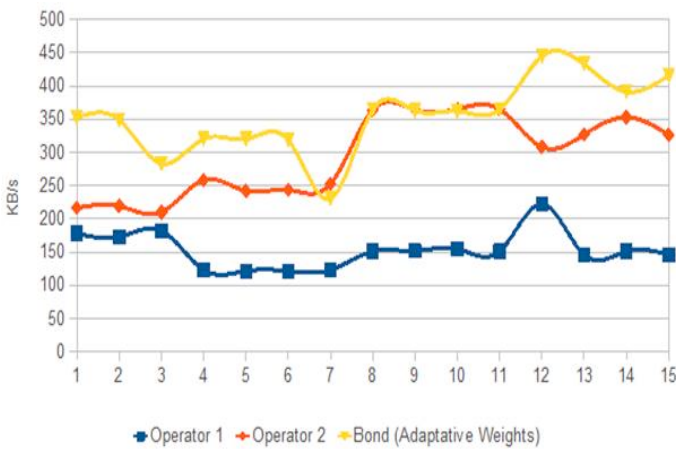


Fig. 7. Throughput comparison Single operators and adaptive bond.

packet loss rate not compatible with time critical applications, a smart dual SIM sink/gateway based on multiple radio access, VPN bonding and adaptive load balancing between the available connections is proposed.

The present section will prove the effectiveness of the proposed solution showing the results obtained during our test bed. We performed two campaigns of simulation, the first has been realized in a countryside scenario as shown in fig. 5, the second has been realized by moving the prototype in an urban scenario as shown in fig. 10; for each test bed 15 data transfers from the mobile sink/gateway to the remote C2 have been performed; during the test bed it has been evaluated:

- the throughput for each cellular operator;
- the throughput obtained by using the dual SIMs VPNs bonding with static weights assignment;
- the throughput obtained by using the bond of the two VPNs coupled with the adaptive weights assignment and load balancing.

In fig. 6 and fig. 7, referring to the static and the adaptive weights assignment respectively in the extra-urban scenario, it is possible to notice that two different conditions appear: in the

first part of the test bed the two network operators have similar performances in terms of available end-to-end bandwidth; in the second part the Operator 2 performs better than the Operator 1.

When the first case appears both static and adaptive bonding perform well outperforming the performance of the two single operators; static and adaptive approaches show almost the same behavior. When the second case appears, the performance of the static bonding mechanism is drastically worse than the proposed adaptive approach and, furthermore, the VPNs bonding provides an end-to-end bandwidth lower than the one offered by the best single network operator, in such a case the Operator 2.

More in detail, during the sink movement the network operator 2 delivers better performance respect with the network operator 1. In such a case, the VPNs bond and the static load balancing algorithm does not perform as expected and the dual SIM gateway behaves similarly to the worst of the two network operators (the throughput should be double the worst connection but the overhead due to the establishment of the two VPNs, i.e. the overhead related to the establishment of SSH tunnel among the two radio network interfaces and the remote server, drastically reduces the effective available bandwidth.); in fact, the load balancing algorithm splits into two equal flows the original one, assigning to each connection the amount of data to transmit equal to the available bandwidth offered by the worst operator, the latter representing, the bottleneck of the system. In such a case, the VPN bond coupled with the static load balancing does not offer any performance enhancement because of the incorrect assignment of bond weights.

Fig. 7 indicates the results obtained by the proposed cellular bonding prototype with the use of the adaptive load balancing algorithm in order to counteract the drawbacks related to the variability of the end-to-end bandwidth offered by each radio operator during the movement of the mobile sink/gateway. The mobile sink/gateway was moved following the same route. It clearly appears that the cellular bonding almost always outperforms the best cellular operator; however, when this does not happen it is due to the convergence time of the adaptive weights algorithms. Also, this case highlights that the final end-to-end bandwidth is not equal to the sum of all bandwidths because of the presence of the overhead due to

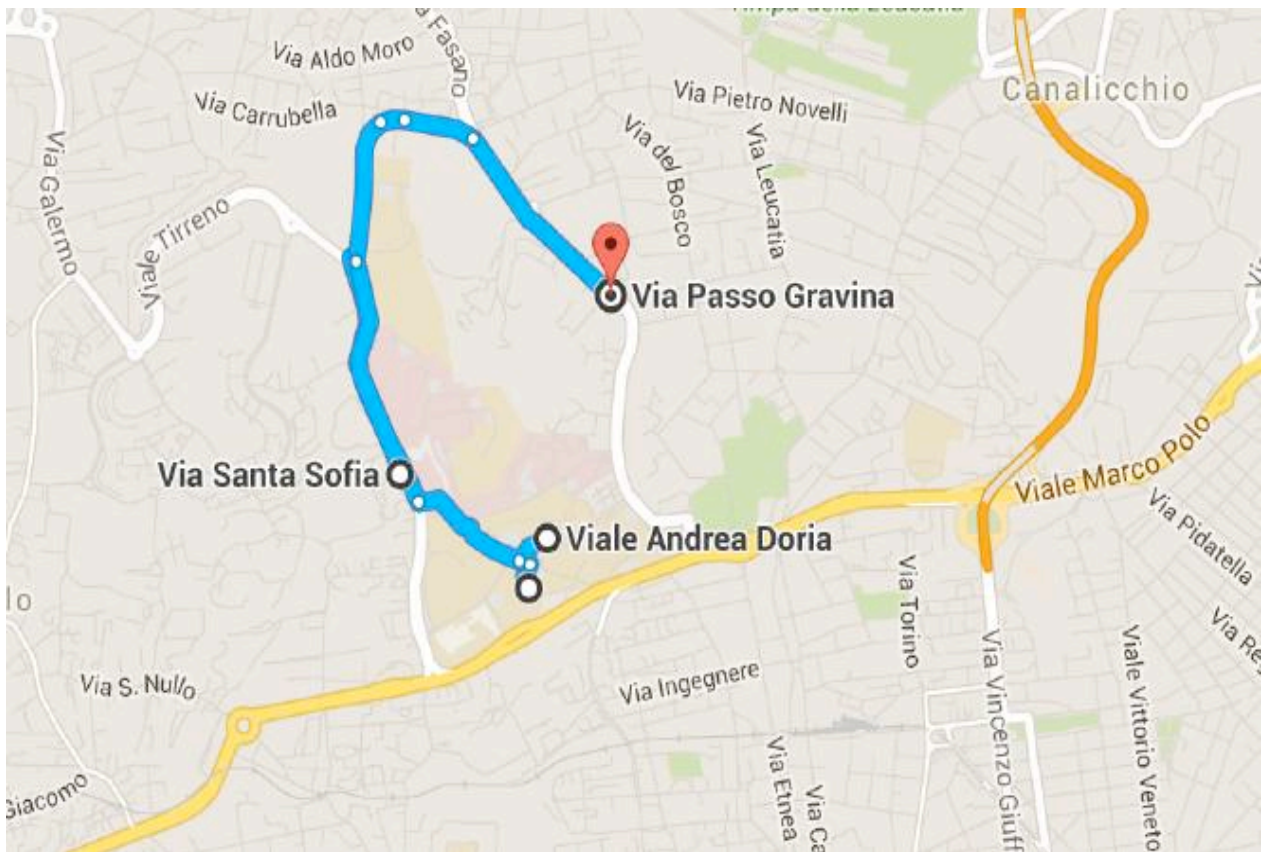


Fig. 10. Urban route of the test bed.

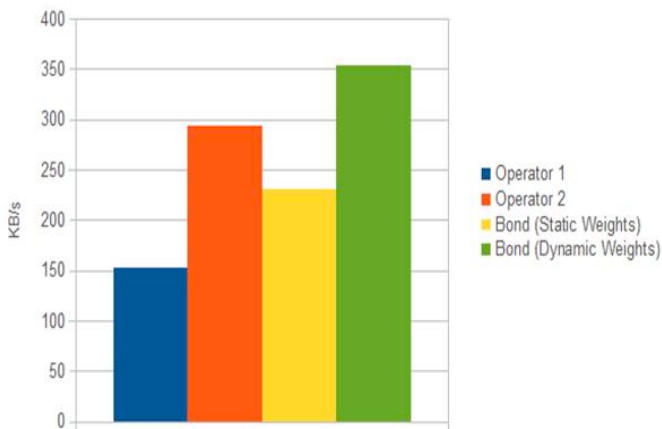


Fig. 9. Average end-to-end bandwidth comparison.

the implementation of the VPNs and their bonding.

In the fig. 8 the behaviour of static and dynamic weights is presented, whereas in the fig. 9 the average end-to-end bandwidths of the two schemes and of the single operators are compared. As we can see, the VPNs bond with adaptive weights assignment outperforms the static assignment scheme by almost 60% showing the effectiveness of the proposed solution in vehicular applications such as telemedicine, telemetry, remote command and control, etc...

In fig. 11 and fig. 12, referring to the static and the adaptive

weights assignment respectively in the urban scenario, it is possible to notice that three different conditions appear: in the first part of the test bed one of the two operator goes down because of lack of radio coverage or network congestion; in the second phase Operator 1 and Operator 2 have almost the same performance, and the same condition appear at the end of the test bed; in the third phase of the test bed Operator 1 performs better than Operator 2.

When the first condition appear, the use of the VPNs bond technique and the use of two or more network accesses guarantees a seamless connectivity between the source and the destination if compared to the use of only one radio interface. More in detail when one of the two operators goes down the VPNs bond performs as the only working operator and the prototype behaves every time like a common single stream device equipped with the USIM belonging to the best network operator, i.e. the operator offering the best connectivity at the given time.

Static and adaptive approaches behaves in the same manner and the performance delivered by the VPN bond coupled with the static load balancing between the two available connections is satisfactory in the above mentioned scenarios; however, when the performances of the two radio access networks are different the adaptive scheme appropriately adjust the weights assigned to the VPNs (see fig. 13) and it outperforms the static one as shown in fig. 14. Finally, when the available bandwidth offered by each operator is almost equal, the adaptive scheme converges to the static one assigning the same weight to the two connections and the two approaches show equal

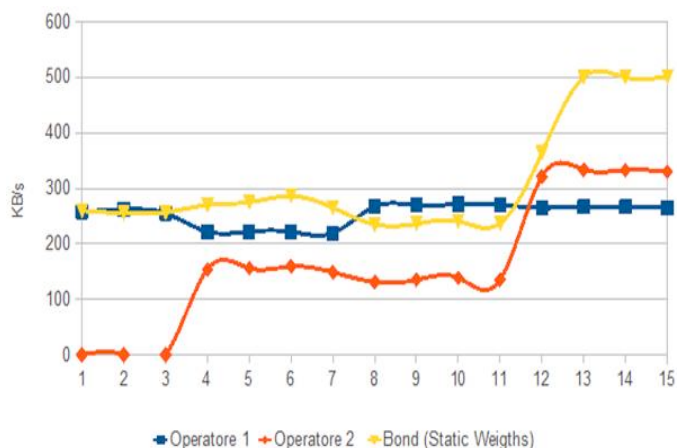


Fig. 11. Throughput comparison Static scheme.

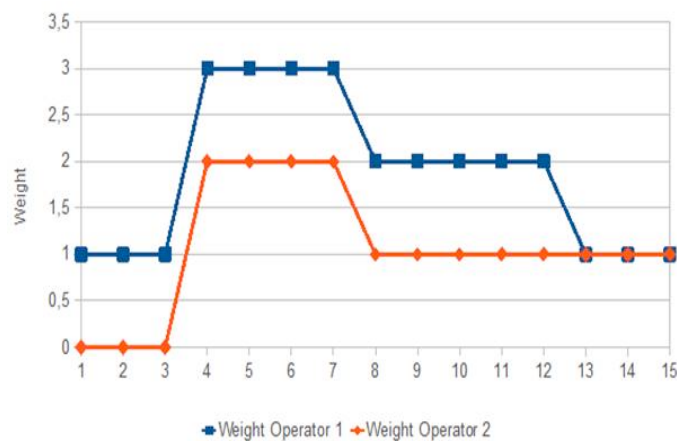


Fig. 13. Weights assigned to each VPN by the Adaptive scheme.

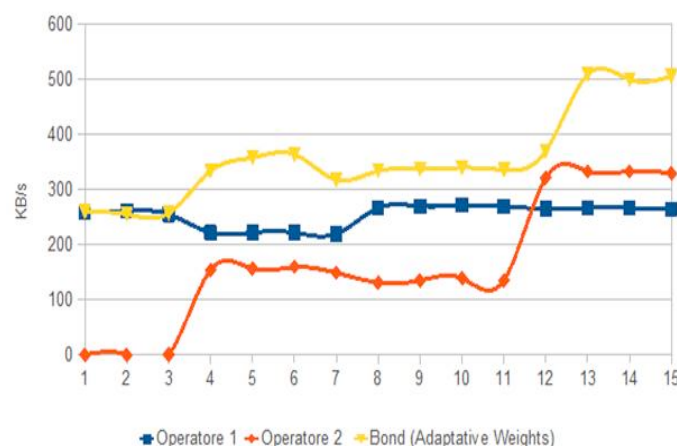


Fig. 12. Throughput comparison Adaptive scheme.

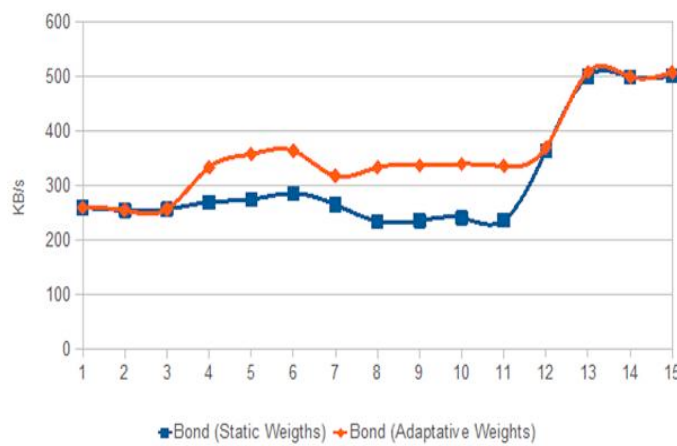


Fig. 14. Static scheme vs. Adaptive scheme.

performance.

## VI. CONCLUSION

The present paper proposes a dynamic VPNs bonding and load balancing techniques between two or more available radio access connections.

The approach is based on a smart gateway and the typical scenario is based on the following applications: mobile wireless sensor networks, IoT networks, local area networks for time critical or real time communications.

The first approach permits us to enhance the available end-to-end bandwidth and the reliability of the connection between the sink and the remote position; the second step consists in the dynamic weights calculation to be assigned to each connection in order to maximize the cumulative end-to-end bandwidth. In fact, Mobile IP networks are not designed to support real-time and/or time-critical traffic because of several drawbacks concerning the wireless medium, such as resources sharing, traffic congestion, radio link coverage etc., which impact directly such parameters as bandwidth, delay, jitter, and packet losses that are the main causes of quality degradation of numerous services over the PSTN.

Under this condition, the dynamic assignment of the weight to each connection of the VPN bonding plays a key role in exploiting the best connection available at the given time. Performance evaluation of the prototype shows the effectiveness of our approach in terms of instantaneous throughput. Considering the future work, the authors of the present paper are currently working on a device that is able to calculate the dynamic weights of the load balancing algorithm based on the kind of data traffic the sink/gateway has to transmit or receive from the remote command and control station.

## REFERENCES

- [1] A. Lamba, J. Yadav, and G. U. Devi, "Analysis of technologies in 3g and 3.5g mobile networks," in *International Conference on Communication Systems and Network Technologies (CSNT)*, 11-13 May, 2012, 2012, pp. 330-333.
- [2] S. Jadhav, H. Zhang, and Z. Huang, "Performance evaluation of quality of voip in wimax and umts," in *IEEE 12th International Conference on Parallel and Distributed Computing, Applications and Technologies (PDCAT)*, 2011.
- [3] F. Beritelli, A. Gallotta, and C. Rametta, "A dual streaming approach for speech quality enhancement of voip service over 3g networks," in *IEEE Digital Signal Processing (DSP)*, 1-3 July 2013, 2013, pp. 1-5.
- [4] F. Beritelli and C. Rametta, "Hsdpa dual streaming approach for improving voip speech quality in forensic applications," in *IEEE 9th International Symposium on Communications Systems Networks and*

- [5] G. Pappalardo and E. Tramontana, "Automatically discovering design patterns and assessing concern separations for applications," in *Proceedings of ACM Symposium on Applied Computing (SAC)*, Dijon, France, April 2006, pp. 1591–1596.
- [6] C. Napoli, G. Pappalardo, E. Tramontana, and G. Zappala, "A Cloud-Distributed GPU Architecture for Pattern Identification in Segmented Detectors Big-Data Surveys," *The Computer Journal*, 2014.
- [7] C. Napoli, G. Pappalardo, and E. Tramontana, "An agent-driven semantical identifier using radial basis neural networks and reinforcement learning," in *XV Workshop "From Objects to Agents" (WOA)*, vol. 1260. Catania, Italy: CEUR-WS, September 2014.
- [8] C. Napoli, G. Pappalardo, E. Tramontana, R. Nowicki, J. Starczewski, and M. Woźniak, "Toward work groups classification based on probabilistic neural network approach," in *Proceedings of International Conference on Artificial Intelligence and Soft Computing (ICAISC)*, ser. Springer LNCS, Zakopane, Poland, June 2015, vol. 9119, pp. 79–89.
- [9] C. Napoli, G. Pappalardo, E. Tramontana, Z. Marszałek, D. Połap, and M. Woźniak, "Simplified firefly algorithm for 2d image key-points search," in *Symposium on Computational Intelligence for Human-like Intelligence (CHILI)*, ser. Symposium Series on Computational Intelligence (SSCI). IEEE, 2014, pp. 118–125. [Online]. Available: <http://dx.doi.org/10.1109/CIHLI.2014.7013395>
- [10] M. Woźniak, D. Połap, M. Gabryel, R. Nowicki, C. Napoli, and E. Tramontana, "Can we process 2d images using artificial bee colony?" in *Proceedings of International Conference on Artificial Intelligence and Soft Computing (ICAISC)*, ser. Springer LNCS, Zakopane, Poland, June 2015, vol. 9119, pp. 660–671.
- [11] G. Capizzi, G. Lo Sciuto, C. Napoli, E. Tramontana, and M. Woźniak, "Automatic classification of fruit defects based on co-occurrence matrix and neural networks," in *Proceedings of IEEE Federated Conference on Computer Science and Information Systems (FedCSIS)*, Lodz, Poland, September 2015, pp. 873–879.
- [12] M. Woźniak, C. Napoli, E. Tramontana, G. Capizzi, G. Lo Sciuto, R. Nowicki, and J. Starczewski, "A multiscale image compressor with rbfnn and discrete wavelet decomposition," in *Proceedings of IEEE International Joint Conference on Neural Networks (IJCNN)*, Killarney, Ireland, July 2015, pp. 1–7, DOI: 10.1109/IJCNN.2015.7280461.
- [13] G. Borowik, M. Woźniak, A. Fornaia, R. Giunta, C. Napoli, G. Pappalardo, and E. Tramontana, "A software architecture assisting workflow executions on cloud resources," *International Journal of Electronics and Telecommunications*, vol. 61, no. 1, pp. 17–23, 2015.
- [14] "<http://www.pcengines.ch/alix.htm>."
- [15] "<http://www.zeroshell.net>."
- [16] "Openvpn: Building and integrating virtual private networks," in *Markus Feilner, Packt Publishing Ltd, 11 mag 2006*, 2006.
- [17] J. Manish and C. Dovrolis, "Pathload: a measurement tool for end-to-end available bandwidth," in *Passive and Active Measurements (PAM) Workshop*, 2002.
- [18] C. Manish, J. and Dovrolis, "End-to-end available bandwidth: Measurements, methodology, dynamic and relation with tcp throughput," *IEEE/ACM Transactions on Networking*, 2003.
- [19] R. S. Prasad, M. Murray, Dovrolis, and C. K. Claffy, "Bandwidth estimation: metrics, measurement techniques and tools," *IEEE Network*, 2003.