

Self-Improving-Leaderboard (SIL): A Call for Real-World Centric Natural Language Processing Leaderboards

Chanjun Park^{1,2}, Hyeonseok Moon¹, Seolhwa Lee³,
Jaehyung Seo¹, Sugyeong Eo¹, Heuseok Lim^{1,†*}

¹Korea University, ²Upstage, ³Technical University of Darmstadt

{bcj1210, glee889, seojae777, whiteldark, djtnrud, limhseok}@korea.ac.kr
chanjun.park@upstage.ai

Abstract

Leaderboard systems allow researchers to objectively evaluate Natural Language Processing (NLP) models and are typically used to identify models that exhibit superior performance on a given task in a predetermined setting. However, we argue that evaluation on a given test dataset is just one of many performance indications of the model. In this paper, we claim leaderboard competitions should also aim to identify models that exhibit the best performance in a real-world setting. We highlight three issues with current leaderboard systems: (i) the use of a single, static test set, (ii) discrepancy between testing and real-world application (iii) the tendency for leaderboard-centric competition to be biased towards the test set. As a solution, we propose a new paradigm of leaderboard systems that addresses these issues of current leaderboard system. Through this study, we hope to induce a paradigm shift towards more real-world-centric leaderboard competitions.

1 Introduction

Leaderboard systems allow researchers to compete with artificial intelligence (AI) models. The general purpose of leaderboard competition is to identify models that exhibit superior performance on a given task (Liu et al., 2021; Mazumder et al., 2022). Most of these competitions focus on solving real-world task, such as a machine reading comprehension (Rajpurkar et al., 2016) or a question-answering task (Lai et al., 2017). As a representative of the real-world task, most of each current leaderboard system propose a test dataset that serves as a measure of model performance for the corresponding task (Park et al., 2021b; Wang et al., 2018).

However, we should investigate that whether the current leaderboard competition system sufficiently considers the intended goal. While most

leaderboard systems use a single test set for the model evaluation in each task (Rajpurkar et al., 2016; Wang et al., 2018), this may derive biased evaluation (Beyer et al., 2020; van der Goot, 2021). In particular, in utilizing a single-static test dataset, we are exposed to various sources of bias, including annotation bias (Gururangan et al., 2018; Hovy and Prabhunoye, 2021)

We argue that this setting may derive the leaderboard competition to be recognized as a race for the higher rankings rather than the consortium for developing better models for the objective real-world task (van der Goot, 2021).

In this paper, we extend this discussion to analyze the differences in the current NLP leaderboard ranking system from the perspective of real-world applications in the following three aspects.

First, several leaderboards adopt static test dataset (Wang et al., 2018; Farhad et al., 2021). Hundreds of millions of data points are generated every day in the real world (Agababov et al., 2015; Ramkumar et al., 2019; Liu and Demosthenes, 2022). In several industrial services, data are generated and evolved daily, and the newly gained user history acts as the key to the model performance (Resnick and Varian, 1997; Shin et al., 2021). However, we find that existing leaderboards are stuck with outdated data and do not reflect the current situation. In other words, while real-world data are dynamic and continuously accumulating, leaderboard data remain static.

Second, current leaderboards hardly reflects real-world environments (Raji et al., 2021; Thompson et al., 2020). As data are continuously accumulated via several sources, such as users or industries, we can find that edge cases and outliers continue to occur (Lyu et al., 2020). In particular, errors, typos, and noisy data always exist in the industrial services, which require models that are sufficiently flexible to deal with them. The current leaderboard system, which operates only on clean data, does

† Corresponding author

not have a way to measure this flexibility in models (Loïc et al., 2020). Optimal models should be able to adapt to real-world data that is continuously generated, changing, and evolving (Grispos et al., 2019; Budach et al., 2022).

Finally, existing systems are leaderboard-centric. For instance, several models were adjusted to the test set to correspond to the leaderboard (Zhang et al., 2017; Khashabi et al., 2021). However, this approach can accelerate overfitting, resulting in test set fitted-only model while gives deteriorated performance on the real-world data. In other words, the current leaderboard system is not operated in a real-world centric manner but rather in a leaderboard-centric manner. Thus, we have to determine whether the current system of competition is meaningful

To address these issues, we propose a new paradigm for leaderboards: the Self-Improving Leaderboard (SIL). SIL is based on a continuously self-improving test dataset, with rankings updated every 24 hours according to the data of that day. The key feature of this leaderboard is that the rankings are constantly updated while the model remains fixed. In other words, this concept addresses the inherent flaws of conventional leaderboards by retaining the model characteristics and permitting the data to evolve.

2 Hurdles to developing Real-World-Centric Leaderboards

In this section, we analyze current leaderboard competitions and identify their limitations from the perspective of real-world environment. In particular, three challenges are identified.

Static Dataset Most leaderboards and benchmark data have been tested and verified by numerous models over a long period of time since their release. However, it is important to note that these data may not reflect the changes that occur in real-world scenarios. In practice, systems that constantly update models based on new data, such as data flywheel systems and continual learning methods, are often used to keep models current and improve their performance (Kreuzberger et al., 2022).

As various services are provided in the real-world, new data is constantly generated and the model is continuously improving through continual learning, creating a structure called a data flywheel (Agababov et al., 2015). While many compa-

nies are adopting this process. we argue that current leaderboard systems are not able to consider this dynamic characteristics of data.

In other words, current leaderboard systems do not reflect these data-flywheel systems as whole evaluation is performance based on a single test set (van der Goot, 2021). This limits the objective evaluation on the practical usability of a model in an actual setting.

Discrepancy between testing and real-world application When evaluating the performance of a model, most of them are evaluated on clean data as a common practice. The purpose here is to measure the performance in a state where errors or biases present in the test data are removed as much as possible. However, this may be a suitable method for evaluating excellence in targeting tasks, but it can be difficult to evaluate whether the model can produce robust performance in real-world settings where various errors exist.

In other words, data without any errors or biases is often referred to as “gold” data, and using it to evaluate a model’s performance is considered to be the most objective way to measure its capabilities (Gehrmann et al., 2021; Koo et al., 2022). Hence, the quality of data is regarded in all areas of NLP, and methods for improving data to meet specific needs are actively studied (Koehn et al., 2020).

However, when considering real-world applications, this strict focus on clean text may be considered as an additional bias, since even real-world data is not cleaned (Liu et al., 2022). Currently, most NLP models are trained using clean texts in general (Petroni et al., 2020; Wang et al., 2019), while real-world setting include noisy or inconsistency data (Stickland et al., 2022). This may exacerbates the gap between the data on which the model performs well and the data on which the model should perform. We argue that models need to be robust to noise to actually solve—“the problems that the dataset aims to solve” (Wang et al., 2020).

From this perspective, test data in current use are not as suitable for validating the performance of real-world centric models. In other words, there can be a discrepancy between the performance of a model when it is evaluated on clean data during testing and its performance when it is applied in the real-world.

Leaderboard-Centric Competition As leaderboards operate over longer periods, the number of participating models increases. However, the emphasis is placed solely on evaluating performance of each model on the given test dataset, neglecting performance in other environments or test sets. As a result, the original goal of the competition, which is to develop models that can effectively address real-world challenges, is obscured by the emphasis on achieving high performance on a single test dataset.

In particular, earlier studies have highlighted that employing a fixed single test dataset are extremely vulnerable to biases inherent in NLP application (Hovy and Prabhumoye, 2021). As the number of competition trials using such limited data increases, studies on the leaderboard are likely to overfit the proposed test dataset, not the corresponding task itself (Rodriguez et al., 2021; Rosenman et al., 2011). We should note that the testset is selected as a representative of the given task. Adoption of test dataset in evaluating each model is not problematic (Lee et al., 2019), but it becomes complicated in the leaderboard competition where the verification work should indispensably be repeated several times (van der Goot, 2021).

Furthermore, existing works suggest more severe situations including annotation artifacts that the data selected to constitute the test set cannot sufficiently reflect objective of the intended real-world task (Chen and Ritter, 2020; Gururangan et al., 2018). Competitions based on such data fundamentally result in an imbalanced focus on the given static dataset (Rosenman et al., 2011). In other words, as the number of teams participating in ranking through static test sets increases, these biases are exacerbated, and all models are likely to overfit the publicly released static dataset as a benchmark (Scargle, 1999).

3 Self-Improving Leaderboard (SIL)

Considering the purpose of using the existing leaderboard ranking system, we propose that model performance evaluation should move beyond—“*model learning for the model*” and towards “*model learning for real world applications.*” Accordingly, we propose three characteristics that would address the problems of the existing leaderboard system: an evolving test dataset, periodic ranking system, and comprehensive evaluation. Based on these characteristics, we introduce the SIL as an ideal leader-

board system, which is based on *self-improving test datasets*.

3.1 Evolving Test Dataset

As previously mentioned, most models that have proven their capability through leaderboards suffer from excessive overfitting of task data (Roelofs et al., 2019; Raji et al., 2021). Despite being in the same domain and task, they do not perform well when tested in real-world scenarios (Engstrom et al., 2020). Therefore, we propose to overcome this limitation by introducing a evolving test dataset that enables the evaluation of various aspects. We proposed two methods for data transformation and evaluation: an “External Test Dataset” and “Noise Injection”.

External Test Dataset First, we propose to use an outsourced test dataset, i.e., an external source of test data for the target task. External sources include using task-related test data provided by individuals or companies in the verification phase or generated test data through prompts from large language models (LLMs) such as GPT3 (Yoo et al., 2021). In particular, large language models, such as GPT3 and ChatGPT¹, are currently being used in various fields with decent performance in NLP tasks, and are often show human-replaceable level of performance (Elkins and Chun, 2020; Wang et al., 2021). In this sense, evaluating model performance via distillation of the knowledge in a large language model can aid us in comprehensively evaluating various aspects (Meyer et al., 2022).

Noise Injected Test Dataset Real-world data always contain noise (Yue et al., 2020). Considering that, data integrity may not guarantee fair evaluation, but can deepen the gap between the evaluation and the real-world suitability (Zhou et al., 2018). We argue that evaluation with noised setting should be considered to match the evaluation environment with the real-world setting. We propose to separately evaluate each model participated in the leaderboard competition, with noised data. Through this process, we can estimate each model’s robustness to simple changes as well as its ability to maintain its performance in unstable situations (Xie et al., 2017).

The method of injecting noise can be easily implemented by applying the approaches proposed in the fields of adversarial attack and spelling cor-

¹<https://chat.openai.com/>

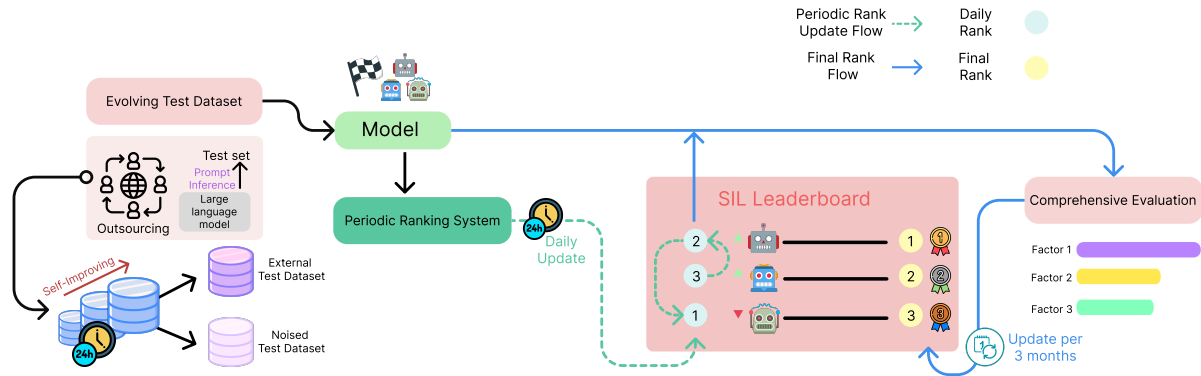


Figure 1: Architecture of the Self-Improving Leaderboard (SIL).

rection (Morris et al., 2020; Park et al., 2021a). Additionally, only about 15% of the original test data accumulated per day is augmented with noise injection. It is hard to measure the exact number of noise errors that occur in real-world NLP systems, since they may not always be easily spotted or reported. Therefore, the 15% figure should be taken as an example rather than a precise measurement.

3.2 Periodic Ranking System

Over time, the evaluation data on leaderboards gradually become outdated (Beyer et al., 2020). Furthermore, as more competitors participate, the performance on the leaderboard hardly reveals the corresponding suitability to the real-world setting (van der Goot, 2021). In alleviating these, we propose to set a regular performance update cycle for the evaluation data that considers the characteristics of constantly changing data.

We judged that it would be reasonable to update the ranking every 24 hours, since new logs or data are accumulated every day when performing actual NLP services. Participants in the leaderboard, whose rankings are updated daily, will have to devise a new methodology beyond changing the model architecture (i.e. model-centric) or data-cleansing approach (i.e. data-centric (Mazumder et al., 2022)) to improve their ranking. We believe that these considerations eventually promote real-world centric research.

Consequently, the dynamic capabilities of models can be evaluated through periodic evaluations, rather than determining their capabilities at the initial evaluation point (Beyer et al., 2020). The new ranking system also reflects instability and potential for changes in real-world data (Thompson et al., 2020).

3.3 Comprehensive Evaluation

In evaluating the performance of the model through multiple test datasets (i.e., evolving test dataset and periodic ranking system), we propose to eliminate the approach of determining the ranking of participating models based on a single performance or condition (Vajjala and Balasubramaniam, 2022). Instead, we aim to obtain a comprehensive score for all validation environments to determine whether the model can maintain superior performance even when faced with data that may change constantly and include unexpected errors.

In summary, the testset and ranking change every 24 hours. However, the comprehensive evaluation is conducted quarterly (every 3 months). In other words, the final ranking is released every 3 months and the evaluation factors can include "how long the ranking has been maintained in the top position", "how small the range of ranking changes has been", and so on. It may also be possible to apply a medal system similar to Kaggle² based on the final ranking.

In the end, our suggested procedure is not ended as a one-time ranking process (never-ending ranking system), unlike the existing leaderboard, while the final ranking is determined every quarter, the test set will continuously evolve, so the competition will not end. Medals will be awarded every three months, but the competition will continue indefinitely (Mitchell et al., 2018).

3.4 Overall Process of SIL

Our suggested procedure for the leaderboard ranking process is as follows in Figure 1.

Firstly, the evolving test dataset is supplied by

²<https://www.kaggle.com/progression>

the company or through the prompts using Large Language Model (LLM) to preserve the quality of the test dataset. In specific, the above test set is growing like self-improving every 24 hours cycle and is separated into an external test dataset and a noised test dataset, respectively (*black colored direction*).

Secondly, the periodic ranking system scores the daily rank of the models using an up-to-date test set (i.e., evolving test dataset) with daily cycles to check the model’s robustness (*green colored direction*).

Thirdly, the final rank is derived quarterly (every three months) through comprehensive evaluation using the above daily ranks and many different factors, mentioned in Section. 3.3 (*blue colored direction*). Consequently, models are updated in SIL leaderboard dynamically.

Our proposed SIL is real-world centric compared with existing leaderboards in the following ways. First, “data are the most up-to-date”. In SIL, the data are maintained as the most updated version. Second, “data are real-world similar”. SIL offers data that are not of high quality, but rather data that are consistent with actual situations in contrast to the noise-cleaned gold test sets. Lastly, “data are not static and are subjected to less biases”.

4 Conclusions

This paper is a position paper, discussed the limitations of conventional NLP leaderboards and proposed a new paradigm for leaderboard systems called SIL. Conventional leaderboards bears several challenges in real-world scenarios as they evaluate the performance of participating models solely with a single test dataset. We argue that this lead to even challenging estimation of model robustness and reproducibility in real-world environments. Another problem is that competition accelerates overfitting, i.e., the model performs well only within the test set provided by the leaderboard. To address these problems, we proposed a new paradigm of leaderboard system called SIL, which continuously improves by updating the test data and reevaluating the models and rankings daily. This new type of leaderboard operates in a more real-world-centric manner rather than solely focusing on ranking up within the leaderboard. Hopefully, this work can trigger NLP community to apply this paradigm widely in real-world.

Limitations

As a position paper, we present a new perspective on the leaderboard systems. While there is certainly room for additional empirical analysis, we argue that the insights provided in this work would serve as a starting step toward the new perspective. We contend that the novel perspectives on leaderboard systems presented in this paper will foster the emergence of leaderboards that are better suited to real-world centric and offer insight into the concept of valuable competition.

With the Breakthrough emerging of ChatGPT, many researchers and people without expertise in NLP knowledge have been astonished by its abilities. Now they consider using ChatGPT in their real world life indeed, not just as an okay assistant. Likewise, our community is growing fastly, and we need to go through more real-world centric models and suitable cases for its evaluation.

Ethics Statement

There are no ethical issues to declare.

References

- Victor Agababov, Michael Buettner, Victor Chudnovsky, Mark Cogan, Ben Greenstein, Shane McDaniel, Michael Piatek, Colin Scott, Matt Welsh, and Bolian Yin. 2015. Flywheel:{Google’s} data compression proxy for the mobile web. In *12th USENIX Symposium on Networked Systems Design and Implementation (NSDI 15)*, pages 367–380.
- Lucas Beyer, Olivier J Hénaff, Alexander Kolesnikov, Xiaohua Zhai, and Aäron van den Oord. 2020. Are we done with imagenet? *arXiv preprint arXiv:2006.07159*.
- Lukas Budach, Moritz Feuerpfeil, Nina Ihde, Andrea Nathansen, Nele Noack, Hendrik Patzlaff, Hazar Harmouch, and Felix Naumann. 2022. The effects of data quality on machine learning performance. *arXiv preprint arXiv:2207.14529*.
- Yang Chen and Alan Ritter. 2020. Model selection for cross-lingual transfer using a learned scoring function.
- Katherine Elkins and Jon Chun. 2020. Can gpt-3 pass a writer’s turing test? *Journal of Cultural Analytics*, 5(2):17212.
- Logan Engstrom, Andrew Ilyas, Shibani Santurkar, Dimitris Tsipras, Jacob Steinhardt, and Aleksander Madry. 2020. Identifying statistical bias in dataset replication. In *International Conference on Machine Learning*, pages 2922–2932. PMLR.

- Akhbardeh Farhad, Arkhangorodsky Arkady, Biesialska Magdalena, Bojar Ondřej, Chatterjee Rajen, Chaudhary Vishrav, Marta R Costa-jussa, España-Bonet Cristina, Fan Angela, Federmann Christian, et al. 2021. Findings of the 2021 conference on machine translation (wmt21). In *Proceedings of the Sixth Conference on Machine Translation*, pages 1–88. Association for Computational Linguistics.
- Sebastian Gehrmann, Tosin Adewumi, Karmanya Agarwal, Pawan Sasanka Ammanamanchi, Aremu Anuoluwapo, Antoine Bosselut, Khyathi Raghavi Chandu, Miruna Clinciu, Dipanjan Das, Kaustubh D Dhole, et al. 2021. The gem benchmark: Natural language generation, its evaluation and metrics. *arXiv preprint arXiv:2102.01672*.
- George Grispos, William Bradley Glisson, and Tim Storer. 2019. How good is your data? investigating the quality of data generated during security incident response investigations. *arXiv preprint arXiv:1901.03723*.
- Suchin Gururangan, Swabha Swayamdipta, Omer Levy, Roy Schwartz, Samuel Bowman, and Noah A Smith. 2018. Annotation artifacts in natural language inference data. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 107–112.
- Dirk Hovy and Shrimai Prabhumoye. 2021. Five sources of bias in natural language processing. *Language and Linguistics Compass*, 15(8):e12432.
- Daniel Khashabi, Gabriel Stanovsky, Jonathan Bragg, Nicholas Lourie, Jungo Kasai, Yejin Choi, Noah A Smith, and Daniel S Weld. 2021. Genie: A leaderboard for human-in-the-loop evaluation of text generation. *arXiv preprint arXiv:2101.06561*.
- Philipp Koehn, Vishrav Chaudhary, Ahmed El-Kishky, Naman Goyal, Peng-Jen Chen, and Francisco Guzmán. 2020. Findings of the wmt 2020 shared task on parallel corpus filtering and alignment. In *Proceedings of the Fifth Conference on Machine Translation*, pages 726–742.
- Seonmin Koo, Chanjun Park, Jaehyung Seo, Seungjun Lee, Hyeonseok Moon, Jungseob Lee, and Heuseok Lim. 2022. K-nct: Korean neural grammatical error correction gold-standard test set using novel error type classification criteria. *IEEE Access*, 10:118167–118175.
- Dominik Kreuzberger, Niklas Kühl, and Sebastian Hirschl. 2022. Machine learning operations (mlops): Overview, definition, and architecture. *arXiv preprint arXiv:2205.02302*.
- Guokun Lai, Qizhe Xie, Hanxiao Liu, Yiming Yang, and Eduard Hovy. 2017. Race: Large-scale reading comprehension dataset from examinations. *arXiv preprint arXiv:1704.04683*.
- Seung B Lee, Xiaofan Gui, Megan Manquen, and Eric R Hamilton. 2019. Use of training, validation, and test sets for developing automated classifiers in quantitative ethnography. In *International Conference on Quantitative Ethnography*, pages 117–127. Springer.
- Fang Liu and Panagiotakos Demosthenes. 2022. Real-world data: a brief review of the methods, applications, challenges and opportunities. *BMC Medical Research Methodology*, 22(1):1–10.
- Pengfei Liu, Jinlan Fu, Yang Xiao, Weizhe Yuan, Shuaicheng Chang, Junqi Dai, Yixin Liu, Zihuiwen Ye, Zi-Yi Dou, and Graham Neubig. 2021. Explain-able: An explainable leaderboard for nlp. *arXiv preprint arXiv:2104.06387*.
- Xiaogeng Liu, Haoyu Wang, Yechao Zhang, Fangzhou Wu, and Shengshan Hu. 2022. Towards efficient data-centric robust machine learning with noise-based augmentation. *arXiv preprint arXiv:2203.03810*.
- Barrault Loïc, Biesialska Magdalena, Bojar Ondřej, Federmann Christian, Graham Yvette, Grundkiewicz Roman, Haddow Barry, Huck Matthias, Joanis Eric, Kocmi Tom, et al. 2020. Findings of the 2020 conference on machine translation (wmt20). In *Proceedings of the Fifth Conference on Machine Translation*, pages 1–55. Association for Computational Linguistics,.
- Sungwon Lyu, Bokyung Son, Kichang Yang, and Jaekyoung Bae. 2020. Revisiting modularized multilingual nmt to meet industrial demands. *arXiv preprint arXiv:2010.09402*.
- Mark Mazumder, Colby Banbury, Xiaozhe Yao, Bojan Karlaš, William Gaviria Rojas, Sudnya Diamos, Greg Diamos, Lynn He, Douwe Kiela, David Jurado, et al. 2022. Dataperf: Benchmarks for data-centric ai development. *arXiv preprint arXiv:2207.10062*.
- Selina Meyer, David Elswiler, Bernd Ludwig, Marcos Fernandez-Pichel, and David E Losada. 2022. Do we still need human assessors? prompt-based gpt-3 user simulation in conversational ai. In *Proceedings of the 4th Conference on Conversational User Interfaces*, pages 1–6.
- Tom Mitchell, William Cohen, Estevam Hruschka, Partha Talukdar, Bishan Yang, Justin Betteridge, Andrew Carlson, Bhavana Dalvi, Matt Gardner, Bryan Kisiel, et al. 2018. Never-ending learning. *Communications of the ACM*, 61(5):103–115.
- John X Morris, Eli Lifland, Jin Yong Yoo, Jake Grigsby, Di Jin, and Yanjun Qi. 2020. Textattack: A framework for adversarial attacks, data augmentation, and adversarial training in nlp. *arXiv preprint arXiv:2005.05909*.
- Chanjun Park, Kuekyeng Kim, YeongWook Yang, Minhoo Kang, and Heuseok Lim. 2021a. Neural spelling correction: translating incorrect sentences

- to correct sentences for multimedia. *Multimedia Tools and Applications*, 80(26):34591–34608.
- Sungjoon Park, Jihyung Moon, Sungdong Kim, Won Ik Cho, Jiyeon Han, Jangwon Park, Chisung Song, Junseong Kim, Yongsook Song, Taehwan Oh, et al. 2021b. Klue: Korean language understanding evaluation. *arXiv preprint arXiv:2105.09680*.
- Fabio Petroni, Aleksandra Piktus, Angela Fan, Patrick Lewis, Majid Yazdani, Nicola De Cao, James Thorne, Yacine Jernite, Vladimir Karpukhin, Jean Maillard, et al. 2020. Kilt: a benchmark for knowledge intensive language tasks. *arXiv preprint arXiv:2009.02252*.
- Inioluwa Deborah Raji, Emily Denton, Emily M Bender, Alex Hanna, and Amandalynne Paullada. 2021. Ai and the everything in the whole wide world benchmark. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. Squad: 100,000+ questions for machine comprehension of text. *arXiv preprint arXiv:1606.05250*.
- Prem N Ramkumar, Heather S Haeberle, Michael R Bloomfield, Jonathan L Schaffer, Atul F Kamath, Brendan M Patterson, and Viktor E Krebs. 2019. Artificial intelligence and arthroplasty at a single institution: real-world applications of machine learning to big data, value-based care, mobile health, and remote patient monitoring. *The Journal of arthroplasty*, 34(10):2204–2209.
- Paul Resnick and Hal R Varian. 1997. Recommender systems. *Communications of the ACM*, 40(3):56–58.
- Pedro Rodriguez, Joe Barrow, Alexander Miserlis Hoyle, John P Lalor, Robin Jia, and Jordan Boyd-Graber. 2021. Evaluation examples are not equally informative: How should that change nlp leaderboards? In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*.
- Rebecca Roelofs, Vaishaal Shankar, Benjamin Recht, Sara Fridovich-Keil, Moritz Hardt, John Miller, and Ludwig Schmidt. 2019. A meta-analysis of overfitting in machine learning. *Advances in Neural Information Processing Systems*, 32.
- Robert Rosenman, Vidhura Tennekoon, and Laura G Hill. 2011. Measuring bias in self-reported data. *International journal of behavioural & healthcare research*, 2(4):320.
- Jeffrey D Scargle. 1999. Publication bias (the "file-drawer problem") in scientific inference. *arXiv preprint physics/9909033*.
- Kyuyong Shin, Hanock Kwak, Kyung-Min Kim, Su Young Kim, and Max Nihlen Ramstrom. 2021. Scaling law for recommendation models: Towards general-purpose user representations. *arXiv preprint arXiv:2111.11294*.
- Asa Cooper Stickland, Sailik Sengupta, Jason Krone, Saab Mansour, and He He. 2022. Robustification of multilingual language models to real-world noise with robust contrastive pretraining. *arXiv preprint arXiv:2210.04782*.
- William Hedley Thompson, Jessey Wright, Patrick G Bissett, and Russell A Poldrack. 2020. Meta-research: dataset decay and the problem of sequential analyses on open datasets. *Elife*, 9:e53498.
- Sowmya Vajjala and Ramya Balasubramaniam. 2022. What do we really know about state of the art ner? *arXiv preprint arXiv:2205.00034*.
- Rob van der Goot. 2021. We need to talk about train-dev-test splits. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 4485–4494.
- Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2019. Superglue: A stickier benchmark for general-purpose language understanding systems. *Advances in neural information processing systems*, 32.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R Bowman. 2018. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv preprint arXiv:1804.07461*.
- Shuohang Wang, Yang Liu, Yichong Xu, Chenguang Zhu, and Michael Zeng. 2021. Want to reduce labeling cost? gpt-3 can help. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 4195–4205.
- Yu Wang, Yuelin Wang, Jie Liu, and Zhuo Liu. 2020. A comprehensive survey of grammar error correction. *arXiv preprint arXiv:2005.06600*.
- Ziang Xie, Sida I Wang, Jiwei Li, Daniel Lévy, Aiming Nie, Dan Jurafsky, and Andrew Y Ng. 2017. Data noising as smoothing in neural network language models. *arXiv preprint arXiv:1703.02573*.
- Kang Min Yoo, Dongju Park, Jaewook Kang, Sang-woo Lee, and Woomyoung Park. 2021. Gpt3mix: Leveraging large-scale language models for text augmentation. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 2225–2239.
- Zongsheng Yue, Qian Zhao, Lei Zhang, and Deyu Meng. 2020. Dual adversarial network: Toward real-world noise removal and noise generation. In *European Conference on Computer Vision*, pages 41–58. Springer.

Yuhao Zhang, Victor Zhong, Danqi Chen, Gabor Angeli, and Christopher D Manning. 2017. Position-aware attention and supervised data improve slot filling. In *Conference on Empirical Methods in Natural Language Processing*.

Lei Zhou, Anmin Fu, Shui Yu, Mang Su, and Boyu Kuang. 2018. Data integrity verification of the outsourced big data in the cloud environment: A survey. *Journal of Network and Computer Applications*, 122:1–15.