

Latent Causal Probing: A Formal Perspective on Probing with Causal Models of Data

Charles Jin & Martin Rinard
MIT CSAIL
Cambridge, MA 02142, USA
{ccj,rinard}@csail.mit.edu

Abstract

As language models (LMs) deliver increasing performance on a range of NLP tasks, *probing classifiers* have become an indispensable technique in the effort to better understand their inner workings. A typical setup involves (1) defining an auxiliary task consisting of a dataset of text annotated with labels, then (2) supervising small classifiers to predict the labels from the representations of a pretrained LM as it processed the dataset. A high probing accuracy is interpreted as evidence that the LM has learned to perform the auxiliary task as an unsupervised byproduct of its original pretraining objective. Despite the widespread usage of probes, however, the robust design and analysis of probing experiments remains a challenge. We develop a formal perspective on probing using *structural causal models* (SCM). Specifically, given an SCM which explains the distribution of tokens observed during training, we frame the central hypothesis as whether the LM has learned to represent the latent variables of the SCM. Empirically, we extend a recent study of LMs in the context of a synthetic grid-world navigation task, where having an exact model of the underlying causal structure allows us to draw strong inferences from the result of probing experiments. Our techniques provide robust empirical evidence for the ability of LMs to induce the latent concepts underlying text.

1 Introduction

As large LMs pretrained on massive amounts of unlabeled text continue to reach new heights in NLP tasks (and beyond), the question of what kinds of information such models encode about their training data remains a topic of intense discussion and research. One prominent technique is to supervise small *probing classifiers* to extract some linguistically relevant property from the representations of the pretrained LM (Shi et al., 2016; Adi et al., 2017; Alain & Bengio, 2018), with the intuition being that the success of the probe reveals the LM has, in fact, learned to encode the property of interest as a byproduct of its training.

Despite their widespread usage, however, probes themselves are also an active area of research, with a number of interconnected open questions in the design and interpretation of probing experiments (Belinkov, 2022), including:

(Q1) Control and interpretation. Given that the probe itself is directly supervised to perform the auxiliary task, the observed outcomes could depend not only on the information inherently encoded in the LM but also the ability of the probe to extract the information itself. For instance, researchers have found that training probes to predict *randomized* labels can often yield comparably high accuracies on certain tasks, calling into question the significance of prior results (Hewitt & Liang, 2019). As a result, drawing robust conclusions from the classification accuracy of a probe remains up for debate.

(Q2) Classifier selection and training. To combat the risk of measuring the probe’s capacity to learn the auxiliary task, researchers often limit probes to low capacity architectures such as linear classifiers (Maudslay et al., 2020). However, other works have countered with evidence that LMs encode more complex concepts using non-linear representations, which

can only be accurately measured using higher capacity classifiers (Belinkov & Glass, 2019; Li et al., 2022). A related question which has received little attention is how the training procedure itself (e.g., optimizer selection, training hyperparameters, auxiliary dataset size) interacts with the outcome of the probing experiment.

(Q3) Auxiliary task design. Finally, as large, pretrained LMs have progressed from producing human-like text to exhibiting increasingly “intelligent” behaviors such as reasoning and in-context learning (Brown et al., 2020), there is an emerging need to better understand the limitations and capabilities of LMs along dimensions such world knowledge and theory of mind. These domains present a distinct set of challenges compared to traditional linguistic tasks such as part-of-speech tagging and dependency parsing.

The theoretical section of this paper develops a formal perspective on probing using the language of *structural causal models* (SCM). Specifically, given a causal model which explains the distribution of tokens observed during training, we pose the central hypothesis as determining whether the LM has learned to represent the *latent variables* of the SCM: concepts that explain how the text was generated, but are never directly observed during training. We then introduce probes as a means of empirically testing such hypotheses, by extracting the value of the latent concepts given only the LM representations as input. Our setting naturally captures broader questions about the inductive bias of LMs trained solely on text, and the latent concepts they acquire over the course of training (Q3).

Next, by extending the SCM beyond the data generation process to cover the training of the LM (unsupervised) and probe (supervised), we further show that Q1 and Q2 can be understood as the mediating and moderating effects of the probe, respectively. We propose a general technique based on *causal mediation analysis* which isolates the causal path through the LM while excluding the probe’s influence. Our analysis yields clear, testable conditions for accepting or rejecting our hypotheses based on a probing experiment’s outcomes.

Finally, we conduct an empirical study that extends the experimental setting introduced by Jin & Rinard (2023), who use probes to quantify the extent to which LMs are capable of learning “meaning” from text, as operationalized by the semantics of a synthetic programming language for grid-world navigation. By leveraging the proposed **latent causal probing** framework, our experiments allow us to draw precise conclusions about the *causal relationship* between the latent dynamics that generated the training data and what is learned by the LM. In particular, we find evidence that (1) the LM has, in fact, learned to represent the latent variables corresponding to the underlying semantics of the language, and (2) the LM representations exhibit an inductive bias that generalizes to novel action sequences. Our study marks the first rigorous empirical evaluation of the hypothesis that *language models are latent concept learners*, revealing intriguing insights into how language models might acquire an understanding of language.

2 Structural causal models of text

This section introduces the setting of our framework for probing, which is based on the idea that the text used to train LMs may exhibit latent causal structure; we formalize these concepts using the approach of structural causal models.

2.1 Background: structural causal models

Structural causal models are graphical models which represent causal relationships in a data generation process as a directed graphical model (Pearl et al., 2000). We illustrate the key concepts with an example; we refer the reader to Pearl (2010) for a more comprehensive overview. Suppose that we are interested in the effect the weather has on employees bringing an umbrella to work. In this case, we may hypothesize a SCM like the one in Figure 1a. Each node represents a different random variable: the weather, the weather forecast, whether the employee’s morning gets off to a late start, and whether the employee brings an umbrella to work. Nodes without parents are *exogenous* variables, whose causes are left unexplained; they are often used to model nature, randomness, or other aspects of physical reality, such as genetic or environmental factors. The exogenous variables in

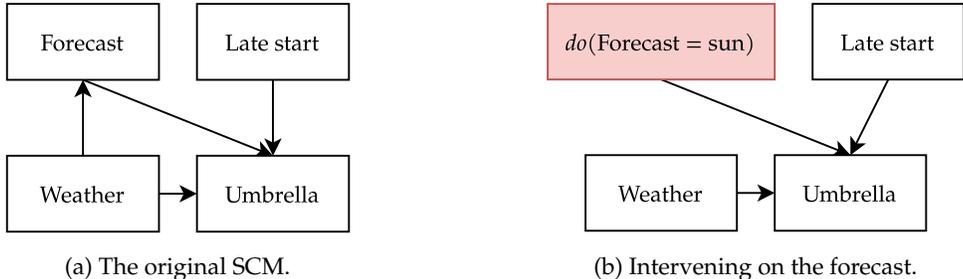


Figure 1: An SCM for bringing an umbrella to work.

Figure 1a are the weather and having a late start. Nodes with a parent indicate the possibility of a causal relationship, e.g., the edge from weather to forecast indicates that the weather might influence the forecast. In particular, every *missing* edge in the SCM asserts the lack of a causal relationship. A standard assumption of causal analysis is that the underlying causal graph is Markovian (or acyclic); we adopt this assumption as well.

Mediators and moderators. Returning now to our original question of how the weather affects employees bringing an umbrella to work, we note the SCM hypothesizes 3 possible causes: the weather, the weather forecast, and having a late start. The forecast is a *mediator* because total causal effect of the weather on umbrella is partially transferred by the *path-specific effect* over the weather-forecast-umbrella pathway (Avin et al., 2005; Imai et al., 2010). A natural question is how much the forecast is responsible for the increase in likelihood that an employee brings an umbrella to work when, for instance, the weather changes from sunny to rainy. One answer is given by the *necessary indirect effect*, which quantifies how much the presence of the causal path through the mediator contributes to the total measured effect (Weinberger, 2019):

$$\begin{aligned} \text{NIE}_{\text{rain,sun}}(\text{Forecast}) &= \mathbb{E}[\text{Umbrella} \mid \text{Weather} = \text{rain}] \\ &\quad - \mathbb{E}[\text{Umbrella} \mid \text{Weather} = \text{rain}, \text{do}(\text{Forecast} = \text{sun})], \end{aligned}$$

where $\text{do}(\text{Forecast} = \text{sun})$ is a *causal intervention*. The intervention can be conceptualized as forcing the weather station to forecast sun regardless of the weather, thereby severing the weather-forecast-umbrella pathway. Figure 1b depicts the SCM post-intervention.

The late start variable is not a mediator of the weather-umbrella causal effect (because there is no path from the weather to umbrella that passes through it), but it could still be a *moderator*: variables that do not directly mediate a causal effect, but affect the strength (and possibly direction) of another causal path (Baron & Kenny, 1986). For instance, the forecast’s effect on whether an employee brings an umbrella (i.e., the NIE) might be lower if the employee has a late start and rushes out the door without checking the forecast.

2.2 Case study: causal structure in programming languages

Jin & Rinard (2023) propose an experiment to study whether LMs are able to ground a sequence of actions into a sequence of states, having only seen instances of the initial and final state during training. Specifically, they train a 350M parameter Transformer (Vaswani et al., 2017) on a corpus of *specification-program* examples using a standard causal language modeling objective. The programs are strings in a grid-world navigation language with 5 actions (move, turn_right, turn_left, put_marker, pick_marker), sampled uniformly between lengths 6 and 10, inclusive. The specifications consist of the initial and final state, which are 8x8 grids. Executing the program navigates a single robot in the initial state to the final state. We refer to Jin & Rinard (2023) for more details about the language.

Figure 2 displays an SCM of the data generation process (along with an example assignment of values to each variable). The exogenous variables are the initial state and the program actions. Each action produces a latent state (green), save for the last action, which is observed

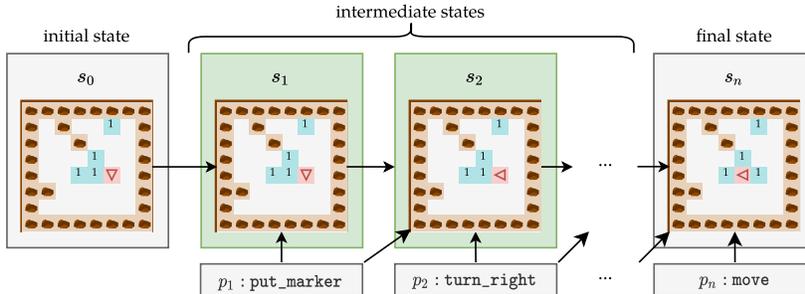


Figure 2: An SCM of the data generation process for the grid world corpus. The exogenous variables are the initial state and the actions; latent variables are green and observed variables are gray. The training corpus consists of programs of length between 6 and 10.

as the final state. A training sample consists of the sequence: $s_0, s_n, p_1, \dots, p_n$, where each grid world is converted to text by scanning in row order, with one token per entry.

Consider now modeling a distribution of text drawn from this SCM. In particular, for each sample x there is an assignment e to the exogenous variables in the SCM M such that $M(e) = x$. One strategy would be to learn a model of the SCM depicted in Figure 2, and integrate the latent variables during inference. For instance, knowing that the robot is one space away from s_n in s_{n-1} could help a learner predict $p_n = \text{move}$.

More generally, given observations generated according to some unknown causal mechanism, a learner could propose various SCMs of the underlying causal mechanism consistent with the observations, then use these SCMs to inform future predictions, an approach known as causal learning (Schölkopf et al., 2021). A major challenge in the foregoing approach is the problem of *latent variable induction*, or inferring the latent variables over which candidate SCMs are to be defined. In this work, we focus on the causal structure of programming languages, where the underlying causal dynamics are governed by a precise *formal semantics*, and the latent variables are given by program states. Having formally defined semantics and latent variables enables us interpret the results of our probing experiments in an unambiguous way; we refer the reader to Sloman (2005); Feder et al. (2022) for surveys of causal structure in natural language.

3 Latent causal probing

We present **latent causal probing**, a formal framework for empirically testing the hypothesis

Language models are latent concept learners.

At a high level, given an SCM that models the training data as the observed variables, we probe the LM for representations of the latent variables of the SCM. Our main insight, as illustrated in Figure 2, is that knowing the latent value of s_{n-1} could help predict the observed value of p_n ; hence, an LM trained to predict p_n might eventually induce the existence of the latent variable s_{n-1} .

3.1 Probing for latent concepts

We begin by defining the auxiliary task and dataset for probing. Fix some structural causal model M , and let v_M be the latent variable of interest. Given some text x , we use $v_M(x)$ to denote the value of the latent variable in the SCM of text x . For instance, the value of $v_M = s_1$ in the sample x from Figure 2 is the grid depicted in the s_1 node. We assume that the value of each latent variable is uniquely determined by x and M .

calibration	measurement	
	bound	free
bound	deductive knowledge	inductive bias (inference)
free	deductive bias (consistency)	inductive knowledge

Table 1: Interpreting probing with different calibration and measurement datasets.

Given a language model LM with parameters θ , we denote an arbitrary representation function as $LM(x; \theta)$. The auxiliary dataset consists of input features $\{LM(x; \theta) \mid x \in X\}$ and labels $\{v_M(x) \mid x \in D\}$, where $D = \{x_i\}_{i=1}^N$ is a corpus of text. We then split D into two auxiliary datasets: one for **calibration** and one for **measurement**. The probe is trained to predict $v_M(x)$ given $LM(x; \theta)$ on the calibration data, and the accuracy is taken over the measurement data. We next discuss the design and interpretation of these two datasets.

Bound vs. free latent variable outcomes. In general, there may exist several causal dynamics that explain the data equally well. For instance, the following dynamics could also generate the data in Figure 2:

- put_marker Jump to a random location.
- turn_right Return to the last position, put a marker, then turn right.

These dynamics assign a different value to s_1 , but explain the observed variables equally well. Assuming the training corpus consists entirely of this single example, it would be impossible to distinguish between M and M' on the basis of data alone. In other words:

1. M and M' share the same set of set of latent, observed, and exogenous variables;
2. M and M' agree on the observed data; and
3. there exists an assignment e to the exogenous variables such that $v_M(x) \neq v_{M'}(x')$ for $x = M(e)$ and $x' = M'(e)$.

In this case, we say that the latent variable v is **free** over the assignment e . More generally, given a hypothesis class \mathcal{M} of SCMs over the same set of variables, denote the LM training data as D_{train} and define $\mathcal{M}|_{\text{train}}$ to be the subset of SCMs that generate D_{train} . The free latent variable outcomes consist of pairs of latent variables and assignments (v, e) such that there exist $M, M' \in \mathcal{M}|_{\text{train}}$ where $v_M(M(e)) \neq v_{M'}(M'(e))$. Any latent variable outcome (v, e) which is not free is **bound**, i.e., the training data D_{train} fully specifies the outcome of v on the assignment e , given the hypothesis class \mathcal{M} .

Probing with free vs. bound splits. Table 1 details four possible probing setups when separating the auxiliary dataset D into free and bound splits. In particular, when calibration and measurement occur on the same split, the probe quantifies the **knowledge**, or information content, that can be extracted from the LM representations; conversely, probing with different splits measures the transferability of the representations across different splits, which relies on implicit **bias**. Additionally, because the bound variables outcomes, can, by definition, be deduced from the given data (and hypothesis class \mathcal{M}), measuring on the bound split relates to the **deductive** ability of the LM; conversely, measuring on the free split is inherently an **inductive** process. We highlight that the inductive bias can be understood as quantifying the capacity of the LM representations to *infer values in unseen data by applying theories derived from known data*, a form of inductive inference; while the deductive bias measures the extent to which the LM representations *produce theories of unseen data that are consistent with the observed data*, a key tenet of deductive logic.

3.2 Causal mediation analysis of probing

We next turn to controlling for the probe (Q1). Intuitively, the challenge is any measurement using a supervised probe conflates the LM’s representation of the auxiliary labels with the probe’s ability to learn the auxiliary task (Hewitt & Liang, 2019). While there exist a number

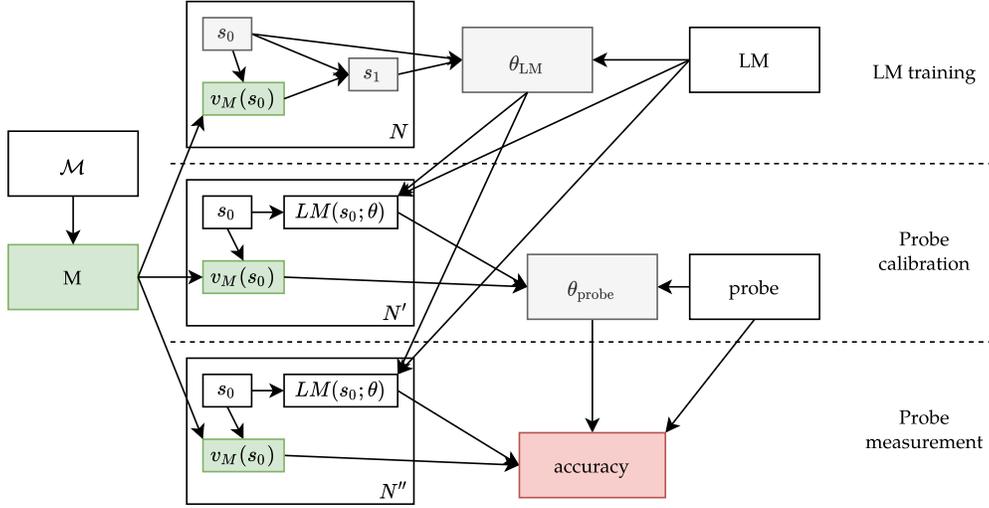


Figure 3: An SCM depicting the LM training, probe calibration, and probe measurement. We use plate notation for repeated iid samples, e.g., we draw N samples for LM training.

of proposals for controlling for the contribution of the probe, such techniques typically do not provide any formal guarantees, rendering their correct application and interpretation a challenge (Belinkov, 2022).

We propose a method of disentangling the two effects using the formal framework of causal mediation analysis, and specifically, path-specific effects, which analyze how causal effects decompose over multiple causal paths (Avin et al., 2005; Imai et al., 2010). To begin, we extend the SCM of the data generation process to include (1) the LM training, (2) the probe calibration, and (3) the probe measurement. Figure 3 illustrates an example where the hypothesis class \mathcal{M} consists of 3-variable SCMs with a single exogenous, observed variable s_0 , a latent variable v_M , and another observed variable s_1 .

Observe that there are three causal paths from the true SCM of the data generation process to the auxiliary task accuracy, each of which is mediated by a different set of the latent variables v_M : (1) during LM training, the LM is trained on a dataset whose text is causally affected by v_M ; (2) during probe calibration, the probe is calibrated using v_M directly; and (3) during probe measurement, the probe is evaluated for accuracy on v_M directly. However, we only care to measure the effect over the first of these causal paths, i.e.:

To what extent can the auxiliary task performance be attributed to what LM learns from the latent variables in its training data?

This question can be posed formally as the necessary indirect effect of the paths mediated by the LM’s learned representation for some baseline causal dynamics M' :

$$\begin{aligned} \text{NIE}_{M,M'}(\theta_{\text{LM}}) = & \mathbb{E}[\text{accuracy} \mid \text{LM is trained on } M, \text{ probe is calibrated and measured on } M] \\ & - \mathbb{E}[\text{accuracy} \mid \text{do}(\text{LM is trained on } M'), \text{ probe is calibrated and measured on } M], \end{aligned}$$

Although path-specific effects offer a crisp conceptual framework for isolating the contribution of the LM in probing experiments, actually computing NIE is not straightforward. First, picking a proper baseline M' is critical; intuitively, if we pick an inappropriate M' , then the NIE will measure the difference between M and M' in addition to the latent variables hypothetically mediated by the LM representations. Second, measuring the effect requires intervening along the path of interest while holding the other paths constant, i.e., we would need to retrain LM according to the baseline M' , which would render the technique prohibitively expensive for large pretrained LMs.

Let $acc_{aux}(M_0, M_1)$ denote the (expected) auxiliary task accuracy after the LM is trained using the SCM M_0 and the probe is calibrated and measured on M_1 . The following result addresses these challenges (proof in Appendix C).

Definition 3.1 (Valid baseline). M' is a *valid baseline* for M if

$$acc_{aux}(M', M') \geq acc_{aux}(M, M) \tag{1}$$

$$acc_{aux}(M, M') \geq acc_{aux}(M', M). \tag{2}$$

Proposition 3.2. Let M' be a *valid baseline* for M . Then

$$acc_{aux}(M, M) - acc_{aux}(M, M') > 0$$

implies both $NIE_{M, M'}(\theta_{LM}) > 0$ and $NIE_{M', M}(\theta'_{LM}) > 0$.

Intuitively, M' is a valid baseline when measuring M' is easier than measuring M under both normal or intervened circumstances. The conclusion then states that, so long as $acc_{aux}(M, M) - acc_{aux}(M, M') > 0$ (which can be evaluated by running probe calibration and measurement twice rather than training the LM twice), there is no bias in which SCM is used to train the LM and which is the baseline: the LM representations always mediate a positive amount of the measured effect.

A positive NIE now also has a rigorous interpretation as the LM having *learned latent concepts*, as some positive amount of causal effect is transferred through the representations of the LM. For instance, a positive mediated measurement for inductive bias implies that

The presence of latent causal variables in the pretraining data causes the LM to learn representations that generalize to unknown data.

3.3 Discussion

We summarize the **latent causal probing** framework as follows:

1. Select a set of exogenous, latent, and observed variables and pick a hypothesis class \mathcal{M} of SCMs (from the set of all Markovian SCMs over the variables).
2. Fix a specific target SCM $M \in \mathcal{M}$ and a set of latent variables $v \in M$ to test.
3. Construct the auxiliary dataset and create the bound vs. free partition (if possible).
4. Identify a valid baseline M' and perform the mediation analysis.

A significant measurement $acc_{aux}(M, M) - acc_{aux}(M, M') > 0$ is interpreted evidence that the LM encodes the latent concepts in its representations. We conclude with some remarks.

Interventions, and probing for non-causal latent variables. Our mediation technique requires knowing “what would the text have been if the underlying dynamics were different?”, which could be difficult (especially in non-synthetic domains). Similarly, for non-causal latent variables, such as part-of-speech, producing a hypothesis class \mathcal{M} with more than one SCM may not be possible: what would the data look like in a counterfactual world in which “dog” is actually an adverb? Unfortunately, our analysis suggests that a baseline M' which induces a different distribution of text is a necessary precondition, since otherwise $NIE_{M, M'}(\theta_{LM})$ and $NIE_{M', M}(\theta'_{LM})$ cannot both be positive (as M and M' are indistinguishable when used to train the LM). Intuitively, we interpret this result as saying *any measurement is inherently biased when the auxiliary task has only one “right” answer.*

Probe architecture and hyperparameters. Our framework also explicates the role of the probe’s architecture and other hyperparameters in the training process, such as the optimizer, learning rate, dataset size, etc., as potential *moderators*, but not mediators (**Q2**). In other words, so long as there exists a choice of hyperparameters such that the NIE is positive, the analysis concludes that there exists a causal effect mediated by the model’s parameters (although certain settings of the moderator variables could offer additional interpretations). Practically speaking, our framework also offers a novel way to interpret (and justify) complex probes (Voita & Titov, 2020; Pimentel & Cotterell, 2021).

4 Experiments

We conduct empirical study of whether an LM, trained from scratch on a corpus of program data, induces the latent concepts in the underlying data generation process.

4.1 Methods

We describe the key steps according to the framework in Section 3.3; Appendix A.1 contains full experimental details (e.g., LM and probe architecture and training, LM representations).

Hypothesis class. The exogenous variables are the initial state and program. The latent variables are the intermediate states, and the observed variables are the initial and final state and the program. The hypothesis class \mathcal{M} is all Markovian SCMs over the variables.

Target SCM and latent variables. The target SCM $M \in \mathcal{M}$ is the true data generation process in Figure 2. The target latent variables consist of the robot’s position, facing direction, and whether the robot is facing a rock for each intermediate state.

Auxiliary dataset construction and bound and free latent variable outcomes. For the auxiliary dataset, we use the same data generation process, except that programs range in length between 1 and 15, and we replace the final state in the specification with the initial state. Due to the size of the training corpus (1 million samples), we assume the LM observed all combinations of the exogenous variables. Because the programs in the LM training corpus are between length 5 and 9, the bound latent variables are s_6 to s_{10} (they are observed during training as the final state). The free latent variables are s_1 to s_5 and s_{11} to s_{15} .

Valid baseline. We construct valid baselines according to a counterfactual state of the world where the intermediate states are generated by executing the program according to a different set of causal dynamics. Specifically, we define M' using the same SCM, but permute the causal dynamics of the `turn_right`, `turn_left`, and `move` actions (e.g., the robot turns left when executing a `turn_right` action). As M and M' are clearly symmetric from a language modeling perspective, Definition 3.1 (and hence Proposition 3.2) holds.

4.2 Results

Figure 4 plots the main results. For all four measurements (deductive knowledge, inductive bias, deductive bias, and inductive knowledge) and across all three probes (linear, 1-layer MLP, 2-layer MLP), the mediated measurements are significantly positive (above the dashed line at 0%) by the end of training. We thus conclude that a positive fraction of the *observed measurements of latent concepts can be attributed to what is learned by the LM’s representations*. We make several additional observations:

Deeper probes are more (generally) more accurate. The linear probe exhibits the lowest raw and mediated measurements of the 3 probes across all four tasks. Furthermore, the 2-layer MLP exhibits the highest raw measurement in all four tasks, and the highest mediated measurement in two of the four tasks; and only in the case of the deductive bias (Figure 4f) does the 1-layer MLP achieve a substantially higher measurement. This suggests that more complex auxiliary tasks require more complex probes and, more generally, highlights the importance of probing frameworks that can robustly accommodate deeper probes.

Raw measurements can be uncorrelated with mediated measurements. Comparing deductive and inductive knowledge, the raw measurement for inductive knowledge is the substantially higher (inductive knowledge: $\sim 52\%$ and $\sim 58\%$ vs. deductive knowledge: $\sim 48\%$ and $\sim 51\%$, using a 1-layer and 2-layer MLP, respectively, at the end of training) but the mediated measurements are reversed (inductive knowledge: $\sim 4\%$ and $\sim 7\%$ vs. deductive knowledge: $\sim 12\%$ and $\sim 15\%$, using a 1-layer and 2-layer MLP, respectively, at the end of training). These results confirm that the raw measurements of probing experiments may be misleading in that a higher raw measurement does not necessarily mean that the LM performs the auxiliary task better.

Appendix A.2 contains further results and analyses.

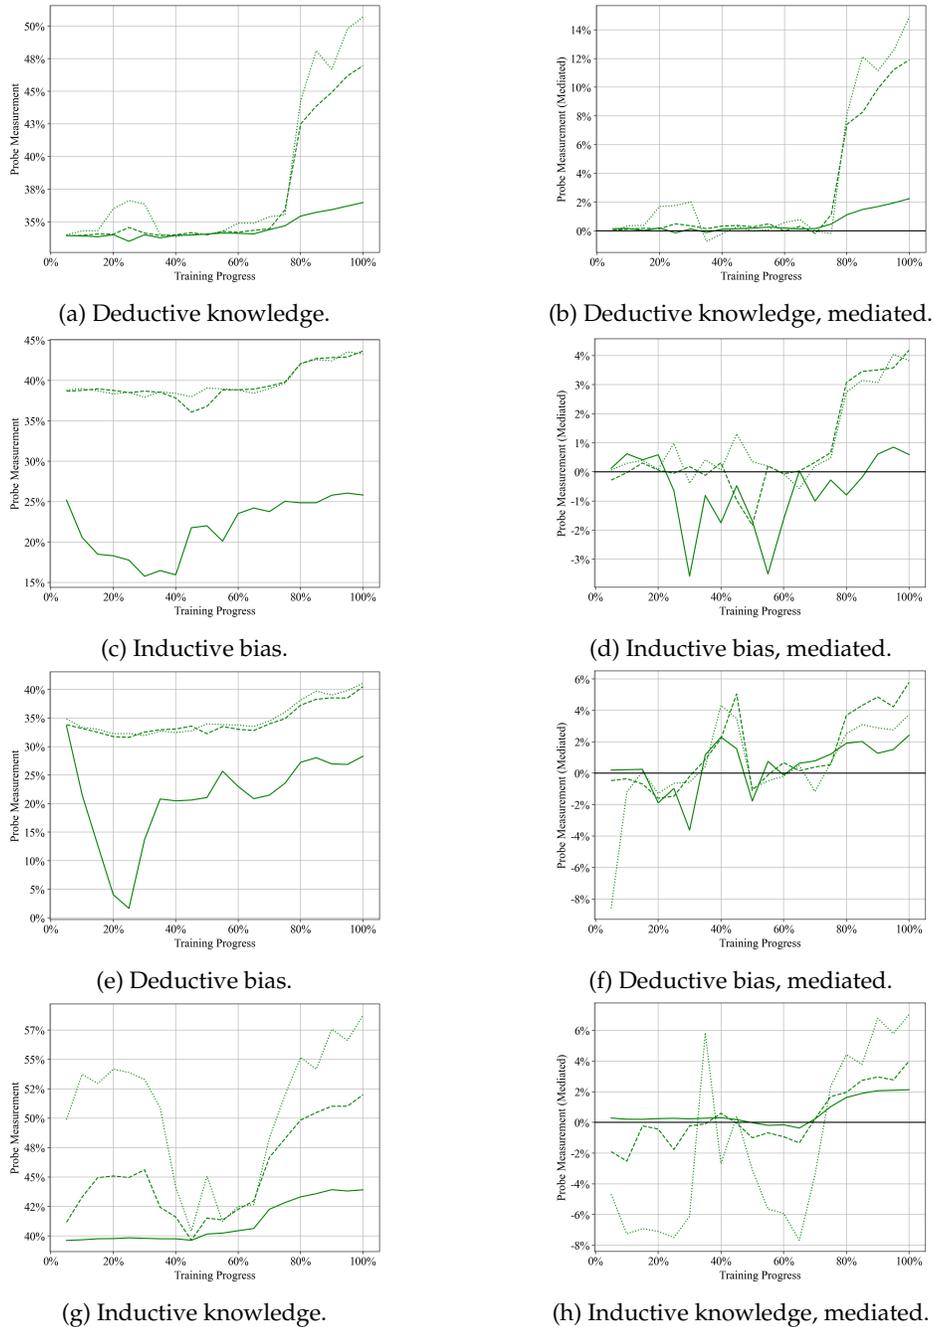


Figure 4: Results from the main experiments. Solid, dashed, and dotted green lines plot the accuracy of a linear, 1-layer MLP, and 2-layer MLP probing classifier, respectively. The final model achieves 92.4% accuracy on generating correct programs for unseen specifications.

5 Related work

Causal interpretability of LMs. Several prior lines of work apply causal techniques to the interpretability of LMs. These works typically intervene on either the model’s representations (Elazar et al., 2021; Geiger et al., 2021; Meng et al., 2022; Abraham et al., 2022; Li et al., 2022) or the model’s inputs (Kaushik et al., 2020; Vig et al., 2020; Gangal & Hovy, 2020; Amini et al., 2023), and analyze the causal effect on the LM’s outputs. In contrast,

we present a formal framework that, conceptually, intervenes on the model’s *training data*, and measures the causal effect on the LM’s internal representations. To the best of our knowledge, Elazar et al. (2022) is the only other work that studies the causal relationship between the training data and the LM, presenting a technique for estimating the causal effect of dataset statistics on the factuality of LM’s outputs.

World models in LMs. The hypothesis that LMs can induce latent concepts is related to evidence of world models in LMs, in which the agenda is to understand the extent to which LMs are capable of grounding their inputs to (some representation of) reality. For instance, Abdou et al. (2021) show that LMs’ representations of color terms have geometric structure that reflects human perceptual distance. Li et al. (2021) find that LMs perform entity state tracking over the course of simple stories. Li et al. (2022) present evidence that an LM trained on Othello transcripts develops a representation of the underlying board state. Our work is based on Jin & Rinard (2023), who show that an LM trained only on sequences of instructions and instances of initial and final states in a grid-world navigation task can develop representations of the intermediate states resulting from the sequence of instructions is applied. All these works use some form of supervised classifier trained for an auxiliary objective, but unlike the present work, do not provide any rigorous guarantees that control for the classifier’s ability to fit the auxiliary objective independently of whether the LM has truly learned a world model (or simply represents the text as is). The closest is Jin & Rinard (2023), whose *semantic probing interventions* follow a similar interventional intuition. However, they do not present any formal analysis, and their baselines also fail to satisfy the requirements of a valid baseline; Appendix B discusses some of the differences in experimental design in greater detail. Finally, our formulation of world models according to the underlying causal mechanism that generated the data is also highly related to the position developed by Andreas (2022), who argues that LMs could model properties of agents that are likely to have uttered the language in their training data.

Frameworks for probing. A number of works have proposed frameworks toward a more rigorous understanding of probing. One line takes an information-theoretic view on the information represented by the LM (Zhu & Rudzicz, 2020; Pimentel et al., 2020; Voita & Titov, 2020; Pimentel & Cotterell, 2021). Our work uses probes to quantify knowledge and biases in the LM’s learned representations. Immer et al. (2022) propose an interpretation of probing as quantifying the inductive bias of pretrained representations for downstream tasks, but their framework differs significantly from ours in that the model is understood as a representation-probe pair. In contrast, our approach unifies the LM training and probe calibration procedures under a single causal framework for analysis, yielding formal guarantees for the control of probes. Our analysis also reveals settings in which prior techniques, such as control tasks (Hewitt & Liang, 2019), can yield biased estimates of the intended auxiliary measurement.

6 Conclusion

This paper presents **latent causal probing**, a probing framework that studies whether LMs induce latent variables as a byproduct of the language modeling objective. Our framework offers robust tools for interpreting experiment results through the lens of causal analysis, and in particular, rigorously controls for the probe’s contribution in learning the auxiliary task. Experimentally, we extend a previous study of whether Transformers can infer the intermediate states that underlie a sequence of actions. Our results provide strong empirical evidence that LMs can induce latent concepts from textual pretraining.

References

Mostafa Abdou, Artur Kulmizev, Daniel Hershcovich, Stella Frank, Ellie Pavlick, and Anders Søgaard. Can language models encode perceptual structure without grounding? a case study in color. In Arianna Bisazza and Omri Abend (eds.), *Proceedings of the 25th Conference on Computational Natural Language Learning*, pp. 109–132, Online, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.conll-1.9. URL <https://aclanthology.org/2021.conll-1.9>.

- Eldar David Abraham, Karel D’Oosterlinck, Amir Feder, Yair Ori Gat, Atticus Geiger, Christopher Potts, Roi Reichart, and Zhengxuan Wu. CEBab: Estimating the causal effects of real-world concepts on NLP model behavior. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=3AbigH4s-ml>.
- Yossi Adi, Einat Kermany, Yonatan Belinkov, Ofer Lavi, and Yoav Goldberg. Fine-grained analysis of sentence embeddings using auxiliary prediction tasks. In *International Conference on Learning Representations*, 2017. URL <https://openreview.net/forum?id=BJh6Ztuxl>.
- Guillaume Alain and Yoshua Bengio. Understanding intermediate layers using linear classifier probes, 2018.
- Afra Amini, Tiago Pimentel, Clara Meister, and Ryan Cotterell. Naturalistic Causal Probing for Morpho-Syntax. *Transactions of the Association for Computational Linguistics*, 11:384–403, 05 2023. ISSN 2307-387X. doi: 10.1162/tacl_a_00554. URL https://doi.org/10.1162/tacl_a_00554.
- Jacob Andreas. Language models as agent models. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang (eds.), *Findings of the Association for Computational Linguistics: EMNLP 2022*, pp. 5769–5779, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.findings-emnlp.423. URL <https://aclanthology.org/2022.findings-emnlp.423>.
- Chen Avin, Ilya Shpitser, and Judea Pearl. Identifiability of path-specific effects. In *IJCAI International Joint Conference on Artificial Intelligence*, pp. 357–363, 2005.
- Reuben M Baron and David A Kenny. The moderator–mediator variable distinction in social psychological research: Conceptual, strategic, and statistical considerations. *Journal of personality and social psychology*, 51(6):1173, 1986.
- Yonatan Belinkov. Probing classifiers: Promises, shortcomings, and advances. *Computational Linguistics*, 48(1):207–219, March 2022. doi: 10.1162/coli_a_00422. URL <https://aclanthology.org/2022.cl-1.7>.
- Yonatan Belinkov and James Glass. Analysis Methods in Neural Language Processing: A Survey. *Transactions of the Association for Computational Linguistics*, 7:49–72, 04 2019. ISSN 2307-387X. doi: 10.1162/tacl_a_00254. URL https://doi.org/10.1162/tacl_a_00254.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- Yanai Elazar, Shauli Ravfogel, Alon Jacovi, and Yoav Goldberg. Amnesic Probing: Behavioral Explanation with Amnesic Counterfactuals. *Transactions of the Association for Computational Linguistics*, 9:160–175, 03 2021. ISSN 2307-387X. doi: 10.1162/tacl_a_00359. URL https://doi.org/10.1162/tacl_a_00359.
- Yanai Elazar, Nora Kassner, Shauli Ravfogel, Amir Feder, Abhilasha Ravichander, Marius Mosbach, Yonatan Belinkov, Hinrich Schütze, and Yoav Goldberg. Measuring causal effects of data statistics on language model’sfactual’predictions. *arXiv preprint arXiv:2207.14251*, 2022.
- Amir Feder, Katherine A Keith, Emaad Manzoor, Reid Pryzant, Dhanya Sridhar, Zach Wood-Doughty, Jacob Eisenstein, Justin Grimmer, Roi Reichart, Margaret E Roberts, et al. Causal inference in natural language processing: Estimation, prediction, interpretation and beyond. *Transactions of the Association for Computational Linguistics*, 10:1138–1158, 2022.
- Varun Gangal and Eduard Hovy. BERTering RAMS: What and how much does BERT already know about event arguments? - a study on the RAMS dataset. In Afra Alishahi, Yonatan Belinkov, Grzegorz Chrupała, Dieuwke Hupkes, Yuval Pinter, and Hassan Sajjad

- (eds.), *Proceedings of the Third BlackboxNLP Workshop on Analyzing and Interpreting Neural Networks for NLP*, pp. 1–10, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.blackboxnlp-1.1. URL <https://aclanthology.org/2020.blackboxnlp-1.1>.
- Atticus Geiger, Hanson Lu, Thomas F Icard, and Christopher Potts. Causal abstractions of neural networks. In A. Beygelzimer, Y. Dauphin, P. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, 2021. URL <https://openreview.net/forum?id=RmuXDtjDhG>.
- John Hewitt and Percy Liang. Designing and interpreting probes with control tasks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 2733–2743, 2019.
- Kosuke Imai, Luke Keele, and Dustin Tingley. A general approach to causal mediation analysis. *Psychological methods*, 15(4):309, 2010.
- Alexander Immer, Lucas Torroba Hennigen, Vincent Fortuin, and Ryan Cotterell. Probing as quantifying inductive bias. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1839–1851, 2022.
- Charles Jin and Martin Rinard. Evidence of meaning in language models trained on programs, 2023.
- Divyansh Kaushik, Eduard Hovy, and Zachary Lipton. Learning the difference that makes a difference with counterfactually-augmented data. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=SkIgsONFvr>.
- Belinda Z. Li, Maxwell Nye, and Jacob Andreas. Implicit representations of meaning in neural language models. In Chengqing Zong, Fei Xia, Wenjie Li, and Roberto Navigli (eds.), *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pp. 1813–1827, Online, August 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.acl-long.143. URL <https://aclanthology.org/2021.acl-long.143>.
- Kenneth Li, Aspen K Hopkins, David Bau, Fernanda Viégas, Hanspeter Pfister, and Martin Wattenberg. Emergent world representations: Exploring a sequence model trained on a synthetic task. In *The Eleventh International Conference on Learning Representations*, 2022.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=Bkg6RiCqY7>.
- Rowan Hall Maudslay, Josef Valvoda, Tiago Pimentel, Adina Williams, and Ryan Cotterell. A tale of a probe and a parser. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 7389–7395, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.659. URL <https://aclanthology.org/2020.acl-main.659>.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in gpt. *Advances in Neural Information Processing Systems*, 35:17359–17372, 2022.
- Erik Nijkamp, Bo Pang, Hiroaki Hayashi, Lifu Tu, Huan Wang, Yingbo Zhou, Silvio Savarese, and Caiming Xiong. Codegen: An open large language model for code with multi-turn program synthesis. *ICLR*, 2023.
- Judea Pearl. An introduction to causal inference. *The international journal of biostatistics*, 6(2), 2010.

- Judea Pearl et al. Models, reasoning and inference. *Cambridge, UK: CambridgeUniversityPress*, 19(2):3, 2000.
- Tiago Pimentel and Ryan Cotterell. A Bayesian framework for information-theoretic probing. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih (eds.), *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 2869–2887, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.229. URL <https://aclanthology.org/2021.emnlp-main.229>.
- Tiago Pimentel, Josef Valvoda, Rowan Hall Maudslay, Ran Zmigrod, Adina Williams, and Ryan Cotterell. Information-theoretic probing for linguistic structure. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 4609–4622, 2020.
- Bernhard Schölkopf, Francesco Locatello, Stefan Bauer, Nan Rosemary Ke, Nal Kalchbrenner, Anirudh Goyal, and Yoshua Bengio. Toward causal representation learning. *Proceedings of the IEEE*, 109(5):612–634, 2021.
- Xing Shi, Inkit Padhi, and Kevin Knight. Does string-based neural mt learn source syntax? In *Proceedings of the 2016 conference on empirical methods in natural language processing*, pp. 1526–1534, 2016.
- Steven Sloman. Locating Causal Structure in Language. In *Causal Models: How People Think about the World and Its Alternatives*. Oxford University Press, 08 2005. ISBN 9780195183115. doi: 10.1093/acprof:oso/9780195183115.003.0011. URL <https://doi.org/10.1093/acprof:oso/9780195183115.003.0011>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- Jesse Vig, Sebastian Gehrmann, Yonatan Belinkov, Sharon Qian, Daniel Nevo, Yaron Singer, and Stuart Shieber. Investigating gender bias in language models using causal mediation analysis. *Advances in neural information processing systems*, 33:12388–12401, 2020.
- Elena Voita and Ivan Titov. Information-theoretic probing with minimum description length. In Bonnie Webber, Trevor Cohn, Yulan He, and Yang Liu (eds.), *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 183–196, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.14. URL <https://aclanthology.org/2020.emnlp-main.14>.
- Naftali Weinberger. Path-specific effects. *British Journal for the Philosophy of Science*, 70(1): 53–76, 2019. doi: 10.1093/bjps/axx040.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 38–45, Online, October 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-demos.6. URL <https://aclanthology.org/2020.emnlp-demos.6>.
- Zining Zhu and Frank Rudzicz. An information theoretic view on selecting linguistic probes. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 9251–9262, 2020.

A Additional experimental details and results

A.1 Language model and probe details

Following [Jin & Rinard \(2023\)](#), the language model is a 350M parameter CodeGen model ([Nijkamp et al., 2023](#)) taken from the HuggingFace Transformers library ([Wolf et al., 2020](#)). The model was trained for 2.5 billion tokens, which was roughly 6 passes or 80000 training batches over the training corpus. We refer to [Jin & Rinard \(2023\)](#) for further details.

We next describe the design and training of the probing classifiers; these notes apply to all the probing experiments, unless otherwise noted. The linear probe is a single linear layer. The MLP probes have ReLU, batch_norm, then dropout(p=.2) after each linear layer. The hidden dimensions of the 1-layer and 2-layer MLP probes were (256,) and (256, 1024), respectively. The auxiliary datasets consisted of 500000 randomly selected samples. To extract representations from the LM, we use the same strategy as [Jin & Rinard \(2023\)](#), averaging the LM hidden states over the layer dimension after processing each program token. Probes were trained using AdamW ([Loshchilov & Hutter, 2019](#)) with weight decay of 1e-4. The learning rate starts at 0.01, then decays by .1 at 75% and 90% through training. All probes are trained for 2000000 steps using a batch size of 256.

For the mediated results reported in [Figure 4](#), we generated the auxiliary dataset using an SCM that maps `turn_right` to `turn_left`, `turn_left` to `move`, and `move` to `turn_right`.

A.2 Ablation studies

This section present some ablation studies on the set up of the probing experiments.

A.2.1 Valid baseline selection

To test the sensitivity of the mediated results (and hence, overall conclusions) on the choice of valid baseline, we generate two additional auxiliary datasets with the following SCMs:

1. swap `move` and `turn_left`
2. swap `turn_right` and `turn_left`

The results are plotted in [Figure 5](#) and [Figure 6](#), respectively. We find that the mediated measurements in the first case are nearly identical to those in [Figure 4](#), despite only swapping two actions (instead of permuting 3). However, in the second case, the mediated measurements are essentially noise, centered around 0. We attribute this to the fact that the resulting labels are extremely similar, as, in most cases, the robot is simply reflected along the starting axis. We emphasize that a negative result for one valid baseline does not constitute evidence to reject the hypothesis, and that a single positive result from a valid baseline is sufficient to accept the hypothesis.

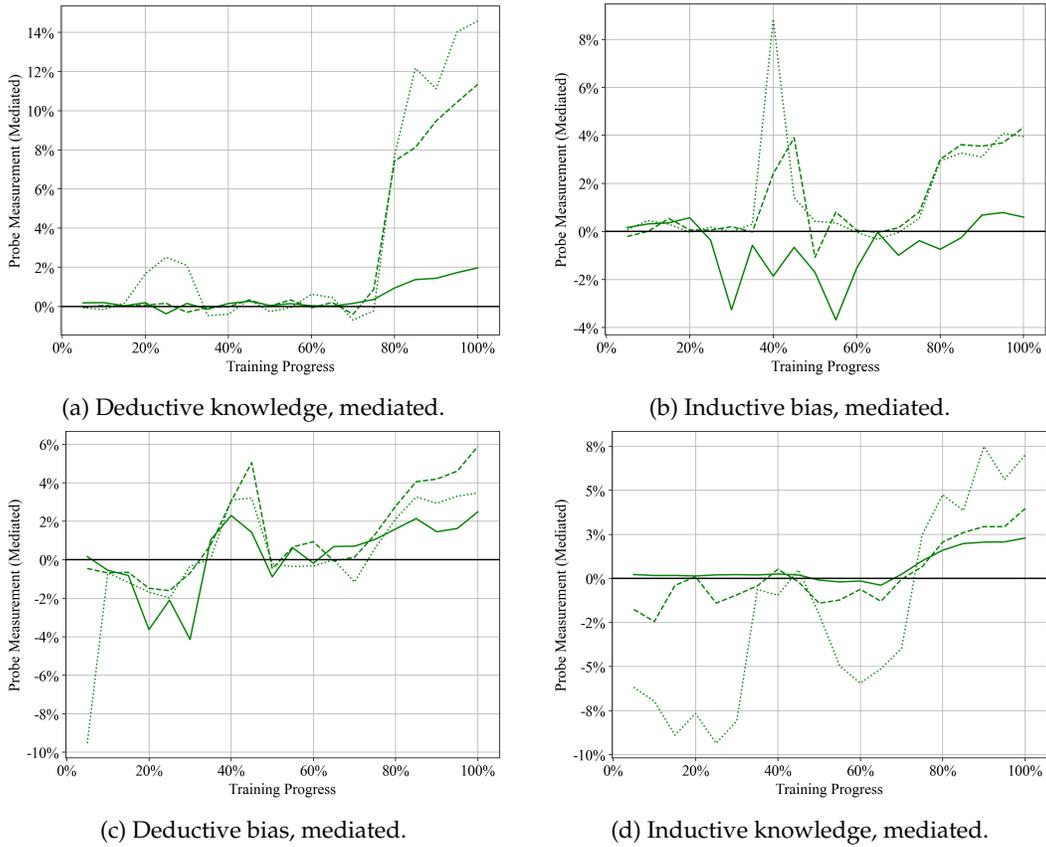


Figure 5: Mediating with the valid baseline that swaps move and turn_left.

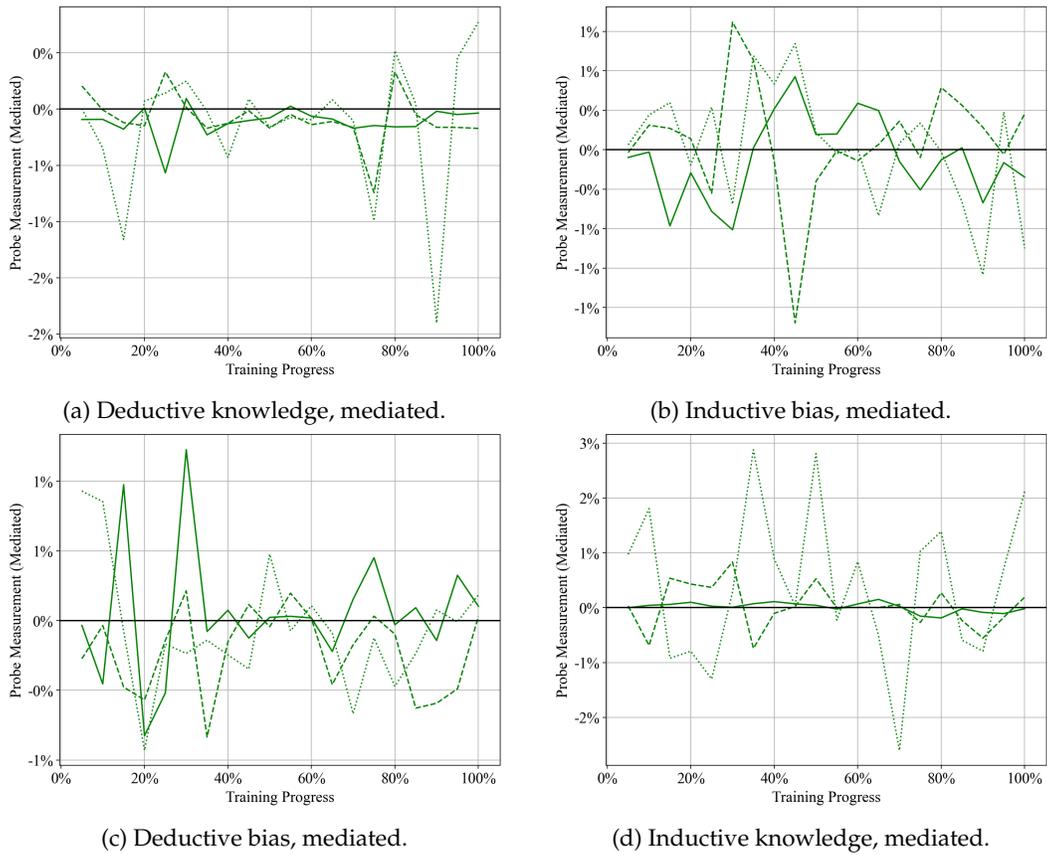


Figure 6: Mediating with the valid baseline that swaps turn_right and turn_left.

A.2.2 Probe architecture and hyperparameters

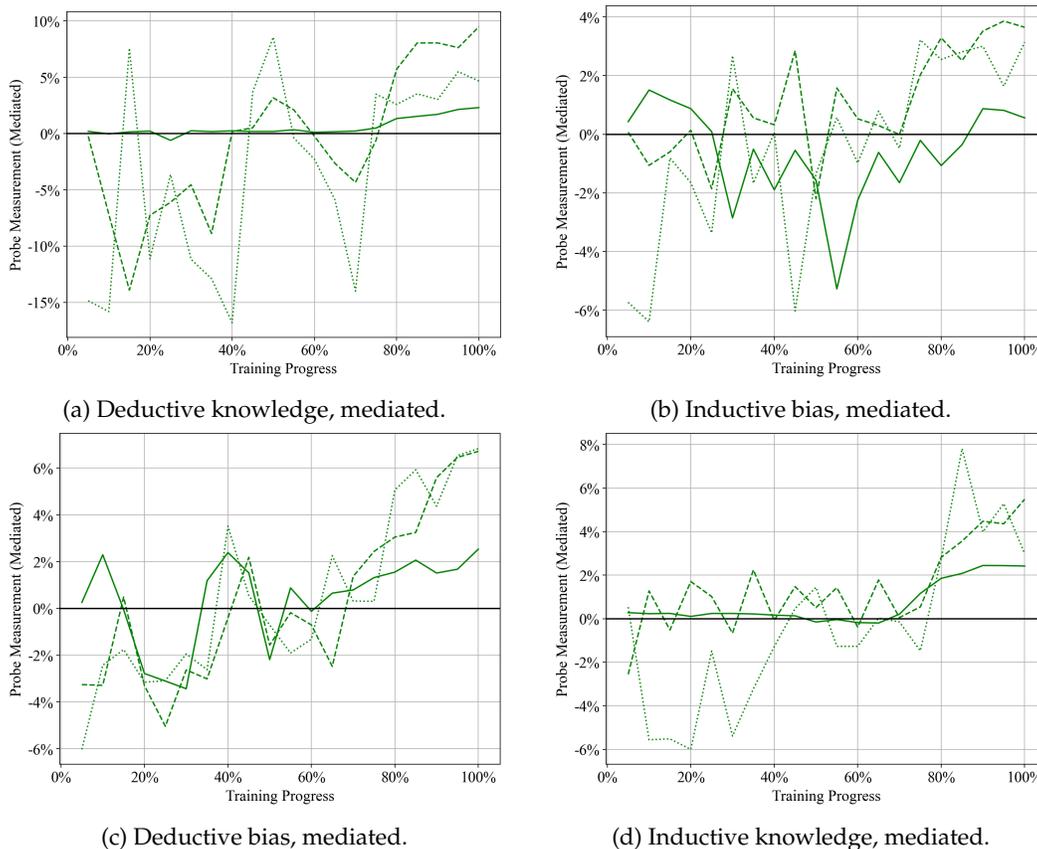


Figure 7: Mediating with the valid baseline from the main text. Both the original and the mediated measurements are retaken using the probe architecture and hyperparameters from [Jin & Rinard \(2023\)](#).

We next ablate the probe architecture and hyperparameters by adopting the settings used in [Jin & Rinard \(2023\)](#). The differences are: no dropout, a batch size of 1024, training the probe for 10000000 steps, and using 100000 samples in the auxiliary dataset. We use the same valid baseline as in Figure 4 of the main text.

The results are plotted in Figure 7. We observe that the general trends are preserved, and all four mediated measurements ending above 0% by the end of training. However, we note that both deductive and inductive knowledge measure slightly lower, which is an example of the moderating effect of the probe architecture and training hyperparameters. We attribute the effect to the increased batch size and lack of dropout, which could encourage the probe to converge more quickly to a global optimum, given that the risk of overfitting is low (due to the large size and high quality of the training dataset). This is also consistent with (1) the general intuition that simpler (or less optimal) probes are a proxy for “ease of extraction,” which is often interpreted as evidence that the representations are “more aligned” with the target features ([Hewitt & Liang, 2019](#)), and (2) the theoretical findings in [Pimentel et al. \(2020\)](#), who conclude that probes of infinite capacity are most informative for measuring syntactic knowledge.

B Comparison with Jin & Rinard (2023)

In this section, we highlight several key departures from the experimental design in Jin & Rinard (2023).

First, they do not split their auxiliary dataset into bound and free latent variable outcomes, and hence their results do not yield fine-grained interpretations about probing with different calibration and measurement datasets.

Second, our analysis reveals the presence of possible confounders in the design of their interventional baseline, leading to *uncontrolled effects*. In particular, the auxiliary dataset is constructed using programs generated by the LM itself, rather than randomly sampled as we do. Intuitively, this means that the LM “sees” both s_0 and s_n , *which reveals information about the original casual dynamics*. Formally, the representations of the LM used for probing mediates all 3 causal pathways, rather than the simple causal pathway from the LM training data (as in Figure 3), and hence their interventional baseline is not a proper measurement of the causal effect mediated by the LM representations. Our solution is to use randomly sampled programs and replace the occurrence of s_n with s_0 in the construction of the auxiliary dataset, which breaks this causal dependence.

Finally, Jin & Rinard (2023) do not verify that their interventional baselines satisfy the conditions in Equations (1) and (2). In particular, one of their baselines map the `put_marker` and `pick_marker` actions to `turn_right` and `turn_left`, respectively, in addition to permuting the `turn_right`, `turn_left`, and `move` actions. Because the extracted features all relate to the position and direction of the robot, the new dynamics could present a more difficult task (for both the LM and the probe) due to replacing what were effectively no-ops (`put_marker` and `pick_marker`) with new operations that affect the position or direction (`turn_right`, `turn_left`, and `move`). Hence, the observed drop in accuracy post-intervention could be attributable to increased task difficulty, rather than the learned representations of the LM.

C Proofs

Proof of Proposition 3.2. The proof follows directly from substituting the appropriate assumptions into the definitions of NIE. Recall that

$$\text{NIE}_{M,M'}(\theta_{\text{LM}}) := \text{acc}_{\text{aux}}(M, M) - \text{acc}_{\text{aux}}(M', M) \quad (3)$$

$$\text{NIE}_{M',M}(\theta'_{\text{LM}}) := \text{acc}_{\text{aux}}(M', M') - \text{acc}_{\text{aux}}(M, M'), \quad (4)$$

and, by Definition 3.1,

$$\text{acc}_{\text{aux}}(M', M') \geq \text{acc}_{\text{aux}}(M, M) \quad (5)$$

$$\text{acc}_{\text{aux}}(M, M') \geq \text{acc}_{\text{aux}}(M', M). \quad (6)$$

Applying Equation (5) to the definitions of NIE,

$$\text{NIE}_{M,M'}(\theta_{\text{LM}}) \leq \text{acc}_{\text{aux}}(M', M') - \text{acc}_{\text{aux}}(M', M) \quad (7)$$

$$= \text{NIE}_{M',M}(\theta'_{\text{LM}}). \quad (8)$$

Applying Equation (6) to the definition of NIE,

$$\text{NIE}_{M,M'}(\theta_{\text{LM}}) = \text{acc}_{\text{aux}}(M, M) - \text{acc}_{\text{aux}}(M', M) \quad (9)$$

$$\geq \text{acc}_{\text{aux}}(M, M) - \text{acc}_{\text{aux}}(M, M'). \quad (10)$$

Hence,

$$\text{acc}_{\text{aux}}(M, M) - \text{acc}_{\text{aux}}(M, M') \leq \text{NIE}_{M,M'}(\theta_{\text{LM}}) \leq \text{NIE}_{M',M}(\theta'_{\text{LM}}) \quad (11)$$

□