

DemoShapley: Valuation of Demonstrations for In-Context Learning

Shan Xie¹, Man Luo², Chadly Daniel Stern³, Mengnan Du⁴, Cheng Lu⁵,
¹Eindhoven University of Technology, ²Intel Lab,
³University of Illinois Urbana-Champaign, ⁴New Jersey Institute of Technology,
⁵University of Illinois Chicago
Correspondence: s.xie1@student.tue.nl

Abstract

Large language models (LLMs) leveraging in-context learning (ICL) have set new benchmarks in few-shot learning across various tasks without needing task-specific fine-tuning. However, extensive research has demonstrated that the effectiveness of ICL is significantly influenced by the selection and ordering of demonstrations. Considering the critical role of demonstration selection in ICL, we introduce DemoShapley which is inspired by the Data Shapley valuation theorem. This approach assesses the influence of individual demonstration instances, distinguishing between those that contribute positively and those that may hinder performance. Our findings reveal that DemoShapley not only enhances model performance in terms of accuracy and fairness but also generalizes queries from domains distinct from those of the in-context demonstrations, highlighting its versatility and effectiveness in optimizing ICL demonstration selection. Last but not least, DemoShapley demonstrates its ability to aid in identifying noisy data within the demonstration set.

1 Introduction

Large language models (LLMs) excel in adapting to new tasks through in-context learning (ICL), using a few input-label pairs (*demonstrations*) without requiring fine-tuning (Brown et al., 2020). This method, contrasting from traditional fine-tuning, enables LLMs to manage diverse tasks with less complexity and resource use. ICL’s efficiency and versatility have led to top performance in many few-shot tasks (Rae et al., 2021; Smith et al., 2022; Touvron et al., 2023; Chowdhery et al., 2023). Additionally, its unified architecture simplifies deployment and maintenance, offering a cost-effective alternative to conventional models (Mialon et al., 2023).

In the domain of few-shot learning, in-context learning (ICL) has shown significant promise but

also presents challenges; unexpected behaviors have frequently been observed (Min et al., 2022). Typically, ICL involves generating prompts by randomly selecting a few examples from the training dataset (Brown et al., 2020). Prior research indicates that ICL’s inferential performance is highly sensitive to the choice and order of demonstrations in the prompt, as well as to slight variations in prompt format (Lu et al., 2021; Rubin et al., 2021; Garg et al., 2022; Li et al., 2023; Luo et al., 2023, 2024; Chen et al., 2022). Therefore, selecting high-quality examples as demonstrations is crucial, as it can enhance model predictions, while suboptimal demonstrations may degrade performance (Min et al., 2022).

To address these issues, we present the DemoShapley, an approach inspired by the Data Shapley method (Ghorbani and Zou, 2019), which itself is derived from the Shapley value concept in cooperative game theory (Shapley et al., 1953). The Shapley value methodically assesses the average marginal contribution of each participant in every possible coalition, quantifying each player’s impact on the final outcome. Data Shapley extends this concept into machine learning, not only focusing on the marginal contribution of data points to a learning algorithm’s performance but also considering the sequence of data presentation. This aspect is crucial in ICL, where the order of demonstrations can significantly affect model performance. Our DemoShapley algorithm refines this approach, specifically addressing the challenges of demonstration selection in ICL.

The DemoShapley algorithm evaluates the contributions of demonstrations by considering various permutations, effectively marginalizing the influence of a demonstration’s position within a prompt. This method provides a nuanced assessment of how different data points impact ICL, identifying both beneficial and detrimental demonstrations based on their Shapley values. This strategic selection

is crucial in ICL. An illustration of DemoShapley algorithm is in Figure 1.

Empirical validation shows that DemoShapley not only selects demonstrations that enhance model performance but also improves LLM fairness and model’s generalization capabilities, particularly in out-of-distribution (OOD) tasks. This is important for real-world applications, where models frequently face data that vary from their training sets. Additionally, DemoShapley can identify demonstrations affected by label noise, preventing them from negatively impacting model performance.

2 Related Work

Data Valuation Data valuation in machine learning is a field of research aimed at evaluating the inherent worth of data within machine learning frameworks. For a more comprehensive review of data valuation, we refer the reader to this survey (Sim et al., 2022). Overall, there are three major categories of data valuation strategies which are leave-one-out (LOO), based on Cooperative Game Theory (CGT), and based on desiderata. (Cook and Weisberg, 1980) proposed LOO (Leave-One-Out) based strategy evaluates the value of data point D_k by measuring the alteration in the performance metric of the resulting model (or dataset) when D_k is excluded from the whole dataset. CGT-based methods are adapted from the game theory area. The two most well-known methods are Shapley value (Shapley et al., 1953) and Banzhaf index (Banzhaf III, 1964). Both methods depend on D_k marginal contribution to every coalition of the whole dataset where the coalition includes or excludes D_k . The marginal contribution of D_k is defined as the value change after adding D_k into a coalition without D_k , where the difference can be negative or positive values. The desiderata-based strategies are several Shapley variant methods which include Data Shapley (Ghorbani and Zou, 2019), Distributional Shapley (Ghorbani et al., 2020), and Beta Shapley (Kwon and Zou, 2021). DVRL (Yoon et al., 2020) used reinforcement learning to automatically learn data values and improve learning during training.

ICL Demonstrations Selection Chang and Jia (2022a) found that selectively choosing training samples based on their impact on model accuracy stabilized In-Context Learning (ICL) outcomes compared to random selection. Furthermore, Nguyen and Wong (2023) developed a technique to assess the impact of examples and select them ac-

cordingly, significantly improving performance on SuperGLUE tasks. When choosing demonstrations through retrieval, strategies typically prioritize similarity and diversity. Similarity-based selection involves choosing examples closely aligned with the query, leveraging linguistic or structural similarities. Liu et al. (2021) found that semantically closer demonstrations are more effective for GPT-3 ICL that utilize semantic representations from language models trained on tasks like natural language inference, employing the kNN algorithm for retrieval. Rubin et al. (2021) introduced a retrieval method that leverages language model cues to find better demonstrations compared to traditional retrievers. In contrast, Cheng et al. (2023) develop a universal retriever for cross-domain tasks, eliminating the need for task-specific retrievers by combining multiple training datasets. Apart from similarity, diversity in demonstrations is valued for avoiding repetition, incorporating varied viewpoints, and ensuring comprehensive coverage of test queries, as emphasized by Levy et al. (2022). In some cases, ICL benefits more from demonstrations of higher complexity, defined by query length or reasoning steps (Fu et al., 2022).

3 Demonstration Valuation for ICL

3.1 Preliminaries

As a method used in traditional machine learning domains for the equitable valuation of data contributions, Data Shapley assigns a quantitative value to each data point within a training dataset, revealing its contribution to model performance. The Data Shapley value ϕ_i for each data point is defined to be an equitable evaluation that provides a fair measure of a data point’s contribution to the overall performance of a learning algorithm. Mathematically, the value ϕ_i for each data point i in a dataset D with respect to a learning algorithm A and performance metric V is given by:

$$\phi_i = C \sum_{S \subseteq D \setminus \{i\}} \binom{n-1}{|S|}^{-1} [V(S \cup \{i\}) - V(S)], \quad (1)$$

where n is the total number of data points in D , S represents a subset of D excluding the i -th data point, and $V(S)$ denotes the performance score of the predictor trained on subset S . The sum iterates over all possible subsets S of D excluding i , and $\binom{n-1}{|S|}$ is the binomial coefficient representing the number of ways to choose $|S|$ elements from $n-1$

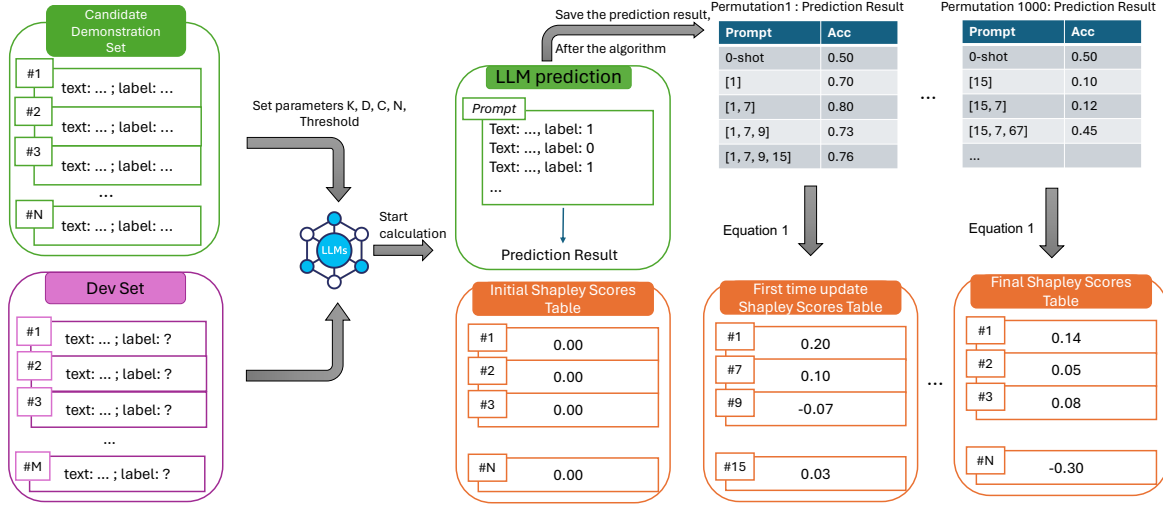


Figure 1: At the outset, we select a candidate demonstration set and the development dataset. Then, we define hyperparameters K, D, C, N and the threshold μ . The process begins with zero-shot learning, progressively adding examples in sequence with each iteration. For each prompt, the DemoShapley value of each example is updated. The algorithm concludes after numerous iterations, ensuring every example in the candidate pools is evaluated.

elements. C is an arbitrary constant.

One key method to practically compute Data Shapley values is the Truncated Monte Carlo Shapley (TMC-Shapley) algorithm, which is an efficient approximation technique. The TMC-Shapley algorithm leverages a "performance tolerance" based on the intrinsic noise in the performance metric $V(S)$ and truncates the calculation of marginal contributions when the performance score of a subset S is within this tolerance of the performance score of the full dataset $V(D)$. This algorithm effectively reduces computational overhead by avoiding the full recalculation of the performance metric for subsets S that are sufficiently close to the full dataset performance, thus accelerating the approximation of Data Shapley values.

3.2 Proposed DemoShapley Framework

To adapt the TMC-Shapley calculation for Demonstration Shapley values in the context of ICL with LLMs, several key steps are outlined, taking into account the unique characteristics of ICL. Unlike traditional model training where all data points are used, ICL involves selecting only a small set of demonstrations as prompt. The steps for calculating Demonstration Shapley values are as follows:

1. **Random Sample and Permutation:** Begin by randomly selecting K samples from the candidate demonstration set. These samples are then permuted randomly to form a sequence $\Pi = \{\pi_1, \pi_2, \dots, \pi_K\}$, which will

be used to construct the prompt P with an ordered list of input-output pairs. For zero-shot learning, the prompt contains only the task instruction.

2. **Performance Metric Calculation:** For each prompt P , compute the performance metric $V(P, f)$ for the LLM f . Initially, the zero-shot performance $V(\emptyset, f)$, where the prompt consists solely of the task instruction, needs to be calculated.
3. **Sequential Demonstration Addition:** Following the predetermined permutation $\{\pi_a, \pi_b, \dots\}$, sequentially add demonstrations to the preceding prompt P' and compute the new performance $V'(P', f)$ each time a demonstration is added. This is done using the same development dataset for consistency.
4. **Shapley Value Update:** If the change in performance v' after adding a demonstration exceeds a certain threshold, update the Demonstration Shapley value ϕ_n for the newly added demonstration π_n using the equation:

$$\phi_{\pi^{t_c}[c]} \leftarrow \frac{t_c - 1}{t_c} \phi_{\pi^{t_c-1}[c]} + \frac{1}{t_c} (v'), \quad (2)$$

where t_c denotes the number of iterations for the c -th demonstration, and v' represents the change in performance metric resulting from adding the c -th demonstration.

5. **Repetition for Convergence:** Repeat the entire process N times, where N is a sufficiently large number to ensure that each data point is included in various permutations and orders among other demonstrations. This repetition helps in achieving a stable estimate of the Demonstration Shapley values.

This adapted framework for calculating Demonstration Shapley values acknowledges the specific requirements of ICL with LLMs, where the selection and ordering of demonstrations are critical. The process aims to quantify the general value of each demonstration in terms of its contribution to the LLM’s performance on a given task, thereby providing insights into the most effective demonstrations for enhancing model understanding and performance. We outline the general procedure of our Demonstration Shapley algorithm using the pseudo code in Algorithm 1 in the Appendix.

4 Experiments & Applications

In this section, we outline four experimental setups aimed at assessing the effectiveness of DemoShapley in predictive tasks, improving fairness, and its detection ability to OOD and label noise scenarios.

4.1 Experimental Settings

LLMs: Our evaluation framework utilizes four primary models: two GPT models, the proprietary LLM ChatGPT-3.5-Turbo (OpenAI, 2024), the open-source LLM GPT-J-6B (Wang and Komatsuzaki, 2021); and two non-GPT models, Mistral-7B-v0.3 (Jiang et al., 2023) and Llama3-8B (AI@Meta, 2024).

Datasets: The analysis includes diverse datasets tailored for specific tasks: Toxi-text-3M, a vast multilingual corpus for classifying texts as toxic or non-toxic (FredZhang7, 2023); the Adult Dataset, used to predict if an individual’s income exceeds \$50,000 and employed in fairness assessments (Becker and Kohavi, 1996); the Emotion Dataset, which consists of English Twitter messages annotated with six emotions for emotion recognition tasks (Saravia et al., 2018); BoolQ and BoolQ Contrast, where BoolQ involves yes/no question-answering and BoolQ Contrast tests model adaptability to data variations (Clark et al., 2019; Gardner et al., 2020); and SST-2 alongside FinancialPhraseBank-v1.0, with SST-2 used for sentiment analysis from movie reviews

and FinancialPhraseBank-v1.0 serving as an Out-Of-Distribution task with sentences from financial news (Socher et al., 2013; Malo et al., 2014). Data preprocessing involves converting tabular data which is Adult in our experiment into natural language for processing by large language models, and only focusing on the English subset of the Toxi-text-3M dataset.

Baseline Methods: We compare DemoShapley against four baseline methods for selecting demonstrations: CondAcc (Chang and Jia, 2022b) and Influence (Nguyen and Wong, 2023) represent the state-of-the-art influence-based demonstration selection strategies. Additionally, we incorporate Leave-One-Out (LOO) and Random selection as two other baselines, following the approach outlined in (Ghorbani and Zou, 2019). Note that we opted not to include baselines focused on similarity or perplexity measures. This decision is based on findings from the Influence (Nguyen and Wong, 2023) baseline, which indicates that these factors might be less effective in comparison.

- **CondAcc** uses the average performance to find examples to improve and stabilize the performance of ICL. The calculation of CondAcc score of demonstrations x_i on LLM f is given as $s_{ca}(i) = \mathbb{E}_{\mathcal{Z} \sim \mathcal{D}_{ICL}} [f(\mathcal{Z}) | x_i \in \mathcal{Z}]$, where \mathcal{Z} denotes the prompt.
- **Influence** calculates the influence of each example. The influence is the difference between the average performance of prompts with and without x_i . The calculation is given as $\mathcal{I}(i) = \frac{1}{N_i} \sum_{\mathcal{Z}: x_i \in \mathcal{Z}} f(\mathcal{Z}) - \frac{1}{M-N_i} \sum_{\mathcal{Z}: x_i \notin \mathcal{Z}} f(\mathcal{Z})$. N_i and M denote the number of prompts with x_i and the total number of prompts respectively.
- **LOO** detailed by Cook (Cook, 1977), quantifies the significance of an individual data point by the resultant change in model performance upon its removal. For ICL, we assess the performance difference between a complete prompt and one that excludes the example x_i , to gauge the contribution of each demonstration.
- **Random** selection involves choosing K examples randomly from the pool of candidate demonstrations for inference in ICL.

4.2 The Prediction Efficacy of DemoShapley

We design two experiments to showcase the predictive performance of DemoShapley compared to other baselines.

Add In-context Learning Examples based on Demonstration Values. We initiate with a 0-shot setting, applying two distinct strategies for choosing demonstrations. The first strategy progressively incorporates examples with the highest demonstration Shapley values from a 0-shot baseline, enhancing the prompt with valuable demonstrations. In contrast, the second strategy also begins from a 0-shot baseline but integrates examples with the lowest demonstration values into the prompt, adding new demonstrations that are theoretically less beneficial or even detrimental.

Remove In-context Learning Examples based on Demonstration Values. We start with 10 randomly selected demonstrations. The first experiment in this category uses all 10 demonstrations initially and then removes the top five examples with the highest demonstration Shapley values to gauge the impact on prediction performance. Conversely, the second experiment begins with the same set of 10 demonstrations but removes the five examples with the lowest demonstration Shapley values, assessing the effects from the bottom of the value scale.

Results We have the following observations based on the results for GPT models in Figure 2 and results for non-GPT architecture LLMs in Table 1.

Observation 1: Incorporating demonstrations with high DemoShapley values proves advantageous, whereas those of low value are detrimental. The first column of Figure 2 demonstrates that adding high-value demonstrations consistently improves performance more than other methods, such as in cases where six high-value demonstrations invariably yield better results. In contrast, the second column and Table 1 show that integrating low-value demonstrations leads to a performance decline, a trend that is more pronounced using the DemoShapley method. This suggests a strong correlation between DemoShapley values and their actual impact in an ICL setting. Both Llama3 and Mistral models, along with other architectures, exhibit these trends, indicating that the quality of data significantly influences model performance across different structures.

Observation 2: Eliminating demonstrations with high DemoShapley values leads to reduced performance, whereas removing those with low values enhances model performance. The third column of Figure 2 demonstrates that starting with a set of 10 demonstrations and then removing the ones with the highest DemoShapley values leads to a notable decrease in performance. The most significant

drop occurs after the top five positive DemoShapley demonstrations are removed, marking the lowest performance point for our method. Conversely, the fourth column shows that removing demonstrations with negative DemoShapley values leads to a rapid improvement in performance. This pattern highlights the effectiveness of excluding negatively valued demonstrations from the ICL process.

4.3 DemoShapley for Algorithmic Fairness

In this experiment, we aim to answer *whether ICL exhibits different fairness performance when using demonstrations selected by different methods.*

We utilize the benchmark dataset, Adult, and consider gender as a sensitive attribute for our investigation. After computing DemoShapley values, we follow (Wang et al., 2023) and construct a test dataset that maintains a fixed base rate parity (bpt) 0.0. The base rate parity of demonstrations (bpc) varies among 0, 0.5, and 1. Base rate parity is a measure indicating bias within the data distribution in relation to a particular sensitive attribute; a higher value denotes significant bias, revealing a lack of demographic balance within the dataset. With bpt=0, we ensure that any observed bias in predictions can be attributed to the prompts, as per (Wang et al., 2023), allowing for a clearer assessment of the prompts’ influence on model bias. We conduct experiments with 16 and 32 shots to examine how the performance varies with different numbers of demonstrations. We use two common group fairness metrics, specifically the demographic parity difference (M_{dpd}) (Dwork et al., 2012) and equalized odds difference (M_{eod}) (Hardt et al., 2016). M_{dpd} measures the difference between the probability of positive predictions across groups. M_{eod} indicates the gap in predictions conditioned on different values of the sensitive attribute while also considering the ground truth label. The detailed definitions of base rate parity, M_{dpd} , and M_{eod} are listed in the Appendix.

Results We have the following observations based on results in Table 2.

Observation 1: In settings where both the context and test datasets have a base rate parity of 0, our approach achieves the highest accuracy with minimal bias, as measured by M_{dpd} and M_{eod} metrics in our predictions. As the base rate parity in the context dataset increases, we observe a corresponding rise in fairness metrics, suggesting a potential increase in disparity between the context and test datasets. Despite this, the samples selected

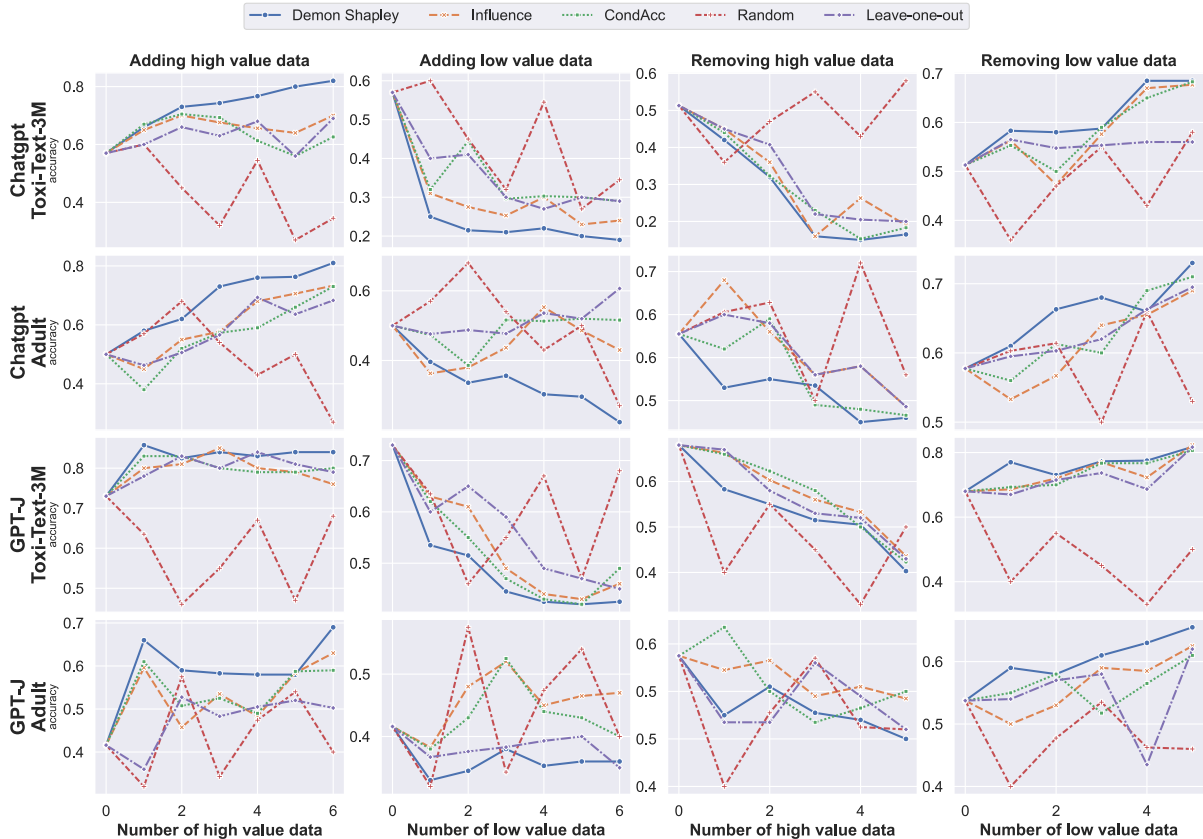


Figure 2: Performance improvements and comparative analysis of DemoShapley against baseline methods using GPT-J-6B and ChatGPT-3.5-Turbo.

using our method also show an uptick in bias but remain comparatively less biased than those chosen by other benchmarks, all the while sustaining high accuracy levels.

Observation 2: In our experiments, smaller-sized models tend to perform better on fairness metrics compared to their larger counterparts, even though they might lag slightly in accuracy. Specifically, under identical conditions (16-shots), the GPT-J-6B model demonstrates superior capability in reducing bias compared to ChatGPT-3.5 Turbo. This observation highlights the potential effectiveness of smaller-scale models in striking a balance between addressing fairness issues and achieving desirable accuracy in model performance.

4.4 DemoShapley for OOD Generalization

In this section, we assess the potential of higher DemoShapley value samples to enhance model generalization on OOD tasks without necessitating finetuning. Our experimental framework focuses on the effect of selecting demonstration examples with significant DemoShapley values to bolster the model’s generalization capabilities across datasets originating from disparate distributions. We calcu-

late DemoShapley values for demonstrations that are coherent with the task of the test set but derived from various sources. Our investigation is structured around two distinct scenarios: the first scenario utilizes the BoolQ dataset as the source and BoolQ Contrast as the corresponding OOD test set. The second scenario examines the transferability of sentiment analysis tasks from the sst-2 dataset to the FinancialPhraseBank-v1.0 dataset, exploring how well the model adapts to sentiment analysis in a financial context, divergent from the original movie review domain. In this task, we utilized the GPT-J-6B LLM and opted not to use ChatGPT-3.5-Turbo. This is because, for all compared methods, we observed that varying permutations did not yield significant prediction differences in ChatGPT-3.5-Turbo, leading to small demonstration values. This phenomenon might be attributed to the possibility that both datasets were part of the pre-training material for ChatGPT-3.5-Turbo, affecting its sensitivity to permutations in the demonstration set. Our experimental results are presented in Table 3.

Observations: Our results reveal that the performance achieved using our method consistently outperforms the baselines on OOD tasks, main-

Methods	Adding High Value Data (Accuracy %) \uparrow				Adding Low Value Data (Accuracy %) \downarrow			
	DemoShapley	CondAcc	Influence	LOO	DemoShapley	CondAcc	Influence	LOO
Llama3 on Toxi-Text-3M	86.7	85.0	84.3	80.3	21.0	27.7	33.0	40.7
Llama3 on Adult	79.7	74.5	74.7	73.7	47.5	58.7	52.0	57.6
Llama3 on Emotion	47.7	43.0	43.2	44.3	23.5	21.5	23.0	19.3
Mistral on Toxi-Text-3M	82.1	80.3	76.3	65.3	40.7	46.7	40.3	44.6
Mistral on Adult	73.5	74.7	71.3	67.1	49.7	51.2	52.2	57.0
Mistral on Emotion	44.3	43.0	44.5	40.2	15.0	14.2	25.0	16.1
Methods	Removing High Value Data (Accuracy %) \downarrow				Removing Low Value Data (Accuracy %) \uparrow			
	DemoShapley	CondAcc	Influence	LOO	DemoShapley	CondAcc	Influence	LOO
Llama3 on Toxi-Text-3M	53.0	52.7	53.2	54.8	82.3	76.7	77.4	74.6
Llama3 on Adult	64.5	67.5	69.5	68.6	72.3	72.0	71.5	74.5
Llama3 on Emotion	29.7	31.9	32.8	30.4	45.3	40.3	39.5	41.7
Mistral on Toxi-Text-3M	44.3	45.5	42.7	43.8	65.7	63.2	62.3	64.8
Mistral on Adult	60.5	61.8	60.5	63.5	72.3	70.3	73.0	66.5
Mistral on Emotion	24.3	29.8	26.4	29.0	38.6	37.7	37.0	39.1

Table 1: Results for Llama3 and Mistral models across different datasets with the same experiment settings in the experiment section. We compared our method with other benchmarks that assigned a score to each datum. From the result, DemoShapley outperformed in most cases.

taining the same experimental conditions. This disparity is particularly pronounced with the FinancialPhraseBank-v1.0 dataset, underscoring the effectiveness of our selection method. These results affirm that the samples chosen through our approach not only excel on test sets sharing the training dataset’s distribution but also significantly enhance the model’s comprehension of the nuanced information contained within the prompts. Consequently, this leads to improved generalization capabilities of the model in ICL scenarios.

4.5 DemoShapley Robust to Label Noise

In this section, we delve into the effectiveness of DemoShapley values in identifying instances of label noise within datasets. Given the prevalence of manually annotated datasets through crowdsourcing in practical applications, mislabeling remains a significant challenge. Such inaccuracies can detrimentally impact a model’s predictive performance. Drawing on the insights from previous research by [Ghorbani and Zou \(2019\)](#), which highlighted the utility of Data Shapley values in pinpointing mislabeled data, we anticipate that our DemoShapley method will similarly aid in detecting erroneous labels in demonstrations.

For this experiment, we select a random subset of 100 examples from both datasets as our pool of demonstration candidates. Within this set, we introduce label noise by randomly altering the labels of 10% of the data, ensuring these changes represent genuine mislabeling through manual verification. We then compute the DemoShapley values across

both datasets and models. Upon obtaining these values, we analyze the correlation between examples possessing the lowest DemoShapley values and those identified with label noise, assessing the method’s efficacy in recognizing mislabeled data.

Results Our results are shown in Table 4. We have observations as below:

Observation 1: Our method excels in detecting label-flipped samples in toxic classification tasks on both ChatGPT-3.5-Turbo and GPT-J-6B models, showing higher sensitivity than other approaches. However, the performance of our method on the Adult dataset is not as robust as in the toxic classification scenario, likely because label flipping in toxic classification starkly contrasts with pretrained semantics, unlike in the Adult dataset where flipped labels diverge from the original distribution without contradicting semantics. This trend is similar with the LOO method, while CondAcc and Influence methods perform well on the Adult dataset, adapting better to its label flipping characteristics.

Observation 2: In the task of label noise example detection, our investigation revealed a notable advantage in performance exhibited by larger-size models over the smaller models from the result of Average rank which indicates the overall rank of the flipped-labels examples. Specifically, the average rank outperforms on ChatGPT-3.5-Turbo than on GPT-J-6B for all datasets. The lower scores of the examples signify the larger negative impact of the flipped-label examples in ICL. This might serve as further evidence, corroborating a key insight for [\(Wei et al., 2023\)](#)’s study. The size of the model

Table 2: Accuracy (ACC), Demographic Parity Difference (M_{dpd}), and Equalized Odds Difference (M_{eod}) on the Adult Dataset Using 16-shot and 32-shot ICL with different Base Rate Parity (bpc). The Base Rate Parity of the test set (bpt) is fixed at 0.0. Because of the input limit of GPT-J-6B, we only run the 16-shot experiments on GPT-J-6B.

16-shots (ChatGPT)	bpc=0			bpc=0.5			bpc=1		
	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow
DemoShapley	0.736	0.029	0.016	0.748	0.112	0.136	0.741	0.146	0.164
CondAcc	0.723	0.059	0.056	0.747	0.114	0.148	0.740	0.168	0.196
Influence	0.728	0.068	0.036	0.742	0.120	0.148	0.728	0.172	0.192
LOO	0.724	0.136	0.183	0.741	0.158	0.188	0.722	0.156	0.160

32-shots (ChatGPT)	bpc=0			bpc=0.5			bpc=1		
	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow
DemoShapley	0.728	0.076	0.144	0.730	0.094	0.124	0.724	0.122	0.132
CondAcc	0.71	0.124	0.184	0.715	0.102	0.148	0.711	0.170	0.240
Influence	0.625	0.142	0.156	0.622	0.116	0.140	0.708	0.140	0.220
LOO	0.721	0.138	0.172	0.733	0.234	0.308	0.709	0.214	0.234

16-shot (GPT-J-6B)	bpc=0			bpc=0.5			bpc=1		
	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow	Acc \uparrow	M_{dpd} \downarrow	M_{eod} \downarrow
DemoShapley	0.622	0.038	0.044	0.644	0.062	0.068	0.626	0.026	0.030
CondAcc	0.628	0.096	0.112	0.635	0.162	0.180	0.621	0.030	0.036
Influence	0.606	0.082	0.136	0.627	0.190	0.208	0.620	0.034	0.038
LOO	0.626	0.042	0.088	0.619	0.074	0.104	0.613	0.042	0.072

Table 3: The accuracy for OOD tasks. The model used for evaluation is GPT-J-6B.

GPT-J-6B OOD Tasks	BoolQ Cst.		Financial	
	16-shots	32-shots	16-shots	32-shots
DemoShapley	0.568	0.582	0.652	0.674
CondAcc	0.554	0.561	0.614	0.632
Influence	0.556	0.553	0.622	0.620
LOO	0.535	0.564	0.594	0.582
Random	0.562	0.531	0.532	0.568

plays a crucial role in its ability to override semantic priors. Small language models tend to ignore flipped labels in context and rely heavily on pre-training semantic priors. In contrast, larger models can override these priors when given in-context examples that challenge them, even though they may possess stronger priors themselves.

5 Conclusion

We introduce the DemoShapley approach as a robust algorithm for selecting demonstrations in in-context learning (ICL). Inspired by Data Shapley, it offers a fair way to evaluate each demonstration’s impact on ICL. Our experiments across prediction efficacy, algorithmic fairness, Out-Of-Distribution (OOD) generalization, and label noise detection show that DemoShapley significantly en-

Table 4: We sort the samples from lowest to highest based on their scores, focusing on counting the label-flipped examples among the bottom 10 and bottom 20 with the lowest values. Then, we calculate the average rank of these label-flipped examples.

ChatGPT-3.5	Toxi			Adult		
	N in bottom 10	N in bottom 20	Average Rank	N in bottom 10	N in bottom 20	Average Rank
DemoShapley	3	7	22.3	2	5	24.2
CondAcc	2	5	25.9	2	6	22.2
Influence	2	5	25.9	2	6	22.2
LOO	3	6	29.1	2	2	30.8

GPT-J-6B	Toxi			Adult		
	N in bottom 10	N in bottom 20	Average Rank	N in bottom 10	N in bottom 20	Average Rank
DemoShapley	3	7	35.4	4	6	32.4
CondAcc	1	5	47.2	3	6	30.2
Influence	1	5	45.3	3	6	31.5
LOO	2	4	38.7	1	4	39.9

hances model performance. This method not only improves accuracy but also ensures robustness in challenging environments and maintains fairness, making it ideal for ethical AI applications.

Limitation

Building upon the principles of Data Shapley, the proposed DemoShapley method provides a fair assessment of each demonstration’s contribution to ICL. However, the computational demands remain a challenge, despite efforts to mitigate these through Monte Carlo sampling. The inherent complexity of updating Shapley values, which is exponential, restricts updates to N examples at a time, slowing down the computation process in the DemoShapley approach. In current implementations, our approach utilizes a fixed number of examples N in an N -shot scenario, where DemoShapley values are calibrated specifically for this configuration. While this setup has shown robust performance across various N values, there remains room for enhancement. A promising direction for future research could involve developing methods to calculate more universally applicable example scores that adapt across different shot configurations.

References

- AI@Meta. 2024. [Llama 3 model card](#).
- John F Banzhaf III. 1964. Weighted voting doesn’t work: A mathematical analysis. *Rutgers L. Rev.*, 19:317.
- Barry Becker and Ronny Kohavi. 1996. Adult. UCI Machine Learning Repository. DOI: <https://doi.org/10.24432/C5XW20>.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Ting-Yun Chang and Robin Jia. 2022a. Careful data curation stabilizes in-context learning. *arXiv preprint arXiv:2212.10378*.
- Ting-Yun Chang and Robin Jia. 2022b. Data curation alone can stabilize in-context learning. *arXiv preprint arXiv:2212.10378*.
- Yanda Chen, Chen Zhao, Zhou Yu, K. McKeown, and He He. 2022. On the relation between sensitivity and accuracy in in-context learning. *ArXiv*, abs/2209.07661.
- Daixuan Cheng, Shaohan Huang, Junyu Bi, Yuefeng Zhan, Jianfeng Liu, Yujing Wang, Hao Sun, Furu Wei, Denvy Deng, and Qi Zhang. 2023. Uprise: Universal prompt retrieval for improving zero-shot evaluation. *arXiv preprint arXiv:2303.08518*.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. 2023. Palm: Scaling language modeling with pathways. *Journal of Machine Learning Research*, 24(240):1–113.
- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. 2019. Boolq: Exploring the surprising difficulty of natural yes/no questions. *arXiv preprint arXiv:1905.10044*.
- R Dennis Cook. 1977. Detection of influential observation in linear regression. *Technometrics*, 19(1):15–18.
- R Dennis Cook and Sanford Weisberg. 1980. Characterizations of an empirical influence function for detecting influential cases in regression. *Technometrics*, 22(4):495–508.
- Cynthia Dwork, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Richard Zemel. 2012. Fairness through awareness. In *Proceedings of the 3rd innovations in theoretical computer science conference*, pages 214–226.
- FredZhang7. 2023. [Toxi-Text-3M](#).
- Yao Fu, Hao Peng, Ashish Sabharwal, Peter Clark, and Tushar Khot. 2022. Complexity-based prompting for multi-step reasoning. In *The Eleventh International Conference on Learning Representations*.
- Matt Gardner, Yoav Artzi, Victoria Basmova, Jonathan Berant, Ben Bogin, Sihao Chen, Pradeep Dasigi, Dheeru Dua, Yanai Elazar, Ananth Gottumukkala, et al. 2020. Evaluating models’ local decision boundaries via contrast sets. *arXiv preprint arXiv:2004.02709*.
- Shivam Garg, Dimitris Tsipras, Percy Liang, and G. Valiant. 2022. What can transformers learn in-context? a case study of simple function classes. *ArXiv*, abs/2208.01066.
- Amirata Ghorbani, Michael Kim, and James Zou. 2020. A distributional framework for data valuation. In *International Conference on Machine Learning*, pages 3535–3544. PMLR.
- Amirata Ghorbani and James Zou. 2019. Data shapley: Equitable valuation of data for machine learning. In *International conference on machine learning*, pages 2242–2251. PMLR.
- Moritz Hardt, Eric Price, and Nati Srebro. 2016. Equality of opportunity in supervised learning. *Advances in neural information processing systems*, 29.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. 2023. Mistral 7b. *arXiv preprint arXiv:2310.06825*.

- Yongchan Kwon and James Zou. 2021. Beta shapley: a unified and noise-reduced data valuation framework for machine learning. *arXiv preprint arXiv:2110.14049*.
- Itay Levy, Ben Bogin, and Jonathan Berant. 2022. Diverse demonstrations improve in-context compositional generalization. *arXiv preprint arXiv:2212.06800*.
- Yingcong Li, M. E. Ildiz, Dimitris Papailiopoulos, and Samet Oymak. 2023. Transformers as algorithms: Generalization and implicit model selection in in-context learning. *ArXiv*, abs/2301.07067.
- Jiachang Liu, Dinghan Shen, Yizhe Zhang, Bill Dolan, Lawrence Carin, and Weizhu Chen. 2021. What makes good in-context examples for gpt-3? *arXiv preprint arXiv:2101.06804*.
- Yao Lu, Max Bartolo, Alastair Moore, Sebastian Riedel, and Pontus Stenetorp. 2021. Fantastically ordered prompts and where to find them: Overcoming few-shot prompt order sensitivity. *arXiv preprint arXiv:2104.08786*.
- Man Luo, Xin Xu, Zhuyun Dai, Panupong Pasupat, Mehran Kazemi, Chitta Baral, Vaiva Imbrasaitė, and Vincent Y Zhao. 2023. Dr. icl: Demonstration-retrieved in-context learning. *arXiv e-prints*, pages arXiv–2305.
- Man Luo, Xin Xu, Yue Liu, Panupong Pasupat, and Mehran Kazemi. 2024. In-context learning with retrieved demonstrations for language models: A survey. *arXiv preprint arXiv:2401.11624*.
- Pekka Malo, Ankur Sinha, Pekka Korhonen, Jyrki Wallenius, and Pyry Takala. 2014. Good debt or bad debt: Detecting semantic orientations in economic texts. *Journal of the Association for Information Science and Technology*, 65(4):782–796.
- Grégoire Mialon, Roberto Dessì, M. Lomeli, Christoforos Nalmpantis, Ramakanth Pasunuru, Roberta Raileanu, Baptiste Rozière, Timo Schick, Jane Dwivedi-Yu, Asli Celikyilmaz, Edouard Grave, Yann LeCun, and Thomas Scialom. 2023. Augmented language models: a survey. *ArXiv*, abs/2302.07842.
- Sewon Min, Xinxu Lyu, Ari Holtzman, Mikel Artetxe, Mike Lewis, Hannaneh Hajishirzi, and Luke Zettlemoyer. 2022. Rethinking the role of demonstrations: What makes in-context learning work? *arXiv preprint arXiv:2202.12837*.
- Tai Nguyen and Eric Wong. 2023. In-context example selection with influences. *arXiv preprint arXiv:2302.11042*.
- OpenAI. 2024. [Openai platform](#).
- Jack W Rae, Sebastian Borgeaud, Trevor Cai, Katie Millican, Jordan Hoffmann, Francis Song, John Aslanides, Sarah Henderson, Roman Ring, Susannah Young, et al. 2021. Scaling language models: Methods, analysis & insights from training gopher. *arXiv preprint arXiv:2112.11446*.
- Ohad Rubin, Jonathan Herzig, and Jonathan Berant. 2021. Learning to retrieve prompts for in-context learning. *arXiv preprint arXiv:2112.08633*.
- Elvis Saravia, Hsien-Chi Toby Liu, Yen-Hao Huang, Junlin Wu, and Yi-Shin Chen. 2018. **CARER: Contextualized affect representations for emotion recognition**. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3687–3697, Brussels, Belgium. Association for Computational Linguistics.
- Lloyd S Shapley et al. 1953. A value for n-person games.
- Rachael Hwee Ling Sim, Xinyi Xu, and Bryan Kian Hsiang Low. 2022. Data valuation in machine learning: "ingredients", strategies, and open challenges. In *IJCAI*, pages 5607–5614.
- Shaden Smith, Mostofa Patwary, Brandon Norick, Patrick LeGresley, Samyam Rajbhandari, Jared Casper, Zhun Liu, Shrimai Prabhumoye, George Zerveas, Vijay Korthikanti, et al. 2022. Using deep-speed and megatron to train megatron-turing nlg 530b, a large-scale generative language model. *arXiv preprint arXiv:2201.11990*.
- Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D Manning, Andrew Y Ng, and Christopher Potts. 2013. Recursive deep models for semantic compositionality over a sentiment treebank. In *Proceedings of the 2013 conference on empirical methods in natural language processing*, pages 1631–1642.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Ben Wang and Aran Komatsuzaki. 2021. Gpt-j-6b: A 6 billion parameter autoregressive language model.
- Boxin Wang, Weixin Chen, Hengzhi Pei, Chulin Xie, Mintong Kang, Chenhui Zhang, Chejian Xu, Zidi Xiong, Ritik Dutta, Rylan Schaeffer, et al. 2023. Decodingtrust: A comprehensive assessment of trustworthiness in gpt models. *arXiv preprint arXiv:2306.11698*.
- Jerry Wei, Jason Wei, Yi Tay, Dustin Tran, Albert Webson, Yifeng Lu, Xinyun Chen, Hanxiao Liu, Da Huang, Denny Zhou, et al. 2023. Larger language models do in-context learning differently. *arXiv preprint arXiv:2303.03846*.
- Jinsung Yoon, Sercan Arik, and Tomas Pfister. 2020. Data valuation using reinforcement learning. In *International Conference on Machine Learning*, pages 10842–10851. PMLR.

A Appendix

A.1 Pseudo code for DemoShapley

Algorithm 1 Algorithm for calculating the Demonstration Shapley

Input Number of demonstrations K , Candidate Demonstration Set \mathcal{C} , Dev Dataset \mathcal{D} , Iteration Times N , Validation Method V , LLM f , Threshold μ , Instruction Prompt $\mathcal{P}_{\mathcal{I}}$

Output Shapley Scores Table Φ with size of $|\mathcal{C}|$ for candidate demonstration set \mathcal{C}

```

1: zero_shot_acc  $\leftarrow V(\mathcal{P}_{\mathcal{I}}, f, D)$ 
2: for  $i \leftarrow 1$  to  $|\mathcal{C}|$  do
3:    $t_i \leftarrow 0$     $\triangleright$  Iteration times for  $i_{th}$  datum
4: end for
5: for  $i \leftarrow 1$  to  $N$  do
6:   Randomly select  $K$  datum from Candidate Demonstration Set  $\mathcal{C}$ 
7:   Generate a random permutation  $\Pi$  with  $K$  datum selected.
8:   last_acc  $\leftarrow$  zero_shot_acc
9:   Prompt  $\mathcal{P} \leftarrow \mathcal{P}_{\mathcal{I}}$ 
10:  for  $j \leftarrow 1$  to  $K$  do
11:     $\mathcal{P} \leftarrow \mathcal{P} + \pi_j$ 
12:    acc  $\leftarrow V(\mathcal{P}, f)$ 
13:    if  $|\text{acc} - \text{last\_acc}| \geq \mu$  then
14:       $t_c \leftarrow t_c + 1$ 
15:       $v' \leftarrow \text{acc} - \text{last\_acc}$ 
16:       $\phi_{\pi^{t_c}[c]} \leftarrow \frac{t_c - 1}{t_c} \phi_{\pi^{t_c - 1}[c]} + \frac{1}{t_c} (v')$ 
17:    end if
18:  end for
19: end for

```

Hyper parameters K, C, D, N, μ

A.2 Fairness related definitions

To assess the demographic balance (fairness) of the data distribution, we employ the base rate parity (bP) for distribution P . In this equation, Y is the label for prediction and A is the sensitive attribute in the data.

$$b_P = \mathbb{P}_{(X,Y,A) \sim P_{XY}}[Y = 1 \mid A = 1] - \mathbb{P}_{(X,Y) \sim P_{XYA}}[Y = 1 \mid A = 0] \quad (3)$$

The **demographic parity difference** measures the probability of positive prediction conditioned on the sensitive attribute A being 1 and being 0. The

equation is shown below.

$$M_{dpd} = \left| \mathbb{P}_{(X,Y,A) \sim P_{XY}}[f(X) = 1 \mid A = 1] - \mathbb{P}_{(X,Y,A) \sim P_{XY}}[f(X) = 1 \mid A = 0] \right| \quad (4)$$

One drawback of M_{dpd} is that it does not consider the ground-truth labels. **Equalized odds difference** also considers the ground truth label when calculating the demographic gap. The equation is shown below.

$$M_{eod} = \max \{M_{TP}, M_{FP}\} \quad (5)$$

The M_{TP} denotes the true positive equalized odds difference while the M_{FP} denotes the false positive equalized odds difference:

$$M_{TP} = \left| \mathbb{P}_{(X,Y,A) \sim P_{XY}}[f(X) = 1 \mid Y = 1, A = 0] - \mathbb{P}_{(X,Y,A) \sim P_{XY}}[f(X) = 1 \mid Y = 1, A = 1] \right| \quad (6)$$

$$M_{FP} = \left| \mathbb{P}_{(X,Y,A) \sim P_{XY}}[f(X) = 1 \mid Y = 0, A = 0] - \mathbb{P}_{(X,Y,A) \sim P_{XY}}[f(X) = 1 \mid Y = 0, A = 1] \right| \quad (7)$$