

# Integrating Expert Judgment and Algorithmic Decision Making: An Indistinguishability Framework

Rohan Alur\*      Loren Laine†      Darrick K. Li†

Dennis Shung†      Manish Raghavan\*      Devavrat Shah\*

\*Massachusetts Institute of Technology, †Yale School of Medicine

## Abstract

We introduce a novel framework for human-AI collaboration in prediction and decision tasks. Our approach leverages human judgment to distinguish inputs which are *algorithmically indistinguishable*, or “look the same” to any feasible predictive algorithm. We argue that this framing clarifies the problem of human-AI collaboration in prediction and decision tasks, as experts often form judgments by drawing on information which is not encoded in an algorithm’s training data. Algorithmic indistinguishability yields a natural test for assessing whether experts incorporate this kind of “side information”, and further provides a simple but principled method for selectively incorporating human feedback into algorithmic predictions. We show that this method provably improves the performance of any feasible algorithmic predictor and precisely quantify this improvement. We demonstrate the utility of our framework in a case study of emergency room triage decisions, where we find that although algorithmic risk scores are highly competitive with physicians, there is strong evidence that physician judgments provide signal which could not be replicated by *any* predictive algorithm. This insight yields a range of natural decision rules which leverage the complementary strengths of human experts and predictive algorithms.

## 1 Introduction

Our work begins with the following puzzle: since at least 1954, it has been known that “actuarial” predictions — those made by algorithms, even very simple ones — often outperform even expert human decision makers (Meehl, 1954). Indeed, in 1989, the clinical psychologist Paul Meehl remarked that “no controversy in social science...shows such a large body of qualitatively diverse studies coming out so uniformly in the same direction as this one” (Meehl, 1986). Nonetheless, and despite dramatic advances in machine learning over the intervening decades, human judgment continues to play a central role in most high-stakes prediction tasks.

One explanation for this apparent contradiction is that humans often have access to *information* which is not encoded in the data available to predictive algorithms. For example, consider the problem of triage in the emergency room, where healthcare providers assess and prioritize patients for immediate care. While it is perhaps tempting to supplement clinicians’ discretionary judgment with an algorithmic risk score – and indeed, a large body of literature suggests that these algorithms may be more accurate than their human counterparts (Cowgill, 2018; Dawes et al., 1989; Grove et al., 2000; Kleinberg et al., 2017; Kuncel et al., 2013a; Dawes, 1971; Currie and MacLeod, 2017; Mullainathan and Obermeyer, 2019) – predictive algorithms will typically only have access to

structured data stored in a patient’s electronic health records. In contrast, a physician has access to many additional modalities — not least of which is the ability to directly examine the patient! Furthermore, physicians can draw on extensive background knowledge, formal training and intuitive judgments which are difficult to replicate in the classical statistical learning paradigm (Kabrhel et al., 2005; Cook, 2009; Stolper et al., 2011). Our work thus seeks to answer the following question:

*When (and how) can human judgment improve the predictions of any learning algorithm?*

Answering this question is of central importance to managers and policymakers. On one hand, investments in automation have the potential to dramatically improve both efficiency and accuracy relative to the status quo. On the other hand, in contexts where humans have access to information which is not encoded in an algorithm’s training data, there is reason to believe that *no* learning algorithm, no matter how sophisticated, can obviate the need for human expertise. Furthermore, there are many contexts in which decision makers cannot deploy arbitrarily sophisticated algorithms due to e.g., limited computational resources, training data, technical expertise or other logistical constraints.<sup>1</sup> Thus, in deciding whether (and to what degree) to invest in automating a given task, the relevant question is often not whether humans outperform a particular algorithm *on average*, but instead whether incorporating human judgment can improve the performance of the best algorithm which is feasible to deploy in a given setting.

## 1.1 Case study: emergency room triage

To illustrate these concerns, consider the aforementioned problem of *triage* for patients who present with acute gastrointestinal bleeding in the emergency room (we study this task in detail in Section 5). For each of these patients, the attending physician is tasked with deciding whether the bleeding is severe enough to warrant admission to the hospital. To aid physicians in making this determination efficiently, the *Glasgow-Blatchford Score* (GBS) (Blatchford et al., 2000) is a validated algorithmic risk score that can be used as a highly sensitive indicator for whether a patient will require hospital-based interventions (Barkun et al., 2019; Laine et al., 2021). Nonetheless, we are interested in whether we can improve these algorithmic risk assessments by incorporating a second opinion from the physician, particularly because the physician’s impression (or “gestalt”) may be informed by subjective factors which are not available to the GBS.

**Observationally indistinguishable patients.** A first heuristic, without making any assumptions about the construction of the GBS, is to ask whether a physician can distinguish between high and low risk patients whose electronic health records are *identical*. Because the GBS is determined by a combination of existing data in the health record and additional pre-specified elements recorded by providers at presentation, this implies that all such patients will be assigned the same risk score. Indeed, this is true of any algorithmic risk score which uses only the electronic health record as input. Thus, a physician who can correctly distinguish between high and low risk patients within a group of these “observationally indistinguishable” patients must necessarily be incorporating information which is not available to a predictive algorithm. If so, even an algorithm that outperforms the physician’s prognostic accuracy might benefit from physician input.

We demonstrate the results of this exercise below on 2893 patients who presented with acute gastrointestinal bleeding in the emergency room of a large academic hospital system (this represents

---

<sup>1</sup>For example, Marwaha et al. (2022) document the myriad practical challenges associated with deploying algorithmic risk scores and other digital tools in large hospital systems.

a random 80% subsample of our full dataset containing 3617 patients; we hold out the remaining 20% for validating experiments in Section 5). We group these patients into subsets which are *observationally indistinguishable* on the basis of the nine discrete-valued inputs to the GBS. For example, the GBS uses a binary indicator for hepatic (liver) disease as one of its input features; thus, all patients within an observationally indistinguishable subset will share the same value of this feature. Within each of these subsets, we plot the Matthew’s Correlation Coefficient<sup>2</sup> between the physician’s binary decision whether or not to hospitalize a given patient and a binary indicator for whether a patient suffered an adverse event (to streamline presentation, we defer additional discussion of this dataset, including the precise outcome definition and the potential selective labels issue that arises, to Section 5). These results are presented in Figure 1 below, where points above the x-axis indicate that the physician decisions are informative about a patient’s true risk *conditional* on the characteristics which serve as inputs to the GBS.

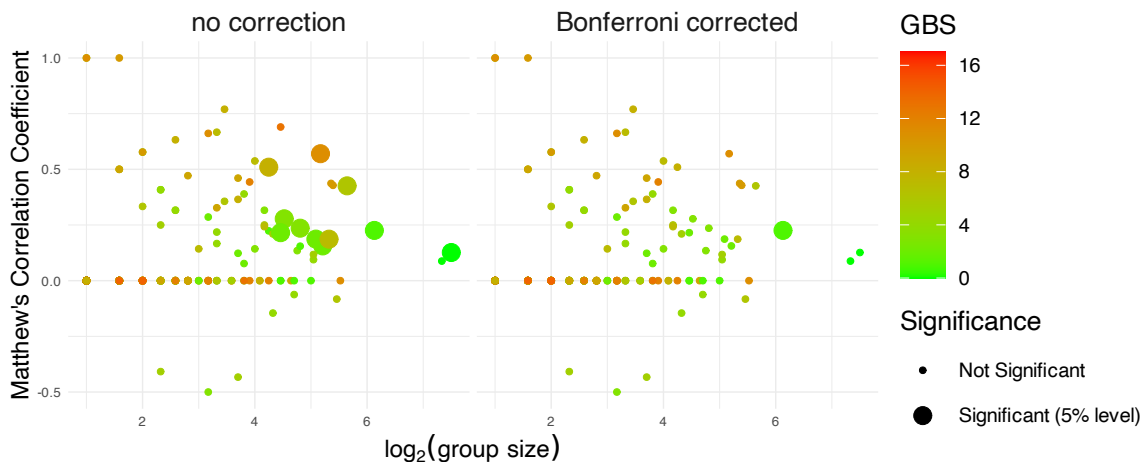


Figure 1: The correlation between the physician’s decision (hospitalize or discharge) and adverse outcomes within the 669 observationally indistinguishable groups of patients. Large points are statistically significant at the 5% level (estimated from 1000 bootstrap replicates). The right panel applies a Bonferroni correction to account for multiple testing (i.e., large points are significantly different from 0 at the  $.05/669$  level).

This exercise provides suggestive evidence that physicians incorporate information which is not encoded in the nine inputs to the Glasgow-Blatchford Score. Indeed, the physician’s judgment appears to provide additional value relative to *any* predictor trained on these same inputs, as no function can distinguish patients who are observationally indistinguishable. Of course, Figure 1 highlights the key technical challenge: even in a setting with only nine discrete-valued features, most patients are ‘almost’ unique; there are 669 observationally indistinguishable subsets, and most of these contain just a handful of patients. Thus, while it is possible to show that physician judgments add predictive signal *on average*, trying to ascertain *which* patients would particularly benefit from a physician assessment leads to a severe multiple testing problem. This challenge is only compounded in settings where the data are continuous-valued and/or high-dimensional.

<sup>2</sup>We use the Matthew’s Correlation Coefficient (MCC) as a standard measure of binary classification accuracy (Chicco and Jurman, 2020). The MCC is the usual Pearson Correlation Coefficient specialized to the case of binary-valued random variables.

**Algorithmically indistinguishable patients.** To begin to address these challenges, we now consider a much simpler problem: rather than asking whether physician judgment provides signal which cannot be communicated *any* predictive algorithm, can we instead characterize the value of physician judgment relative to the Glasgow-Blatchford Score alone? To evaluate this, we simply stratify patients into groups which are assigned the same risk score by the GBS and again examine the conditional correlation between hospitalization decisions and adverse outcomes. We plot these below in Figure 2.

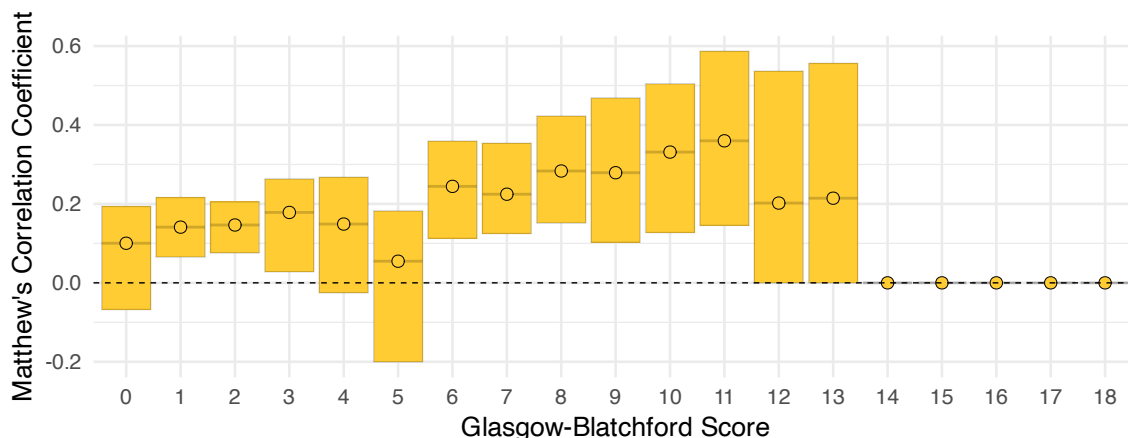


Figure 2: The correlation between the physician’s decision (hospitalize or discharge) and adverse outcomes within the level sets of the Glasgow-Blatchford Score. Point estimates are reported with 95% Bonferroni Corrected confidence intervals (estimated from 1000 bootstrap replicates).

As Figure 2 demonstrates, physicians’ decision remain substantially predictive of adverse event risk even conditional on most values of the Glasgow-Blatchford Score. This is true both for high risk patients ( $GBS \in [6, 11]$ ), and for patients with scores immediately above and below the recommended hospitalization threshold of 2 (Barkun et al., 2019; Laine et al., 2021). Thus, we interpret this as demonstrating that physicians succeed in distinguishing patients who are indistinguishable on the basis of the GBS alone.

Figure 1 and Figure 2 can be interpreted as spanning two extremes of some spectrum, albeit one which we have yet to formally define. In Figure 1 we look to make strong, information-theoretic claims about the value of physician judgment with respect to *any* algorithmic predictor, but lack statistical power to operationalize our approach. In Figure 2, we instead test whether physicians incorporate information which is not communicated by the Glasgow-Blatchford Score alone, but cannot generalize our findings beyond this particular risk score. The remainder of our work seeks to interpolate between these two approaches to achieve the best of both worlds. We define a notion of *algorithmic indistinguishability*, which smoothly characterizes which instances are “effectively” identical from the perspective of some rich, user-defined class of feasible predictive algorithms, and show that this allows us to leverage the complementary strengths of humans and algorithms for both prediction and decision making. We elaborate on these contributions below.

## 1.2 Contributions

We propose a novel framework for human-AI collaboration in prediction and decision tasks. Our approach uses human judgment to refine predictions within sets of inputs which are *algorithmically*

*indistinguishable*, or “look the same” to any feasible predictive algorithm. This class of feasible algorithms is domain-specific, and is the critical ingredient which parameterizes our approach. At one extreme, this class may contain only a single, fixed predictor; in this case, inputs which receive the same prediction (i.e., the level sets of the predictor) are algorithmically indistinguishable. We generalize this intuition to richer, infinitely large classes of predictive models, and argue that this framing helps clarify the role of human judgment in complementing algorithmic predictions.

In Section 3, we provide technical preliminaries and an overview of our methodology. In Section 4 we provide our main technical results, which show that indistinguishability allows a decision maker to selectively incorporate human feedback only when it provably improves on the best feasible predictive model (and precisely quantify this improvement). We also show that, in the important special case of binary classification, indistinguishability can enable a stronger information-theoretic characterization of whether human judgment provides signal which cannot be replicated by *any* feasible algorithmic predictor.

In Section 5 we apply these results to the emergency room triage task discussed in the previous section, where we find that physician judgment provides predictive signal which is complementary not just to the Glasgow-Blatchford Score, but also with respect to *any* shallow (depth  $\leq 3$ ) regression tree. This provides an intuitive basis for decision making, collapsing the space of more than 5000 unique patient characteristics into just 7 “indistinguishable” subsets. In particular, indistinguishability greatly simplifies the space of possible decision rules — for each patient, whether to solicit physician input or defer to an algorithmic risk score — and yields a range of attractive policies.

Our technical results have connections to *multicalibration* (Hébert-Johnson et al., 2018) and *omniprediction* (Gopalan et al., 2022), and our approach is conceptually inspired by the notion of *outcome indistinguishability* (Dwork et al., 2020). Our work extends the main result of Gopalan et al. (2022) in the special case of squared error, which may be of independent interest. We provide a detailed discussion of this connection in Appendix H, and elaborate on the relationship to other related work below.

## 2 Related work

**The relative strengths of humans and algorithms.** Our work is motivated by large body of literature which studies the relative strengths of human judgment and algorithmic decision making (Cowgill, 2018; Dawes et al., 1989; Grove et al., 2000; Kuncel et al., 2013b) or identifies behavioral biases in decision making (Tversky and Kahneman, 1974; Camerer and Johnson, 1991; Arnold et al., 2020; Rambachan, 2022). More recent work also studies whether predictive algorithms can *improve* expert decision making (Kleinberg et al., 2017; Mullainathan and Obermeyer, 2019; Bastani et al., 2021; Agarwal et al., 2023).

**Recommendations, deferral and complementarity.** One popular approach for incorporating human judgment into algorithmic predictions is by *deferring* some instances to a human decision maker (Madras et al., 2018; Raghu et al., 2019; Mozannar and Sontag, 2020; Keswani et al., 2021; Okati et al., 2021; Keswani et al., 2022). Other work studies contexts where human decision makers are free to override algorithmic recommendations (De-Arteaga et al., 2020; Beede et al., 2020; Cowgill and Stevenson, 2020; Dietvorst et al., 2018; Agarwal et al., 2023), which may suggest alternative design criteria for these algorithms (Bansal et al., 2020; Benz and Rodriguez, 2023). More generally, systems which achieve human-AI *complementarity* (as defined in Section 1) have

been previously studied in Agrawal et al. (2018); Bansal et al. (2020); Wilder et al. (2020); Donahue et al. (2022); Steyvers et al. (2022); De et al. (2020); Leitão et al. (2022).

Rastogi et al. (2022) develop a comprehensive taxonomy of this area, which generally takes the predictor as given, or learns a predictor which is optimized to complement a particular model of human decision making. Our work takes a different perspective, and instead seeks to characterize the complementary role of human judgment in contexts where a decision maker may choose from among a rich (often infinitely large) class of feasible predictive models.

**Performative prediction.** A recent line of work studies *performative prediction* (Perdomo et al., 2020), or settings in which predictions influence future outcomes. For example, predicting the risk of adverse health outcomes may directly inform treatment decisions, which in turn affects future health outcomes. This can complicate the design and evaluation of predictive algorithms, and there is a growing literature which seeks to address these challenges (Brown et al., 2020; Mendler-Dünner et al., 2020; Jagadeesan et al., 2022; Kim and Perdomo, 2022; Mendler-Dünner et al., 2022; van Amsterdam et al., 2023; Hardt and Mendler-Dünner, 2023; Zhao et al., 2023). Performativity is also closely related to the *selective labels problem*, in which some historical outcomes are unobserved as a consequence of past human decisions (Lakkaraju et al., 2017). Though these issues arise in many canonical human-AI collaboration tasks, we focus on standard supervised learning problems in which predictions do not causally affect the outcome of interest. These include e.g., weather prediction, stock price forecasting and many medical diagnosis and triage tasks. In particular, although a physician’s decision may inform subsequent treatment decisions, it does not affect the contemporaneous presence, absence or severity of a given condition. More generally, our work can be applied to any “prediction policy problem”, where accurate predictions can be translated into policy gains without explicitly modeling causality (Kleinberg et al., 2015).

**Multicalibration, omnipredictors and boosting.** Our results draw on recent developments in learning theory, particularly work on *omnipredictors* (Gopalan et al., 2022) and its connections to *multicalibration*. Dwork et al. (2020) show that multicalibration is tightly connected to a cryptographic notion of indistinguishability, which serves as conceptual inspiration for our work. Globus-Harris et al. (2023) provide an elegant boosting algorithm for learning multicalibrated partitions that we make use of in our experiments, and Gopalan et al. (2023) provide results which reveal tight connections between a related notion of “swap agnostic learning”, multi-group fairness, omniprediction and outcome indistinguishability.

### 3 Methodology and preliminaries

In this section we develop a simple method for selectively incorporating human feedback to improve algorithmic predictions. Our approach generalizes the intuition outlined in Section 1.1, which focused on the use of physician judgment to distinguish patients who are “observationally indistinguishable,” or share the same representation in the algorithm’s input space. This strategy is intuitively appealing, but, as discussed in Section 1.1, it quickly becomes statistically intractable as the dimension of the input space grows. One way to deal with this limitation is to consider inputs which are “close” (but not necessarily identical) to be indistinguishable, as suggested by Alur et al. (2023). In this section we define a richer notion of *algorithmic indistinguishability*, which instead characterizes conditions under which input are “effectively” identical for the purposes of making algorithmic predictions. We show that this definition admits a conceptually simple method for incorporating human feedback only when it improves the performance of any feasible predictive algorithm while remaining statistically tractable.

**Notation.** Let  $X \in \mathcal{X}$  be a random variable denoting the inputs (or “features”) which are available for making algorithmic predictions about an outcome  $Y \in [0, 1]$ . Let  $\hat{Y} \in [0, 1]$  be an expert’s prediction of  $Y$ , and let  $x, y, \hat{y}$  denote realizations of the corresponding random variables. Our approach is parameterized by a class of predictors  $\mathcal{F}$ , which is some set of functions mapping  $\mathcal{X}$  to  $[0, 1]$ . We interpret  $\mathcal{F}$  as the class of predictive models which are relevant (or feasible to implement) for a given prediction task; we discuss this choice below. Broadly, we are interested in whether the expert prediction  $\hat{Y}$  provides a predictive signal which cannot be extracted from  $X$  by any  $f \in \mathcal{F}$ .

**Choice of model class  $\mathcal{F}$ .** For now we place no restrictions on  $\mathcal{F}$ , but it’s helpful to consider a concrete model class (e.g., a specific neural network architecture) from which, given some training data, one could derive a *particular* model (e.g., via empirical risk minimization over  $\mathcal{F}$ ). The choice of  $\mathcal{F}$  could be guided by practical considerations; for example, some domains might require interpretable models (e.g., linear functions) or impose computational constraints at training and/or inference time. We might also simply believe that a certain architecture or functional form is well suited to the task of interest. In any case, we are interested in whether human judgment can provide information which is not conveyed by any model in this class, but are agnostic as to *how* this is accomplished: an expert may have information which is not encoded in  $X$ , or be deploying a decision rule which is not in  $\mathcal{F}$  — or both!

Another perspective is to interpret  $\mathcal{F}$  as modeling more abstract limitations on the expert’s cognitive process. In particular, to model experts who are subject to “bounded rationality” (Simon, 1957; Klaes and Sent, 2005),  $\mathcal{F}$  might be the set of functions which can be efficiently computed (e.g., by a circuit of limited complexity). In this case, an expert who provides a prediction which cannot be modeled by any  $f \in \mathcal{F}$  must have access to *information* which is not present in the training data. We take the choice of  $\mathcal{F}$  as given, but emphasize that these two approaches yield qualitatively different insight about human expertise.

**Indistinguishability with respect to  $\mathcal{F}$ .** Our approach will be to use human input to distinguish observations which are *indistinguishable* to any predictor  $f \in \mathcal{F}$ . We formalize this notion of indistinguishability as follows:

**Definition 3.1** ( $\alpha$ -Indistinguishable subset). For some  $\alpha \geq 0$ , a set  $S \subseteq \mathcal{X}$  is  $\alpha$ -indistinguishable with respect to a function class  $\mathcal{F}$  and target  $Y$  if, for all  $f \in \mathcal{F}$ ,

$$|\text{Cov}(f(X), Y \mid X \in S)| \leq \alpha \tag{1}$$

To interpret this definition, observe that the subset  $S$  can be viewed as generalizing the intuition given in Section 1 for grouping observationally indistinguishable inputs. In particular, rather than requiring that all  $x \in S$  are exactly equal, Definition 3.1 requires that all members of  $S$  effectively “look the same” for the purposes of making algorithmic predictions about  $Y$ , as every  $f \in \mathcal{F}$  is only weakly related to the outcome within  $S$ . We now adopt the definition of a multicalibrated partition (Gopalan et al., 2022) as follows:

**Definition 3.2** ( $\alpha$ -Multicalibrated partition). For  $K \geq 1$ ,  $S_1 \dots S_K \subseteq \mathcal{X}$  is an  $\alpha$ -multicalibrated partition with respect to  $\mathcal{F}$  and  $Y$  if (1)  $S_1 \dots S_K$  partitions  $\mathcal{X}$  and (2) each  $S_k$  is  $\alpha$ -indistinguishable with respect to  $\mathcal{F}$  and  $Y$ .<sup>3</sup>

Intuitively, the partition  $\{S_k\}_{k \in [K]}$  “extract[s] all the predictive power” from  $\mathcal{F}$  (Gopalan et al., 2022). In particular, while knowing that an input  $x$  lies in some subset  $S_k$  may be highly informative

---

<sup>3</sup>This is closely related to  $\alpha$ -approximate multicalibration (Gopalan et al., 2022), which requires that Definition 3.1 merely holds in expectation over the partition. We work with a stronger pointwise definition for clarity, but our results can also be interpreted as holding for the ‘typical’ element of an  $\alpha$ -approximately multicalibrated partition.

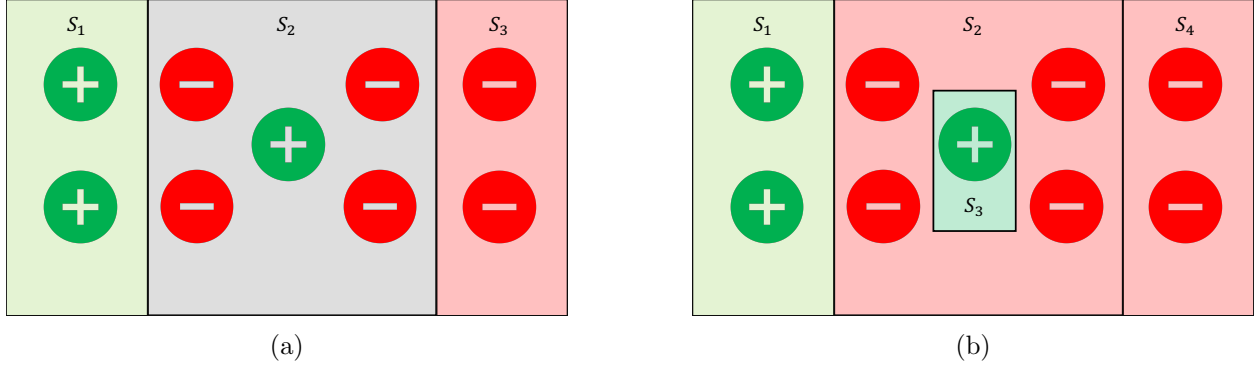


Figure 3: Partitions which are approximately multicalibrated with respect to the class of hyperplane classifiers. For illustration purposes, we consider the empirical distribution placing equal probability on each observation. In both panels, no hyperplane classifier has significant discriminatory power within each subset.

for predicting  $Y$  — for example, it may be that  $\mathbb{E}[Y | X = x] \approx \mathbb{E}[Y | X = x']$  for all  $x, x' \in S_k$  — no predictor  $f \in \mathcal{F}$  provides significant *additional* signal within this subset. We provide a stylized example of such partitions in Figure 3 above.

It's not obvious that such partitions are feasible to compute, or even that they should exist. We'll show in Appendix E however that a multicalibrated partition can be efficiently computed for many natural classes of functions. Where the relevant partition is clear from context, we use  $\mathbb{E}_k[\cdot], \text{Var}_k(\cdot), \text{Cov}_k(\cdot, \cdot)$  to denote expectation, variance and covariance conditional on the event that  $\{X \in S_k\}$ . For a subset  $S \subseteq \mathcal{X}$ , we use  $\mathbb{E}_S[\cdot], \text{Var}_S(\cdot)$  and  $\text{Cov}_S(\cdot, \cdot)$  analogously.

**Incorporating human judgment into predictions.** To incorporate human judgment into predictions, a natural heuristic is to first test whether the conditional covariance  $\text{Cov}_k(Y, \hat{Y})$  is nonzero within some indistinguishable subset. Intuitively, this indicates that within  $S_k$ , the expert prediction is informative even though every algorithm  $f \in \mathcal{F}$  is not. This suggests the following approach: first, learn a partition which is multicalibrated with respect to  $\mathcal{F}$ , and then use  $\hat{Y}$  to predict  $Y$  within each indistinguishable subset. We describe this procedure in Algorithm 1 below, where we define a univariate learning algorithm  $\mathcal{A}$  as a procedure which takes one or more  $(\hat{y}_i, y_i) \in [0, 1]^2$  training observations and outputs a function which predicts  $Y$  using  $\hat{Y}$ . For example,  $\mathcal{A}$  might be an algorithm which fits a univariate linear or logistic regression which predicts  $Y$  as a function of  $\hat{Y}$ .

---

**Algorithm 1** A method for incorporating human expertise into algorithmic predictions

---

- 1: **Inputs:** Training data  $\{x_i, y_i, \hat{y}_i\}_{i=1}^n$ , a multicalibrated partition  $\{S_k\}_{k \in K}$ , a univariate regression algorithm  $\mathcal{A}$ , and a test observation  $(x_{n+1}, \hat{y}_{n+1})$
  - 2: **Output:** A prediction of the missing outcome  $y_{n+1}$
  - 3: **for**  $k = 1$  to  $K$  **do** ▷ iterate over indistinguishable subsets
  - 4:      $Z_k \leftarrow \{(\hat{y}_j, y_j) : x_j \in S_k\}$  ▷ collect (expert prediction, outcome) pairs which lie in subset  $k$
  - 5:      $\hat{g}_k \leftarrow \mathcal{A}(Z_k)$  ▷ regress outcomes on expert predictions, save resulting predictor  $\hat{g}_k$
  - 6: **end for**
  - 7:  $k^* \leftarrow$  the index of the subset  $S_{k^*}$  which contains  $x_{n+1}$
  - 8: **return**  $\hat{g}_{k^*}(\hat{y}_{n+1})$  ▷ return prediction corresponding to subset which contains  $x_{n+1}$
-



The algorithm above simply learns a different predictor of  $Y$  as a function of  $\hat{Y}$  within each indistinguishable subset. As we show below, even simple instantiations of this approach can outperform the squared error achieved by *any*  $f \in \mathcal{F}$ . This approach can also be readily extended to more complicated human input — for example, we might instead model a human’s feedback as a high-dimensional vector instead of a point prediction  $\hat{Y}$  — and can be used to *test* whether human judgment provides information that an algorithm cannot learn from the available training data. We turn to these results below.

## 4 Technical results

In this section we present our main technical results. As outlined above, our method uses human predictions  $\hat{Y}$  to predict the outcome  $Y$  within subsets which are indistinguishable with respect to some function class  $\mathcal{F}$ . In Theorem 4.1, we show that a particularly simple instantiation this method — a univariate linear regression of the outcome  $Y$  on human predictions  $\hat{Y}$  within each indistinguishable subset — suffices to outperform the squared error of *any* predictive algorithm  $f \in \mathcal{F}$ . In Corollary 4.2, we show that this result generalizes readily to arbitrary nonlinear predictors and/or cases where the expert provides richer, high-dimensional inputs (e.g., natural language feedback rather than a single point prediction  $\hat{Y} \in [0, 1]$ ). In Theorem 4.3, we show that, in the important special case where  $Y$  is a binary outcome, our method also provides an information-theoretic approach for proving that no subset of algorithmic predictors  $F \subseteq \mathcal{F}$  can obviate the need for human expertise (in a way we make precise below).

Proofs of Theorem 4.1, Corollary 4.2 and Theorem 4.3 are presented in Appendix A, Appendix B and Appendix C, respectively. For clarity, results in this section are presented in terms of population quantities, and assume oracle access to a multicalibrated partition. We present corresponding generalization arguments and background on learning multicalibrated partitions in Appendix D and Appendix E, respectively.

**Theorem 4.1.** *Let  $\{S_k\}_{k \in [K]}$  be an  $\alpha$ -multicalibrated partition with respect to a model class  $\mathcal{F}$  and target  $Y$ . Let the random variable  $J(X) \in [K]$  be such that  $J(X) = k$  iff  $X \in S_k$ . Define  $\gamma^*, \beta^* \in \mathbb{R}^K$  as*

$$\gamma^*, \beta^* \in \arg \min_{\gamma \in \mathbb{R}^K, \beta \in \mathbb{R}^K} \mathbb{E} \left[ \left( Y - \gamma_{J(X)} + \beta_{J(X)} \hat{Y} \right)^2 \right]. \quad (2)$$

*Then, for any  $f \in \mathcal{F}$  and  $k \in [K]$ ,*

$$\mathbb{E}_k \left[ \left( Y - \gamma_k^* - \beta_k^* \hat{Y} \right)^2 \right] + 4\text{Cov}_k(Y, \hat{Y})^2 \leq \mathbb{E}_k \left[ \left( Y - f(X) \right)^2 \right] + 2\alpha. \quad (3)$$

That is, the squared error incurred by the univariate linear regression of  $Y$  on  $\hat{Y}$  within each indistinguishable subset outperforms that of any  $f \in \mathcal{F}$ . This improvement is at least  $4\text{Cov}_k(Y, \hat{Y})^2$ , up to an additive approximation error  $2\alpha$ . We emphasize that  $\mathcal{F}$  is an arbitrary class, and may include complex, nonlinear predictors. Nonetheless, given a multicalibrated partition, a simple linear predictor can improve on the *best*  $f \in \mathcal{F}$ . Furthermore, this approach allows us to *selectively* incorporate human feedback: whenever  $\text{Cov}_k(Y, \hat{Y}) = 0$ , we recover a coefficient  $\beta_k^*$  of 0.<sup>4</sup>

---

<sup>4</sup>Recall that the population coefficient in a univariate linear regression of  $Y$  on  $\hat{Y}$  is  $\frac{\text{Cov}(Y, \hat{Y})}{\text{Var}(\hat{Y})}$ .

**Nonlinear functions and high-dimensional feedback.** Theorem 4.1 corresponds to instantiating Algorithm 1 with a learning algorithm  $\mathcal{A}$  that fits a univariate linear regression, but the same insight generalizes readily to other functional forms. For example, if the target  $Y$  is a binary outcome, it might be desirable to instead fit a logistic regression. We provide a similar guarantee for generic nonlinear predictors via Corollary D.1 in Appendix D. Furthermore, while the results above assume that an expert provides a prediction  $\hat{Y} \in [0, 1]$ , the same insight extends to richer forms of feedback. For example, in a medical diagnosis task, a physician might produce free-form clinical notes which contain information that is not available in tabular electronic health records. Incorporating this kind of feedback requires a predictor which is better suited to high-dimensional inputs (e.g., a deep neural network), which motivates our following result.

**Corollary 4.2.** *Let  $S$  be an  $\alpha$ -indistinguishable subset with respect to a model class  $\mathcal{F}$  and target  $Y$ . Let  $H \in \mathcal{H}$  denote expert feedback which takes values in some arbitrary domain (e.g.,  $\mathbb{R}^d$ ), and let  $g : \mathcal{H} \rightarrow [0, 1]$  be a function which satisfies the following approximate calibration condition for some  $\eta \geq 0$  and for all  $\beta, \gamma \in \mathbb{R}$ :*

$$\mathbb{E}_S[(Y - g(H))^2] \leq \mathbb{E}_S[(Y - \gamma - \beta g(H))^2] + \eta. \quad (4)$$

Then, for any  $f \in \mathcal{F}$ ,

$$\mathbb{E}_S [(Y - g(H))^2] + 4\text{Cov}_S(Y, g(H))^2 \leq \mathbb{E}_S [(Y - f(X))^2] + 2\alpha + \eta. \quad (5)$$

To interpret this result, notice that (4) requires only that the prediction  $g(H)$  cannot be significantly improved by any linear post-processing function. For example, this condition is satisfied by any calibrated predictor  $g(H)$ .<sup>5</sup> Furthermore, any  $g(H)$  which does not satisfy (4) can be transformed by letting  $\tilde{g}(H) = \min_{\gamma, \beta} \mathbb{E}[(Y - \gamma - \beta g(H))^2]$ ; i.e., by linearly regressing  $Y$  on  $g(H)$ , in which case  $\tilde{g}(H)$  satisfies (4). This result mirrors Theorem 4.1: within each element of a multicalibrated partition, a predictor which depends only on human feedback  $H$  can improve on the best  $f \in \mathcal{F}$ .

**Testing for informative experts.** While we have thus far focused on incorporating human judgment to improve predictions, a policymaker may also be interested in the related question of *testing* whether human judgment provides information that cannot be expressed by any algorithmic predictor. For example, such a test might be valuable in informing whether to automate a given prediction task.

Theorem 4.1 suggests a heuristic for such a test: if the conditional covariance  $\text{Cov}_k(Y, \hat{Y})$  is large, then we might expect that  $\hat{Y}$  is somehow “more informative” than any  $f \in \mathcal{F}$  within  $S_k$ . While covariance only measures a certain form of *linear* dependence between random variables, we now show that, in the special case of binary-valued algorithmic predictors, computing the covariance of  $Y$  and  $\hat{Y}$  within an indistinguishable subset serves as a stronger test for whether  $\hat{Y}$  provides *any* predictive information which cannot be expressed by the class  $\mathcal{F}$ . We state this result as Theorem 4.3 below.

---

<sup>5</sup>A calibrated predictor is one where  $\mathbb{E}_S[Y | g(H)] = g(H)$ . This is a fairly weak condition; for example, it is satisfied by the constant predictor  $g(H) \equiv \mathbb{E}_S[Y]$  (Dawid, 1982; Foster and Vohra, 1998).

**Theorem 4.3.** *Let  $\{S_k\}_{k \in [K]}$  be an  $\alpha$ -multicalibrated partition for a binary-valued model class  $\mathcal{F}^{\text{binary}}$  and target outcome  $Y$ . For all  $k \in [K]$ , let there be  $\tilde{f}_k \in \mathcal{F}$  such that  $Y \perp\!\!\!\perp \hat{Y} \mid \tilde{f}_k(X), X \in S_k$ . Then, for all  $k \in [K]$ ,*

$$\left| \text{Cov}_k(Y, \hat{Y}) \right| \leq \sqrt{\frac{\alpha}{2}}. \quad (6)$$

That is, if there exists a set of predictors  $\{\tilde{f}_k\}_{k \in [K]}$  which “explain” the signal provided by the human, then the covariance of  $Y$  and  $\hat{Y}$  is bounded within each indistinguishable subset. The contrapositive implies that a sufficiently large value of  $\text{Cov}_k(Y, \hat{Y})$  serves as a certificate for the property that *no* subset of algorithmic predictors can fully explain the information that  $\hat{Y}$  provides about  $Y$ . This result can be viewed as a finer-grained extension of the test proposed in Alur et al. (2023). A proof of Theorem 4.3 is provided in Appendix C.

Taken together, our results demonstrate that algorithmic indistinguishability provides a principled way of reasoning about the complementary value of human judgment. Furthermore, this approach yields a concrete methodology for incorporating this expertise: we can simply use human feedback to predict  $Y$  within subsets which are indistinguishable on the basis of  $X$  alone. While our results in this section are stated in terms of population quantities, we provide a corresponding finite sample result in Appendix D. Operationalizing these results depends critically on the ability to *learn* multicalibrated partitions, e.g., via the boosting algorithm proposed in Globus-Harris et al. (2023). We provide additional detail on learning such partitions in Appendix E.

## 5 Experiments

In this section we return to the emergency room triage task described in Section 1. Recall that Figure 1 provided suggestive evidence that physicians have access to additional information which is unavailable to the Glasgow-Blatchford Score. We now apply the machinery developed in Section 4 to investigate this more thoroughly; specifically, do physicians provide a predictive signal which cannot be extracted by any “feasible” predictive algorithm? First, we provide additional background on the emergency room triage task.

### 5.1 Risk stratification and triage for gastrointestinal bleeding

Acute gastrointestinal bleeding (AGIB) is a potentially serious condition for which 530,855 patients/year receive treatment in the United States alone (Peery et al., 2022). It is estimated that 32% of patients with presumed bleeding from the lower gastrointestinal tract (Oakland et al., 2017) and 45% of patients with presumed bleeding from the upper gastrointestinal tract (Stanley et al., 2017) require urgent medical intervention; overall mortality rates for AGIB in the U.S. are estimated at around 3 per 100,000 (Peery et al., 2022). For patients who present with AGIB in the emergency room, the attending physician is tasked with deciding whether the bleeding is severe enough to warrant admission to the hospital. However, the specific etiology of AGIB is often difficult to determine from patient presentation alone, and gold standard diagnostic techniques — an endoscopy for upper GI bleeding or a colonoscopy for lower GI bleeding — are both invasive and costly, particularly when performed urgently in a hospital setting. As discussed in Section 1, the Glasgow-Blatchford Bleeding Score or GBS (Blatchford et al., 2000) is a standard screening metric

used to algorithmically assess the risk that a patient with acute GI bleeding will require red blood cell transfusion, intervention to stop bleeding, or die within 30 days.<sup>6</sup>

**Construction of the Glasgow-Blatchford Score.** The Glasgow-Blatchford Score is a function of the following nine patient characteristics, which are converted to discrete values before being provided as input: blood urea nitrogen (BUN), hemoglobin (HGB), systolic blood pressure (SBP), pulse, cardiac failure, hepatic disease, melena, syncope and biological sex. Scores are integers ranging from 0 to 23, with higher scores indicating a higher risk that a patient will require subsequent intervention. US and international guidelines suggest that patients with a score of 0 or 1 can be safely discharged from the emergency department (Barkun et al., 2019; Laine et al., 2021), with further investigation to be performed outside the hospital. For additional details on the construction of the GBS, we refer to Blatchford et al. (2000).

**Defining features, predictions and outcomes.** We consider 3617 patients who presented with AGIB at one of three hospitals in a large academic health system between 2014 and 2018. Consistent with the goals of triage for patients with AGIB, we record an *adverse outcome* if a patient (1) requires some form of urgent intervention to stop bleeding (endoscopic, interventional radiologic, or surgical; excluding patients who only undergo a diagnostic endoscopy or colonoscopy) while in the hospital (2) dies within 30 days of their emergency room visit or (3) is initially discharged but later readmitted within 30 days.<sup>7</sup> As is typical of large urban hospitals in the United States, staffing protocols at this health system dictate a separation of responsibilities between emergency room physicians and other specialists. In particular, while emergency room physicians make an initial decision whether to hospitalize a patient, it is typically a gastrointestinal specialist who subsequently decides whether a patient admitted with AGIB requires some form of urgent hemostatic intervention. This feature, along with our ability to observe whether discharged patients are subsequently readmitted, substantially mitigates the selective labels issue that might otherwise occur in this setting. Thus, consistent with clinical and regulatory guidelines — to avoid hospitalizing patients who do not require urgent intervention (Stanley et al., 2009), and to avoid discharging patients who are likely to be readmitted within 30 days (NEJM, 2018) — we interpret the emergency room physician’s decision to admit or discharge a patient as a *prediction* that one of these adverse outcomes will occur. We thus instantiate our model by letting  $X_i \in \mathbb{N}^9$  be the nine discrete patient characteristics from which the Glasgow-Blatchford Score is computed. We further let  $\hat{Y}_i \in \{0, 1\}$  indicate whether that patient was initially hospitalized, and  $Y_i \in \{0, 1\}$  indicate whether that patient suffered one of the adverse outcomes defined above.

**Assessing the accuracy of physician decisions.** We first summarize the performance of the emergency room physicians’ hospitalization decisions, and compare them with the performance of a simple rule which would instead admit every patient with a GBS above a certain threshold and discharge the remainder in Table 1. We consider thresholds of 0 and 1 – the generally accepted range for low risk patients (Laine et al. (2021); Barkun et al. (2019)) – as well as less conservative thresholds of 2 and 7 (the latter of which we find maximizes overall accuracy). For additional context, we also provide the total fraction of patients admitted under each decision rule.

---

<sup>6</sup>US and international guidelines use the Glasgow-Blatchford score as the preferred risk score for assessing patients with upper gastrointestinal bleeding (Laine et al., 2021; Barkun et al., 2019); it has been also validated in patients with acute lower gastrointestinal bleeding (Ur-Rahman et al., 2018). Other risk scores tailored to bleeding in the lower gastrointestinal tract have been proposed in the literature, but these are less commonly used in practice. In this work, we interpret the GBS as a measure of risk for patients who present with either upper or lower GI bleeding, and refer interested readers to Almaghrabi et al. (2022) for additional background.

<sup>7</sup>This threshold is consistent with the definition used in the Centers for Medicare and Medicaid Services Hospital Readmission Reduction Program, which seeks to incentivize healthcare providers to avoid discharging patients who will be readmitted within 30 days (NEJM, 2018)

Decision Rule	Fraction Hospitalized	Accuracy	Sensitivity	Specificity
Physician Discretion	$0.86 \pm 0.02$	$0.55 \pm 0.02$	$0.99 \pm 0.00$	$0.24 \pm 0.02$
Admit GBS $> 0$	$0.88 \pm 0.02$	$0.53 \pm 0.02$	$0.99 \pm 0.00$	$0.19 \pm 0.02$
Admit GBS $> 1$	$0.80 \pm 0.02$	$0.60 \pm 0.02$	$0.98 \pm 0.00$	$0.33 \pm 0.02$
Admit GBS $> 2$	$0.73 \pm 0.02$	$0.66 \pm 0.02$	$0.97 \pm 0.00$	$0.43 \pm 0.02$
Admit GBS $> 7$	$0.40 \pm 0.02$	$0.79 \pm 0.02$	$0.73 \pm 0.02$	$0.84 \pm 0.02$

Table 1: Comparing the accuracy of physician hospitalization decisions to thresholding the GBS. A decision is correct if it hospitalizes a patient who suffers an adverse outcome (as defined above) or discharges a patient who does not. Results are reported to  $\pm 2$  standard errors.

Unsurprisingly, we find that the physicians calibrate their decisions to maximize sensitivity (minimize false negatives) at the expense of admitting a significant fraction of patients who, in retrospect, could have been discharged immediately. Indeed we find that although 86% of patients are initially hospitalized, only  $\approx 42\%$  actually require a specific hospital-based intervention or otherwise suffer an adverse outcome which would justify hospitalization (i.e.,  $y_i = 1$ ). Consistent with Blatchford et al. (2000) and Chatten et al. (2018), we also find that thresholding the GBS in the range of  $[0, 2]$  achieves a sensitivity of close to 100%. We further can see that using one of these thresholds achieves overall accuracy (driven by improved specificity) which is substantially better than physician discretion.

## 5.2 Indistinguishability with respect to an infinite class

Table 1 demonstrates that the Glasgow-Blatchford Score is highly competitive with physicians, at least *on average* over the patient population. However, in Section 1, we saw suggestive evidence that physicians incorporate additional information which is not encoded in the inputs to the GBS when making triage decisions. We now look to reconcile these findings by investigating whether physicians can selectively distinguish patients who are algorithmically indistinguishable, and thus improve predictive performance.

In particular, to illustrate the flexibility of our approach, we consider indistinguishability with respect to an infinitely large but nonetheless simple class of shallow (depth  $\leq 3$ ) regression trees. We denote this class by  $\mathcal{F}^{\text{RT}^3}$ . We define our input space as the nine features which serve as input to the GBS (as described in Section 5.1), as well as a tenth feature which is the Glasgow-Blatchford Score itself. Intuitively, we will iteratively construct a partition in which the patients in each subset cannot be further distinguished by any shallow regression tree. Then, within each subset, we will test whether physician judgment adds additional predictive signal to distinguish patients who should be hospitalized from those who can be safely discharged. Importantly, this partition is also indistinguishable with respect to the GBS, as no shallow regression tree — which, in particular, can directly split on the value of the GBS — can further distinguish patients within each indistinguishable subset. Thus, indistinguishability with respect to  $\mathcal{F}^{\text{RT}^3}$  implies indistinguishability with respect to the GBS alone (and the latter is a substantially weaker condition than the former).

To learn this partition, we apply the boosting algorithm proposed in Globus-Harris et al. (2023) to construct a predictor  $h : \mathcal{X} \rightarrow [0, 1]$  such that no  $f \in \mathcal{F}^{\text{RT}^3}$  can substantially improve on the squared error of  $h$  within any of its approximate level sets  $\{x \mid h(x) \in [0, .1)\}, \{x \mid h(x) \in (.1, .2] \dots \{x \mid$

$h(x) \in [.9, 1)\}, \{x \mid h(x) = 1\}$ .<sup>8</sup> We learn the predictor  $h$  on the the training set containing 2893 patients, and plot the Matthew’s Correlation Coefficient between physician decisions and adverse outcomes on the remaining 724 patients within each level set in Figure 4 below.

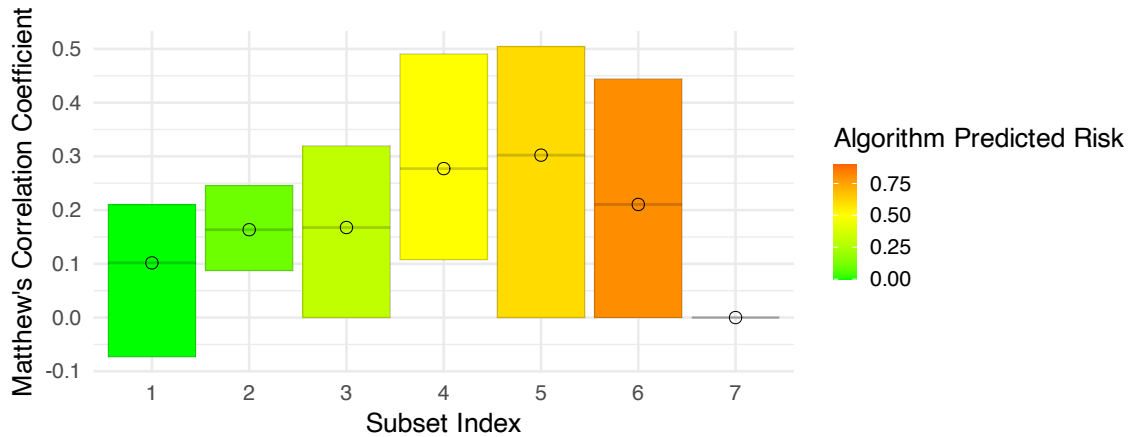


Figure 4: Physician performance within the level sets of a predictor which is multicalibrated with respect to  $\mathcal{F}^{\text{RT}^3}$ . Point estimates are reported with 95% Bonferroni corrected bootstrap confidence intervals (estimated from 1000 bootstrap replicates).

Figure 4 indicates that physicians appear to add a predictive signal which cannot be extracted from the data by any shallow regression tree, as their decisions remain meaningfully correlated with adverse event risk within the level sets of a predictor which is multicalibrated over  $\mathcal{F}^{\text{RT}^3}$ . It is again instructive to directly compare Figure 4 to Figure 1 and Figure 2, as the analysis in this section provides a natural way of interpolating between these two extremes. On one hand, examining physician performance within observationally indistinguishable subsets (Figure 1) is guaranteed to directly test whether physicians provide signal which is not present in the *data*, but partitions the input space too finely to be statistically tractable. On the other hand, examining physician performance within the level sets of the GBS (Figure 2) indicated that physicians provide signal that is not expressed by the GBS, but does not tell us whether a *different* predictive algorithm might obviate the need for physician expertise. Figure 4 demonstrates the result of the natural compromise suggested by our framework, as we are able to test whether physicians add signal that cannot be extracted by *any* predictor in a rich class of predictive algorithms while only testing physician performance within a modest number of indistinguishable subsets (here, 7). Given additional training data, we could naturally extend this approach to successively richer function classes, thus approaching the strongest claim (sketched in Figure 1) that physicians provide signal which cannot be extracted by *any* algorithmic predictor.

**Physician judgment does not improve mean squared error.** Given the multicalibrated partition in Figure 4, we can directly apply Theorem 4.1 to test whether physician judgment can improve mean squared error over the entire patient population. In particular, we first fit a univariate linear regression of the binary outcome  $Y$  on the physician decision  $\hat{Y}$  within each of the 7 indistinguishable subsets, using the same subsample of 2893 randomly selected patients.

<sup>8</sup>We discuss the connection between this condition and multicalibration in Appendix E. We cannot necessarily verify whether the multicalibration condition is satisfied empirically; however, the theory provides guidance for choosing subsets, within which we can directly test the conditional performance physicians. We restrict the algorithm to require at least 50 patients within each level set for an update to occur; for additional details, including the recommended hyperparameters which we adopt, we refer to Globus-Harris et al. (2023).

We then evaluate these predictions on the remaining 724 patients, where we find that the mean squared error achieved by incorporating physician judgment (0.1360; 95% CI : 0.1188 – 0.1522) fails to significantly outperform the mean squared error achieved by the predictor which simply predicts the mean value of  $Y$  (computed on the training set) within each indistinguishable subset (0.1447; 95% CI : 0.1286 – 0.1624).<sup>9</sup> However, while incorporating physician judgment does not appear to improve mean squared error *on average* over the patient population, Figure 4 suggests that *selectively* incorporating physician judgment may still improve performance. Furthermore, as discussed in Section 5.1, physicians are ultimately responsible for making *decisions* for each patient, and likely have preferences over outcomes which are substantially richer than simply minimizing mean squared error (e.g., minimizing false positives). In the following section, we develop a simple decision-theoretic framework which demonstrates how algorithmic indistinguishability provides a basis for incorporating such preferences.

### 5.3 Leveraging physician judgment to improve decision making

As discussed above, the results in Section 1.1 and Section 5.2 suggest that physician decisions provide *information* that algorithmic predictors cannot learn from the training data. It is thus natural to ask whether this heterogeneity allows us to design better *decision rules* (hereafter, “policies”) which leverage the complementary strengths of algorithms and physicians. Specifically, a natural class of policies to consider is those which make one of three decisions for each indistinguishable subset: hospitalize every patient, discharge every patient, or defer to the physician’s decision for every patient. Intuitively, because an algorithmic predictor cannot distinguish individuals *within* an indistinguishable subset, it is natural to constrain the policy space to those which make the same decision on all patients which are not deferred to the physician. This yields only  $3^7 = 2187$  possible policy choices, as we make one of 3 decisions within each of the 7 subsets in Figure 4. In contrast, there are 669 unique patients in our training set and, in principle, more than 5000 unique combinations of the 9 discrete-valued patient characteristics.

It is not immediately clear how to rank these policies, as the choice naturally depends on the policy makers’ preferences over different measures of accuracy (e.g., false positive and false negative rates), the fraction of decisions which are automated (e.g., due to constraints on physicians’ bandwidth) and other unobserved factors. Although modeling the decision maker’s utility function is beyond the scope of this work, we provide an overview of each possible policy evaluated on the test set in Figure 5 below. We exclude policies which are Pareto dominated with respect to the three measures we consider i.e., those which simultaneously have a weakly smaller true positive rate, weakly larger false positive rate and weakly smaller fraction of cases automated, where at least one inequality is strict. We emphasize that this is only intended to give a sample of the attractive policy choices afforded by our approach; it is possible that policymakers indeed have richer preferences (e.g., that include equity or fairness concerns) which would lead to a different notion of pareto dominance.

As Figure 5 demonstrates, policies of this form yield a diverse array of tradeoffs between false positive rates, true positive rates and the fraction of automated decisions. For example, the policy highlighted in red defers to the physician within all but the highest risk subset, where the algorithm predicts that patients have a  $\geq 90\%$  adverse event risk. Within this subset, the red policy hospitalizes every patient, thus automating the hospitalization decision for 7.6% of the highest risk

---

<sup>9</sup>Intuitively, the mean value of  $Y$  within each subset can be interpreted as the best predictor which does not incorporate physician judgment (because patients cannot be further distinguished by any  $f \in \mathcal{F}^{\text{RT}3}$ ). For additional discussion, see the proof of Theorem 4.1 in Appendix A. 95% confidence intervals are calculated over 1000 bootstrap samples.

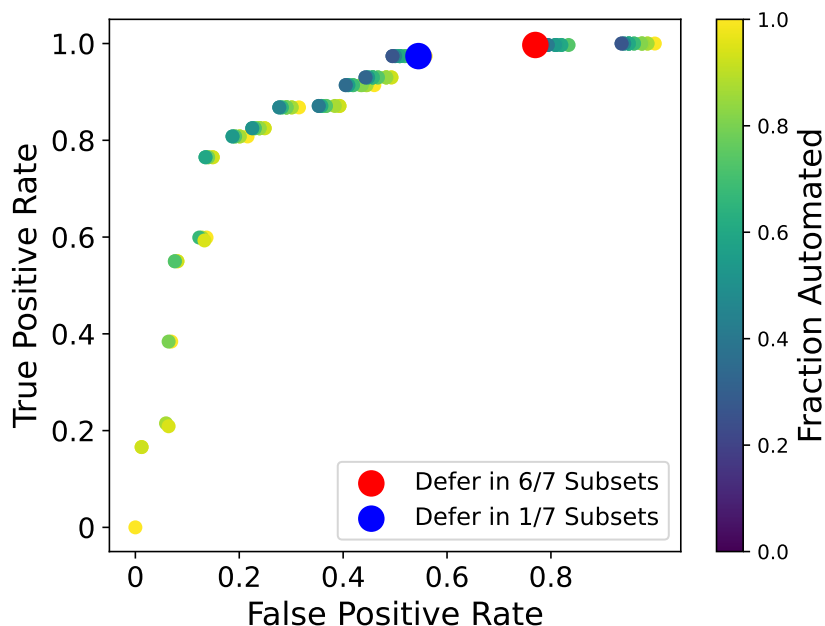


Figure 5: The performance of policies which independently choose whether to hospitalize, discharge, or defer to the physician within each indistinguishable subset. The red policy defers to the physician within all but one subset; it achieves a true positive rate of 99.7%, a false positive rate of 77.0%, and automates 7.6% of decisions. The blue policy only defers to the physician within one subset, achieving a true positive rate of 97.4% and a false positive rate of 53.6% while automating 86% of decisions.

patients. This policy *exactly* matches the true positive and false positive rate of the physician, as the physician also chooses to hospitalize every patient in the highest risk subset. Importantly, US and international clinical guidelines (Barkun et al., 2019; Laine et al., 2021) do not make specific recommendations regarding the use of algorithmic decision rules for the highest risk patients; however, our results suggest that algorithms can help enhance patient safety by ensuring that all high-risk patients receive immediate escalation of care. This suggests a complementary role for algorithms in making triage and treatment decisions for the *highest risk* patients.

In contrast, the blue policy achieves a slightly lower true positive rate of 97.4%, but compensates for this loss with a large decrease in the false positive rate (53.6% vs the physician’s 77.0%) while automating 86% of decisions. Under this policy, the decision to discharge or hospitalize patients is automated in every subset except for subset 4 (where, as Figure 4 suggests, physician judgment provides the most additional value). We caution that this latter policy may be inappropriate for real-world triage decisions, as both US and international guidelines indicate that the consensus is that algorithmic decision rules (or algorithmic recommendations) should achieve a true positive rate of at least 99% (Barkun et al., 2019; Laine et al., 2021). Nonetheless, this serves to illustrate the manner in which indistinguishability can provide decision makers with an array of potentially attractive policies. Furthermore, additional data might allow for finer-grained stratification of patients by learning a multicalibrated partition over a richer function class, which in turn could yield a richer space of possible decision rules.



## 6 Discussion

In this work we propose a framework for enabling human-AI collaboration in prediction and decision tasks. Under this framework, we develop a set of methods for testing whether experts provide a predictive signal which cannot be replicated by an algorithmic predictor, and further show how to selectively incorporate human feedback to improve algorithmic predictions. In Section 5, we show how algorithmic indistinguishability can induce a natural set of decision rules which govern when an algorithm should defer to a human expert. Beyond these methodological contributions, we argue that our framing clarifies *when* and *why* human judgment can improve algorithmic performance. In particular, a key theme in our work is that even if humans do not consistently outperform algorithms on average, *selectively* incorporating human judgment can often improve both predictions and decision-making.

A key limitation of our work is a somewhat narrow focus on minimizing a well-defined loss function over a well-defined (and stationary) distribution. This fails to capture decision makers with richer, multidimensional preferences that may be difficult to model (e.g., fairness, robustness or simplicity), and does not extend to settings in which predictions *influence* future outcomes (see the discussion of performative prediction in Section 2). However, we view indistinguishability as a powerful primitive for modeling these more complex scenarios; for example, a decision maker might impose additional preferences — like a desire for some notion of fairness — to distinguish inputs which are otherwise indistinguishable with respect to the “primary” outcome of interest.

At a technical level, our results rely on the ability to efficiently *learn* multicalibrated partitions. While we give conditions under which this is feasible in Appendix E and a finite sample analysis of our main results in Appendix D, finding such partitions can be challenging for rich function classes. Furthermore, as Figure 3 demonstrates, multicalibrated partitions are not always unique, and our work does not offer guidance for choosing among multiple possibilities. However, as discussed in Section 5, algorithms for learning multicalibrated partitions still offer useful heuristics, as the key question — does incorporating human feedback improve algorithmic predictions within a given subset of the input space — remains empirically testable even when the assumptions underpinning our theory are violated.

Finally, we caution that even in contexts which fit neatly into our framework, human decision makers can be critical for ensuring interpretability and accountability. Thus, although our approach can provide guidance for choosing the appropriate level of automation, it does not address practical or ethical concerns which may arise. Despite these limitations, we argue that indistinguishability helps to clarify the role of human expertise in algorithmic decision making, and this framing in turn provides fundamental conceptual and methodological insights for enabling effective human-AI collaboration.

## Acknowledgements

Rohan Alur, Devavrat Shah and Manish Raghavan are supported in part by a Stephen A. Schwarzman College of Computing Seed Grant. Devavrat Shah is supported in part by an NSF FODSI Award (2022448). Dennis Shung is supported in part by an NIH NIDDK Award (DK125718).

## References

- Agarwal, N., Moehring, A., Rajpurkar, P., and Salz, T. (2023). Combining human expertise with artificial intelligence: Experimental evidence from radiology. Technical report, Cambridge, MA.
- Agrawal, A., Gans, J., and Goldfarb, A. (2018). Exploring the impact of artificial intelligence: Prediction versus judgment. Technical report, National Bureau of Economic Research, Cambridge, MA.
- Almaghrabi, M., Gandhi, M., Guizzetti, L., Iansavichene, A., Yan, B., Wilson, A., Oakland, K., Jairath, V., and Sey, M. (2022). Comparison of risk scores for lower gastrointestinal bleeding: A systematic review and meta-analysis. *JAMA Netw. Open*, 5(5):e2214253.
- Alur, R., Laine, L., Li, D. K., Raghavan, M., Shah, D., and Shung, D. L. (2023). Auditing for human expertise. In *Advances in Neural Information Processing Systems*, volume 36.
- Arnold, D., Dobbie, W., and Hull, P. (2020). Measuring racial discrimination in bail decisions. Technical report, National Bureau of Economic Research, Cambridge, MA.
- Bansal, G., Nushi, B., Kamar, E., Horvitz, E., and Weld, D. S. (2020). Is the most accurate ai the best teammate? optimizing ai for teamwork.
- Barkun, A. N., Almadi, M., Kuipers, E. J., Laine, L., Sung, J., Tse, F., Leontiadis, G. I., Abraham, N. S., Calvet, X., Francis K.L. Chan, J. D., Enns, R., Gralnek, I. M., Jairath, V., Jensen, D., Lau, J., Lip, G. Y., Loffroy, R., Maluf-Filho, F., Meltzer, A. C., Reddy, N., Saltzman, J. R., Marshall, J. K., and Bardou, M. (2019). Management of nonvariceal upper gastrointestinal bleeding: Guideline recommendations from the international consensus group. *Annals of Internal Medicine*, 171(11):805–822.
- Bastani, H., Bastani, O., and Sinchaisri, W. P. (2021). Improving human decision-making with machine learning.
- Beede, E., Baylor, E. E., Hersch, F., Iurchenko, A., Wilcox, L., Ruamviboonsuk, P., and Vardoulakis, L. M. (2020). A human-centered evaluation of a deep learning system deployed in clinics for the detection of diabetic retinopathy. *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*.
- Benz, N. L. C. and Rodriguez, M. G. (2023). Human-aligned calibration for ai-assisted decision making.
- Blatchford, O., Murray, W. R., and Blatchford, M. (2000). A risk score to predict need for treatment for upper-gastrointestinal haemorrhage. *Lancet*, 356(9238):1318–1321.
- Brown, G., Hod, S., and Kalemaj, I. (2020). Performative prediction in a stateful world. *ArXiv*, abs/2011.03885.
- Camerer, C. and Johnson, E. (1991). The process-performance paradox in expert judgment: How can experts know so much and predict so badly? In Ericsson, A. and Smith, J., editors, *Toward a General Theory of Expertise: Prospects and Limits*. Cambridge University Press.
- Chatten, K., Purssell, H., Banerjee, A. K., Soteriadou, S., and Ang, Y. (2018). Glasgow blatchford score and risk stratifications in acute upper gastrointestinal bleed: can we extend this to 2 for urgent outpatient management? *Clin. Med.*, 18(2):118–122.

- Chicco, D. and Jurman, G. (2020). The advantages of the matthews correlation coefficient (MCC) over F1 score and accuracy in binary classification evaluation. *BMC Genomics*, 21(1):6.
- Cook, C. (2009). Is clinical gestalt good enough? *Journal of Manual and Manipulative Therapy*, 17(1):6–7.
- Cowgill, B. (2018). Bias and productivity in humans and algorithms: Theory and evidence from resume screening.
- Cowgill, B. and Stevenson, M. T. (2020). Algorithmic social engineering. *AEA Pap. Proc.*, 110:96–100.
- Currie, J. and MacLeod, W. B. (2017). Diagnosing expertise: Human capital, decision making, and performance among physicians. *J. Labor Econ.*, 35(1):1–43.
- Dawes, R. M. (1971). A case study of graduate admissions: Application of three principles of human decision making. *Am. Psychol.*, 26(2):180–188.
- Dawes, R. M., Faust, D., and Meehl, P. E. (1989). Clinical versus actuarial judgment. *Science*, 243(4899):1668–1674.
- Dawid, A. P. (1982). The well-calibrated bayesian. *Journal of the American Statistical Association*, 77:605–610.
- De, A., Okati, N., Zarezade, A., and Gomez-Rodriguez, M. (2020). Classification under human assistance.
- De-Arteaga, M., Fogliato, R., and Chouldechova, A. (2020). A case for humans-in-the-loop: Decisions in the presence of erroneous algorithmic scores.
- Dietvorst, B., Simmons, J., and Massey, C. (2018). Overcoming algorithm aversion: People will use imperfect algorithms if they can (even slightly) modify them. *Management Science*, 64:1155–1170.
- Donahue, K., Chouldechova, A., and Kenthapadi, K. (2022). Human-algorithm collaboration: Achieving complementarity and avoiding unfairness.
- Dwork, C., Kim, M. P., Reingold, O., Rothblum, G. N., and Yona, G. (2020). Outcome indistinguishability.
- Foster, D. P. and Vohra, R. V. (1998). Asymptotic calibration. *Biometrika*, 85(2):379–390.
- Globus-Harris, I., Harrison, D., Kearns, M., Roth, A., and Sorrell, J. (2023). Multicalibration as boosting for regression.
- Gopalan, P., Kalai, A. T., Reingold, O., Sharan, V., and Wieder, U. (2022). Omnipredictors. In *Innovations in Theoretical Computer Science (ITCS'2022)*.
- Gopalan, P., Kim, M. P., and Reingold, O. (2023). Swap agnostic learning, or characterizing omniprediction via multicalibration.
- Grove, W. M., Zald, D. H., Lebow, B. S., Snitz, B. E., and Nelson, C. (2000). Clinical versus mechanical prediction: a meta-analysis. *Psychol Assess*, 12(1):19–30.

- Hardt, M. and Mendler-Dünner, C. (2023). Performative prediction: Past and future. *ArXiv*, abs/2310.16608.
- Hébert-Johnson, U., Kim, M., Reingold, O., and Rothblum, G. (2018). Multicalibration: Calibration for the (computationally-identifiable) masses. In *International Conference on Machine Learning*, pages 1939–1948. PMLR.
- Jagadeesan, M., Zrnic, T., and Mendler-Dünner, C. (2022). Regret minimization with performative feedback. In *International Conference on Machine Learning*.
- Kabrhel, C., Camargo, C. A. J., and Goldhaber, S. Z. (2005). Clinical gestalt and the diagnosis of pulmonary embolism: Does experience matter? *Chest*, 127(5):1627–1630.
- Keswani, V., Lease, M., and Kenthapadi, K. (2021). Towards unbiased and accurate deferral to multiple experts. *Proceedings of the 2021 AAAI/ACM Conference on AI, Ethics, and Society*.
- Keswani, V., Lease, M., and Kenthapadi, K. (2022). Designing closed human-in-the-loop deferral pipelines.
- Kim, M. P. and Perdomo, J. C. (2022). Making decisions under outcome performativity. *ArXiv*, abs/2210.01745.
- Klaes, M. and Sent, E.-M. (2005). A conceptual history of the emergence of bounded rationality. *Hist. Polit. Econ.*, 37(1):27–59.
- Kleinberg, J., Lakkaraju, H., Leskovec, J., Ludwig, J., and Mullainathan, S. (2017). Human decisions and machine predictions.
- Kleinberg, J., Ludwig, J., Mullainathan, S., and Obermeyer, Z. (2015). Prediction policy problems. *American Economic Review*, 105(5):491–95.
- Kuncel, N. R., Klieger, D. M., Connelly, B. S., and Ones, D. S. (2013a). Mechanical versus clinical data combination in selection and admissions decisions: a meta-analysis. *J Appl Psychol*, 98(6):1060–1072.
- Kuncel, N. R., Klieger, D. M., Connelly, B. S., and Ones, D. S. (2013b). Mechanical versus clinical data combination in selection and admissions decisions: a meta-analysis. *J Appl Psychol*, 98(6):1060–1072.
- Laine, L., Barkun, A. N., Saltzman, J. R., Martel, M., and Leontiadis, G. I. (2021). ACG clinical guideline: Upper gastrointestinal and ulcer bleeding. *Am. J. Gastroenterol.*, 116(5):899–917.
- Lakkaraju, H., Kleinberg, J., Leskovec, J., Ludwig, J., and Mullainathan, S. (2017). The selective labels problem: Evaluating algorithmic predictions in the presence of unobservables. In *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD '17, page 275–284, New York, NY, USA. Association for Computing Machinery.
- Leitão, D., Saleiro, P., Figueiredo, M. A. T., and Bizarro, P. (2022). Human-ai collaboration in decision-making: Beyond learning to defer. *ArXiv*, abs/2206.13202.
- Madras, D., Pitassi, T., and Zemel, R. S. (2018). Predict responsibly: Improving fairness and accuracy by learning to defer. In *Advances in Neural Information Processing Systems 31*, pages 6150–6160.

- Marwaha, J. S., Landman, A. B., Brat, G. A., Dunn, T., and Gordon, W. J. (2022). Deploying digital health tools within large, complex health systems: key considerations for adoption and implementation. *npj Digital Medicine*, 5:13.
- Meehl, P. E. (1954). Clinical versus statistical prediction: A theoretical analysis and a review of the evidence.
- Meehl, P. E. (1986). Causes and effects of my disturbing little book. *Journal of Personality Assessment*, 50(3):370–375.
- Mendler-Dünner, C., Ding, F., and Wang, Y. (2022). Anticipating performativity by predicting from predictions. In *Neural Information Processing Systems*.
- Mendler-Dünner, C., Perdomo, J. C., Zrnic, T., and Hardt, M. (2020). Stochastic optimization for performative prediction. *ArXiv*, abs/2006.06887.
- Mozannar, H. and Sontag, D. A. (2020). Consistent estimators for learning to defer to an expert. In *International Conference on Machine Learning*.
- Mullainathan, S. and Obermeyer, Z. (2019). Diagnosing physician error: A machine learning approach to low-value health care. Technical report, National Bureau of Economic Research, Cambridge, MA.
- NEJM (2018). Hospital readmissions reduction program (hrrp). *Catalyst Carryover*, 4(2).
- Oakland, K., Jairath, V., Uberoi, R., Guy, R., Ayaru, L., Mortensen, N., Murphy, M. F., and Collins, G. S. (2017). Derivation and validation of a novel risk score for safe discharge after acute lower gastrointestinal bleeding: a modelling study. *The Lancet Gastroenterology & Hepatology*, 2(9):635–643.
- Okati, N., De, A., and Gomez-Rodriguez, M. (2021). Differentiable learning under triage.
- Peery, A. F., Crockett, S. D., Murphy, C. C., Jensen, E. T., Kim, H. P., Egberg, M. D., Lund, J. L., Moon, A. M., Pate, V., Barnes, E. L., Schlusser, C. L., Baron, T. H., Shaheen, N. J., and Sandler, R. S. (2022). Burden and cost of gastrointestinal, liver, and pancreatic diseases in the united states: Update 2021. *Gastroenterology*, 162(2):621–644.
- Perdomo, J. C., Zrnic, T., Mendler-Dünner, C., and Hardt, M. (2020). Performative prediction. In *Proceedings of the 37th International Conference on Machine Learning (ICML)*, volume abs/2002.06673.
- Raghu, M., Blumer, K., Corrado, G., Kleinberg, J., Obermeyer, Z., and Mullainathan, S. (2019). The algorithmic automation problem: Prediction, triage, and human effort.
- Rambachan, A. (2022). Identifying prediction mistakes in observational data.
- Rastogi, C., Leqi, L., Holstein, K., and Heidari, H. (2022). A taxonomy of human and ml strengths in decision-making to investigate human-ml complementarity.
- Simon, H. A. (1957). *Models of Man: Social and Rational*. Wiley.
- Stanley, A. J., Ashley, D., Dalton, H. R., Mowat, C., Gaya, D. R., Thompson, E., Warshow, U., Groome, M., Cahill, A., Benson, G., Blatchford, O., and Murray, W. (2009). Outpatient management of patients with low-risk upper-gastrointestinal haemorrhage: multicentre validation and prospective evaluation. *Lancet*, 373(9657):42–47.

- Stanley, A. J., Laine, L., Dalton, H. R., Ngu, J. H., Schultz, M., Abazi, R., Zakko, L., Thornton, S., Wilkinson, K., Khor, C. J. L., Murray, I. A., and Laursen, S. B. (2017). Comparison of risk scoring systems for patients presenting with upper gastrointestinal bleeding: international multicentre prospective study. *BMJ*, 356.
- Steyvers, M., Tejada, H., Kerrigan, G., and Smyth, P. (2022). Bayesian modeling of human-AI complementarity. *Proc. Natl. Acad. Sci. U. S. A.*, 119(11):e2111547119.
- Stolper, E., Van de Wiel, M., Van Royen, P., Van Bokhoven, M., Van der Weijden, T., and Dinant, G.-J. (2011). Gut feelings as a third track in general practitioners’ diagnostic reasoning. *Journal of General Internal Medicine*, 26(2):197–203. Epub 2010 Oct 22.
- Tversky, A. and Kahneman, D. (1974). Judgment under uncertainty: Heuristics and biases. *Science*, 185(4157):1124–1131.
- Ur-Rahman, A., Guan, J., Khalid, S., Munaf, A., Sharbatji, M., Idrisov, E., He, X., Machavarapu, A., and Abusaada, K. (2018). Both full glasgow-blatchford score and modified glasgow-blatchford score predict the need for intervention and mortality in patients with acute lower gastrointestinal bleeding. *Digestive Diseases and Sciences*, 63:3020–3025.
- van Amsterdam, W., van Geloven, N., Krijthe, J. H., Ranganath, R., and Cin’a, G. (2023). When accurate prediction models yield harmful self-fulfilling prophecies. *ArXiv*, abs/2312.01210.
- Wainwright, M. J. (2019). *High-dimensional statistics*. Cambridge Series in Statistical and Probabilistic Mathematics. Cambridge University Press, Cambridge, England.
- Wilder, B., Horvitz, E., and Kamar, E. (2020). Learning to complement humans.
- Zhao, Z., Rodríguez, A., and Prakash, B. A. (2023). Performative time-series forecasting. *ArXiv*, abs/2310.06077.

## A Proof of Theorem 4.1

*Proof.* A well known fact about univariate linear regression is that the coefficient of determination (or  $r^2$ ) is equal to the square of the Pearson correlation coefficient between the regressor and the outcome (or  $r$ ). In our context, this means that within any indistinguishable subset  $S_k$  we have:

$$1 - \frac{\mathbb{E}_k \left[ \left( Y - \gamma_k^* - \beta_k^* \hat{Y} \right)^2 \right]}{\mathbb{E}_k \left[ \left( Y - \mathbb{E}_k[Y] \right)^2 \right]} = \frac{\text{Cov}_k(Y, \hat{Y})^2}{\text{Var}_k(Y) \text{Var}_k(\hat{Y})}. \quad (7)$$

This implies that

$$\mathbb{E}_k \left[ \left( Y - \mathbb{E}_k[Y] \right)^2 \right] - \mathbb{E}_k \left[ \left( Y - \gamma_j^* - \beta_j^* \hat{Y} \right)^2 \right] = \frac{\text{Cov}_k(Y, \hat{Y})^2}{\text{Var}(\hat{Y})}. \quad (8)$$

Which finally implies that

$$\mathbb{E}_k \left[ \left( Y - \gamma_j^* - \beta_j^* \hat{Y} \right)^2 \right] = \mathbb{E}_k \left[ \left( Y - \mathbb{E}_k[Y] \right)^2 \right] - \frac{\text{Cov}_k(Y, \hat{Y})^2}{\text{Var}(\hat{Y})} \quad (9)$$

$$\leq \mathbb{E}_k \left[ \left( Y - \mathbb{E}_k[Y] \right)^2 \right] - 4\text{Cov}_k(Y, \hat{Y})^2, \quad (10)$$

where (10) is an application of Popoviciu's inequality for variances, and makes use of the fact that  $\hat{Y} \in [0, 1]$  almost surely. We can then obtain the final result by applying the following lemma, which extends the main result in Gopalan et al. (2022). We provide a proof in Appendix I, but for now simply state the result as Lemma A.1 below.

**Lemma A.1.** *Let  $\{S_k\}_{k \in [K]}$  be an  $\alpha$ -multicalibrated partition with respect to a real-valued function class  $\mathcal{F} = \{f : \mathcal{X} \rightarrow [0, 1]\}$  and target outcome  $Y \in [0, 1]$ . For all  $f \in \mathcal{F}$  and  $k \in [K]$ , it follows that:*

$$\mathbb{E}_k \left[ \left( Y - \mathbb{E}_k[Y] \right)^2 \right] \leq \mathbb{E}_k \left[ \left( Y - f(X) \right)^2 \right] + 2\alpha \quad (11)$$

We provide further discussion of the relationship between Lemma A.1 and the main result of Gopalan et al. (2022) in Appendix H below.

Chaining inequalities (11) and (10) yields the final result:

$$\mathbb{E}_k \left[ \left( Y - \gamma_j^* - \beta_j^* \hat{Y} \right)^2 \right] \leq \mathbb{E}_k \left[ \left( Y - f(X) \right)^2 \right] + 2\alpha - 4\text{Cov}_k(Y, \hat{Y})^2 \quad \forall f \in \mathcal{F} \quad (12)$$

$$\Rightarrow \mathbb{E}_k \left[ \left( Y - \gamma_j^* - \beta_j^* \hat{Y} \right)^2 \right] + 4\text{Cov}_k(Y, \hat{Y})^2 \leq \mathbb{E}_k \left[ \left( Y - f(X) \right)^2 \right] + 2\alpha \quad \forall f \in \mathcal{F} \quad (13)$$

□

## B Proof of Corollary 4.2

*Proof.* The proof is almost immediate. Let  $\gamma^*, \beta^* \in \mathbb{R}$  be the population regression coefficients obtained by regressing  $Y$  on  $g(H)$  within  $S$  (as in Theorem 4.1; the only difference is that we consider a single indistinguishable subset rather than a multicalibrated partition). This further implies, by the approximate calibration condition (4):

$$\mathbb{E}_S [(Y - g(H))^2] \leq \mathbb{E}_S [(Y - \gamma_k^* - \beta_k^* g(H))^2] + \eta \quad (14)$$

The proof then follows from that of Theorem 4.1, replacing  $\hat{Y}$  with  $g(H)$ . □

## C Proof of Theorem 4.3

*Proof.* Fix any  $k \in [K]$ .

$$\left| \text{Cov}_k(Y, \hat{Y}) \right| \quad (15)$$

$$= \left| \mathbb{E}_k[\text{Cov}_k(Y, \hat{Y} \mid \tilde{f}_k(X))] + \text{Cov}_k(\mathbb{E}_k[Y \mid \tilde{f}_k(X)], \mathbb{E}_k[\hat{Y} \mid \tilde{f}_k(X)]) \right| \quad (16)$$

$$= \left| \text{Cov}_k(\mathbb{E}[Y \mid \tilde{f}_k(X)], \mathbb{E}[\hat{Y} \mid \tilde{f}_k(X)]) \right| \quad (17)$$

$$\leq \sqrt{\text{Var}(\mathbb{E}_k[Y \mid \tilde{f}_k(X)]) \text{Var}_k(\mathbb{E}[\hat{Y} \mid \tilde{f}_k(X)])} \quad (18)$$

$$\leq \frac{1}{2} \sqrt{\text{Var}_k(\mathbb{E}_k[Y \mid \tilde{f}_k(X)])} \quad (19)$$

Where (16) is the law of total covariance, (17) follows from the assumption that  $Y \perp\!\!\!\perp \hat{Y} \mid \tilde{f}_k(X)$ ,  $X \in S_k$ , (18) is the Cauchy-Schwarz inequality and (19) applies Popoviciu's inequality to bound the variance of  $\mathbb{E}[\hat{Y} \mid \tilde{f}_k(X)]$  (which is assumed to lie in  $[0, 1]$  almost surely).

We now focus on bounding  $\text{Var}_k(\mathbb{E}_k[Y \mid \tilde{f}_k(X)])$ . Recall that by assumption,  $|\text{Cov}_k(Y, \tilde{f}_k(X))| \leq \alpha$ , so we should expect that conditioning on  $\tilde{f}_k(X)$  does not change the expectation of  $Y$  by too much.

$$\text{Var}_k(\mathbb{E}_k[Y \mid \tilde{f}_k(X)]) \quad (20)$$

$$= \mathbb{E}_k[(\mathbb{E}_k[Y \mid \tilde{f}_k(X)] - \mathbb{E}_k[\mathbb{E}_k[Y \mid \tilde{f}_k(X)]])^2] \quad (21)$$

$$= \mathbb{E}_k[(\mathbb{E}_k[Y \mid \tilde{f}_k(X)] - \mathbb{E}_k[Y])^2] \quad (22)$$

$$= \mathbb{P}_k(\tilde{f}_k(X) = 1)(\mathbb{E}_k[Y \mid \tilde{f}_k(X) = 1] - \mathbb{E}_k[Y])^2 \\ + \mathbb{P}_k(\tilde{f}_k(X) = 0)(\mathbb{E}_k[Y \mid \tilde{f}_k(X) = 0] - \mathbb{E}_k[Y])^2 \quad (23)$$

$$\leq \mathbb{P}_k(\tilde{f}_k(X) = 1) \left| \mathbb{E}_k[Y \mid \tilde{f}_k(X) = 1] - \mathbb{E}_k[Y] \right| \\ + \mathbb{P}_k(\tilde{f}_k(X) = 0) \left| \mathbb{E}_k[Y \mid \tilde{f}_k(X) = 0] - \mathbb{E}_k[Y] \right| \quad (24)$$



Where the last step follows because  $Y$  is assumed to be bounded in  $[0, 1]$  almost surely. We now make use of the following lemma:

**Lemma C.1.** *The following simple lemma will be useful in our subsequent proofs. Let  $X \in \{0, 1\}$  be a binary random variable. Then for any other random variable  $Y$ , the following pair of equalities hold:*

$$\text{Cov}(X, Y) = \mathbb{P}(X = 1) (\mathbb{E}[Y | X = 1] - \mathbb{E}[Y]), \quad (25)$$

$$\text{Cov}(X, Y) = \mathbb{P}(X = 0) (\mathbb{E}[Y] - \mathbb{E}[Y | X = 0]). \quad (26)$$

*This is exactly corollary 5.1 in Gopalan et al. (2022). We provide the proof in Appendix I.*

Applying Lemma C.1 to (24) yields

$$\text{Var}_k(\mathbb{E}_k[Y | \tilde{f}_k(X)]) \leq \left| 2\text{Cov}_k(Y, \tilde{f}_k(X)) \right| \leq 2\alpha, \quad (27)$$

where the second inequality follows because our analysis is conditional on  $X \in S_k$  for some  $\alpha$ -indistinguishable subset  $S_k$ . Plugging (27) into (19) completes the proof. □

## D Additional technical results

In this section we present additional technical results which complement those in the main text. All proofs are deferred to Appendix F.

### D.1 A nonlinear analog of Theorem 4.1

Below we provide a simple extension of Theorem 4.1 from univariate linear regression to arbitrary univariate predictors of  $Y$  given  $\hat{Y}$ .

**Corollary D.1.** *Let  $S$  be an  $\alpha$ -indistinguishable subset with respect to a model class  $\mathcal{F}$  and target  $Y$ . Let  $g : [0, 1] \rightarrow [0, 1]$  be a function which satisfies the following approximate Bayes-optimality condition for  $\eta \geq 0$ :*

$$\mathbb{E}_S[(Y - g(\hat{Y}))^2] \leq \mathbb{E}_S[(Y - \mathbb{E}_S[Y | \hat{Y}])^2] + \eta. \quad (28)$$

*Then, for any  $f \in \mathcal{F}$ ,*

$$\mathbb{E}_S \left[ (Y - g(\hat{Y}))^2 \right] + 4\text{Cov}_S(Y, \hat{Y})^2 \leq \mathbb{E}_S \left[ (Y - f(X))^2 \right] + 2\alpha + \eta. \quad (29)$$

That is, any function  $g$  which is nearly as accurate (in terms of squared error) as the univariate conditional expectation function  $\mathbb{E}_S[Y | \hat{Y}]$  provides the same guarantee as in Theorem 4.1. This conditional expectation function is exactly what e.g., a logistic regression of  $Y$  on  $\hat{Y}$  seeks to model. We provide a proof in ??.

## D.2 A finite sample analog of Corollary 4.2

For simplicity, the technical results in Section 4 are presented in terms of population quantities. In this section we consider the empirical analogue of Corollary 4.2, and provide a generalization argument which relates these empirical quantities to the corresponding population results in Section 4. We focus our attention on Corollary 4.2, as the proof follows similarly for Theorem 4.1 and Corollary D.1.

Let  $\mathcal{G}$  be some class of predictors mapping  $\mathcal{H}$  to  $[0, 1]$ . We'll begin with the setup of Corollary 4.2, with  $S \subseteq \mathcal{X}$  denoting a fixed, measurable subset of the input space (we'll generalize to a full partition  $S_1 \dots S_K$  below). Further let  $n_S \equiv \sum_{i=1}^n \mathbb{1}(x_i \in S)$  denote the number of training examples which lie in the subset  $S \subseteq \mathcal{X}$ , and  $\{y_i, h_i\}_{i=1}^{n_S}$  denote i.i.d. samples from the unknown joint distribution over the random variables  $(Y, H)$  conditional on the event that  $X \in S$ . Let  $\hat{g}_S \equiv \arg \min_{g \in \mathcal{G}} \frac{1}{n_S} \sum_{i=1}^{n_S} (y_i - g(h_i))^2$  denote the empirical risk minimizer within  $S$ . Our goal will be to show that if there exists some  $g_S^* \in \mathcal{G}$  satisfying (4), then the empirical risk minimizer  $\hat{g}_S$  also approximately satisfies (4) with high probability.

**Lemma D.2.** *Let  $\mathcal{L} = \{\ell_g : g \in \mathcal{G}\}$ , where  $\ell_g(x, h) \equiv (y - g(h))^2$ , denote the class of squared loss functions indexed by  $g \in \mathcal{G}$ , and let  $R_{n_S}(\mathcal{L})$  denote the Rademacher complexity of  $\mathcal{L}$ . Let  $P(S) \equiv \mathbb{P}(X \in S)$  denote the measure of  $S$ . Then, for any  $\delta \geq 0$ , with probability at least  $(1 - e^{-\frac{nP(S)\delta^2}{4}})(1 - 2e^{-P(S)n})$ , we have*

$$\mathbb{E}_S[\ell_{\hat{g}}] \leq \mathbb{E}_S[\ell_{g^*}] + 4R_{n_S}(\mathcal{L}) + 2\delta, \quad \text{and} \quad n_S \geq nP(S)/2. \quad (30)$$

That is, if there exists some  $g^* \in \mathcal{G}$  satisfying (4), then the empirical risk minimizer  $\hat{g} \in \mathcal{G}$  within the subset  $S$  also satisfies (4) with high probability, up to an approximation error that depends on the Rademacher complexity of  $\mathcal{L}$ . For many natural classes of functions, including linear functions, the Rademacher complexity (1) tends to 0 as  $n \rightarrow \infty$  and (2) can be sharply bounded in finite samples (see e.g., Chapter 4 in Wainwright (2019)). We provide a proof of Lemma D.2 in Appendix F.

**Extending Lemma D.2 to a partition of  $\mathcal{X}$ .** The result above is stated for a single subset  $S$ , and depends critically on the *measure* of that subset  $P(S) \equiv \mathbb{P}(X \in S)$ . We now show this generalization argument can be extended to a partition of the input space  $S_1 \dots S_K \subseteq \mathcal{X}$  by arguing that Lemma D.2 applies to “most” instances sampled from the marginal distribution over  $\mathcal{X}$ . Specifically, we show that the probability that  $X$  lies in *any* subset  $S$  with measure  $P(S)$  approaching 0 is a low probability event; for the remaining inputs, Lemma D.2 applies.

**Corollary D.3.** *Let  $\{S_k\}_{k \in [K]}$  be a (not necessarily multicalibrated) partition of the input space, chosen independently of the training data, and let  $n_k$  denote the number of training observations which lie in a given subset  $S_k \subseteq \mathcal{X}$ . Then, for any  $\epsilon > 0$  and  $\delta \geq 0$ ,  $X$  lies in a subset  $S_k \subseteq \mathcal{X}$  such that,*

$$\mathbb{E}_k[\ell_{\hat{g}}] \leq \mathbb{E}_k[\ell_{g^*}] + 4R_{n_k}(\mathcal{L}) + 2\delta \quad (31)$$

*with probability at least  $(1 - \epsilon)(1 - e^{-\frac{n_k \epsilon \delta^2}{4K}})(1 - 2e^{-\frac{n_k \epsilon}{K}})$  over the distribution of the training data  $\{x_i, y_i, \hat{y}_i\}_{i=1}^n$  and a test observation  $(x_{n+1}, y_{n+1}, \hat{y}_{n+1})$ .*

The preceding corollary indicates that Lemma D.2 also holds for a “typical” subset of the input space, replacing the dependence on the measure of any given subset  $P(S)$  with a lower bound on the probability that a test observation  $x_{n+1}$  lies in some subset whose measure is at least  $\frac{\epsilon}{K}$ . We provide a formal proof in ??.

## E Learning multicalibrated partitions

In this section we discuss two sets of conditions on  $\mathcal{F}$  which enable the efficient computation of multicalibrated partitions. An immediate implication of our first result is that any class of Lipschitz predictors induce a multicalibrated partition. All proofs are deferred to Appendix G.

**Level sets of  $\mathcal{F}$  are multicalibrated.** Observe that one way in which Definition 3.1 is trivially satisfied (with  $\alpha = 0$ ) is whenever every  $f \in \mathcal{F}$  is *constant* within a subset  $S \subseteq \mathcal{X}$ . We relax this insight as follows: if the variance of every  $f \in \mathcal{F}$  is bounded within  $S$ , then  $S$  is approximately indistinguishable with respect to  $\mathcal{F}$ .

**Lemma E.1.** *Let  $\mathcal{F}$  be a class of predictors and  $S \subseteq \mathcal{X}$  be a subset of the input space. If:*

$$\sup_{f \in \mathcal{F}} \text{Var}(f(X) \mid X \in S) \leq 4\alpha^2, \quad (32)$$

*then  $S$  is  $\alpha$ -indistinguishable with respect to  $\mathcal{F}$  and  $Y$ .*

This result yields a natural corollary: the approximate level sets of  $\mathcal{F}$  (i.e., sets in which the range of every  $f \in \mathcal{F}$  is bounded) are approximately indistinguishable. We state this result formally as Corollary E.2 below. We use exactly this approach to finding multicalibrated partitions in our study of a chest X-ray classification task in Section 5.

**Corollary E.2.** *Let  $\mathcal{F}$  be a class of predictors whose range is bounded within some  $S \subseteq \mathcal{X}$ . That is, for all  $f \in \mathcal{F}$ :*

$$\sup_{x \in S} f(x) - \inf_{x' \in S} f(x') \leq 4\alpha \quad (33)$$

*Then  $S$  is  $\alpha$ -indistinguishable with respect to  $\mathcal{F}$ .*

Lemma E.1 also implies a simple algorithm for finding multicalibrated partitions when  $\mathcal{F}$  is Lipschitz with respect to some distance metric  $d : \mathcal{X} \times \mathcal{X} \rightarrow \mathbb{R}$ : observations which are close under  $d(\cdot, \cdot)$  are guaranteed to be approximately indistinguishable with respect to  $\mathcal{F}$ . We state this result formally as Corollary E.3 below.

**Corollary E.3.** *Let  $\mathcal{F}^{Lip(L,d)}$  be the set of  $L$ -Lipschitz functions with respect to some distance metric  $d(\cdot, \cdot)$  on  $\mathcal{X}$ . That is:*

$$|f(x) - f(x')| \leq Ld(x, x') \quad \forall f \in \mathcal{F}^{Lip(L,d)} \quad (34)$$

*Let  $\{S_k\}_{k \in K}$  for  $K \subseteq \mathbb{N}$  be some  $(4\alpha/L)$ -net on  $\mathcal{X}$  with respect to  $d(\cdot, \cdot)$ . Then  $\{S_k\}_{k \in K}$  is  $\alpha$ -multicalibrated with respect to  $\mathcal{F}^{Lip(L,d)}$ .*

Proofs of the results above are provided in Appendix G.

**Multicalibration via boosting.** Recent work by Globus-Harris et al. (2023) demonstrates that multicalibration is closely related to *boosting* over a function class  $\mathcal{F}$ . In this section we first provide conditions, adapted from Globus-Harris et al. (2023), which imply that the level sets of a certain predictor  $h : \mathcal{X} \rightarrow [0, 1]$  are multicalibrated with respect to  $\mathcal{F}$ ; that is, the set  $\{x \mid h(x) = v\}$  for every  $v$  in the range of  $h$  is approximately indistinguishable. We then discuss how these conditions yield a natural boosting algorithm for *learning* a predictor  $h$  which induces a multicalibrated partition. In the lemma below, we use  $\mathcal{R}(f)$  to denote the range of a function  $f$ .

**Lemma E.4.** *Let  $\mathcal{F}$  be a function class which is closed under affine transformations; i.e.,  $f \in \mathcal{F} \Rightarrow a + bf \in \mathcal{F}$  for all  $a, b \in \mathbb{R}$ , and let  $\tilde{\mathcal{F}} = \{f \in \mathcal{F} \mid \mathcal{R}(f) \subseteq [0, 1]\}$ . Let  $Y \in [0, 1]$  be the target outcome, and  $h : \mathcal{X} \rightarrow [0, 1]$  be some predictor with countable range  $\mathcal{R}(h) \subseteq [0, 1]$ . If, for all  $f \in \mathcal{F}, v \in \mathcal{R}(h)$ :*

$$\mathbb{E} [(h(X) - Y)^2 - (f(X) - Y)^2 \mid h(X) = v] < \alpha^2, \tag{35}$$

*then the level sets of  $h$  are  $(2\alpha)$ -multicalibrated with respect to  $\tilde{\mathcal{F}}$  and  $Y$ .*

To interpret this result, observe that (35) is the difference between the mean squared error of  $f$  and the mean squared error of  $h$  within each level set  $S_v = \{x \in \mathcal{X} \mid h(x) = v\}$ . Thus, if the best  $f \in \mathcal{F}$  fails to significantly improve on the squared error of  $h$  within a given level set  $S_v$ , then  $S_v$  is indistinguishable with respect to  $\tilde{\mathcal{F}}$  (which is merely  $\mathcal{F}$  restricted to functions that lie in  $[0, 1]$ ). Globus-Harris et al. (2023) give a boosting algorithm which, given a squared error regression oracle<sup>10</sup> for  $\mathcal{F}$ , outputs a predictor  $h$  which satisfies (35). We make use of this algorithm in Section 5 to learn a partition of the input space in a visual prediction task. Although the class we consider there (the class of shallow regression trees  $\mathcal{F}^{\text{RT}^5}$ ) is not closed under affine transformations, boosting over this class captures the spirit of our main result: while no  $f \in \mathcal{F}^{\text{RT}^5}$  can improve accuracy within the level sets of  $h$ , humans provide additional predictive signal within three of them.

Taken together, the results in this section demonstrate that multicalibrated partitions can be efficiently computed for many natural classes of functions, which in turn enables the application of results in Section 4.

## F Omitted proofs from Appendix D

### F.1 Proof of Corollary D.1

*Proof.* Observe that, because the conditional expectation function  $\mathbb{E}_k[Y \mid \hat{Y}]$  minimizes squared error with respect to all univariate functions of  $\hat{Y}$ , we must have:

$$\mathbb{E}_S [(Y - \mathbb{E}_S[Y \mid \hat{Y}])^2] \leq \mathbb{E}_S [(Y - \gamma^* - \beta^* \hat{Y})^2] \tag{36}$$

<sup>10</sup>Informally, a squared error regression oracle for  $\mathcal{F}$  is an algorithm which can efficiently output  $\arg \min_{f \in \mathcal{F}} \mathbb{E}[(Y - f(X))^2]$  for any distribution over  $X, Y$ . When the distribution is over a finite set of training data, this is equivalent to empirical risk minimization. We refer to Globus-Harris et al. (2023) for additional details, including generalization arguments.

Where  $\gamma^* \in \mathbb{R}$ ,  $\beta^* \in \mathbb{R}$  are the population regression coefficients obtained by regression  $Y$  on  $g(H)$  as in Theorem 4.1. This further implies, by the approximate Bayes-optimality condition (28):

$$\mathbb{E}_S \left[ (Y - g(\hat{Y}))^2 \right] \leq \mathbb{E}_S \left[ (Y - \gamma_k^* - \beta_k^* \hat{Y})^2 \right] + \eta \quad (37)$$

The proof then follows immediately from that of Theorem 4.1. □

## F.2 Proof of Lemma D.2

*Proof.* We will adopt the notation from the setup of Corollary 4.2. Further let  $\mathcal{G}$  be some class of predictors mapping  $\mathcal{H}$  to  $[0, 1]$ , over which we seek to learn the mean-squared-error minimizing  $g_S^* \in \mathcal{G}$  within some subset  $S \subseteq \mathcal{X}$ .

Let  $n_S \equiv \sum_{i=1}^n \mathbb{1}(x_i \in S)$  denote the number of training examples which lie in the subset  $S$ , and let  $\widehat{\mathbb{E}}_S[\ell_g] \equiv \frac{1}{n_S} \sum_{i=1}^{n_S} (Y_i - g(X_i))^2$  denote the empirical loss incurred by some  $g \in \mathcal{G}$  within  $S$ . Finally, let  $\mathbb{E}_S[\ell_g] \equiv E[(Y - g(X))^2 \mid X \in S]$  denote the population analogue of  $\widehat{\mathbb{E}}_S[\ell_g]$ .

By Hoeffding's inequality we have:

$$\mathbb{P} \left( n_S \geq \frac{nP(S)}{2} \right) \geq \left( 1 - 2e^{-P(S)n} \right) \quad (38)$$

that is,  $n_S$  is at least half its expectation with high probability. Let  $\mathcal{L} = \{\ell_g : g \in \mathcal{G}\}$ , where  $\ell_g(x, y) = (y - g(x))^2$ , be the class of squared loss functions indexed by  $g \in \mathcal{G}$ . Let  $R_{n_S}(\mathcal{L})$  denote the Rademacher complexity of  $\mathcal{L}$ , which is defined as follows:

### Definition F.1. Rademacher Complexity

For a fixed  $n \in \mathbb{N}$ , let  $\epsilon_1 \dots \epsilon_n$  denote  $n$  i.i.d. Rademacher random variables (recall that Rademacher random variables take values 1 and  $-1$  with equal probability  $\frac{1}{2}$ ). Let  $Z_1 \dots Z_n$  denote i.i.d. random variables taking values in some abstract domain  $\mathcal{Z}$ , and let  $\mathcal{T}$  be a class of real-valued functions over the domain  $\mathcal{Z}$ . The Rademacher complexity of  $\mathcal{T}$  is denoted by  $R_n(\mathcal{T})$ , and is defined as follows:

$$R_n(\mathcal{T}) = \mathbb{E} \left[ \sup_{t \in \mathcal{T}} \left| \frac{1}{n} \sum_{i=1}^n \epsilon_i t(Z_i) \right| \right] \quad (39)$$

Where the expectation is taken over both  $\epsilon_1 \dots \epsilon_n$  and  $Z_1 \dots Z_n$ . Intuitively, the Rademacher complexity is the expected maximum correlation between some  $t \in \mathcal{T}$  and the noise vector  $\epsilon_1 \dots \epsilon_n$ .

We now make use of a standard uniform convergence result, which is stated in terms of the Rademacher complexity of a function class. We reproduce this theorem (lightly adapted to our notation) from the textbook treatment provided in Wainwright (2019) below:

**Theorem F.2.** (adapted from Wainwright (2019)) *For any  $b$ -uniformly-bounded class of functions  $\mathcal{T}$ , any positive integer  $n \geq 1$  and any scalar  $\delta \geq 0$ , we have:*

$$\sup_{t \in \mathcal{T}} \left| \frac{1}{n} \sum_{i=1}^n t(Z_i) - \mathbb{E}[t(Z_1)] \right| \leq 2\mathcal{R}_n(\mathcal{T}) + \delta \quad (40)$$

with probability at least  $1 - \exp\left(-\frac{n\delta^2}{2b^2}\right)$ .

Applying Theorem F.2 (noting that  $\mathcal{L}$  is uniformly bounded in  $[0, 1]$ ) implies:

$$\sup_{g \in \mathcal{G}} \left| \widehat{\mathbb{E}}_S[\ell_g] - \mathbb{E}_S[\ell_g] \right| \leq 2R_{n_S}(\mathcal{L}) + \delta \quad (41)$$

with probability at least  $1 - e^{-\frac{n_S\delta^2}{2}}$ . Finally, combining (38) with (41) further implies, for any  $\delta \geq 0$ ,

$$\mathbb{E}_S[\ell_{\hat{g}}] \leq \mathbb{E}_S[\ell_{g^*}] + 4R_{n_S}(\mathcal{L}) + 2\delta \quad (42)$$

with probability at least  $(1 - e^{-\frac{nP(S)\delta^2}{4}})(1 - 2e^{-P(S)n})$ , as desired.

### F.3 Proof of Corollary D.3

*Proof.* We'll adopt the notation from the setup of Lemma D.2 and Corollary D.3. Observe that, if we were to take the union of every element of the partition  $\{S_k\}_{k \in K}$  with measure  $P(S) \equiv \mathbb{P}(X \in S_k) \leq \frac{\epsilon}{K}$ , the result would be a subset of the input space with measure at most  $K \times \frac{\epsilon}{K} = \epsilon$ . Note that this is merely an analytical device; we need not identify which subsets these are.

Thus, with probability at least  $(1 - \epsilon)$ , a newly sampled test observation will lie in some element of the partition  $\{S_k\}_{k \in [K]}$  with measure at least  $\frac{\epsilon}{K}$ . Conditional on this event, we can directly apply the result of Lemma D.2, plugging in a lower bound of  $\frac{\epsilon}{K}$  for  $P(S)$ . This yields, for any  $\epsilon > 0$  and  $\delta \geq 0$ ,  $X$  lies in a subset  $S_k \subseteq \mathcal{X}$  such that,

$$\mathbb{E}_k[\ell_{\hat{g}}] \leq \mathbb{E}_k[\ell_{g^*}] + 4R_{n_k}(\mathcal{L}) + 2\delta \quad (43)$$

with probability at least  $(1 - \epsilon)(1 - e^{-\frac{n\epsilon\delta^2}{4K}})(1 - 2e^{-\frac{n\epsilon}{K}})$  over the distribution of the training data  $\{x_i, y_i, \hat{y}_i\}_{i=1}^n$  and a test observation  $(x_{n+1}, y_{n+1}, \hat{y}_{n+1})$ , as desired.  $\square$

$\square$

## G Omitted proofs from Appendix E

### G.1 Proof of Lemma E.1

*Proof.* We want to show  $|\text{Cov}(Y, f(X) \mid X \in S)| \leq \alpha$  for all  $f \in \mathcal{F}$  and some  $S$  such that  $\sup_{f \in \mathcal{F}} \text{Var}(f(X) \mid X \in S) \leq 4\alpha^2$ .

Fix any  $f \in \mathcal{F}$ . We then have:

$$|\text{Cov}(Y, f(X) \mid X \in S)| \tag{44}$$

$$\leq \sqrt{\text{Var}(Y \mid X \in S)\text{Var}(f(X) \mid X \in S)} \tag{45}$$

$$\leq \sqrt{\frac{1}{4} \times \text{Var}(f(X) \mid X \in S)} \tag{46}$$

$$\leq \sqrt{\frac{1}{4} \times 4\alpha^2} \tag{47}$$

$$= \alpha \tag{48}$$

Where (45) is the Cauchy-Schwarz inequality, (46) is Popoviciu's inequality and makes use of the fact that  $Y$  is bounded in  $[0, 1]$  by assumption, and (47) uses the assumption that  $\sup_{f \in \mathcal{F}} \text{Var}(f(X) \mid X \in S) \leq 4\alpha^2$ .

□

## G.2 Proof of Corollary E.2

*Proof.* We want to show that  $\forall f \in \mathcal{F}$ :

$$|\text{Cov}(Y, f(X) \mid X \in S)| \leq \alpha \tag{49}$$

By assumption,  $f(X)$  is bounded in a range of  $4\alpha$  within  $S$ . From this it follows by Popoviciu's inequality for variances that  $\forall f \in \mathcal{F}$ :

$$\text{Var}(f(X) \mid X \in S_j) \leq \frac{(4\alpha)^2}{4} = 4\alpha^2 \tag{50}$$

The proof then follows from Lemma E.1.

□

## G.3 Proof of Corollary E.3

*Proof.* We want to show that  $\forall f \in \mathcal{F}^{\text{Lip}(L,d)}, k \in K$ :

$$|\text{Cov}_k(Y, f(X))| \leq \alpha \tag{51}$$

Because  $S_k$  is part of a  $4\alpha/L$ -net, there exists some  $m \in [0, 1]$  such that  $\mathbb{P}(f(X) \in [m, m + 4\alpha] \mid X \in S_k) = 1$ ; that is,  $f(X)$  is bounded almost surely in some interval of length  $4\alpha$ . From this it follows by Popoviciu's inequality for variances that  $\forall f \in \mathcal{F}^{\text{Lip}(L,d)}, k \in K$ :

$$\text{Var}_k(f(X)) \leq \frac{(4\alpha)^2}{4} = 4\alpha^2 \quad (52)$$

The remainder of the proof follows from Lemma E.1. □

#### G.4 Proof of Lemma E.4

*Proof.* The result follows Lemma 3.3 and Lemma 6.8 in Globus-Harris et al. (2023). We provide a simplified proof below, adapted to our notation. We'll use  $\mathbb{E}_v[\cdot]$  to denote the expectation conditional on the event that  $\{h(X) = v\}$  for each  $v \in \mathcal{R}(h)$ . We use  $\text{Cov}_v(\cdot, \cdot)$  analogously.

Our proof will proceed in two steps. First we'll show that:

$$\forall v \in \mathcal{R}(h), f \in \mathcal{F}, \mathbb{E}_v[(h(X) - Y)^2 - (f(X) - Y)^2] < \alpha^2 \quad (53)$$

$$\Rightarrow \mathbb{E}_v[f(X)(Y - v)] < \alpha \quad \forall v \in \mathcal{R}(h), f \in \tilde{\mathcal{F}} \quad (54)$$

This condition states that if there does not exist some  $v$  in the range of  $h$  where the best  $f \in \mathcal{F}$  improves on the squared error incurred by  $h$  by more than  $\alpha^2$ , then the predictor  $h(\cdot)$  is  $\alpha$ -multicalibrated in the sense of Globus-Harris et al. (2023) with respect to the constrained class  $\tilde{\mathcal{F}}$ . We then show that the level sets of a predictor  $h(\cdot)$  which satisfies (54) form a multicalibrated partition (Definition 3.2). That is:

$$\mathbb{E}_v[f(X)(Y - v)] \leq \alpha \quad \forall v \in \mathcal{R}(h), f \in \tilde{\mathcal{F}} \Rightarrow \text{Cov}_v(f(X), Y) \leq 2\alpha \quad \forall v \in \mathcal{R}(h), f \in \tilde{\mathcal{F}} \quad (55)$$

That is, the level sets  $S_v = \{x \mid h(x) = v\}$  form a  $(2\alpha)$ -multicalibrated partition with respect to  $\tilde{\mathcal{F}}$ .

First, we'll prove the contrapositive of (54). This proof is adapted from that of Lemma 3.3 in Globus-Harris et al. (2023). Suppose there exists some  $v \in \mathcal{R}(h)$  and  $f \in \tilde{\mathcal{F}}$  such that

$$\mathbb{E}_v[f(X)(Y - v)] \geq \alpha \quad (56)$$

Then there exists  $f' \in \mathcal{F}$  such that:

$$\mathbb{E}_v[(f'(X) - Y)^2 - (h(X) - Y)^2] \geq \alpha^2 \quad (57)$$

Proof: let  $\eta = \frac{\alpha}{\mathbb{E}_v[f(X)^2]}$  and  $f' = v + \frac{\alpha}{\mathbb{E}_v[f(X)^2]}f(X) = v + \eta f(X)$ . Then:



$$\mathbb{E}_v [(h(X) - Y)^2 - (f'(X) - Y)^2] \quad (58)$$

$$= \mathbb{E}_v [(v - Y)^2 - (v + \eta f(X) - Y)^2] \quad (59)$$

$$= \mathbb{E}_v [v^2 + Y^2 - 2Yv - v^2 - \eta^2 f(X)^2 - Y^2 - 2v\eta f(X) + 2vY + 2\eta f(X)Y] \quad (60)$$

$$= \mathbb{E}_v [2\eta f(X)(Y - v) - \eta^2 f(X)^2] \quad (61)$$

$$= \mathbb{E}_v [2\eta f(X)(Y - v)] - \frac{\alpha^2}{\mathbb{E}_v[f(X)^2]} \quad (62)$$

$$\geq 2\eta\alpha - \frac{\alpha^2}{\mathbb{E}_v[f(X)^2]} \quad (63)$$

$$= \frac{\alpha^2}{\mathbb{E}_v[f(X)^2]} \quad (64)$$

$$\geq \alpha^2 \quad (65)$$

Where the last step follows because we took  $f \in \tilde{\mathcal{F}}$ , the subset of the function class  $\mathcal{F}$  which only takes values in  $[0, 1]$ . This implies that if instead  $\mathbb{E}_v[(f'(X) - Y)^2 - (h(X) - Y)^2] < \alpha^2$  for all  $v \in \mathcal{R}(h)$ ,  $f' \in \mathcal{F}$ , then  $\mathbb{E}_v[f(X)(Y - v)] < \alpha$  for all  $v \in \mathcal{R}(h)$  and  $f \in \tilde{\mathcal{F}}$ . Next we prove (55); that is,  $\mathbb{E}_v[f(X)(Y - v)] < \alpha$  for all  $v \in \mathcal{R}(h)$  and  $f \in \tilde{\mathcal{F}}$  implies  $|\text{Cov}_v(f(X), Y)| \leq 2\alpha$  for all  $v \in \mathcal{R}(h)$ ,  $f \in \tilde{\mathcal{F}}$ .

The proof is adapted from that of Lemma 6.8 in Globus-Harris et al. (2023); our proof differs beginning at (73). Fix some  $f \in \tilde{\mathcal{F}}$  and  $v \in \mathcal{R}(h)$ . By assumption we have, for all  $v \in \mathcal{R}(h)$  and  $f \in \tilde{\mathcal{F}}$ ,

$$\mathbb{E}_v[f(X)(Y - v)] < \alpha \quad (66)$$

Then we can show:

$$|\text{Cov}_v(f(X), Y)| \quad (67)$$

$$= |\mathbb{E}_v[f(X)Y] - \mathbb{E}_v[f(X)]\mathbb{E}_v[Y]| \quad (68)$$

$$= |\mathbb{E}_v[f(X)Y] - \mathbb{E}_v[f(X)]\mathbb{E}_v[Y] + v\mathbb{E}_v[f(X)] - v\mathbb{E}_v[f(X)]| \quad (69)$$

$$= |\mathbb{E}_v[f(X)(Y - v)] + \mathbb{E}_v[f(X)](v - \mathbb{E}_v[Y])| \quad (70)$$

$$\leq |\mathbb{E}_v[f(X)(Y - v)]| + |\mathbb{E}_v[f(X)](v - \mathbb{E}_v[Y])| \quad (71)$$

$$= |\mathbb{E}_v[f(X)(Y - v)]| + |\mathbb{E}_v[f(X)](\mathbb{E}_v[Y] - v)| \quad (72)$$

$$\leq \alpha + |\mathbb{E}_v[f(X)](\mathbb{E}_v[Y] - v)| \quad (73)$$

Where the last step follows from the assumption (66). Now, let  $f'(X) \equiv \mathbb{E}_v[f(X)]$  be the constant function which takes the value  $\mathbb{E}_v[f(X)]$ . We can write (73) as follows:

$$\alpha + |\mathbb{E}_v[f(X)](\mathbb{E}_v[Y] - v)| = \alpha + |f'(X)(\mathbb{E}_v[Y] - v)| \quad (74)$$

$$= \alpha + |\mathbb{E}_v[f'(X)(Y - v)]| \quad (75)$$

Because  $\mathcal{F}$  is closed under affine transformations, it contains all constant functions, and thus,  $f'(X) \in \mathcal{F}$ .  $\tilde{\mathcal{F}}$ , by definition, is the subset of  $\mathcal{F}$  whose range lies in  $[0, 1]$ . Because  $f \in \tilde{\mathcal{F}}$ , it must be that  $\mathbb{E}_v[f(X)] \in [0, 1]$  and thus,  $f' \in \tilde{\mathcal{F}}$ . So, we can again invoke (66) to show:

$$\alpha + |\mathbb{E}_v[f'(X)(Y - v)]| \leq 2\alpha \tag{76}$$

Which completes the proof. □

## H Relating Lemma A.1 to Omnipredictors (Gopalan et al., 2022)

In this section we compare Lemma A.1 to the main result of Gopalan et al. (2022). While the main result of Gopalan et al. (2022) applies broadly to convex, Lipschitz loss functions, we focus on the special case of minimizing squared error. In this case, we show that Lemma A.1 extends the main result of Gopalan et al. (2022) to cover real-valued outcomes under somewhat weaker and more natural conditions. We proceed in three steps: first, to provide a self-contained exposition, we state the result of Gopalan et al. (2022) for real-valued outcomes in the special case of squared error (Lemma H.1 and Lemma H.2 below). Second, we derive a matching bound using Lemma A.1 (our result), which we do by demonstrating that the conditions of Lemma H.2 imply the conditions of Lemma A.1. Finally, we show that Lemma A.1 applies in more generality than Lemma H.2, under conditions which match those of Definition 3.2.

We first state the main result of Gopalan et al. (2022) (adapted to our notation) below, which holds for binary outcomes  $Y \in \{0, 1\}$ .<sup>11</sup>

**Lemma H.1** (Omnipredictors for binary outcomes, specialized to squared error (Gopalan et al. (2022), Theorem 6.3)). *Let  $S$  be a subset which is  $\alpha$ -indistinguishable with respect to a real-valued function class  $\mathcal{F}$  and a binary target outcome  $Y \in \{0, 1\}$ . Then, for all  $f \in \mathcal{F}$ ,*

$$\mathbb{E}_S [(Y - \mathbb{E}[Y])^2] \leq \mathbb{E}_S [(Y - f(X))^2] + 4\alpha \tag{77}$$

This result makes use of the fact that for any fixed  $y \in [0, 1]$ , the squared error function is 2-Lipschitz with respect to  $f(x)$  over the interval  $[0, 1]$ . This is similar to Lemma A.1, but requires that  $Y$  is binary-valued. In contrast, Lemma A.1 allows for real-valued  $Y \in [0, 1]$ , and gains a factor of 2 on the RHS.<sup>12</sup> Gopalan et al. (2022) provide an alternate extension of Lemma H.1 to bounded, real-valued  $Y$ , which we present below for comparison to Lemma A.1.

### H.1 Extending Lemma H.1 to real-valued $Y$

Fix some  $\epsilon > 0$ , and let  $B(\epsilon) = \{0, 1, 2 \dots \lfloor \frac{2}{\epsilon} \rfloor\}$ . Let  $\tilde{Y}$  be a random variable which represents a discretization of  $Y$  into bins of size  $\frac{\epsilon}{2}$ . That is,  $\tilde{Y} = \min_{b \in B(\epsilon)} |Y - \frac{b\epsilon}{2}|$ . Let  $\mathcal{R}(\tilde{Y})$  denote the range of  $\tilde{Y}$ . Observe that the following holds for any function  $g : \mathcal{X} \rightarrow [0, 1]$ :

$$\left| \mathbb{E}[(\tilde{Y} - g(X))^2] - \mathbb{E}[(Y - g(X))^2] \right| \leq \epsilon \tag{78}$$

<sup>11</sup>As discussed in Section 1, we also continue to elide the distinction between the ‘approximate’ multicalibration of Gopalan et al. (2022) and our focus on individual indistinguishable subsets. The results in this section can again be interpreted as holding for the ‘typical’ element of an approximately multicalibrated partition.

<sup>12</sup>Note that Lemma A.1 also requires that each  $f \in \mathcal{F}$  takes values in  $[0, 1]$ , but this is without loss of generality when the outcome is bounded in  $[0, 1]$ ; projecting each  $f \in \mathcal{F}$  onto  $[0, 1]$  can only reduce squared error.

Where (78) follows because the function  $(y - g(x))^2$  is 2-Lipschitz with respect to  $g(x)$  over  $[0, 1]$  for all  $y \in [0, 1]$ . We now work with the discretization of  $\tilde{Y}$ , and provide an analogue to Lemma H.1 under a modified indistinguishability condition for discrete-valued  $\tilde{Y}$ , which we'll show is stronger than Definition 3.1.

**Lemma H.2** (Extending Lemma H.1 to real-valued  $Y$  (Gopalan et al. (2022), adapted from Theorem 8.1)). *Let  $\mathcal{R}(f)$  denote the range of a function  $f$ , and let  $1(\cdot)$  denote the indicator function. Let  $S$  be a subset of the input space  $\mathcal{X}$  which satisfies the following condition with respect to a function class  $\mathcal{F}$  and discretized target  $\tilde{Y}$ :*

*For all  $f \in \mathcal{F}$  and  $\tilde{y} \in \mathcal{R}(\tilde{Y})$ , if:*

$$\left| \text{Cov}_S(1(\tilde{Y} = \tilde{y}), f(X)) \right| \leq \alpha \quad (79)$$

*Then:*

$$\mathbb{E}_S \left[ \left( \tilde{Y} - \mathbb{E}_S[\tilde{Y}] \right)^2 \right] \leq \mathbb{E}_S \left[ \left( \tilde{Y} - f(X) \right)^2 \right] + 2 \left\lceil \frac{2}{\epsilon} \right\rceil \alpha \quad (80)$$

To interpret this result, observe that (80) yields a bound which is similar to Lemma H.1 under a modified ‘pointwise’ indistinguishability condition (79) for any discretization  $\tilde{Y}$  of  $Y$ . Combining (80) with (78) further implies:

$$\mathbb{E}_S \left[ \left( Y - \mathbb{E}_S[\tilde{Y}] \right)^2 \right] \leq \mathbb{E}_S \left[ \left( Y - f(X) \right)^2 \right] + 2 \left\lceil \frac{2}{\epsilon} \right\rceil \alpha + 2\epsilon \quad (81)$$

## H.2 Deriving Lemma H.2 using Lemma A.1

We show next that the ‘pointwise’ condition (79) for  $\alpha \geq 0$  implies our standard indistinguishability condition (Definition 3.1) for  $\alpha' = \left\lceil \frac{2}{\epsilon} \right\rceil \alpha$ . This will allow us to apply Lemma A.1 to obtain a bound which is identical to (81). Thus, we show that Lemma A.1 is at least as general as Lemma H.2.

**Lemma H.3.** *Let  $S$  be a subset satisfying (79). Then, for all  $f \in \mathcal{F}$ ,*

$$\left| \text{Cov}_S(\tilde{Y}, f(X)) \right| \leq \left\lceil \frac{2}{\epsilon} \right\rceil \alpha \quad (82)$$

We provide a proof in Appendix I. Thus, combining assumption (79) with Lemma A.1 and (78) recovers a result which is identical to Lemma H.2. That is, for all  $f \in \mathcal{F}$ :

$$\left| \text{Cov}_S(1(\tilde{Y} = \tilde{y}), f(X)) \right| \leq \alpha \quad (83)$$

$$\Rightarrow \left| \text{Cov}_S(\tilde{Y}, f(X)) \right| \leq \left\lceil \frac{2}{\epsilon} \right\rceil \alpha \quad (84)$$

$$\Rightarrow \mathbb{E}_S \left[ \left( \tilde{Y} - \mathbb{E}_S[\tilde{Y}] \right)^2 \right] \leq \mathbb{E}_S \left[ \left( \tilde{Y} - f(X) \right)^2 \right] + 2 \left\lceil \frac{2}{\epsilon} \right\rceil \alpha \quad (85)$$

$$\Rightarrow \mathbb{E}_S \left[ \left( Y - \mathbb{E}[\tilde{Y}] \right)^2 \right] \leq \mathbb{E}_S \left[ \left( Y - f(X) \right)^2 \right] + 2 \left\lceil \frac{2}{\epsilon} \right\rceil \alpha + 2\epsilon \quad (86)$$

Where (84) follows from Lemma H.3, (85) follows from Lemma A.1 and (86) follows from (78).

### H.3 Extending Lemma A.1 beyond Lemma H.2

Finally, to show that Lemma A.1 extends Lemma H.2, it suffices to provide a distribution over  $f(X)$  for some  $f \in \mathcal{F}$  and a discrete-valued  $\tilde{Y}$  taking  $l \geq 1$  values such that Definition 3.1 is satisfied at level  $\alpha \geq 0$ , but (79) is not satisfied at  $\alpha' = (\alpha/l)$  (though in fact that taking  $\alpha' = \alpha$  also suffices for the following counterexample).

Consider the joint distribution in which the events  $\{\tilde{Y} = 0, f(X) = 0\}$ ,  $\{\tilde{Y} = \frac{1}{2}, f(X) = \frac{1}{2}\}$  and  $\{\tilde{Y} = \frac{1}{2}, f(X) = 1\}$  occur with equal probability  $\frac{1}{3}$  conditional on  $\{X \in S\}$  for some  $S \subseteq \mathcal{X}$ . We suppress the conditioning event  $\{X \in S\}$  for clarity. Then:

$$\text{Cov}(1(\tilde{Y} = 0), f(X)) = \mathbb{P}(\tilde{Y} = 1) \left( \mathbb{E}[f(X) \mid \tilde{Y} = 0] - \mathbb{E}[f(X)] \right) = -\frac{1}{6} \quad (87)$$

On the other hand we have:

$$\text{Cov}(\tilde{Y}, f(X)) = \mathbb{E}[\tilde{Y}f(X)] - \mathbb{E}[\tilde{Y}]\mathbb{E}[f(X)] \quad (88)$$

$$= \mathbb{E}[\tilde{Y}\mathbb{E}[f(X) \mid \tilde{Y}]] - \mathbb{E}[\tilde{Y}]\mathbb{E}[f(X)] \quad (89)$$

$$= \left( \frac{1}{3} \times 0 + \frac{2}{3} \times \frac{1}{2} \times \frac{3}{4} \right) - \frac{1}{3} \times \frac{1}{2} = \frac{1}{12} \quad (90)$$

That is, we have  $\left| \text{Cov}(\tilde{Y}, f(X)) \right| = \frac{1}{12} < 3 \left| \text{Cov}(1(\tilde{Y} = 0), f(X)) \right| = \frac{1}{2}$ . Thus, Lemma A.1 establishes a result which is similar to (H.2) for real-valued  $Y$  under the weaker and more natural condition that  $|\text{Cov}(Y, f(X))|$  is bounded, which remains well-defined for real-valued  $Y$ , rather than requiring the stronger pointwise bound (79) for some discretization  $\tilde{Y}$ .

Finally, we briefly compare Lemma A.1 to Theorem 8.3 in Gopalan et al. (2022), which generalizes Lemma H.2 to hold for linear combinations of the functions  $f \in \mathcal{F}$  and to further quantify the gap between the ‘canonical predictor’  $\mathbb{E}_k[Y]$  and any  $f \in \mathcal{F}$  (or linear combinations thereof). These extensions are beyond the scope of our work, but we briefly remark that the apparently sharper bound of Theorem 8.3 is due to an incorrect assumption that the squared loss  $(y - g(x))^2$  is 1-Lipschitz with respect to  $g(x)$  over the interval  $[0, 1]$ , for any  $y \in [0, 1]$ . Correcting this to a Lipschitz constant of 2 recovers the same bound as (86).

# I Proofs of auxiliary lemmas

## I.1 Proof of Lemma C.1

*Proof.* We'll first prove (25).

$$\text{Cov}(X, Y) = \mathbb{E}[XY] - \mathbb{E}[X]\mathbb{E}[Y] \tag{91}$$

$$= \mathbb{E}[\mathbb{E}[XY \mid X]] - \mathbb{E}[X]\mathbb{E}[Y] \tag{92}$$

$$= \mathbb{P}(X = 1)\mathbb{E}[XY \mid X = 1] + \mathbb{P}(X = 0)\mathbb{E}[XY \mid X = 0] - \mathbb{E}[X]\mathbb{E}[Y] \tag{93}$$

$$= \mathbb{P}(X = 1)\mathbb{E}[Y \mid X = 1] - \mathbb{E}[X]\mathbb{E}[Y] \tag{94}$$

$$= \mathbb{P}(X = 1)\mathbb{E}[Y \mid X = 1] - \mathbb{P}(X = 1)\mathbb{E}[Y] \tag{95}$$

$$= \mathbb{P}(X = 1) (\mathbb{E}[Y \mid X = 1] - \mathbb{E}[Y]) \tag{96}$$

As desired. To prove (26), let  $X' = 1 - X$ . Applying the prior result yields:

$$\text{Cov}(X', Y) = \mathbb{P}(X' = 1) (\mathbb{E}[Y \mid X' = 1] - \mathbb{E}[Y]) \tag{97}$$

Because  $X' = 1 \Leftrightarrow X = 0$ , it follows that:

$$\text{Cov}(X', Y) = \mathbb{P}(X = 0) (\mathbb{E}[Y \mid X = 0] - \mathbb{E}[Y]) \tag{98}$$

Finally, because covariance is a bilinear function,  $\text{Cov}(X', Y) = \text{Cov}(1 - X, Y) = -\text{Cov}(X, Y)$ . Chaining this identity with (98) yields the result.  $\square$

## I.2 Proof of Lemma A.1

The result we want to prove specializes Theorem 6.3 in Gopalan et al. (2022) to the case of squared error, but our result allows  $Y \in [0, 1]$  rather than  $Y \in \{0, 1\}$ . The first few steps of our proof thus follow that of Theorem 6.3 in Gopalan et al. (2022); our proof diverges starting at (103). We provide a detailed comparison of these two results in Appendix H above.

*Proof.* Fix any  $k \in [K]$ . We want to prove the following bound:

$$\mathbb{E}_k[(Y - \mathbb{E}_k[Y])^2] \leq \mathbb{E}_k[(Y - f(X))^2] + 4\alpha \tag{99}$$

It suffices to show instead that:

$$\mathbb{E}_k[(Y - \mathbb{E}_k[f(X)])^2] \leq \mathbb{E}_k[(Y - f(X))^2] + 4\alpha \tag{100}$$

From this the result follows, as  $\mathbb{E}_k[(Y - \mathbb{E}_k[Y])^2] \leq \mathbb{E}_k[(Y - c)^2]$  for any constant  $c$ . To simplify notation, we drop the subscript  $k$  and instead let the conditioning event  $\{X \in S_k\}$  be implicit throughout. We first show:

$$\mathbb{E}[(Y - f(X))^2] = \mathbb{E}[\mathbb{E}[(Y - f(X))^2 | Y]] \geq \mathbb{E}[(Y - \mathbb{E}[f(X) | Y])^2] \quad (101)$$

Where the second inequality is an application of Jensen's inequality (the squared loss is convex in  $f(X)$ ). From this it follows that:

$$\mathbb{E}[(Y - \mathbb{E}[f(X)])^2] - \mathbb{E}[(Y - f(X))^2] \quad (102)$$

$$\leq \mathbb{E}[(Y - \mathbb{E}[f(X)])^2 - (Y - \mathbb{E}[f(X) | Y])^2] \quad (103)$$

$$= \mathbb{E}[\mathbb{E}[f(X)]^2 - 2Y\mathbb{E}[f(X)] - \mathbb{E}[f(X) | Y]^2 + 2Y\mathbb{E}[f(X) | Y]] \quad (104)$$

$$= 2(\mathbb{E}[Y\mathbb{E}[f(X) | Y] - Y\mathbb{E}[f(X)]]) - \mathbb{E}[\mathbb{E}[f(X) | Y]^2 + \mathbb{E}[f(X)]^2] \quad (105)$$

$$= 2(\mathbb{E}[Yf(X)] - \mathbb{E}[Y]\mathbb{E}[f(X)]) - \mathbb{E}[\mathbb{E}[f(X) | Y]^2 + \mathbb{E}[f(X)]^2] \quad (106)$$

$$= 2\text{Cov}(Y, f(X)) - \mathbb{E}[\mathbb{E}[f(X) | Y]^2] + \mathbb{E}[f(X)]^2 \quad (107)$$

$$= 2\text{Cov}(Y, f(X)) - \text{Var}(\mathbb{E}[f(X) | Y]) \quad (108)$$

$$\leq 2\alpha \quad (109)$$

Where each step until (109) follows by simply grouping terms and applying linearity of expectation. (109) follows by the multicalibration condition and the fact that the variance of any random variable is nonnegative. □

### I.3 Proof of Lemma H.3

*Proof.* Recall that  $\tilde{Y}$  is a discrete random variable taking values  $0, \frac{\epsilon}{2}, \epsilon, \frac{3\epsilon}{2} \dots \lfloor \frac{2}{\epsilon} \rfloor \frac{\epsilon}{2}$ . We again use  $\mathcal{R}(\tilde{Y})$  to denote the range of  $\tilde{Y}$ . Our analysis below proceeds conditional on the event  $\{X \in S\}$ , which we suppress for clarity. We can show

$$\left| \text{Cov}(\tilde{Y}, f(X)) \right| = \left| \mathbb{E}[\tilde{Y}f(X)] - \mathbb{E}[\tilde{Y}]\mathbb{E}[f(X)] \right| \quad (110)$$

$$= \left| \mathbb{E}[\tilde{Y}f(X)] - \mathbb{E}[f(X)] \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \tilde{y} \mathbb{P}(\tilde{Y} = \tilde{y}) \right| \quad (111)$$

$$= \left| \mathbb{E}[\tilde{Y} \mathbb{E}[f(X) \mid \tilde{Y}]] - \mathbb{E}[f(X)] \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \tilde{y} \mathbb{P}(\tilde{Y} = \tilde{y}) \right| \quad (112)$$

$$= \left| \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \tilde{y} \mathbb{P}(\tilde{Y} = \tilde{y}) \mathbb{E}[f(X) \mid \tilde{Y} = \tilde{y}] - \mathbb{E}[f(X)] \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \tilde{y} \mathbb{P}(\tilde{Y} = \tilde{y}) \right| \quad (113)$$

$$= \left| \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \tilde{y} \mathbb{P}(\tilde{Y} = \tilde{y}) \left( \mathbb{E}[f(X) \mid \tilde{Y} = \tilde{y}] - \mathbb{E}[f(X)] \right) \right| \quad (114)$$

$$\leq \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \tilde{y} \mathbb{P}(\tilde{Y} = \tilde{y}) \left| \left( \mathbb{E}[f(X) \mid \tilde{Y} = \tilde{y}] - \mathbb{E}[f(X)] \right) \right| \quad (115)$$

$$= \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \tilde{y} \left| \text{Cov}(1(\tilde{Y} = \tilde{y}), f(X)) \right| \quad (116)$$

$$\leq \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \tilde{y} \alpha \quad (117)$$

$$\leq \sum_{\tilde{y} \in \mathcal{R}(\tilde{Y})} \alpha \quad (118)$$

$$\leq \left\lceil \frac{2}{\epsilon} \right\rceil \alpha \quad (119)$$

Where (115) makes use of the fact that  $\tilde{y} \geq 0$ , (116) makes use of the identity  $\left| \text{Cov}(1(\tilde{Y} = \tilde{y}), f(X)) \right| = \mathbb{P}(\tilde{Y} = \tilde{y}) \left| \left( \mathbb{E}[f(X) \mid \tilde{Y} = \tilde{y}] - \mathbb{E}[f(X)] \right) \right|$  (this is a straightforward analogue of Lemma C.1), (117) applies assumption (79), and (118) makes use of the fact that  $\tilde{y} \leq 1$ .

□