Ultrametricity in Fund of Funds Diversification

M. A. Miceli^a G. Susinno^b

^aDepartment of Public Economics University of Rome "La Sapienza" ^bFinance-and-Physics Independent Advisor in Computational and Quantitative Finance. E-mail contact: susinno@finance-and-physics.org

Abstract

Minimum market transparency requirements impose Hedge Fund (HF) managers to use the statement declared strategy in practice. However each declared strategy may actually origin a multiplicity of implemented management decisions. Is then the "actual "strategy the same as the "announced" strategy? Can the actual strategy be monitored or compared to the actual strategy of HF belonging to the same "announced" class? Can the announced or actual strategy be used as a quantitative argument in the fund of funds policy? With the appropriate metric, it is possible to draw a minimum spanning tree (MST) to emphasize the similarity structure that could be hidden in raw correlation matrix of HF returns.

Key words: Hedge Funds; Selection; Correlation; Random Matrices; Graphs; Taxonomy; Classification

1 Introduction

Before confined to off shore destinations, Hedge Funds (HF) are managed portfolios under the least number of constraints. HF, enjoying more freedom than traditional institutional funds, could historically achieve better returns under the same market conditions: for example, short selling means the possibility to make profit out of a bear market. Investing in a HF is a trust contract between the investor and the fund manager's strategy. However complete freedom in managing investors money is hard to sell. In order to require a minimum transparency between the HF manager strategy and investors, national regulatory institutions ask the hedge funds to declare the adopted policy in the statement. Practice has shrank the "types" of style management in some, by now, well known classes. Why do we care about hedge fund type of style management? Because a growing market practice tends to classify HF as normal assets, hence as objects of a further investor portfolio optimization. Unawareness of HF peculiarities and biases may hide the risk of being fooled by randomness. For a nice introduction to HF consult e.g. [Lha02].

Data on HF performances present more shortcomings than asset time series: HF Net Asset Value (NAV) are quoted just once a month. Give the highly proprietary character of applied strategies, which are jealously guarded, the only public data are about indexes grouping HF by style. These indices contain a set of disappearing and appearing HF, inducing an unavoidable "survivor bias".

In this first paper we focus our attention on the characterization of the applied strategy, in particular our data set shows that strategies plays in HF a role similar to market sectors for traditional assets. Indeed we apply combinatorial optimizing techniques to analyze those characteristics that cluster funds together and those that diversify them. Finally we show how this approach can be used to monitor and select HF investments highlighting those individual HF with a tendency to depart from their stated investment strategy.

2 The Data

We use N single HF NAV time series of T synchronous observations, where:

- Time: Jan-1999 Jan-2003 of 49 monthly observations; T = 49
- Assets:
 - \cdot 62 Funds with strategies reported in Table (see [Lha02] for strategies definition).
 - · 5 Market Indices: MIB30, DJ, HSI, NDQ, FTSE, SP500

3 Noise and Signal in Correlation

Rank reduction for correlation matrices is usually obtained via a standard zeroed-eigenvalues reduced-rank approximation [Bri01,RJ99]. As in [VP01] we identify the significant eigenvalues of correlation matrix by selecting those which depart from the spectrum of a same size symmetric random matrix. Random Matrix Theory (RMT) offers a way to clean the matrix from the random components [Met90]. The "cleaned" correlation matrix is then used to determine Euclidean distances between funds.

We first normalize monthly returns for the all series, then compute the equal time crosscorrelation $N \times N$ matrix C. Problems in measurement (see e.g. [VP01]) are: (i) non stationarity of the matrix as market conditions change; (ii) the finite length of time series available to estimate cross correlations introduces "measurement noise". As T increases to avoid problem (ii), problem (i) increases. From both sources (i) and (ii) we get random contributions into the correlation matrix.

We test the eigenvalues of the matrix C against the null hypothesis given by eigenvalues generated by a same size symmetric random matrix. In the limit $N, T \longrightarrow \infty$ with a fixed radio $Q = T/N \ge 1$, the spectral density is given by [SM99]:

$$P_{rm}(\lambda) = \frac{T}{2\pi} \frac{\sqrt{(\lambda_{+} - \lambda)(\lambda - \lambda_{-})}}{\lambda}, \quad \text{where } \lambda_{\pm} = 1 + \frac{1}{Q} \pm 2\sqrt{\frac{1}{Q}}$$
(1)

The three highest eigenvalues of the correlation matrix spectrum for 62 HF and 5 market indices, is compared to the highest eigenvalue λ_+ given by eq: 1. To gain hindsight on the measurement accuracy for the three highest observed eigenvalues $\lambda_1, \lambda_2, \lambda_3$ we have determined the bootstrapped distribution of their estimators. Since eq: 1 is valid for $N, T \longrightarrow \infty$ s.t. $Q = T/N \ge 1$ is fixed, we test the finite size effect on $\lambda_{max} = \lambda_+$ determination. Results are reported on Fig: 1(a), showing that the three highes eigenvalues of the observed correlation matrix are not compatible with the Random Matrix Hypothesis. In the following we will use the rank-reduced matrix \overline{C} obtained by zeroing all the eigenvalues lower than λ_3 . Since zeroing eigenvalues has altered the diagonal we may consider \overline{C} as a covariance matrix, the associated correlation matrix can be recovered as follow:

$$\hat{C}_{ij} = \frac{C_{ij}}{\sqrt{\overline{C}_{ii}\overline{C}_{jj}}}$$

4 Minimum Spanning Tree: How to Visualize Dependencies

We consider HF time series as points in \mathbb{R}^T Euclidean space. The method is based on a similarity concept expressed by distance: similarity grows as distance shrinks. A frequently used measure is the Euclidean distance d_{ij} between two normalized time series, that can be calculated starting from the linear correlation coefficient [Man99,RRV86].

$$d_{ij}^{2} = \left\| \widetilde{\mathbf{S}}_{i} - \widetilde{\mathbf{S}}_{j} \right\|^{2} = \sum_{k=1}^{n} \left(S_{ik} - S_{jk} \right)^{2} = 2 \left(1 - \hat{C}_{ij} \right)$$
(2)

Given distances between all funds and by considering each fund as a node of a tree structure, it is possible to determine a data representation known as Minimum Spanning Tree (MST). It is the unique graph that connects all nodes with the minimum extension. The minimum spanning tree is obtainable through simple algorithms [PA01]. Distance minimization between tree nodes allows for a natural HF classification in clusters containing elements with similar realizations.

In our example, using return time series of 62 hedge funds in the period January 2000 to January 2003, we determined the associated MST (Fig. 1(b)). We note how the clustering process leads to an economic meaningful classification of strategies and how anomalies can be promptly detected. For some clusters (cona, gta/glm, emn, emm) there exist a fund that acts as a reference center (cona 43, cta51, emm30,), while strategies as "Long-Short" do not show peculiar characteristics, coherently with heterogeneity and discretion in this management style. This observation may suggest that the less discretionary management policies are (for examples, those following mathematical models implemented by software decisions), the more similar corresponding returns are.

5 Conclusions

We observe a broad coherence between the usual qualitative classification of HF and the phenomenological classification deduced from historical data of HF returns. Albeit managers discretionality, macro strategies seems to share enough common points in the realized returns to be quantitatively classified. In a universe where transparency towards investors is low, where operative strategies are protected, data mining and classification instruments allow to extract maximum information from available data and to verify whether the declared strategies in the fund statement are verified. In particular, anomalous nodes with respect to the reference cluster, let identify funds that require a deeper investigation. Beyond qualitative control, these results are useful to maximize portfolio diversification, by selecting funds belonging to different clusters and by paying special attention to those characterizing central nodes. Moreover, those characteristics that identify a cluster help to define the actual benchmark for a given strategy. Finally, the tree structure offers an objective basis to extract economic conclusions, portfolio selection and control. By extracting the structure hidden in large correlation matrices, trees are easier to interpret than inspection of large correlation matrices!

References

- [Bri01] D. Brigo. A note on correlation and rank reduction. http://www.damianobrigo.it, 2001.
- [Lha02] F.-S. Lhabitant. Hedge Funds. Wiley, 2002.
- [Man99] R.N. Mantegna. Hierarchical structures in financial markets. Phys. J. B, 11:193-197, 1999.
- [Met90] Madan Lal Metha. Random Matrices. Academic Press, 1990.
- [RJ99] R. Rebonato and P. Jäckel. The most general methodology to create a valid correlation matrix for risk management and option pricing purposes. QUARC preprint available at http://www.rebonato.com, 1999.
- [RRV86] G. Toulouse R. Rammal and M. Virasoro. Ultrametricity for physicists. Rev. Mod. Phys., 58:765–788, 1986.
- [SM99] A.M. Sengupta and P.P. Mitra. Distributions of singular values for some random matrices. *Phys. Rev. E*, 60, number=3:3389-3392, 1999.
- [VP01] P. Gopikrishnan et al. V. Plerou. A random matrix approach to cross-correlations in financial data. arXiv:cond-mat/0108023, August 2001.

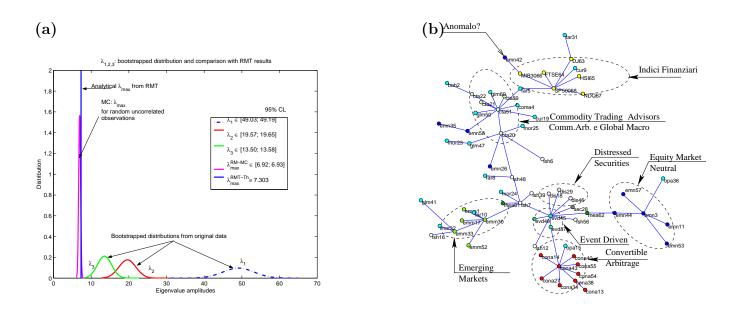


Fig. 1. (a) Highest eigenvalues distribution compared to λ_+ given by RMT results for uncorrelated returns; (b) Minimum Spanning Tree for HF Strategies.