# From plane crashes to algorithmic harm: applicability of safety engineering frameworks for responsible ML

SHALALEH RISMANI, Google Research, McGill University, Canada

RENEE SHELBY, Google, JusTech Lab, Australian National University, U.S.A

ANDREW SMART, Google Research, U.S.A

EDGAR JATHO, Naval Postgraduate School, U.S.A

JOSH A. KROLL, Naval Postgraduate School, U.S.A.

AJUNG MOON, McGill University, Canada

NEGAR ROSTAMZADEH, Google Research, Canada

Inappropriate design and deployment of machine learning (ML) systems leads to negative downstream social and ethical impact – described here as social and ethical risks – for users, society and the environment. Despite the growing need to regulate ML systems, current processes for assessing and mitigating risks are disjointed and inconsistent. We interviewed 30 industry practitioners on their current social and ethical risk management practices, and collected their first reactions on adapting safety engineering frameworks into their practice – namely, System Theoretic Process Analysis (STPA) and Failure Mode and Effects Analysis (FMEA). Our findings suggest STPA/FMEA can provide appropriate structure toward social and ethical risk assessment and mitigation processes. However, we also find nontrivial challenges in integrating such frameworks in the fast-paced culture of the ML industry. We call on the ML research community to strengthen existing frameworks and assess their efficacy, ensuring that ML systems are safer for all people.

CCS Concepts: • Social and professional topics  $\rightarrow$  Computing / technology policy; • General and reference  $\rightarrow$  Evaluation; Surveys and overviews.

Additional Key Words and Phrases: empirical study, safety engineering, machine learning, social and ethical risk

#### **ACM Reference Format:**

#### 1 INTRODUCTION

During a panel at the 1994 ACM Conference on Human Factors in Computing Systems (CHI), prominent scholars from different disciplines convened to discuss "what makes a good computer system good." Panelists highlighted considerations for safety, ethics, user perspectives, and societal structures as critical elements for making a *good* system [41]. Almost 28 years later, we posit that

Authors' addresses: Shalaleh Rismani, Google Research, McGill University, Montreal, Canada; Renee Shelby, Google, JusTech Lab, Australian National University, San Francisco, U.S.A; Andrew Smart, Google Research, San Francisco, U.S.A; Edgar Jatho, Naval Postgraduate School, Monterey, U.S.A; AJung Moon, McGill University, Montreal, Canada; Negar Rostamzadeh, Google Research, Montreal, Canada.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2023 Association for Computing Machinery.

XXXX-XXXX/2023/10-ART \$15.00

these epistemological perspectives need to be in deeper conversation for designing and assessing machine learning (ML) systems that challenge conventional understanding of safety and harm.

The development and use of ML systems can adversely impact people, communities, and society at large [14, 32, 82, 89, 118, 125], including inequitable resource allocation [6, 22, 106], perpetuating normative narratives about people and social groups [56, 119], and the entrenchment of social inequalities [4, 70, 76]. We frame these adverse impacts broadly as *social and ethical risks*. To manage such risks, quantitative [38, 66], qualitative [44, 71, 81, 97], and epistemological frameworks [31, 46, 82] have been proposed. In parallel, active regulatory and standards activities are taking place internationally [1–3, 35, 45]. Despite the rapidly evolving discourse, there is limited empirical understanding of how proposed social and ethical risk management tools have been adopted by practitioners [36, 74].

Inspired by the 1994 panelists, we examine the dialogue between safety engineering frameworks and understandings of social and ethical risks of ML systems. First, we report on ethical and social risk management practices currently used in the industry. Second, we take a developmental approach to examine how safety engineering frameworks can improve existing practices. We chose two of the most successful safety engineering frameworks used in other sociotechnical domains [19, 93, 117]: Failure Mode and Effect Analysis (FMEA) [21] and System Theoretic Process Analysis (STPA) [67, 91], which we describe in detail in Section 2.

We conducted 30 semi-structured in-depth interviews with industry practitioners who shared their current practices used to assess and mitigate social and ethical risks. We introduced the two safety engineering frameworks, inviting them to envision how they might employ them to assess ethical and social risk of ML systems. The results of our study address the following research questions:

- RQ1: Which practices do ML practitioners use to manage social and ethical risks today?
- **RQ2**: What challenges do practitioners face in their attempts to manage social and ethical risks?
- **RQ3**: How could safety engineering frameworks such as FMEA and STPA inform and improve current practices? What advantages and disadvantages of each method do ML practitioners identify?

We contribute to the emerging research on managing social and ethical risk of ML systems in human-computing scholarship and responsible ML communities by offering:

- An overview of how practitioners define, assess and mitigate social and ethical risks;
- An analysis of the corresponding challenges when implementing these practices;
- A set of insights on how FMEA and STPA could inform existing practices along with their perceived advantages and disadvantages;
- Future research directions and calls to action for HCI and responsible ML scholars.

Our findings illustrate safety engineering frameworks provide valuable structure for investigating how social and ethical risks emerge from ML systems design and integration in a given context. However, successful adaptation of these frameworks requires solutions to existing organizational challenges for operationalizing formal risk management practices. Moreover, results of our work motivate further theoretical and applied research on adaptation of such frameworks. The remainder of this paper is organized as follows. We start by providing an overview of current discourse in responsible ML development and contextualize the relevance of the safety engineering frameworks (Section 2). We outline our interview protocol and analysis methods in Section 3, followed by highlighting key findings in Section 4. We discuss the value and shortcomings of applying safety engineering frameworks in light of current practices and call on the research community to further

examine and strengthen these frameworks for ethical and social risk management of ML systems in Section 5.

#### 2 BACKGROUND

Analyzing social and ethical implications of algorithmic systems is not new to computing researchers and practitioners [11, 29, 42, 90]. In the literature, terms such as harm [118], failure [96], and risk [1, 125] are often used to describe adverse impacts of ML systems. While there is currently no agreed upon definition of these terms and their relationships, we use the phrase *social and ethical risk* to frame broadly the adverse social and ethical implications ML systems can have on users, society, and the environment. This working definition provides conceptual consistency in this paper, and is not meant to be normative. In the remainder of this section, we contextualize current discourses on social and ethical risks in ML to situate our study design, findings, and discussion. We highlight current epistemological perspectives and tools for responsible ML development, and detail the safety engineering frameworks (FMEA and STPA).

## 2.1 Epistemological perspectives for anticipating and mitigating harms of ML systems

Scholars have proposed various methods for anticipating social and ethical impacts [36, 37, 109]. Anticipating harm involves thinking about the values [88, 111] and affordances of ML systems [17], with specific attention to how social norms and power dynamics constitutively shape adverse impacts of ML systems [12, 13]. The process of anticipation is aided by critical epistemologies that center the needs and standpoints of socially oppressed groups, including critical race theory [12, 46, 58, 89], post-colonial theories [82], and queer [114] and feminist HCI [9].

As social and ethical impacts are co-constituted through the interplay of technical system components and the social world [53], design methodologies attentive to these dynamics support more meaningful harms anticipation and mitigation. For instance, Value Sensitive Design that examines what value tensions ML systems create or resolve [40, 124], supports increased stakeholder coordination [121] and consideration of technology from different social standpoints and perspectives [8]. Similarly, participatory design methods can center the needs of users, communities, and other stakeholders often excluded from the design process [130] or algorithmic governance [64, 65], especially when incorporating feminist epistemologies [9, 49]. Speculative design can also help designers imagine more socially just and racially equitable technological futures [47]. While these epistemological perspectives and frameworks do not explicitly assess risk, they provide theoretical grounds for examining and mitigating social and ethical risk.

#### 2.2 Responsible ML tools, processes, and emerging regulations

With increased deployment of ML systems and reported harms [14, 89, 125], there is movement towards formalizing quantitative and qualitative tools for responsible ML development. Traditionally, ML system evaluations [50, 104] prioritized assessing and optimizing for a narrow set of performance metrics, mistakenly treating these measurements (e.g., accuracy of a test set) as a target rather than proxy for certain risks [72]. Recognizing these shortcomings [55], ML scholars proposed alternative methods to enable more comprehensive evaluation. These methods include assessing computational fairness with alternative statistical definitions [20, 24, 26, 27], quantifying model interpretability based on statistical properties [83, 95], evaluating robustness to distribution shift [23, 59, 116] and examining model performance when exposed to adversarial examples [34, 105, 128, 129].

In parallel, significant effort has also focused on developing mixed-method (qualitative and quantitative) processes to increase accountability and assess ML systems contextually. Scholars have proposed model cards [81], datasheets [44] and auditing tools [18, 97, 110] to improve the

transparency and quality of model and data practices. Human right and algorithmic impact assessments aid identification of potential societal level harms by examining model deployment in a given context [63, 77, 85]. Similarly, scholars have developed contextual methods of assessing fairness by focusing attention on the situated power dynamics of where systems are deployed [107, 127] and transparency [123] of ML systems. Parallel to technique development, there is a rapidly emerging set of international standards [3], policies [120], and regulatory frameworks [35] that examine ML systems from a risk-based perspective.

2.2.1 Empirical studies of responsible ML practices. HCI scholarship examining the perceptions and needs of responsible ML practitioners have identified key challenges [48, 99], including limited definitional consensus on key terms [60] and the underlying need to translate principles into actionable guidance to catalyze transformative organizational change [28, 75]. Practitioners often work in multidisciplinary environments, where technical and non-technical stakeholders draw on different epistemologies and perspectives [86], posing challenges to cohesive anticipation and identification of harms and risks [126]. In terms of risk assessment specifically, Raji et al. [97] underscore how the often-rapid pace and piecemeal implementation of risk assessment inhibits holistic forecasting of potential risks and their relationships to technical system components.

While there is a growing literature on practitioner needs, limited work has focused on identifying existing social and ethical risk management practices and ML practitioners' perspectives towards safety engineering frameworks. Martelaro et al.'s [78] study of the applicability of hazard analysis and the needs of practitioners is a notable exception. From an exploratory interview study with eight participants, Martelaro et al. conclude existing hazard analysis tools from safety engineering cannot readily support ML systems and highlight how lack of team incentives, the pace of industry development, and underestimating the effort needed to create robust ML systems challenge implementation of these tools. Nonetheless, Martelaro et al. emphasize frameworks are necessary to support risk management for responsible ML practice.

# 2.3 Introducing safety engineering approaches to failure and hazard analysis

Safety engineering is a generic term for an assemblage of engineering analyses and management practices designed to control dangerous situations arising in sociotechnical systems [7, 33, 68]. These analyses and practices identify potential hazards or system failures, understand their impact on users or the public, investigate causes, develop appropriate controls to mitigate the potential harms, and monitor systems [113]. Safety engineering crystallized as a discipline around WWII, when military operators recognized losses and accidents were often the result of avoidable design flaws in technology and human factors [122]. Since then, implementation of safety engineering in sociotechnical domains, such as medical devices and aerospace, has significantly reduced accidents and failures [103].

We motivate use of safety engineering for social and ethical risk management given its strength in drawing attention to the relationships between risks, system design, and deployment [30, 97]. As ML systems introduce interdependencies between the ML artifact, its operational environments, and society at large [101], safety frameworks can provide a strong analytical grounding for risk management [33]. Moreover, harms from ML systems are often recognized after they have occurred [98] at which point mitigating them is significantly more challenging and costly [21]. In this study, we focus on two safety engineering techniques designed to identify and address undesired outcomes early in development [7, 33, 68]: a failure analysis technique for improving reliability (FMEA) and a hazard analysis technique for identifying unsafe system states (STPA).

- 2.3.1 Failure Mode and Effects Analysis (FMEA). FMEA, a long-standing reliability framework, takes an analytic reduction (i.e. divide and conquer) approach to identifying and evaluating likelihood of risk for potential failure modes (i.e. the mechanism of failure) for a technological system or process [21]. FMEA has been used in high consequence projects, such as space shuttle [54] and U.S. nuclear power plant safety [73]. The FMEA framework helps uncover potential failure modes, identify the likelihood of risk, and address higher risk failure modes for a system (i.e. bicycle), component (i.e. bicycle's tire), or process (i.e. bicycle assembly) [21]. FMEA is a multi-step framework, through which steps are iteratively performed by FMEA and system experts over the development life cycle [21] (see also Fig 1):
  - (1) List out the *functions* of a component/system OR steps of a process (e.g., everything the system/process needs to perform).
  - (2) Identify potential failure modes, or mechanisms by which each function or step can go wrong.
  - (3) Identify the *effect*, or impact of a failure, and score its *severity* on a scale of 1 10 (least to most severe).
  - (4) Identify the *cause*, or why the failure mode occurs, and score its *likelihood of occurrence* on a scale of 1 10 (least to most likely).
  - (5) Identify *controls*, or how a failure mode could be detected, and score *likelihood of detection* on a scale of 1 10 (least to most likely).
  - (6) Calculate *Risk Priority Number* (RPN) by multiplying the three scores; higher RPN indicates higher risk level.
  - (7) Develop recommended actions for each failure mode and prioritize based on RPN.



Fig. 1. Steps for conducting an FMEA [21]

2.3.2 System Theoretic Process Analysis (STPA). The hazard analysis method, STPA, is a relatively new technique taking a system theoretic perspective towards safety [68]. It maps elements of a system, their interactions, and examines potential hazards (i.e. sources of harm). While analytic reduction requires a user of the tool to imagine interactions between components, modeling at the system level is meant to capture *emergent* phenomena that are well-described only by component interactions rather than individual component behavior. STPA has been employed in NASA's space program [52], the nuclear power industry [112], and the aviation industry [51].

In contrast to FMEA, the STPA process does not focus on reliability, failures, or risk likelihood. Instead, STPA models the sociotechnical system, focusing on the structure between components as well as control and feedback loops. Broadly, STPA encompasses the following steps, which are meant to be iterative (across the model of a system) and cyclic (across a system's lifecycle) (see Fig 2).

(1) Define the *purpose of the analysis* by identifying losses via outlining stakeholders, and their values. System specific hazards and controls are then highlighted based on the specified loss.

(2) Model the *control structure* of the full sociotechnical system using control feedback loops which consists of a controller which sends *control actions* to a system that is being controlled while receiving *feedback* from the same system.

- (3) Identify *unsafe control actions* (UCA) by going through each control action and thinking about unsafe modes of (no) action, incorrect action and untimely action.
- (4) Identify potential loss scenarios by outlining potential casual scenarios for each UCA.

These steps can be applied to positive effect at any stage in development, and be used to develop requirements that need to be enforced to ensure a safe sociotechnical system, such as new design decisions, requirements, procedures, operator training, test cases, or even periodic audits.

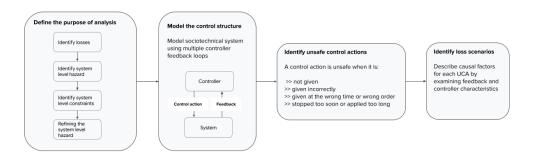


Fig. 2. Steps for conducting an STPA[67]

In sum, FMEA and STPA frameworks pose complementary analytical perspectives from safety engineering. Prior work suggests these techniques could strengthen the identification and mitigation of social and ethical risks of ML systems [30, 69, 97, 102]. Scholars have discussed the overall benefits of FMEA for internal ML auditing [97], illustrating how it could uncover ML fairness related failures [69], and have used it to propose an analysis of "social failure modes" for ML systems [102]. Yet, we could not locate any studies investigating ML practitioner's perspectives towards use of FMEA for social and ethical risk management. Similarly, several works suggest the value of a system theoretic framework for eliminating or mitigating social and ethical risks of ML systems [30, 79]. These works illustrate the theoretical application and benefit; however, little work to date explores industry ML practitioner's perspectives towards these techniques and how they could address perceived gaps in current risk management practices [78].

#### 3 METHODOLOGY

We conducted 30 semi-structured interviews with ML industry practitioners specializing in assessing and mitigating ML ethics risks, from six companies. The research proposal, the interview protocol, and consent forms were reviewed and approved within one of the institutions represented in this study. Here, we describe the participants, recruiting, data collected, analysis, and study limitations.

#### 3.1 Participants and recruiting

We used purposive and snowball sampling to recruit participants. Recruitment inclusion criteria specified participants be 18 years old or older, and currently work in an industry position conducting, managing, or researching social and ethical risks of ML system. As our primary research question is to understand industry adoption of reliability engineering tools, we excluded practitioners in

academic, governmental or not-for-profit organizations. While we did not establish specific quotas for each professional position, we sought a balance of roles and backgrounds.

Four of the authors brainstormed an initial list of interview candidates based on knowledge about their existing work profile (via networking and publication or presentation track record at major conferences) and sent emails inviting their participation. Once a candidate accepted an invitation to participate, the interview was scheduled and the interviewer sent the consent form. At the conclusion of each interview session, we invited participants to recommend other candidates. The lead author conducted all interviews, which lasted approximately 60 minutes except for two 90-minute interviews.

In total, 30 practitioners from a diverse range of industry roles and educational backgrounds took part in the study (**Table 1**). Participants held a range of roles including management (e.g., product, technical program, research and executive) (n=8), research (n=11), analyst/advisory roles (n=9), and software engineers (n=2). All participants worked in their current role for at least one year, and had experience assessing multiple ML systems for social and ethical risks, including classifiers, recommendation systems, large language models and text to image models. We conducted interviews between June and August 2022. All participants gave informed consent prior to participating in the study; interviews were recorded with permission. Participants were not financially compensated for their participation.

Job Title	Description	n (%)	ID
Research (i.e. research scientist,	Primarily conduct interdisciplinary	11 (37)	R3, R4, R5, R12, R18,
principal researcher)	research in responsible ML		R19, R21, R25, R22, R28,
			R29
Analyst/advisory (i.e. ethics	Advise project teams and	9 (30)	R6, R7, R8, R13, R14,
reviewer, ethics and policy advisor,	review ML systems according to		R16, R17, R24, R26
sociotechnical analyst, user	internal review processes		
researcher, research associate)			
Management (i.e. product	Manage products, programs,	8 (27)	R1, R2, R9. R10, R15,
manager, technical program	companies, and research projects		R20, R23, R27
manager, research manager, chief			
executive officer)			
Engineer (i.e. research/software	Design and develop ML systems	2 (6)	R11, R30
engineer)			

Table 1. Participant's roles and reference ID

## 3.2 Interview design

The interview protocol consisted of two parts: a) current practices and challenges, and b) first impressions of FMEA and STPA applicability for ML systems. Following confirmation of consent, we asked participants to describe their role and the type of technologies they focus on. We then asked participants how they define, assess, and mitigate social and ethical risk, broadly conceived. Moreover, we asked participants to discuss challenges they face when assessing and mitigating social and ethical risks in their current role. In the second part of the interview, we introduced the two processes using non-ML examples: FMEA was described with an example of a car tire; STPA was introduced using an example of a new surgical technique. The introduction of each process (including the example) took approximately 5 minutes. We introduced each technique one at a time and then discussed it for 10 minutes each. During this discussion, we asked participants to share their first impressions (pros, cons) while considering their potential use as a social and ethical risks assessment tool for ML systems. We invited them to talk through how they would apply such a process on an ML system they have assessed previously. To avoid order bias, the interviewer

alternated between the processes for each interview. All interviews were conducted online using a video conferencing platform. Participants discussed both techniques in all interviews except in two interviews where due to time restraints one of the techniques was not discussed. This occurred once for each of the technique.

## 3.3 Data analysis

We used reflexive thematic analysis [15, 16] to understand the main themes in the interview data. We used an automatic transcription software for transcribing the interview recordings and then manually cleaned the transcripts. The primary author removed identifying information (e.g., current employer, specific products/projects mentioned) from the transcripts to protect the anonymity of the participants. Four of authors coded the data, first taking familiarization notes to highlight key ideas emerging early in the analysis. We then conducted open coding of the interview data, using the QSR NVivo 12 qualitative analysis software. The lead author coded all of the interviews and three other authors collectively coded 15 interviews. Every interview was coded by two researchers. The authors responsible for coding met iteratively to discuss codes, data interpretations, and progress from codes to thematic discussions. During these discussion session, researchers resolved disagreements, and generated new codes as relevant concepts emerged. In the final session, these authors convened to organize codes thematically and discussed emerging themes. The lead author compiled all the coding documents and synthesized the themes from the group discussions. Next, thematic findings were shared with broader research team for confirmation and collaborative discussion.

#### 3.4 Author reflexivity

As with all research, our positionality and lived experiences inform our approach to designing, conducting, and analyzing this research study. All authors are researchers living in Canada and the United States. Our collective disciplinary backgrounds informing our research perspectives include ML research and engineering, mechanical engineering, robotics, human-robot interaction, sociology/ science and technology studies, cognitive sciences, and cybersecurity.

#### 3.5 Study limitations

Our study examines how ML practitioners engage in social and ethical risk management practices, what challenges they face, and how failure and hazard analysis frameworks could inform and improve their practice. As an exploratory study, further work is needed to deepen understanding and develop ML model or other contextually-specific insights on the applicability of FMEA and STPA. Moreover, the ML practitioners interviewed for the study did not have expertise in safety and reliability engineering, and had limited time and exposure to the techniques. This study reflects first impressions of these frameworks based on their experience. In addition, our participants primarily come from larger, multinational technology organizations (4 of 6 companies represented) and reside in North America. As industry practitioners, there are limitations on what some participants could disclose due to confidentiality commitments. Thus, further work could examine views from a wider range of practitioners, which could provide deeper insights.

#### 4 FINDINGS

Our study examines how failure and hazard analysis frameworks could inform ML risk management practices. We present our findings in two parts and start by highlighting what practitioners identify as existing social and ethical risk management practices and discuss the challenges they remark. In section two, we build on this understanding of current practices and challenges and discuss

ML practitioner's impressions on how FMEA- and STPA-like processes could strengthen existing practices.

## 4.1 Current social and ethical risk management practices

Participants described increased formalization of risk management practices, yet noted key aspects of their work - including defining and assessing for social and ethical risks - were characterized by an interpretive flexibility through which practitioners navigate peers with multiple and sometimes conflicting understandings of risk management work. While this flexibility accommodates the wide range of ML systems and contexts of deployment these practitioners are responsibilized to assess, it also fosters friction in multidisciplinary environments. Organizational culture and resource constraints are power dynamics influencing these challenges.

4.1.1 Variable definitions of risk. Defining social and ethical risks sets the bounds of which system (mis)behaviors or downstream effects are acceptable or concerning. Rather than anchor to a canonical definition, we find participants employ multiple definitions of social and ethical risks, explicitly noting there is no widely-accepted definition in the ML community. Despite lack of common definitions, there were points of convergence, each underpinned by concerns with adverse, material impacts to people. Foremost, participants described social and ethical risks as user and societal harms of ML systems. Here, participants described "harms" broadly, without specifying uniform methods for surfacing harms to who or what. While some participants noted a general "user-centric [harms] framing works well [...] for a product and engineering organization" (R15), others centered harms to "underrepresented" (R13) and "historically marginalized" (R4) communities. Beyond harms, participants also described how transgressions to a company's public AI ethics principles offer a "jumping off point" (R15) to identify social and ethical risks. While these commitments provided a clear north star for identifying risks, participants also noted their abstracted nature does not help them know which impacted stakeholders to prioritize or how to grapple with the constitutive role of context-of-use and system affordances (R15) in generating risks. Lastly, participants described social and ethical risks as human rights violations that could be surfaced through human right impact assessment. The human rights frame was less common than other definitions, though many participants recognized its value in evaluating systems deployed in cross-cultural domains.

While variable definitions allow for flexibility in scoping social and ethical risks for a wide range of ML systems, they can also foster frustration, misunderstanding, and inefficiency in multidisciplinary environments. Participants all stated clear definitions are necessary for productive conversation (R1, R10), for instance, as (R1), a product manager illustrated: "sociologists come from the harm perspective, whereas engineers often think of it in the failure perspective." Without common language, identification and assessment of risks can be slowed. Yet, multidisciplinary expertise is highly desirable. Some participants in engineering roles reflected they felt ill-equipped to define risks (R11) and expressed need for formalized guidelines. Despite desire for clearer definitions, many participants noted value in definitional flexibility, particularly for assessing novel technologies, in which strict definitions may not accommodate possible harms.

4.1.2 Multiple methods for assessing social and ethical risks. Whereas definitions of social and ethical risk constitute the boundaries of (un)acceptable ML system behavior, methods shape the situated assumptions, guide the questions asked, and format how social and ethical risks are communicated. Participants described employing various risk assessment methods including qualitative, quantitative, and "reflexive investigatory" approaches, through which the methods and motivation of fellow practitioners are probed for alignment with organization principles and best practices. Participants from four of the six companies indicated they have formal ethical review teams or

programs, through which structured risk assessment occurs. Even within these formal structures, however, participants may combine or tailor methods employed based on identified needs.

Consistently, ML practitioners noted they begin social and ethical risk assessment by qualitatively mapping potential harms of an ML system individually or when possible, in teams with interdisciplinary expertise (i.e. product managers, AI ethicists, software engineers, and research scientists working collaboratively). Mapping harms focuses attention on the adverse material impacts to people, including how ML systems can change work practices, socialization patterns, and other dimensions of social life (R18). Mapping harms involves surveying existing literature, with a focus on known impacts of "related technologies" and social contexts (R25); although, many participants, especially those whose jobs did not include a significant research mandate, expressed time and resource constraints limit their ability to engage literature as deeply as desired. Literature surveys may incorporate non-scholarly perspectives, as one research scientists noted they centered community disability justice perspectives (R5). Mapping harms also involve foresight exercises to hypothesize potential worst/best case scenarios (R16) through free-form brainstorming and by working through structured questions created internally. Participants also referred to using more formalized assessment process such as human rights and impact assessment processes [63, 85] at this stage where the focus is to qualitatively evaluate potential implications. A third, and highly desired approach by participants, when resources permit, is participatory methods, where community-based stakeholders are engaged to co-identify social and ethical risks.

Engineers and computer scientists also described **quantitatively testing ML system properties**. Assessment begins with functional tests, where "ML components are treated much like a piece of software" (R11) and subject to routine code reviews and performance tests measuring accuracy, recall, and precision. Functional tests do not explicitly measure social and ethics risks. Assessments for such risks are additive and "bespoke for every project" (R11), which may include disaggregated analysis [5, 10], counterfactual and causal analysis [43], and adversarial testing [34, 105, 128, 129]. These assessments are conducted pre- and post-launch, and aim to identify allocative, representational, and quality-of-service harms based on identity characteristics. They cannot, as participants note, capture non-computational harms, particularly the diffused and long term impacts of ML systems in the world. Moreover, participants described limitations in post-launch assessment, as there are no rigorous ways of identifying such risks unless reported by users, media outlets, or external auditors.

Lastly, participants in management roles described **interrogating product and research development processes**. This approach is motivated by participants' recognition that technologies have a world view influenced by the norms, intentions and common practices of researchers and developers. Participants described reviewing product team documentation and methodologies, and making recommendations to improve practices to minimize harms to marginalized communities, such as assessing how a product team ML model evaluation process and identifying whether they are operationalizing any responsible ML metrics [100]. For instance, R24, an ethicist, described "assess[ing] the intentions of teams and ... predict[ing] ... the[ir] impacts." While participants did not detail how they conduct such epistemological assessments, they did reference external literature, including value analysis [39].

Overall, practitioners noted tensions in risk assessment. First, assessment is most effective when there is commitment to multidisciplinary collaboration between product teams and "subject matter experts" (i.e. non-engineering practitioners, such as ethicists, sociologists, or people with contextual expertise), although such collaboration is "hard" given different epistemological background (R19). Second, assessments are "very product dependent" in which many participants remarked on the need to better standardize. However, assessment cannot be easily automated as it requires meaningful

"conversations with the product team to understand" the product, its use case, and where harms may arise (R6).

4.1.3 Emerging approaches for mitigating social and ethical risks. Social and ethical risks are often surfaced by ethicists and social scientists who sit outside of research and product teams, and are not subject to product launch incentive structures. As such, mitigating identified risks requires significant work to build cross-functional "partnerships" (R16) and gain buy-in from teams with relevant technical expertise and control to adjustment models and product design.

Product managers may take charge in mapping a mitigation strategy, however, deciding on an approach also requires collaboration, as preferred strategies vary by disciplinary training. Engineers often gravitated towards algorithmic solutions, such as fine-tuning model parameters, creating new training datasets, and implementing blocklists or filters [87] to prevent harmful model inputs or outputs. In contrast, ethicists, social scientists, and designers emphasized UX solutions, policy development, explainability and transparency artifacts, and education. Yet, practitioners all recognized need for multiple interventions, as one computer scientist elaborated:

"...I tend to gravitate towards algorithmic solutions [...but] want to qualify this is not the only way to solve things [and] there are some things ... not mitigatable by algorithmic techniques. In which case, essentially, I defer my expertise to somebody else because maybe the solution in that case, is more on the policy side or participatory design methods outside the scope of what I'm familiar with." (R3)

Prioritizing mitigations is also a challenge, as some recommendations may "take months, maybe even years to fully fix." (R8). There are no clear guidelines on what mitigations need to happen and which ones can be put on hold; though some noted movement towards formalizing mitigation frameworks (R16). As such, resource availability and product team's priorities dictate which mitigations will be pursued.

## 4.2 Challenges in current social and risk assessment approaches

Our findings show the emergent and chaotic nature of existing practices. We identify four key challenges that ML practitioners face when developing and implementing these practices.

4.2.1 Organizational structure: Incentive conflicts, fractured adoption, and unclear responsibilization. Participants emphasized organizational incentive structures complicate identifying and mitigating social and ethical risks. Research teams are typically incentivized to publish academic papers, and product teams are incentivized to launch new products and features. As such, incorporating social and ethical risk practices can be perceived as slowing down publications and launches. In this way, organizational culture and priorities are a constitutive factor in assessing and mitigating risks—especially those that may take extensive time and resources to fix, as one research scientist, explains:

"When we think about [social and ethical risks of] machine learning, it's not just the algorithms and the code and the data. It also bleeds into the organizational structure, which means that for you to push for a mitigation strategy, internally, or even an assessment strategy, internally, it needs to be recognized as something of value. Because a product team, especially, is going to say, 'Well, this is nice, but it doesn't align with how I'm being measured in terms of my team's performance or my individual performance." (R3)

Similarly, R17, an AI ethics analyst, notes "I think inherently, what we do is not aligned with a corporation ... it's not revenue generating work. It's work that can inhibit the bottom line and a product launch. ... it can be hard to get product teams to mitigate ... because they just want to launch the product." The often partial—or non-systemic—ways organizations adopt social and ethical risk

management is thus a challenge. Organizations may have formal ethical review teams; yet, if these are "opt-in" rather than mandatory, adoption is fractured or ad hoc.

As the development and use of ML system components are typically diffuse, and often lack centralized control, it may not be clear which job functions are responsible for a given component. For instance, R1, a product manager, reflects on how identifying who is responsible for assessing components is not always straightforward: "Who is responsible for [assessing the representativeness of datasets used for adversarial testing of downstream products and features]? [...] is the research team responsible or is it the product managers [for where that dataset is used]?" As well, the team assessing a system component may not "have decision-making power" (R17) to act on findings, creating barriers to mitigating identified risks. This raises questions about who is responsible for implementing these processes into research and product development, and who is responsible for establishing the minimum standards researchers and product teams should meet. One program manager emphasized some teams "are already trying to practice on their own without guidance and really struggle with "How do I make decisions? What's fair enough?" and expressed concern that, "If I'm wrong, am I liable?" (R2). Thus, in recognizing incentive conflicts, fractured adoption, and unclear responsibilization, practitioners often expressed desire for clear guidance on assessing ML systems.

4.2.2 Resource constraints: time, capacity, data. Practitioners motivated to address social and ethical risks encounter time, capacity, and resource constraints. For instance, testing and remediating ML systems requires creation of datasets (e.g., for re-training, fairness benchmark testing, etc.). Responsible dataset development is time consuming [92] and many practitioners are pressured to complete this work in time-constrained environments. R24, who works as a research manager, elaborates the challenges of creating datasets for adversarial product testing under time constraints, which may not leave room for critical self-reflection:

"It is always very difficult because it is an expedited research project. We have to do it in a month ... and every time you have to create a dataset [and] you literally have to sit down and think about all the keywords that you were going to put in a model that could go wrong and ultimately, you're creating a data set, but you're creating a dataset at a point in time and we know that people have all these cognitive biases."

Similarly, R12, who works as research scientist, describes how dataset creation involves forecasting and anticipating context:

"A lot of the challenges are obtaining datasets that we think are representative of the downstream deployment context that we think a model is going to end up in. [...] if you are actually interested in mitigating risks that might fall predominantly on certain social groups, you actually need to collect data on identifying those social groups and that is often a difficult thing to do. Alternatively, for some mitigation strategies, you often need to collect very rich data in order for those mitigation strategies to work and many datasets we have were not collected with the intention of building predictors that would actually transfer well in situations where the composition of social groups changes or something like that. And had you known beforehand ... we might have been able to guide the data collection a little bit better."

Whether a dataset can be characterized as a "good" dataset is context dependent, and requires foresight, input early in the data collection, and necessary expertise to be able to identify what needs to be collected. Creating appropriate dataset is only an example of how resource limitations that practitioners face when evaluating and mitigating social and ethical risks. Similar challenges were noted for the practices highlighted in Sections 4.1.2 and 4.1.3.

4.2.3 Who's in the room? The need for more diverse perspectives and forms of expertise. Participants shared concerns how the people in the room define what ethical and social risks are, which is often inadequate and limiting. Speaking directly to this, R25, a research scientist, emphasized: "One of the biggest challenges when we're trying to assess and mitigate risks is: Who is it in a room?" Similarly R17, an AI ethicist reflected: "[...] we have inherent blind spots on the team. When we think about our lived experience, we do have diverse backgrounds, but ultimately we can't speak to a global perspective as [much] we might like. And when we're imposing an American lens ... it's not as robust an analysis as it could be." Although practitioners noted they "were actively trying to address" (R25) this problem, actually doing so can be perceived as having high time and effort costs, which can conflict with organizational incentives. As R15, a product manager, explains:

"Whose expertise do you need to do a good job at assessing ethical and social risks for a project? Generally, those people aren't going to be the people who are on your team and therefore it's costly in terms of time and potentially these sources to find those people and to get them in the room and to get them up to speed, educate them on what you're trying to do and then actually get them to help you brainstorm the risks."

However, even identifying what is a relevant context-of-use can be challenging, especially as ML systems are deployed globally and across numerous contexts at once.

4.2.4 Uncertainty and knowledge gaps for assessing ML systems. Participants described different "knowledge gaps" that pose challenges to social and ethical risk assessment. Foremost, participants noted they anticipate and mitigate risks for emerging and novel technologies, which have not yet been deployed in the world. This increases practitioners' uncertainty in forecasting relevant risks. As R8, an AI ethicist, describes, "everything we see is at the cutting edge of technology. That's exciting and it also means there is no road map." Similarly, R4, a research scientist, emphasized the challenge of "unknown unknowns," reflecting "How can I find out different kinds of social and ethical risks that might exist that I just am currently unaware of?" Yet, practitioners highlighted knowledge gaps around established ML technologies, especially in connecting identified risks to relevant system components. R25, a research scientist, elaborates: "one of the biggest open problems is, how do you operationalize these complex social constructs in a way that enables us to actually scale evaluation?"

A second type of knowledge gap reflects the uncertainty of assessing ML systems that are often opaque and complex, through which it is not easy to pinpoint why a ML model is making a particular decision, nor is it easy to operationalize measurement of social and ethical impacts. Participants noted the complexity of ML systems pose challenges to identifying what even constitutes a system. R12, a research scientist, notes "One thing from my experience that I found is that it's very difficult at least in ML systems to get people to write down a model of the entire system." This knowledge gap is especially salient when conducting assessments that require scoring severity or likelihood, which often require forecasting and hypothesizing. R22, a research scientist, describes: "Uncertainty is a really big [challenge]. Sometimes [ethical and social] concerns are serious. But, it's not easy to parameterize things in the way a risk suggests. So you don't know if it's 10% likely, 90% likely. You just have deep uncertainty about whether a future risk will transpire. Particularly, when we talk about [compounding] effects and complex systems." Similarly, R7, a research associate, describes "we don't have that faster and harder feedback loop on our actions" and it is unclear what the "marginal impact" of an ML based project is at the societal level. Grappling with uncertainty of existing and emerging ML systems is top of mind for practitioners responsible for assessing and mitigating potential social and ethical risks.

## 4.3 First impressions on safety engineering frameworks

Participant first impressions of FMEA and STPA underscored how safety engineering could bring greater structure to social and ethical risk management practices. However, practitioners emphasized understanding the context of use and implementation remains a critical aspect of assessment, and raised concerns about employing safety engineering when context is not yet known. Other identified limitations include conflicts with organizational norms and capacity.

4.3.1 FMEA- and STPA-like processes provide sound structure. As participants clearly articulated the need for formalized social and ethical risk management guidance, they strongly agreed FMEA- and STPA-like processes provide valuable systematic and structured guidelines for examining potential social and ethical risks for ML systems. When asked about their initial impression of FMEA and its applicability to ML systems, one research scientist describes, "there are definitely cases where explicitly defining failure modes, trying to have a sense of what the potential causes are and how to mitigate them is a really useful framework for machine learning systems and one that has not been terribly well formalized until now." (R12). Many appreciated the ordered steps of FMEA and stated thinking about functions/steps, failure modes, effect, cause and detection can effectively guide existing foresight exercises that evaluators perform to assess social and ethical risks. A few noted similarities between the FMEA process and current foresight exercises they employ.

Similarly, when discussing the STPA framework, participants noted the system theoretic approach is valuable because it frames analysis of an ML system in relation to both co-existing ML systems and societal power structures. An analyst expresses "I feel it provides a really sound structure to a process that we need in machine learning systems, especially from the ethical analysis perspective" (R17). Practitioners emphasized the structure of STPA can support examining the complex interconnections between systems. A research scientist elaborates this point: "I do think a systems theory approach is very useful. It helps [an evaluator] understand relations between new pathways of harm and allows [them] to think about the multiple points of intervention" (R21). Overall, participants noted STPA and FMEA provide complementary and different analytical perspectives for examining failures and hazards.

4.3.2 Understanding context is critical for social and ethical risk management: FMEA and STPA have limitations. In reflecting on the efficacy of these safety engineering processes, participants noticed FMEA does not provide a framework for systematically thinking about the human-ML system interactions when mapping ML system's functions, steps and failure modes. To address this shortcoming, many suggested an FMEA analysis needs to be accompanied by a deep understanding of social issues relevant to a given ML system. As a research scientist explains, FMEA is "very agnostic to the socio-technical context at first glance and it will be important to outline the use case when thinking about each component or process" (R21). Similarly, a product manager remarked if the ethics analysts understand the "context of deployment" (i.e. where a model will be deployed in a product or feature), they can think of failures that are not just "component specific" (R1). Once failure modes are mapped, participants stated that thinking through effect, cause and control can help practitioners gain "foresight" (R19) on social and ethical risks.

STPA, on the other hand, was perceived as a process that considers an ML system in relation to stakeholders and other automated systems that interact with it. A research scientist noted that STPA would be useful to analyze how a ML system "fits into a larger decision-making process" (R12). Many participants appreciated that STPA starts from understanding stakeholders, values and losses and provides a framework for mapping relations between humans and the ML systems. A program manager expressed that STPA "magnifies the fact that when you think of harms you have to have both the technical and then the social and ethical lenses" and that it is valuable that

STPA provides a framework to represent "all of that" (R2). Although STPA facilitates incorporates understanding of context via system theoretic perspectives, participants expressed that mapping multidimensional interactions between an ML system and various stakeholders using bidirectional control feedback loops will at times lead to inaccurate depiction of a sociotechnical system. As R24, an ethicist elaborates "once you start system theoretic analysis, you're going to abstract away and choosing proxies for social phenomena and they're going to be insufficient" and noted that STPA-like processes should "go hand-in-hand with expertise" of understanding "the limitations of systems processes analysis."

Noting the importance of understanding context of use when understanding social and ethical risks, participants questioned and expressed concern about how FMEA- and STPA-like processes would work when a ML system has no defined application or many different ones, such as generative text to image or large language models.

4.3.3 Implementation of FMEA- and STPA-like processes require internal capacity building and organizational shifts. Many of our participants' first reactions to the FMEA and STPA processes was that the current industry culture and lack of internal capacity within technology companies will be hindrances to their adoption. Without a clear demonstration of their usefulness, industry adoption of similar processes will be slow. This sentiment is in line with the current challenges expressed about existing practices. R15, a product manager, states:

My biggest reaction is that [these processes] are so far from where our engineering culture is at. It feels like you would need to hire an entirely new type of person into these companies and over time completely change roles [...]. If [we] want engineering teams to do this themselves or be directly involved in the risk assessment [we] need to dramatically change the incentive structure."

The need for organizational culture shift was expressed with respect to both FMEA and STPA. However, a program manager explains, STPA "will require greater organization across teams and subject matter experts" (R2) considering its focus on interaction between different systems. Recognizing the challenge of creating these organizational shifts, participants were interested in exploring STPA only if they could see some concrete evidence of how it worked and what it delivered. STPA, in particular, was seen to require heavier internal capacity building to implement successfully, since many participants have some familiarity with FMEA-like processes already while elements of STPA remain foreign. A research scientist explains:

"People often think very linearly and there's a challenge of trying a systems approach. [Practitioners] want to know X causes Y, causes Z, and they want to mitigate right at one of those points [similar to an FMEA], rather than thinking about all the connections between X, Y and Z and what pathway is causing the most harm... [T]he first step is to get people to realize there are multiple relationships between X, Y and Z."

As building capacity requires time and buy-in from different teams with different incentives, participants emphasized it is "important for these processes to be simple" (R9) so a diverse group of people can engage them. Practitioners will need to learn new concepts and it will be important to translate terminology used in FMEA and STPA for ML applications.

4.3.4 Observations on step-by-steps application of FMEA and STPA. When asked to walk through the FMEA and STPA processes as illustrated in Figures 1 and 2, participants discussed how they would apply each step on an ML system. Many participants remarked they would benefit from using FMEA and STPA processes "earlier in development" (R25) when they are tasked with assessing potential social and ethical risk.

Observations of the FMEA steps.

• Identify function or steps: Practitioners expressed that there is value in outlining functions or steps for an ML system. They suggested either breaking down functions based on intended uses of an ML-based feature or product (i.e. "to log food, to inform users and to provide the act of tracking." (R10)) OR identifying steps for sub-processes along the ML development pipeline (i.e. "dataset development, annotation, training, evaluation or deployment" (R25)). Some remarked that it would be challenging to break down functions for the ML model itself. According to a research scientist "key features/functions [of an ML system] are often embedded in some distributed representation in the model. This is especially true for larger models, and it is very hard to assess because the boundaries are not there anymore" (R3).

- Identify failure mode: Participants were able and skilled in articulating failure modes (i.e. "unfavorable chatbot responses to zip codes that are identified as lower socioeconomic status" (R17)) but expressed uncertainty about their ability to comprehensively identify all potential failure modes due to the emerging nature of ML technologies. Moreover, they stated ethical and social risk often emerge from complex and non-tangible failures which are hard to identify and often need in-depth analysis of the ML system in context of use.
- Identify effect: Participants emphasized the importance of identifying the effect on whom or what, and expressed this should be incorporated into the FMEA process. They raised questions and seeked guidance about the extent to which practitioners should be responsible for protecting the interest of the company deploying/developing an ML system as opposed to interests of directly impacted users or the society at large.
- Identify cause and control: These two steps were seen as valuable, and participants noted ML technology companies have some control over changing design/implementation based on identified causes and controls. Participants noted that causal analysis and developing controls for social and ethical risk are active areas of research and suffer from similar challenges described in 4.1.4 about the uncertainties and knowledge gaps in assessing ML systems.

## Observations of the STPA steps.

- Identify purpose of analysis: Practitioners in different roles appreciated the start from stakeholder, values and losses. A participant explains "I like the idea of starting with the negative outcomes, it's much more user oriented at the beginning, in terms of how it impacts them" (R1). Social scientists and ethicists noted that in-depth value analysis and normative guidance is required in this step.
- Create control structure: Participants identified two scopes of analysis for drawing a control structure: internal company processes OR human-ML product interactions. Some noted that it is difficult to set meaningful boundaries and questioned how one could create a control structures for sociotechnical harms such as ecological harms. A participant noted that "control structure would be very helpful in terms of limiting rather than constantly overextending where all of the potential problems or risks can come from" (R10). Guidance is needed for where the system needs to be bounded and future work can use lessons from current STPA literature/practice. [67] Similar to reasons expressed for an FMEA, participants stated it is challenging to create a control structure for an ML model.
- Unsafe control actions: Participants appreciate "the quadrant logic" (R10) (i.e. four conditions outlined by the STPA process) for identifying how control actions could be unsafe. Some participants remarked that unsafe control actions could be mapped to "design choices" (R25) and stated that it would be valuable to have this type of analysis earlier on in the development process when creators can critically think about unsafe control actions to inform system requirements and corresponding design choices.

Loss scenarios: Similar to FMEA, participants noted it would be hard to set boundaries
for identifying causal scenarios for unsafe control actions. Considering the time and design
limitations in our interview, participants did not have the time to provide adequate feedback on this step. Further investigation is necessary to understand how this step could be
operationalized for ML systems.

#### 5 DISCUSSION

Policymakers and critics call for establishing strong accountability practices that responsibilize people and organizations for the risks attendant to ML systems [25, 62]. Strong accountability enables flexibility and experimentation while providing assurance and potential recourse to affected people [61]. A common question related to responsibilizing individuals or organizations is whether a given harm or problem was adequately *foreseeable*. Although failure is often viewed as inevitable, or even desirable, in machine learning [94, 108], safety engineering frameworks, such as FMEA and STPA, provide systematic processes to better anticipate risks [21, 68]. We discuss challenges and opportunities for future work to improve existing social and ethical risk management practice for ML systems.

# 5.1 Failure and hazard analysis frameworks are necessary but not enough

Our findings illustrate that despite increasing formalization of social and ethical risk management, current practices are disjointed and do not follow a systematic process. Without standard processes, it is difficult for responsible entities to systematically identify risks [97]. Moreover, lack of guidelines for assessment and mitigation of social and ethical risk, results in risk ownership without strong accountability, which creates uncertainty and frustration among practitioners [100]. Uncertainty about appropriate risk management practices and extant organizational challenges prevent creation of enforcement mechanisms that might foster trust among potentially harmed persons and groups [80]. To enable emerging policies and regulations [1, 35, 120], there is need to create assessments and mitigations of risk into organizational decision points, through which safety engineering could be supportive [30]. Based on initial interactions, ML practitioners recognize the value of safety engineering. Practitioners' walk-through of FMEA and STPA frameworks (Section 4.3.4) provides starting points for future exploration, case studies, and testing such techniques.

However, these frameworks have limited scope of analysis. STPA is designed to be a system safety engineering framework and FMEA is primarily for reliability assurance [67]. These processes cannot adequately answer normative questions such as "is this a good technology for society?" For example, applying FMEA or STPA on an ML application in gender classification could only marginally make the system safer but it will not be able to address concerns with use of automation in gender classification [57]. Traditionally, FMEA and STPA are applied when there is sufficient understanding of the deployment context (i.e. geographic location, typical user base, etc.). FMEA-and STPA-like analysis require practitioners to make assumptions about a system, which could be wrong and not hold true in different contexts. The outcome of an FMEA and STPA is not always valid across different contexts of application [21, 67]. Use of STPA and FMEA like frameworks for general purpose ML systems that are deployed at large scale needs further consideration and investigations. ML practitioners who are tasked with assessing and mitigating social and ethical risks need to be aware of and seek to address the identified scoping challenges for techniques such as FMEA and STPA.

## 5.2 Organizational challenges need to be mitigated

Safety engineering processes, such as STPA and FMEA, hold potential to address some existing challenges with conducting social and ethical risk management - namely, they can provide a

comprehensive framework and structure the analysis. However, implementation of such frameworks could suffer if organizational challenges persist, such as insufficient organizational incentives, homogeneous standpoints and perspectives, and lack of resources. The successful adoption of safety engineering in industries such as medical devices and automotive were accompanied by regulatory and organizational transformations [115]. With movement towards standardization and regularization of the ML industry, it is important to recognize addressing organizational challenges will persist regardless of chosen framework. However, practitioners and company leaders can learn from the growing body of research on operationalizing AI ethics (e.g., [99]) and conceptualize emerging roles such as an "ethics owner," individuals responsibilized to manage ethical dilemmas within a technology company [84].

# 5.3 Research challenges for the ML research community

Industry practices for addressing social and ethical risks of machine learning are rapidly emerging. Recognizing that safety frameworks are primarily designed to manage technological failures and hazards, we call on the ML research community to engage, study, critique, and improve the existing social and ethical risk management practices. Specifically, we have identified three research foci.

First, as illustrated in our findings, there is a need for clarifying existing conceptualization of social and ethical risks (i.e. harms to user, AI ethics principle transgression and human rights violation) and we posit that developing taxonomies of harm, failure and hazard - distinct concepts in safety engineering- for adverse social and ethical impacts of ML systems will provide valuable guidance in social and ethical risk management. Existing critical epistemological perspectives [9, 46, 82] on defining harms of ML systems should inform such taxonomies.

Second, as safety frameworks such as STPA and FMEA can benefit from theoretical framing and analytical processes for examining sociotechnical harms. Building on formalized concepts of risk, hazard, harm and failures for social and ethical implications, this work could provide guidance on STPA and FMEA concepts. When conducting an STPA, guidance is needed around what stakeholders, values and losses need to be considered for a given system. Similarly, an FMEA process needs guidance on how to think about the effect and severity of a potential failure mode. Existing participatory frameworks for AI governance [65] and design approaches [39, 47, 130] could inform this research direction.

Lastly, many empirical studies of responsible ML practices have focused on fairness related methods [75], transparency artifacts [81], and general AI ethics operationalization issues [100]. There is a lack of empirical studies for how practitioners are using, adapting and developing social and ethical risk management techniques. More empirical studies are required to validate the applicability, usability, and capability for identifying and managing risks of emerging frameworks across different ML applications and organizational cultures and application cases.

# 6 CONCLUSION

Challenges with organizational structure, resources constraints, representing diverse perspectives, and uncertainty of assessing ML systems present fertile ground for innovating social and ethical risk management tools. Quantitative, qualitative and reflexive investigative processes are emerging for defining, assessing and mitigating social and ethical risks. We study existing practices and posit tools from safety engineering could provide value for creating more appropriate frameworks. Our preliminary discussions with ML practitioners about safety engineering frameworks, such as STPA and FMEA, showed these approaches could be adapted to provide the necessary guidance for systematically conducting failure and hazard analysis for social and ethical risks of ML systems. In this work, we discussed the strength and limitations of these two processes and highlighted need for further research.

#### REFERENCES

- [1] 2021. AI Risk Management Framework | NIST. https://www.nist.gov/itl/ai-risk-management-framework. Accessed: 2022-9-10.
- [2] 2022. AIS Standards. https://standards.ieee.org/initiatives/artificial-intelligence-systems/standards/. Accessed: 2022-9-10.
- [3] 2022. ISO ISO/IEC JTC 1/SC 42 Artificial intelligence. https://www.iso.org/committee/6794475/x/catalogue/. Accessed: 2022-9-10.
- [4] Abubakar Abid, Maheen Farooqi, and James Zou. 2021. Persistent Anti-Muslim Bias in Large Language Models. (Jan. 2021). arXiv:2101.05783 [cs.CL]
- [5] McKane Andrus, Elena Spitzer, Jeffrey Brown, and Alice Xiang. 2021. What We Can't Measure, We Can't Understand: Challenges to Demographic Data Procurement in the Pursuit of Fairness. In Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency (Virtual Event, Canada) (FAccT '21). Association for Computing Machinery, New York, NY, USA, 249–260. https://doi.org/10.1145/3442188.3445888
- [6] Julia Angwin and Terry Parris, Jr. 2016. Facebook Lets Advertisers Exclude Users by Race. https://www.propublica. org/article/facebook-lets-advertisers-exclude-users-by-race. Accessed: 2022-9-3.
- [7] Nicholas J Bahr. 2014. System safety engineering and risk assessment: a practical approach. CRC press.
- [8] Stephanie Ballard, Karen M. Chappell, and Kristen Kennedy. 2019. Judgment Call the Game: Using Value Sensitive Design and Design Fiction to Surface Ethical Concerns Related to Technology. In Proceedings of the 2019 on Designing Interactive Systems Conference (San Diego, CA, USA) (DIS '19). Association for Computing Machinery, New York, NY, USA, 421–433. https://doi.org/10.1145/3322276.3323697
- [9] Shaowen Bardzell. 2010. Feminist HCI: taking stock and outlining an agenda for design. In Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (Atlanta, Georgia, USA) (CHI '10). Association for Computing Machinery, New York, NY, USA, 1301–1310.
- [10] Solon Barocas, Anhong Guo, Ece Kamar, Jacquelyn Krones, Meredith Ringel Morris, Jennifer Wortman Vaughan, Duncan Wadsworth, and Hanna Wallach. 2021. Designing Disaggregated Evaluations of AI Systems: Choices, Considerations, and Tradeoffs. https://doi.org/10.48550/ARXIV.2103.06076
- [11] Solon Barocas, Sophie Hood, and Malte Ziewitz. 2013. Governing algorithms: A provocation piece. SSRN Electron. J. (2013).
- [12] Ruha Benjamin. 2019. Race After Technology: Abolitionist Tools for the New Jim Code (1 ed.). Polity.
- [13] Abeba Birhane. 2021. Algorithmic injustice: a relational ethics approach. Patterns (N Y) 2, 2 (Feb. 2021), 100205.
- [14] Su Lin Blodgett, Q Vera Liao, Alexandra Olteanu, Rada Mihalcea, Michael Muller, Morgan Klaus Scheuerman, Chenhao Tan, and Qian Yang. 2022. Responsible Language Technologies: Foreseeing and Mitigating Harms. In Extended Abstracts of the 2022 CHI Conference on Human Factors in Computing Systems (New Orleans, LA, USA) (CHI EA '22, Article 152). Association for Computing Machinery, New York, NY, USA, 1–3.
- [15] Virginia Braun and Victoria Clarke. 2019. Reflecting on reflexive thematic analysis. *Qualitative Research in Sport, Exercise and Health* 11, 4 (2019), 589–597.
- [16] Virginia Braun and Victoria Clarke. 2020. One Size Fits All? What Counts as Quality Practice in (Reflexive) Thematic Analysis? *Qualitative Research in Psychology* 18, 3 (Aug. 2020), 1–25.
- [17] Philip A E Brey. 2012. Anticipatory Ethics for Emerging Technologies. Nanoethics 6, 1 (April 2012), 1–13.
- [18] Shea Brown, Jovana Davidovic, and Ali Hasan. 2021. The algorithm audit: Scoring the algorithms that score us. Big Data & Society 8, 1 (Jan. 2021), 2053951720983865.
- [19] Nikhil Bugalia, Surjyatapa R Choudhury, Yu Maemura, and K E Seetharam. 2022. A systems theoretic process analysis (STPA) approach for analyzing the governance structure of fecal sludge management in Japan. Environment and Planning B: Urban Analytics and City Science (March 2022), 23998083221075639.
- [20] Dallas Card and Noah A Smith. 2020. On Consequentialism and Fairness. Frontiers in Artificial Intelligence 3 (2020), 34
- [21] Carl Carlson. 2012. Effective FMEAs: achieving safe, reliable, and economical products and processes using failure mode and effects analysis. Wiley, Hoboken, N.J.
- [22] Le Chen, Alan Mislove, and Christo Wilson. 2016. An Empirical Analysis of Algorithmic Pricing on Amazon Marketplace. In Proceedings of the 25th International Conference on World Wide Web (Montréal, Québec, Canada) (WWW '16). International World Wide Web Conferences Steering Committee, Republic and Canton of Geneva, CHE, 1339–1349.
- [23] Mayee Chen, Karan Goel, Nimit S Sohoni, Fait Poms, Kayvon Fatahalian, and Christopher Ré. 2021. Mandoline: Model Evaluation under Distribution Shift. In *International Conference on Machine Learning*. PMLR, 1617–1629.
- [24] Alex Chohlas-Wood, Madison Coots, Emma Brunskill, and Sharad Goel. 2021. Learning to be Fair: A Consequentialist Approach to Equitable Decision-Making. arXiv preprint arXiv:2109.08792 (2021).

[25] A Feder Cooper, Emanuel Moss, Benjamin Laufer, and Helen Nissenbaum. 2022. Accountability in an algorithmic society: Relationality, responsibility, and robustness in machine learning. In 2022 ACM Conference on Fairness, Accountability, and Transparency. 864–876.

- [26] Sam Corbett-Davies and Sharad Goel. 2018. The measure and mismeasure of fairness: A critical review of fair machine learning. arXiv preprint arXiv:1808.00023 (2018).
- [27] Sam Corbett-Davies, Emma Pierson, Avi Feller, Sharad Goel, and Aziz Huq. 2017. Algorithmic decision making and the cost of fairness. In Proceedings of the 23rd acm sigkdd international conference on knowledge discovery and data mining. 797–806.
- [28] Henriette Cramer, Jean Garcia-Gathright, Aaron Springer, and Sravana Reddy. 2018. Assessing and Addressing Algorithmic Bias in Practice. *Interactions* 25, 6 (oct 2018), 58–63. https://doi.org/10.1145/3278156
- [29] Catherine D'Ignazio and Lauren F Klein. 2021. Data Feminism. Tantor Audio.
- [30] Roel I J Dobbe. 2022. System Safety and Artificial Intelligence. (Feb. 2022). arXiv:2202.09292 [eess.SY]
- [31] Upol Ehsan, Q Vera Liao, Michael Muller, Mark O Riedl, and Justin D Weisz. 2021. Expanding Explainability: Towards Social Transparency in AI systems. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems* (Yokohama, Japan) (CHI '21, Article 82). Association for Computing Machinery, New York, NY, USA, 1–19.
- [32] Upol Ehsan, Ranjit Singh, Jacob Metcalf, and Mark Riedl. 2022. The Algorithmic Imprint. In 2022 ACM Conference on Fairness, Accountability, and Transparency (Seoul, Republic of Korea) (FAccT '22). Association for Computing Machinery, New York, NY, USA, 1305–1317.
- [33] Clifton A Ericson et al. 2015. Hazard analysis techniques for system safety. John Wiley & Sons.
- [34] Allyson Ettinger, Sudha Rao, Hal Daumé III, and Emily M Bender. 2017. Towards linguistically generalizable NLP systems: A workshop and shared task. arXiv preprint arXiv:1711.01505 (2017).
- [35] European Commission. 2021. Proposal for a Regulation laying down harmonised rules on artificial intelligence.
- [36] A Feder Cooper, Emanuel Moss, Benjamin Laufer, and Helen Nissenbaum. 2022. Accountability in an Algorithmic Society: Relationality, Responsibility, and Robustness in Machine Learning. (Feb. 2022). arXiv:2202.05338 [cs.CY]
- [37] Luciano Floridi and Andrew Strait. 2020. Ethical Foresight Analysis: What it is and Why it is Needed? *Minds Mach.* 30, 1 (March 2020), 77–97.
- [38] Jade S Franklin, Karan Bhanot, Mohamed Ghalwash, Kristin P Bennett, Jamie McCusker, and Deborah L McGuinness. 2022. An Ontology for Fairness Metrics. In *Proceedings of the 2022 AAAI/ACM Conference on AI, Ethics, and Society* (Oxford, United Kingdom) (AIES '22). Association for Computing Machinery, New York, NY, USA, 265–275.
- [39] Batya Friedman and David G Hendry. 2019. Value Sensitive Design. MIT Press.
- [40] Batya Friedman and David G Hendry. 2019. Value Sensitive Design: Shaping Technology with Moral Imagination. MIT
- [41] Batya Friedman, Nancy Leveson, Ben Schneiderman, Lucy Suchman, and Terry Winograd. 1994. Beyond Accuracy, Reliability, and Efficiency: Criteria for a Good Computer System. ACM CHI Conference on Human Factors in Computing. (April 1994).
- [42] Batya Friedman and Helen Nissenbaum. 1996. Bias in computer systems. ACM Trans. Inf. Syst. Secur. 14, 3 (July 1996), 330–347
- [43] Sahaj Garg, Vincent Perot, Nicole Limtiaco, Ankur Taly, Ed H Chi, and Alex Beutel. 2019. Counterfactual fairness in text classification through robustness. In *Proceedings of the 2019 AAAI/ACM Conference on AI, Ethics, and Society.* 219–226.
- [44] Timnit Gebru, Jamie Morgenstern, Briana Vecchione, Jennifer Wortman Vaughan, Hanna Wallach, Hal Daumé Iii, and Kate Crawford. 2021. Datasheets for datasets. Commun. ACM 64, 12 (Nov. 2021), 86–92.
- [45] Government of Canada. 2022. Bill C-27 summary: Digital Charter Implementation Act, 2022. https://ised-isde.canada.ca/site/innovation-better-canada/en/canadas-digital-charter/bill-summary-digital-charter-implementation-act-2020. Accessed: 2022-9-10.
- [46] Alex Hanna, Emily Denton, Andrew Smart, and Jamila Smith-Loud. 2020. Towards a critical race methodology in algorithmic fairness. In Proceedings of the 2020 Conference on Fairness, Accountability, and Transparency (Barcelona Spain). ACM, New York, NY, USA.
- [47] Christina N. Harrington, Shamika Klassen, and Yolanda A. Rankin. 2022. "All That You Touch, You Change": Expanding the Canon of Speculative Design Towards Black Futuring. In *Proceedings of the 2022 CHI Conference on Human Factors* in Computing Systems (New Orleans, LA, USA) (CHI '22). Association for Computing Machinery, New York, NY, USA, Article 450, 10 pages. https://doi.org/10.1145/3491102.3502118
- [48] Kenneth Holstein, Jennifer Wortman Vaughan, Hal Daumé, Miro Dudik, and Hanna Wallach. 2019. Improving Fairness in Machine Learning Systems: What Do Industry Practitioners Need?. In Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems (Glasgow, Scotland Uk) (CHI '19). Association for Computing Machinery, New York, NY, USA, 1–16. https://doi.org/10.1145/3290605.3300830

- [49] Alexis Hope, Catherine D'Ignazio, Josephine Hoy, Rebecca Michelson, Jennifer Roberts, Kate Krontiris, and Ethan Zuckerman. 2019. Hackathons as Participatory Design: Iterating Feminist Utopias. In *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems* (Glasgow, Scotland Uk) (CHI '19). Association for Computing Machinery, New York, NY, USA, 1–14. https://doi.org/10.1145/3290605.3300291
- [50] Ben Hutchinson, Negar Rostamzadeh, Christina Greer, Katherine Heller, and Vinodkumar Prabhakaran. 2022. Evaluation Gaps in Machine Learning Practice. arXiv preprint arXiv:2205.05256 (2022).
- [51] Takuto Ishimatsu, Nancy G Leveson, John Thomas, Masa Katahira, Yuko Miyamoto, and Haruka Nakao. 2010. Modeling and hazard analysis using STPA. (2010).
- [52] Takuto Ishimatsu, Nancy G Leveson, John P Thomas, Cody H Fleming, Masafumi Katahira, Yuko Miyamoto, Ryo Ujiie, Haruka Nakao, and Nobuyuki Hoshino. 2014. Hazard Analysis of Complex Spacecraft Using Systems-Theoretic Process Analysis. 7. Spacecr. Rockets 51, 2 (March 2014), 509–522.
- [53] Sheila Jasanoff. 2004. States of Knowledge: The Co-Production of Science and Social Order. Routledge.
- [54] Kouroush Jenab and Joseph Pineau. 2015. Failure mode and effect analysis on safety critical components of space travel. *Manag. Sci. Lett.* 5, 7 (2015), 669–678.
- [55] Anna Jobin, Marcello Ienca, and Effy Vayena. 2019. The global landscape of AI ethics guidelines. Nature Machine Intelligence 1, 9 (Sept. 2019), 389–399.
- [56] Matthew Kay, Cynthia Matuszek, and Sean A Munson. 2015. Unequal Representation and Gender Stereotypes in Image Search Results for Occupations. In Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems (Seoul, Republic of Korea) (CHI '15). Association for Computing Machinery, New York, NY, USA, 3819–3828.
- [57] Os Keyes. 2018. The Misgendering Machines: Trans/HCI Implications of Automatic Gender Recognition. Proc. ACM Hum.-Comput. Interact. 2, CSCW, Article 88 (nov 2018), 22 pages. https://doi.org/10.1145/3274357
- [58] Goda Klumbytė, Claude Draude, and Alex S Taylor. 2022. Critical Tools for Machine Learning: Working with Intersectional Critical Concepts in Machine Learning Systems Design. In 2022 ACM Conference on Fairness, Accountability, and Transparency (Seoul, Republic of Korea) (FAccT '22). Association for Computing Machinery, New York, NY, USA, 1528–1541.
- [59] Pang Wei Koh, Shiori Sagawa, Henrik Marklund, Sang Michael Xie, Marvin Zhang, Akshay Balsubramani, Weihua Hu, Michihiro Yasunaga, Richard Lanas Phillips, Sara Beery, Jure Leskovec, Anshul Kundaje, Emma Pierson, Sergey Levine, Chelsea Finn, and Percy Liang. 2020. WILDS: A Benchmark of in-the-Wild Distribution Shifts. CoRR abs/2012.07421 (2020). https://arxiv.org/abs/2012.07421
- [60] P. M. Krafft, Meg Young, Michael Katell, Karen Huang, and Ghislain Bugingo. 2020. Defining AI in Policy versus Practice. In Proceedings of the AAAI/ACM Conference on AI, Ethics, and Society (New York, NY, USA) (AIES '20). Association for Computing Machinery, New York, NY, USA, 72–78. https://doi.org/10.1145/3375627.3375835
- [61] Joshua A Kroll. 2018. The fallacy of inscrutability. Phil. Trans. R. Soc. A 376, 2133 (2018), 14 pages.
- [62] Joshua A. Kroll, Joanna Huey, Solon Barocas, Edward W. Felten, Joel R. Reidenberg, David G. Robinson, and Harlan Yu. 2017. Accountable Algorithms. *University of Pennsylvania Law Review* 165 (2017), 633–705. Issue 3.
- [63] Mark Latonero and Aaina Agarwal. 2021. Human Rights Impact Assessments for AI: Learning from Facebook's Failure in Myanmar. Technical Report. Carr Center for Human Rights Policy Harvard Kennedy School, Harvard University.
- [64] Min Kyung Lee, Anuraag Jain, Hea Jin Cha, Shashank Ojha, and Daniel Kusbit. 2019. Procedural Justice in Algorithmic Fairness: Leveraging Transparency and Outcome Control for Fair Algorithmic Mediation. Proc. ACM Hum.-Comput. Interact. 3, CSCW, Article 182 (nov 2019), 26 pages. https://doi.org/10.1145/3359284
- [65] Min Kyung Lee, Daniel Kusbit, Anson Kahng, Ji Tae Kim, Xinran Yuan, Allissa Chan, Daniel See, Ritesh Noothigattu, Siheon Lee, Alexandros Psomas, and Ariel D. Procaccia. 2019. WeBuildAI: Participatory Framework for Algorithmic Governance. Proc. ACM Hum.-Comput. Interact. 3, CSCW, Article 181 (nov 2019), 35 pages. https://doi.org/10.1145/ 3359283
- [66] Michelle Seng Ah Lee and Jat Singh. 2021. The Landscape and Gaps in Open Source Fairness Toolkits. In Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems (Yokohama, Japan) (CHI '21, Article 699). Association for Computing Machinery, New York, NY, USA, 1–13.
- [67] Nancy Leveson and John Thomas. 2018. STPA\_Handbook.
- [68] Nancy G Leveson. 2016. Engineering a safer world: Systems thinking applied to safety. The MIT Press.
- [69] Jamy Li and Mark Chignell. 2022. FMEA-AI: AI fairness impact assessment using failure mode and effects analysis. AI and Ethics (March 2022).
- [70] Paul Pu Liang, Irene Mengze Li, Emily Zheng, Yao Chong Lim, Ruslan Salakhutdinov, and Louis-Philippe Morency. 2020. Towards Debiasing Sentence Representations. (July 2020). arXiv:2007.08100 [cs.CL]
- [71] Q Vera Liao, Daniel Gruen, and Sarah Miller. 2020. Questioning the AI: Informing Design Practices for Explainable AI User Experiences. In Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems (Honolulu, HI, USA) (CHI '20). Association for Computing Machinery, New York, NY, USA, 1–15.

[72] Thomas Liao, Rohan Taori, Inioluwa Deborah Raji, and Ludwig Schmidt. 2021. Are we learning yet? a meta review of evaluation failures across machine learning. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*.

- [73] Huai-Wei Lo, James J H Liou, Jen-Jen Yang, Chun-Nen Huang, and Yu-Hsuan Lu. 2021. An Extended FMEA Model for Exploring the Potential Failure Modes: A Case Study of a Steam Turbine for a Nuclear Power Plant. Hindawi (2021).
- [74] Michael Madaio, Lisa Egede, Hariharan Subramonyam, Jennifer Wortman Vaughan, and Hanna Wallach. 2022. Assessing the Fairness of AI Systems: AI Practitioners' Processes, Challenges, and Needs for Support., 26 pages.
- [75] Michael A. Madaio, Luke Stark, Jennifer Wortman Vaughan, and Hanna Wallach. 2020. Co-Designing Checklists to Understand Organizational Challenges and Opportunities around Fairness in AI. In Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems (Honolulu, HI, USA) (CHI '20). Association for Computing Machinery, New York, NY, USA, 1–14. https://doi.org/10.1145/3313831.3376445
- [76] Monique Mann and Tobias Matzner. 2019. Challenging algorithmic profiling: The limits of data protection and anti-discrimination in responding to emergent discrimination. Big Data & Society 6, 2 (July 2019), 2053951719895805.
- [77] Alessandro Mantelero. 2022. Human Rights Impact Assessment and AI. In *Beyond Data: Human Rights, Ethical and Social Impact Assessment in AI*, Alessandro Mantelero (Ed.). T.M.C. Asser Press, The Hague, 45–91.
- [78] Nikolas Martelaro, Carol J. Smith, and Tamara Zilovic. 2022. Exploring Opportunities in Usable Hazard Analysis Processes for AI Engineering. https://doi.org/10.48550/ARXIV.2203.15628
- [79] Donald Martin, Jr, Vinodkumar Prabhakaran, Jill Kuhlberg, Andrew Smart, and William S Isaac. 2020. Participatory Problem Formulation for Fairer Machine Learning Through Community Based System Dynamics. (May 2020). arXiv:2005.07572 [cs.CY]
- [80] Jacob Metcalf, Emanuel Moss, and Danah Boyd. 2019. Owning Ethics: Corporate Logics, Silicon Valley, and the Institutionalization of Ethics. Social Research: An International Quarterly 86, 2 (2019), 449–476.
- [81] Margaret Mitchell, Simone Wu, Andrew Zaldivar, Parker Barnes, Lucy Vasserman, Ben Hutchinson, Elena Spitzer, Inioluwa Deborah Raji, and Timnit Gebru. 2019. Model Cards for Model Reporting. In Proceedings of the Conference on Fairness, Accountability, and Transparency (Atlanta, GA, USA) (FAT\* '19). Association for Computing Machinery, New York, NY, USA, 220–229.
- [82] Shakir Mohamed, Marie-Therese Png, and William Isaac. 2020. Decolonial AI: Decolonial Theory as Sociotechnical Foresight in Artificial Intelligence. Philos. Technol. 33, 4 (Dec. 2020), 659–684.
- [83] Christoph Molnar, Giuseppe Casalicchio, and Bernd Bischl. 2020. Quantifying Model Complexity via Functional Decomposition for Better Post-hoc Interpretability. In *Machine Learning and Knowledge Discovery in Databases*. Springer International Publishing, 193–204.
- [84] Emanuel Moss and Jacob Metcalf. 2020. Ethics owners: a new model of organizational responsibility in data-driven technology companies. Technical Report. Data & Society Research Institute.
- [85] Emanuel Moss, Elizabeth Anne Watkins, Ranjit Singh, Madeleine Clare Elish, and Jacob Metcalf. 2021. Assembling Accountability: Algorithmic Impact Assessment for the Public Interest. (June 2021).
- [86] Nadia Nahar, Shurui Zhou, Grace Lewis, and Christian Kästner. 2022. Collaboration Challenges in Building ML-Enabled Systems: Communication, Documentation, Engineering, and Process. In Proceedings of the 44th International Conference on Software Engineering (Pittsburgh, Pennsylvania) (ICSE '22). Association for Computing Machinery, New York, NY, USA, 413–425. https://doi.org/10.1145/3510003.3510209
- [87] Helen Ngo, Cooper Raterink, João G M Araújo, Ivan Zhang, Carol Chen, Adrien Morisot, and Nicholas Frosst. 2021. Mitigating harm in language models with conditional-likelihood filtration. (Aug. 2021). arXiv:2108.07790 [cs.CL]
- [88] H Nissenbaum. 2001. How computer systems embody values. Computer 34, 3 (March 2001), 120-119.
- [89] Safiya Umoja Noble. 2018. Algorithms of Oppression: How Search Engines Reinforce Racism. NYU Press.
- [90] Wanda J Orlikowski. 2000. Using Technology and Constituting Structures: A Practice Lens for Studying Technology in Organizations. Organization Science 11, 4 (2000), 404–428.
- [91] Riccardo Patriarca, Mikela Chatzimichailidou, Nektarios Karanikas, and Giulio Di Gravio. 2022. The past and present of System-Theoretic Accident Model And Processes (STAMP) and its associated techniques: A scoping review. Saf. Sci. 146 (Feb. 2022), 105566.
- [92] Amandalynne Paullada, Inioluwa Deborah Raji, Emily M Bender, Emily Denton, and Alex Hanna. 2021. Data and its (dis)contents: A survey of dataset development and use in machine learning research. *Patterns* (*N Y*) 2, 11 (Nov. 2021), 100336.
- [93] Todd Pawlicki, Aubrey Samost, Derek W Brown, Ryan P Manger, Gwe-Ya Kim, and Nancy G Leveson. 2016. Application of systems and control theory-based hazard analysis to radiation oncology. Med. Phys. 43, 3 (March 2016), 1514–1530.
- [94] Charles Perrow. 1984. Normal accidents: Living with high risk technologies. Basic Books, New York.
- [95] Forough Poursabzi-Sangdeh, Daniel G Goldstein, Jake M Hofman, Jennifer Wortman Vaughan, and Hanna Wallach. 2018. Manipulating and Measuring Model Interpretability. (Feb. 2018). arXiv:1802.07810 [cs.AI]

- [96] Inioluwa Deborah Raji, I Elizabeth Kumar, Aaron Horowitz, and Andrew Selbst. 2022. The Fallacy of AI Functionality. In 2022 ACM Conference on Fairness, Accountability, and Transparency (Seoul, Republic of Korea) (FAccT '22). Association for Computing Machinery, New York, NY, USA, 959–972.
- [97] Inioluwa Deborah Raji, Andrew Smart, Rebecca N White, Margaret Mitchell, Timnit Gebru, Ben Hutchinson, Jamila Smith-Loud, Daniel Theron, and Parker Barnes. 2020. Closing the AI accountability gap: defining an end-to-end framework for internal algorithmic auditing. In *Proceedings of the 2020 Conference on Fairness, Accountability, and Transparency* (Barcelona, Spain) (FAT\* '20). Association for Computing Machinery, New York, NY, USA, 33–44.
- [98] Inioluwa Deborah Raji, Andrew Smart, Rebecca N. White, Margaret Mitchell, Timnit Gebru, Ben Hutchinson, Jamila Smith-Loud, Daniel Theron, and Parker Barnes. 2020. Closing the AI Accountability Gap: Defining an End-to-End Framework for Internal Algorithmic Auditing. In Proceedings of the 2020 Conference on Fairness, Accountability, and Transparency (Barcelona, Spain) (FAT\* '20). Association for Computing Machinery, New York, NY, USA, 33–44. https://doi.org/10.1145/3351095.3372873
- [99] Bogdana Rakova, Jingying Yang, Henriette Cramer, and Rumman Chowdhury. 2021. Where Responsible AI Meets Reality: Practitioner Perspectives on Enablers for Shifting Organizational Practices. *Proc. ACM Hum.-Comput. Interact.* 5, CSCW1, Article 7 (apr 2021), 23 pages. https://doi.org/10.1145/3449081
- [100] Bogdana Rakova, Jingying Yang, Henriette Cramer, and Rumman Chowdhury. 2021. Where Responsible AI meets Reality: Practitioner Perspectives on Enablers for Shifting Organizational Practices. *Proc. ACM Hum.-Comput. Interact.* 5, CSCW1 (April 2021), 1–23.
- [101] Lydia Reader, Pegah Nokhiz, Cathleen Power, Neal Patwari, Suresh Venkatasubramanian, and Sorelle Friedler. 2022. Models for understanding and quantifying feedback in societal systems. In 2022 ACM Conference on Fairness, Accountability, and Transparency. 1765–1775.
- [102] Shalaleh Rismani and Ajung Moon. 2021. How do AI systems fail socially?: an engineering risk analysis approach. In 2021 IEEE International Symposium on Ethics in Engineering, Science and Technology (ETHICS). 1–8.
- [103] Clarence C Rodrigues, Stephen K Cusick, et al. 2012. Commercial aviation safety. McGraw-Hill Education.
- [104] Negar Rostamzadeh, Ben Hutchinson, Christina Greer, and Vinodkumar Prabhakaran. 2021. Thinking Beyond Distributions in Testing Machine Learned Models. arXiv preprint arXiv:2112.03057 (2021).
- [105] Nataniel Ruiz, Adam Kortylewski, Weichao Qiu, Cihang Xie, Sarah Adel Bargal, Alan Yuille, and Stan Sclaroff. 2022. Simulated Adversarial Testing of Face Recognition Models. CVPR (2022).
- [106] Nithya Sambasivan, Erin Arnesen, Ben Hutchinson, Tulsee Doshi, and Vinodkumar Prabhakaran. 2021. Re-imagining Algorithmic Fairness in India and Beyond. In Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency (Virtual Event, Canada) (FAccT '21). Association for Computing Machinery, New York, NY, USA, 315–328.
- [107] Nithya Sambasivan, Erin Arnesen, Ben Hutchinson, Tulsee Doshi, and Vinodkumar Prabhakaran. 2021. Re-Imagining Algorithmic Fairness in India and Beyond. In Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency (Virtual Event, Canada) (FAccT '21). Association for Computing Machinery, New York, NY, USA, 315–328. https://doi.org/10.1145/3442188.3445896
- [108] Andrew D Selbst. 2020. Negligence and AI's human users. BUL Rev. 100 (2020), 1315.
- [109] Andrew D Selbst, Danah Boyd, Sorelle A Friedler, Suresh Venkatasubramanian, and Janet Vertesi. 2019. Fairness and Abstraction in Sociotechnical Systems. In *Proceedings of the Conference on Fairness, Accountability, and Transparency* (Atlanta, GA, USA) (FAT\* '19). Association for Computing Machinery, New York, NY, USA, 59–68.
- [110] Hong Shen, Alicia DeVos, Motahhare Eslami, and Kenneth Holstein. 2021. Everyday Algorithm Auditing: Understanding the Power of Everyday Users in Surfacing Harmful Algorithmic Behaviors. Proc. ACM Hum.-Comput. Interact. 5, CSCW2 (Oct. 2021), 1–29.
- [111] Katie Shilton. 2013. Values Levers: Building Ethics into Design. Sci. Technol. Human Values 38, 3 (May 2013), 374-397.
- [112] Sung-Min Shin, Sang Hun Lee, Seung K I Shin, Inseok Jang, and Jinkyun Park. 2021. STPA-Based Hazard and Importance Analysis on NPP Safety I&C Systems Focusing on Human-System Interactions. *Reliab. Eng. Syst. Saf.* 213 (Sept. 2021), 107698.
- [113] Kristin Sharon Shrader-Frechette. 1991. Risk and rationality: Philosophical foundations for populist reforms. Univ of California Press.
- [114] Katta Spiel, Alex Ahmed, Jennifer Rode, and Jean Hardy. 2019. Queer(ing) HCI: Moving Forward in Theory and Practice. In Extended Abstracts of the 2019 CHI Conference. unknown, 1–4.
- [115] Alexander Styhre. 2018. The Unfinished Business of Governance: Monitoring and Regulating Industries and Organizations. Edward Elgar Publishing.
- [116] Masashi Sugiyama, Shinichi Nakajima, Hisashi Kashima, Paul Buenau, and Motoaki Kawanabe. 2007. Direct Importance Estimation with Model Selection and Its Application to Covariate Shift Adaptation. Advances in Neural Information Processing Systems 20 (2007).

[117] Sardar Muhammad Sulaman, Armin Beer, Michael Felderer, and Martin Höst. 2019. Comparison of the FMEA and STPA safety analysis methods—a case study. *Software Quality Journal* 27, 1 (March 2019), 349–387.

- [118] Harini Suresh and John Guttag. 2021. A Framework for Understanding Sources of Harm throughout the Machine Learning Life Cycle. In *Equity and Access in Algorithms, Mechanisms, and Optimization* (–, NY, USA) (EAAMO '21, Article 17). Association for Computing Machinery. New York, NY, USA, 1–9.
- [119] Rachael Tatman. 2017. Gender and Dialect Bias in YouTube's Automatic Captions. In Proceedings of the First ACL Workshop on Ethics in Natural Language Processing. Association for Computational Linguistics, Valencia, Spain, 53–59.
- [120] Treasury Board of Canada Secretariat. 2019. Directive on Automated Decision-Making. https://www.tbs-sct.canada.ca/pol/doc-eng.aspx?id=32592. Accessed: 2022-9-15.
- [121] Steven Umbrello. 2019. Beneficial Artificial Intelligence Coordination by Means of a Value Sensitive Design Approach. Big Data and Cognitive Computing 3, 1 (Jan. 2019), 5.
- [122] Diane Vaughan. 1996. The Challenger launch decision: Risky technology, culture, and deviance at NASA. University of Chicago press.
- [123] Jenn Wortman Vaughan. 2020. Transparency and Intelligibility Throughout the Machine Learning Life Cycle.
- [124] Thiemo Wambsganss, Anne Höch, Naim Zierau, and Matthias Söllner. 2021. Ethical Design of Conversational Agents: Towards Principles for a Value-Sensitive Design. In *Innovation Through Information Systems*, Frederik Ahlemann, Reinhard Schütte, and Stefan Stieglitz (Eds.). Springer International Publishing, Cham, 539–557.
- [125] Laura Weidinger, Jonathan Uesato, Maribeth Rauh, Conor Griffin, Po-Sen Huang, John Mellor, Amelia Glaese, Myra Cheng, Borja Balle, Atoosa Kasirzadeh, Courtney Biles, Sasha Brown, Zac Kenton, Will Hawkins, Tom Stepleton, Abeba Birhane, Lisa Anne Hendricks, Laura Rimell, William Isaac, Julia Haas, Sean Legassick, Geoffrey Irving, and Iason Gabriel. 2022. Taxonomy of Risks posed by Language Models. In 2022 ACM Conference on Fairness, Accountability, and Transparency (Seoul, Republic of Korea) (FAccT '22). Association for Computing Machinery, New York, NY, USA, 214–229.
- [126] Richmond Y. Wong, Michael A. Madaio, and Nick Merrill. 2022. Seeing Like a Toolkit: How Toolkits Envision the Work of AI Ethics. https://doi.org/10.48550/ARXIV.2202.08792
- [127] Kyra Yee, Uthaipon Tantipongpipat, and Shubhanshu Mishra. 2021. Image Cropping on Twitter: Fairness Metrics, their Limitations, and the Importance of Representation, Design, and Agency. (May 2021). arXiv:2105.08667 [cs.CY]
- [128] Guoyang Zeng, Fanchao Qi, Qianrui Zhou, Tingji Zhang, Zixian Ma, Bairu Hou, Yuan Zang, Zhiyuan Liu, and Maosong Sun. 2021. OpenAttack: An Open-source Textual Adversarial Attack Toolkit. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing: System Demonstrations. 363–371.
- [129] Wei Emma Zhang, Quan Z Sheng, Ahoud Alhazmi, and Chenliang Li. 2020. Adversarial attacks on deep-learning models in natural language processing: A survey. ACM Transactions on Intelligent Systems and Technology (TIST) 11, 3 (2020), 1–41.
- [130] Douglas Zytko, Pamela J. Wisniewski, Shion Guha, Eric P. S. Baumer, and Min Kyung Lee. 2022. Participatory Design of AI Systems: Opportunities and Challenges Across Diverse Users, Relationships, and Application Domains. In Extended Abstracts of the 2022 CHI Conference on Human Factors in Computing Systems (New Orleans, LA, USA) (CHI EA '22). Association for Computing Machinery, New York, NY, USA, Article 154, 4 pages. https://doi.org/10.1145/ 3491101.3516506

#### A STUDY PROTOCOL

## A.1 Interview protocol

The following outlines the interview protocol and the list of interview questions:

Thank you for taking the time to participate in this interview.

I am conducting these expert interviews to understand existing social and ethical risk management practices for ML systems and brainstorm on how they could be improved. I will start by asking you about your current practices in the first part of the interview. I will then introduce two risk management tools from reliability and safety engineering. We will spend some time discussing the pros/cons of these techniques and brainstorm about the usability of such techniques within the ML development process.

Part 1 [15 min] - current practices

- Could you please briefly describe your role and responsibilities in your current position.
- In your work, how do you currently define social and ethical risks for ML systems?
   How did this definition come about?
- What type of ML systems have you assessed in terms of social and ethical risks? What type of ML systems have you worked with?
- How do you currently assess social and ethical risks for ML systems and how were these assessment processes developed?
- How do you currently mitigate social and ethical risks for ML systems and how were these mitigation processes developed?
- What are the challenges that you face when assessing and mitigating ethical and social risks for different projects? How have you dealt with these challenges?

Part 2 [ 30 min] - safety engineering frameworks

In the rest of this interview we will ask your feedback about two different risk assessment techniques that have mostly been applied within aerospace, medical device and military settings. One of these techniques has a top to bottom approach of examining risks and potential controls while the other one has a bottom up approach.

In this part, introduce STPA and FMEA using the slide deck shown in section ??. Introduce each technique one at a time and get feedback on each for 10 minutes using the following questions.

- Have you heard of/ are you familiar with STPA/FMEA? If yes, have you used them? In what context?
- What are your initial impressions of STPA/FMEA and it application for ML systems?
- What are the pros and cons of applying STPA/FMEA for managing ethical and social risk?
- Thinking about an ML application that you have worked with in the past, can you walk me through how you would adapt STPA/FMEA to look at social and ethical risks of this application?