

mmT5: Modular Multilingual Pre-Training Solves Source Language Hallucinations

Jonas Pfeiffer Francesco Piccinno Massimo Nicosia
Xinyi Wang Machel Reid Sebastian Ruder
Google DeepMind

Abstract

Multilingual sequence-to-sequence models perform poorly with increased language coverage and fail to consistently generate text in the correct target language in few-shot settings. To address these challenges, we propose mmT5, a modular multilingual sequence-to-sequence model. mmT5 utilizes language-specific modules during pre-training, which disentangle language-specific information from language-agnostic information. We identify representation drift during fine-tuning as a key limitation of modular generative models and develop strategies that enable effective zero-shot transfer. Our model outperforms mT5 at the same parameter sizes by a large margin on representative natural language understanding and generation tasks in 40+ languages. Compared to mT5, mmT5 raises the rate of generating text in the correct language under zero-shot settings from 7% to 99%, thereby greatly alleviating the source language hallucination problem.

1 Introduction

Multilingual pre-trained models (Conneau et al., 2020a; Xue et al., 2021) have demonstrated impressive performance on natural language understanding (NLU) tasks across different languages (Hu et al., 2020; Ruder et al., 2021). These models are typically trained on large amounts of unlabeled data in hundreds of languages. Recent large language models (Brown et al., 2020; Chowdhery et al., 2022) display surprising multilingual capabilities despite being pre-trained predominantly on English data. However, all of these models share a key limitation: representations of all languages compete for the model’s limited capacity. As a result, models perform poorly with an increasing number of pre-training languages and on languages with less pre-training data. This is also known as the “**curse of multilinguality**” (Conneau et al., 2020a).

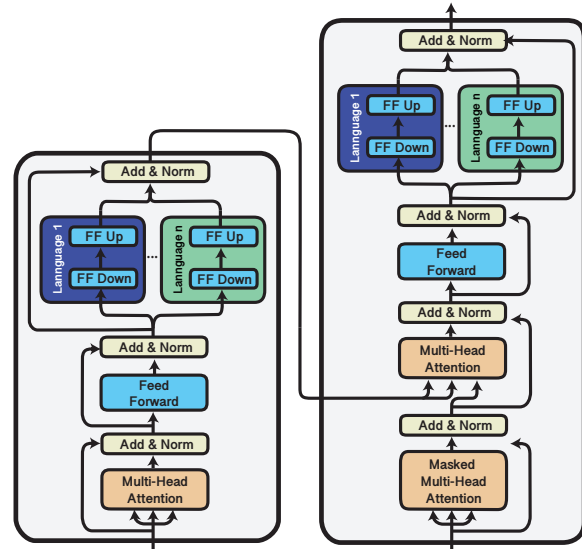


Figure 1: Architecture of mmT5. Language-specific bottleneck modules (dark blue and green components) are placed after the feed-forward component within each layer of the Transformer encoder-decoder model.

Natural language generation (NLG) tasks present another challenge for current multilingual models, which may overfit to the training languages and partially forget their generation ability in the target language (Vu et al., 2022), generating text with the *correct* meaning in the *wrong* language. We refer to this as the “**source language hallucination problem**”.

To address these two limitations, we propose the modular multilingual T5 (mmT5, Figure 1), the first modular multilingual generative model. During pre-training, mmT5 allocates a small amount of language-specific parameters to increase capacity for multilingual modeling. At fine-tuning time, we freeze the language-specific modules while tuning the shared parameters, allowing direct adaptation to a target language by swapping to the corresponding language-specific module.

However, we observe an additional challenge for mmT5: the fine-tuned shared representations

may drift away from the frozen modular representations in the decoder. The modular model is thus susceptible to generating text in the incorrect language, similar to its non-modular counterparts. To ameliorate this, we propose to freeze a subset of shared decoder parameters, which shows large improvements in zero-shot cross-lingual generation for modular generative models.

In general, we find that mmT5 is an effective model that overcomes the two limitations of multilingual sequence-to-sequence models: **1)** mmT5 alleviates the curse of multilinguality by adding additional model capacity to different languages during pre-training. It outperforms both standard baselines as well as mT5 (Xue et al., 2021) at the same parameter sizes on a representative set of multilingual NLU and NLG tasks; **2)** mmT5 resolves the source language hallucination problem with impressive ability on zero-shot cross-lingual text generation. Our analysis (§6.4) shows that mT5 only generates text in the target language 7% of the time for a zero-shot multilingual summarization task, while mmT5 generates text in the correct language for 99% of examples.

2 Related work

Modular language models Much work has focused on *post-hoc* modularity of pre-trained multilingual models, i.e., modular representations are added to existing dense models. The most commonly used modules are known as adapters (Rebuffi et al., 2017, 2018; Houlsby et al., 2019). They enable specialization to new data settings (Chen et al., 2019; Rücklé et al., 2020), combination of new and existing knowledge (Stickland and Murray, 2019; Wang et al., 2021a; Pfeiffer et al., 2021a; Lauscher et al., 2020a; Mahabadi et al., 2021; Poth et al., 2021), and adaptation to new cross-lingual (Pfeiffer et al., 2020, 2021c; Üstün et al., 2020; Vidoni et al., 2020; Ansell et al., 2021b,a; Wang et al., 2021b) and NMT scenarios (Bapna and Firat, 2019; Philip et al., 2020; Chronopoulou et al., 2020; Le et al., 2021; Üstün et al., 2021; Stickland et al., 2021; Garcia et al., 2021; Dua et al., 2022).

Our approach, in contrast, uses modularity *a priori*, i.e., modularity is integrated into the module architecture as an inductive bias. Such modularity is similar to parameter sharing strategies commonly defined in multi-task learning (Ruder, 2017) as well as to mixture-of-experts approaches (MoE; Shazeer et al., 2017), which have been used to scale mod-

els to trillion parameters (Fedus et al., 2021) and for domain-specific pre-training of LMs (Gururangan et al., 2021). The most related work to ours is X-Mod (Pfeiffer et al., 2022), which pre-trains an encoder-only BERT-style model in a modular fashion. Their model, however, cannot be used for natural language generation and underperforms our model on NLU tasks (see Section 4).

Limitations of multilingual language models

State-of-the-art multilingual LMs are pre-trained on large amounts of multilingual data in around 100 languages. Prior work has demonstrated, however, that models’ performance deteriorates with increasing language coverage given the same fixed capacity, known as the *curse of multilinguality* (Conneau et al., 2020b). Prior studies also found that models perform poorly on languages that are under-represented in pre-training (Wu and Dredze, 2020; Hu et al., 2020; Lauscher et al., 2020b; Artetxe et al., 2020; Pfeiffer et al., 2020, 2021c; Chau et al., 2020; Ponti et al., 2020). For natural language generation, multilingual models have been observed to overfit to the source language and fail to generate text consistently in the correct target language (Vu et al., 2022).

3 mmT5

Standard multilingual models update the same model parameters for hundreds of languages during pre-training, resulting in the curse of multilinguality where different languages compete for the limited model capacity (Conneau et al., 2020a). We propose mmT5, the first modular sequence-to-sequence multilingual model that allocates language specific modules during pre-training. In this section, we discuss the architecture of mmT5, its training and fine-tuning methods, and our strategies to resolve the source language hallucination problem with mmT5.

3.1 Modeling

First, we describe the overall architecture of mmT5. We augment a standard Transformer encoder-decoder model with language-specific modules at every transformer layer (see Figure 1). The selection of modules (i.e., fixed routing; Pfeiffer et al., 2023) is performed via the language ID provided with each example¹; all tokens of an example are passed through the same language-specific module.

¹Our pre-training data contains such metadata; alternatively, automatic language ID methods can be used (see §6.4).

We use bottleneck adapters as the language-specific module because they perform better at smaller model sizes compared to other modular methods such as continuous prompts (Karimi Mahabadi et al., 2021; He et al., 2022). We place a module after the feed-forward component in each layer. In contrast to Pfeiffer et al. (2022) that only experimented with encoder-only models, we focus on a more general sequence-to-sequence model following the T5 architecture (Raffel et al., 2020).

We add $N \times L$ modular components to the T5 architecture where L is the number of layers of the model and N corresponds to the number of languages which the model is pre-trained on. The transformer weights are shared across languages while the modular component provides the model with language-specific capacity. During a forward pass, each input is first passed through the shared transformer weights and then routed through the corresponding language-specific module based on the language of the input. We follow this procedure for all transformer layers until the representations are passed to the shared prediction head.

3.2 Modular Pre-training, Fine-tuning, and Inference

We pre-train both language-specific modules and shared parameters jointly. During fine-tuning, we freeze all language-specific modules and only update the shared parameters. This paradigm allows us to more effectively adapt the fine-tuned model to any of the languages included in the pre-training data by simply switching to the corresponding language-specific module. At inference, the module corresponding to the target language is used together with the fine-tuned shared parameters.

3.3 Overcoming Modular Representation Drift

When fine-tuning the modular model for transfer settings in §5, we observe a scenario of *modular representation drift*: we find that the shared parameters that are updated during task-specific training drift away from the modular parameters and become thus less compatible with modules that are used for inference. In practice, this leads to a loss of compositional generalization where the modular model generates text in the incorrect language, similar to its non-modular counterparts (Vu et al., 2022); see §6.4.

In order to ameliorate this drift, we propose to freeze parts of the model, with a focus on the

decoder. We find that freezing the decoder feed-forward parameters provides the biggest benefit (see §6.1 for the detailed ablation) and almost completely eliminates the source language hallucination problem in modular models.²

4 Experiments

Pre-training Details We pre-train mmT5 on data from 100 languages in mC4 (Xue et al., 2021) following the general pre-training setup of mT5 (Xue et al., 2021), if not specified otherwise. We pre-train mmT5 at two model sizes: small (300M parameters), and base (580M parameters). We train model variants with an input sequence length of 1024 and a target sequence length of 256 for 1M update steps with a batch size of 1024. The bottleneck size of each module is half of the hidden dimension of the transformer model. For instance, as the base variant has a hidden dimension of 768, we set the bottleneck size to 384.³ We additionally pre-train a non-modular variant of our modular model, mT5^S, where all parameters are shared across all languages. The mT5^S variant uses exactly the same hyper-parameters and pre-training setup as mmT5. To ensure that the models are directly comparable and have exactly the same number of parameters, we add shared bottleneck layers to mT5^S in the same configuration as in mmT5.

Experimental setting We conduct experiments across datasets in *zero-shot cross-lingual transfer* and *multilingual training* scenarios. For *zero-shot cross-lingual transfer*, we train the model on a subset of languages (e.g., only English) and evaluate the model on held-out data of the same task in other languages. In *multilingual training*, we fine-tune the model on multiple languages of the same task, and evaluate the model on the same set of languages. As the language-specific modular components are replaced at inference time, we do not update the parameters of the modular components (i.e., we freeze the modules). We do the same for our shared model variants, in order for the number of trainable parameters to be equal for comparable scenarios.⁴ For each dataset, we select the best model checkpoint based on performance on the validation set.

²We observe little benefit to freezing decoder parameters in non-modular models, however.

³We analyze the impact of bottleneck sizes in §6.2.

⁴Here, we follow the procedure of Pfeiffer et al. (2022).

Model	Variant	Shared Params.	Mod. Params. per Lang.
mBERT	Base	178M	–
X-Mod	Base	270M	7M
XLM-R	Base	270M	–
	Large	550M	–
mT5	Small	300M	–
	Base	580M	–
mT5 ^S	Small	300M + 4M	–
	Base	580M + 14M	–
mmT5	Small	300M	4M
	Base	580M	14M

Table 1: Number of shared and modular parameters of baselines and our models.

Evaluation Tasks For *zero-shot cross-lingual transfer*, we evaluate on the XQuAD (Artetxe et al., 2020) and TyDi QA GoldP (Clark et al., 2020) question answering datasets; on the XNLI (Conneau et al., 2018) natural language inference dataset; on XL-Sum (Hasan et al., 2021) for summarization;⁵ and MASSIVE (FitzGerald et al., 2022) for semantic parsing.⁶ We mainly fine-tune the model on English training data and evaluate on the target languages (Hu et al., 2020). For XL-Sum, we additionally evaluate in a multi-source zero-shot transfer setting where we train jointly on data in Arabic, English, Japanese and Chinese (XL-Sum^{ar,en,ja,zh}).

For *multilingual training*, we evaluate on semantic parsing (MASSIVE) and summarization (XL-Sum) datasets. For each dataset, we fine-tune and evaluate the model on all languages jointly.

Baselines Our main comparison method is **mT5^S**, a shared model that is pre-trained with the same hyper-parameters, setup, and number of parameters as our modular model. We also compare to the published results of the **mT5** encoder-decoder model (Xue et al., 2021). In addition, we compare to several encoder-only models including **mBERT** (Devlin et al., 2019), **X-Mod** (Pfeiffer et al., 2022), and **XLM-R** (Conneau et al., 2020b). Encoder-only models are generally smaller as they lack a decoder but cannot easily be used for generation tasks. We provide an overview of the model sizes of the baselines and our method in Table 1.

⁵We do not evaluate on Oromo, Kirundi, Pidgin, and Tigrinya as they were not seen during pre-training.

⁶We do not evaluate on Hebrew and Tagalog as they were not seen during pre-training.

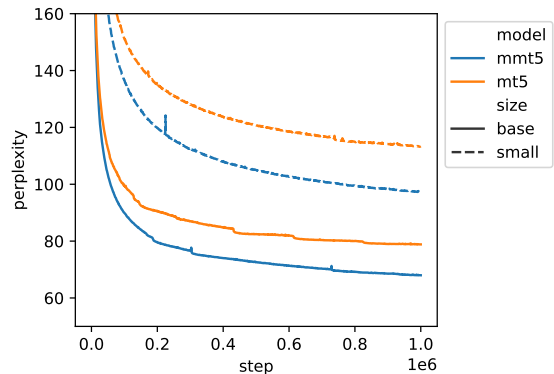


Figure 2: Perplexity (lower is better) of different model sizes during pre-training for mmT5 and mT5^S, averaged across languages.

Decoder Freezing Configurations To overcome the modular representation drift described in §3.3, we experiment with different configurations of freezing parts of the model when fine-tuning the model on a downstream task. We experiment with freezing the LayerNorm (LN), self-attention (Att), cross-attention (CrossAtt) and feed-forward component (FFN) in the encoder (Enc) and decoder (Dec) parts of the transformer model. We ablate freezing configurations in §6.1 and report test results of the freezing configuration that performs best on the dev set for each dataset for mmT5. For dense models, we observe no impact with freezing and report results using full fine-tuning.

5 Results

5.1 Pre-training

We first compare the language modeling perplexities of different model sizes for mmT5 and mT5^S during pre-training in Figure 2. We find that mmT5 significantly outperforms its fully shared counterpart during the early stages of pre-training and maintains the gap throughout the pre-training process. From an efficiency perspective, mmT5 only requires 282k and 220k update steps respectively for the small and base versions to achieve the same final perplexity as the mT5^S models at 1M update steps. This corresponds to a $\approx 4\times$ efficiency boost when training a modular multilingual model compared to a fully dense one.

5.2 Fine-tuning

We present our main results on the test sets for zero-shot cross-lingual transfer and multilingual training scenarios in Tables 2 and 3, respectively.

		<i>Zero-Shot</i>	XQuAD F1 / EM	TyDiQA(GoldP) F1 / EM	XNLI Acc	XL-Sum ^{en} RG ₁ / RG ₂ / RG _L	XL-Sum ^{ar,en,ja,zh} RG ₁ / RG ₂ / RG _L	MASSIVE EM
Encoder	base	mBERT	64.5 / 49.4	59.7 / 43.9	65.4	—	—	—
		X-Mod	72.8* / —	— / —	73.5*	—	—	—
		XLM-R	70.6 / 55.5	— / —	76.2	—	—	—
Encoder	large	XLM-R	76.6 / 60.8	65.1 / 45.0	79.2	—	—	—
Encoder-decoder	small	mT5	58.1 / 42.5	35.2 / 23.2	67.5	—	—	—
		mT5 ^S	61.9 / 46.2	44.5 / 31.1	63.2	15.5 / 2.2 / 14.2	17.0 / 4.7 / 15.1	21.7
		mmT5	66.5 / 50.4	50.8 / 36.3	68.5	16.7 / 4.6 / 14.4	29.4 / 12.6 / 23.3	27.7
	base	mT5	67.0 / 49.0	59.1 / 42.4	75.4	—	—	34.7
		mT5 ^S	68.7 / 51.5	64.0 / 47.8	75.1	16.2 / 2.8 / 4.5	18.6 / 6.0 / 16.7	39.9
		mmT5	76.3 / 60.3	69.0 / 53.2	77.8	19.6 / 6.1 / 16.4	34.5 / 16.1 / 26.8	46.0

Table 2: Zero-shot cross-lingual transfer test results averaged over all languages. mBERT and XLM-R scores are from (Hu et al., 2020); XLM-R Base XNLI results are from (Conneau et al., 2020b); mT5 results are from (Xue et al., 2021); X-Mod results are from (Pfeiffer et al., 2022) (*average is only on a subset of languages).

<i>Multilingual</i>		XL-Sum RG ₁ / RG ₂ / RG _L	MASSIVE EM
Enc-dec	small	mT5 ^S	36.4 / 17.9 / 28.5
		mmT5	36.7 / 18.1 / 28.7
	base	mT5 ^S	39.1 / 20.3 / 30.5
		mmT5	41.6 / 22.8 / 33.0

Table 3: Multilingual training test results averaged over all languages.

mmT5 outperforms both the original mT5 as well as mT5^S across all model sizes. It achieves performance similar to XLM-R at the same parameter size—despite its encoder-decoder configuration—and significantly outperforms X-Mod, the only other modular model.

Zero-shot For zero shot cross-lingual transfer scenarios, we see large gains for generative tasks in particular. For question answering (XQuAD and TyDiQA), we observe an average relative F1 improvement of 5.5 and 6.3 for the small and base models respectively. For summarization, we see larger zero-shot gains when jointly training on more than one language. We suspect that this is due to the increase in training data and due to positive transfer during multi-source training, which modular methods are better able to harness. This is in line with previous findings that multi-source training improves cross-lingual transfer in adapter-based setups (Ansell et al., 2021c). We also see a gain of 6.1 EM points on MASSIVE. The smallest gains are achieved for the classification task XNLI. Here, mmT5 improves over the baselines only by 1–2.4 accuracy points. We hypothesize that due to the constrained formulation of the task,

which only requires predicting a single token, the full multilingual generative capabilities of mmT5 are under-utilized. Overall, we see a clear trend that our modular models significantly outperform their respective dense counterparts especially for generation tasks.

Multilingual training For multilingual training in Table 3, we also find that the modular models outperform their dense counterparts across all tasks we experiment with. Here we find the largest gains for semantic parsing (MASSIVE). For summarization (XL-SUM), we see smaller, but still consistent gains. These results indicate that modular representations are not only useful in transfer settings but that mmT5 can also leverage labeled data in the target language to deliver superior performance compared to the standard non-modular models.

6 Analysis and Ablations

6.1 Impact of Freezing Configuration

We investigate the impact of the freezing configuration on the performance of the model. In Table 5, we compare the best-performing freezing configurations with a non-frozen baseline for mmT5 base (we show the results of all freezing configurations in Appendix A.1). We observe significant improvements when freezing the feed-forward layer of the decoder during fine-tuning, particularly in zero-shot scenarios. For multilingual training, freezing of the decoder has less effect on the performance. We also find that freezing parts of the decoder has no effect on the dense mT5^S model across all tasks (see Appendix A.1).

Emb	Enc _{LN}	Dec _{LN}	Dec _{Att}	Dec _{CrossAtt}	Dec _{FFN}	Zero-Shot			Multilingual	
						XQuAD	XNLI	MASSIVE	XL-Sum	
						dev (en)	test	dev	dev	
						f1 / em	f1 / em	acc	EM	
									Rg ₁ / Rg ₂ / Rg _L	
						90.7 / 83.6	66.9 / 49.3	75.5	32.1	41.2 / 22.4 / 32.4
X		X		X	X	91.9 / 85.1	75.8 / 59.5	75.6	43.2	41.2 / 22.4 / 32.6
X		X			X	91.8 / 85.1	75.8 / 59.8	77.3	41.0	41.9 / 23.1 / 33.2
X	X	X		X	X	92.1 / 85.5	76.3 / 60.3	76.1	45.4	40.8 / 22.1 / 32.3
X	X	X			X	91.8 / 85.1	75.0 / 59.2	77.7	39.9	41.8 / 23.0 / 33.1

Table 4: Results of different freezing configurations for mmT5 base on different tasks. Dev results for most. We always fine-tune Enc_{Att}, and Enc_{FFN} and always freeze Enc_{Mod} and Dec_{Mod}. **X** indicates that this component is frozen during task-level fine-tuning.

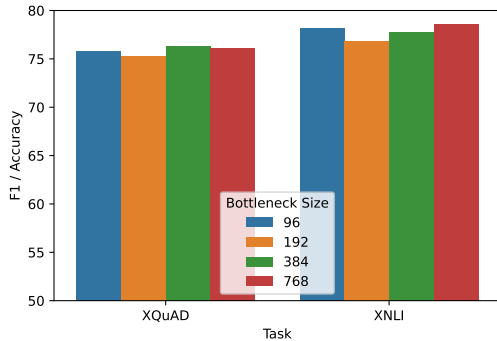


Figure 3: Comparison of bottleneck sizes of base mmT5 for XQuAD (F1) and XNLI (Accuracy).

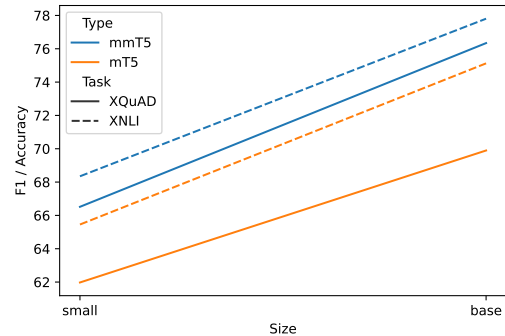


Figure 4: Comparison of model sizes for XQuAD (F1) and XNLI (Accuracy).

6.2 Impact of Bottleneck Size

We experiment with different bottleneck sizes of the modular components to understand the impact of providing each language with more capacity. We report results for XQuAD, and XNLI in Figure 3 using mmT5 base and bottleneck sizes of 96, 192, 384, and 768. We find that for all three tasks the bottleneck size has little effect on the downstream task performance, achieving only 0.5–2 absolute points difference between the larger and the smaller bottleneck sizes. This suggests that it is sufficient to provide the model with only a small amount of language-specific parameters in order to learn idiosyncratic information and mitigate catastrophic interference, and highlights the parameter-efficiency of modular models.

6.3 Impact of Model Size

In Figure 4, we plot the performance difference of mmT5 and mT5^S for the small and base variants. We find that the modular model outperforms the dense variant across model sizes with a similar gap, indicating that the positive effect of modularity may not diminish at scale.

6.4 Source Language Hallucination

We perform an analysis of the generated text on the XL-Sum dev sets for mT5^S and mmT5 models trained in a zero-shot setting on XL-Sum^{ar,en,ja,zh} using full fine-tuning and a decoder freezing configuration. We automatically detect the language of the generated text using the Language Detection from the Google Cloud Translation API⁷ (Caswell et al., 2020). We show the results in Figure 6. We find that most models tend to generate text in one of the source languages (in this setting: Arabic, English, Japanese, and Chinese). This holds true also for mmT5 when we fine-tune the decoder. However, when freezing the decoder we observe a dramatic improvement in the target language generation rate from 1% to 99% of examples for mmT5, essentially solving the issue of source language hallucination in cross-lingual transfer scenarios. This improvement in language consistency also helps explain the significant improvement of the modular model over its dense counterparts on natural language generation tasks.

⁷<https://cloud.google.com/translate/docs/basic/detecting-language>

Südkalifornien besteht aus [...] einer internationalen Metropolregion und Großstadtgebieten. Die Region ist die Heimat von **zwei** erweiterten Metropolregionen mit jeweils mehr als fünf Millionen Einwohnern. [...]

Question: Wie viele erweiterte Metropolregionen gibt es ?

mmT5: **zwei**

mT5^S: **two**

[...] Analysen [...] waren irreführend, da es **mehrere Jahre** dauert, bis die Auswirkungen zu Veränderungen des Wirtschaftswachstums führen. [...]

Question: Wie lange dauert es, bis sich die Auswirkungen als Veränderungen des wirtschaftlichen Wachstums manifestieren?

mmT5: **mehrere Jahre**

mT5^S: **more** ere Jahre

Figure 5: XQuAD examples where mT5^S generates tokens with the correct meaning but in the wrong language. For the same examples, mmT5 is able to generate tokens in the correct language when freezing parts of the decoder.

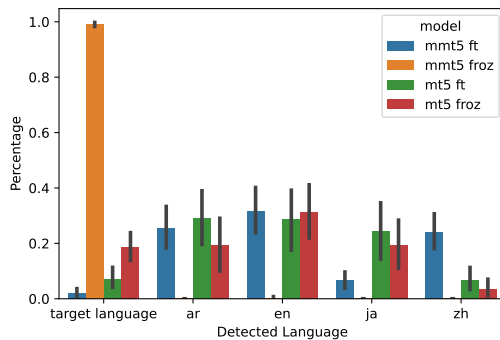


Figure 6: Detected languages of generated text of the development set of XL-Sum^{ar,en,ja,zh}. All models have base size. *ft indicates that the decoder was finetuned, *froz indicates that the decoder was partially frozen. High numbers are desirable for the first set of plots (“target language”), low numbers are desirable for the remaining four sets of plots (“ar”, “en”, “ja”, “zh”). We only include zero-shot cross-lingual results, therefore exclude the four source languages; all models achieve 100% accuracy for those. For more granular results see Appendix Table 10.

In addition, we manually analyze outputs of mT5^S and mmT5 on XQuAD and find similar issues of source language hallucinations. We show examples in Figure 5. Although the task is extractive QA, i.e., the answer is a substring of the input, mT5^S tends to translate subwords into English (the source language). This does not happen to mmT5 when freezing parts of the decoder, partially explaining the large improvements of mmT5 over mT5^S on TyDi QA in Table 2.

6.5 Module Re-Use for Unseen Languages

In the previous sections we have evaluated the cross-lingual performance of mmT5 on languages

seen during pre-training. However, with more than 7000 languages spoken in the world (Joshi et al., 2020), mmT5 covers less than 1% of them. While extending the model to unseen languages is out of scope for this work⁸, we evaluate the potential reusability of existing language modules for truly unseen languages with a case study on Tagalog. We utilize the base mmT5 model fine-tuned on the English MASSIVE training dataset (see Table 2). As a Tagalog language module does not exist within mmT5, we test all existing *other* language modules when evaluating on the Tagalog test set. In Figure 7, we report the Exact Match (EM) zero-shot accuracies for all languages. The module performing best corresponds to Javanese, which is the most closely related language to Tagalog as both belong to the Malayo-Polynesian subgroup of the Austronesian language family. This finding demonstrates the effectiveness of modular models; modular components specifically incorporate interpretable concepts, which can be re-used for unseen scenarios. Additionally, they can be further finetuned or adapted to the target domain if training data is available.

7 Conclusion

We have proposed mmT5, a modular multilingual encoder-decoder model. During multilingual pre-training the majority of parameters of mmT5 are shared between tasks, but each language is provided with a small amount of parameters only accessible to the respective language. We demonstrated that integrating modularity as an architec-

⁸Previous work has demonstrated that it is possible to extend multilingual models to unseen languages (Pfeiffer et al., 2020, 2021c, 2022).

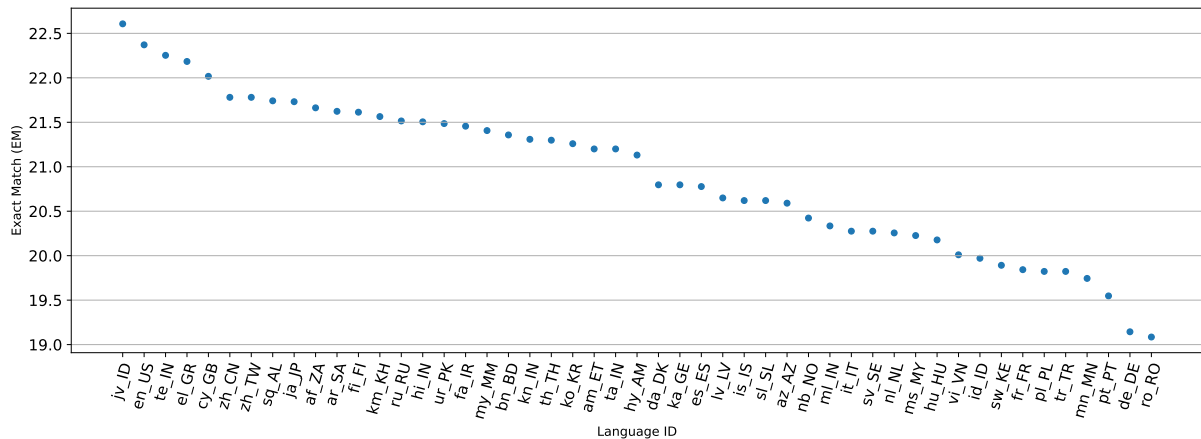


Figure 7: Average of the top-5 zero-shot EM accuracies on the Tagalog MASSIVE development set by varying the input language ID. Tagalog was not seen during mmT5 pre-training.

tural inductive bias significantly improves training efficiency, where the same perplexity as an equivalent fully dense model is achieved at a quarter of the update steps. mmT5 considerably outperforms comparable models on a large number of tasks including Question Answering, Semantic Parsing, Summarization and Classification in both zero-shot as well as multilingual scenarios. Finally, we show that by freezing parts of the decoder when fine-tuning mmT5 on a target task in a source language, the model consistently generates text in the target language. Consequently, modularity arguably solves source language hallucinations in cross-lingual transfer scenarios.

8 Future Work

In this paper, we explored the use of modularity for multilingual language models. We showed that modularity significantly improves cross-lingual performance on a number of generative tasks by mitigating hallucinations in the source language. However, there are still many avenues for future work.

First, we did not consider placing the modules in different parts of the model. We only experimented with placing bottleneck layers after the feed-forward component of each transformer layer. Previous work has demonstrated that depending on the modality, different placements perform better (Pfeiffer et al., 2021b; Eichenberg et al., 2022).

Second, we only experimented with extending the vanilla transformer architecture with modular components. Future work might consider modularizing different parts of the transformer, such as the attention-components or entire feed-forward layers like in Kudugunta et al. (2021).

Third, we performed fixed routing under the assumption that the language ID is easy to obtain. We chose this path, as learning-to-route has many difficulties such as training instabilities (Pfeiffer et al., 2023). However, this architecture design limits the sharing of information (e.g. domains) across languages. Consequently, a combination of fixed routing and learned routing would allow the model to learn how to share information across subsets of languages.

Fourth, we did not try using mmT5 for machine translation. Using a modular design for this type of task setup is quite natural, as modules from the encoder and decoder can be easily replaced with the source and target language components, respectively. The effectiveness of modular sequence-to-sequence models for NMT has been investigated previously (Bapna and Firat, 2019; Philip et al., 2020; Chronopoulou et al., 2020; Le et al., 2021; Üstün et al., 2021; Stickland et al., 2021; Garcia et al., 2021; Dua et al., 2022).

Finally, we did not consider extending the model to languages beyond those we pre-trained on. While our preliminary results (see § 6.5) suggest that there are benefits of reusing related language modules to learn unseen languages, this requires further experimentation. However, previous works have demonstrated that modular (Pfeiffer et al., 2022) as well as dense models can be adapted to new languages and scripts (Pfeiffer et al., 2020, 2021c). Alternatively, future work might consider using post-hoc adaptation techniques, such as LoRA (Hu et al., 2022), to adapt modules to new languages.

Acknowledgements

We thank Andrea Gesmundo, Marc’Aurelio Ranzato and Srini Narayanan for helpful feedback on a draft of this paper.

References

- Alan Ansell, Edoardo Maria Ponti, Anna Korhonen, and Ivan Vulic. 2021a. [Composable sparse fine-tuning for cross-lingual transfer](#). *arXiv preprint*.
- Alan Ansell, Edoardo Maria Ponti, Jonas Pfeiffer, Sebastian Ruder, Goran Glavaš, Ivan Vulić, and Anna Korhonen. 2021b. [MAD-G: Multilingual adapter generation for efficient cross-lingual transfer](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 4762–4781, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Alan Ansell, Edoardo Maria Ponti, Jonas Pfeiffer, Sebastian Ruder, Goran Glavaš, Ivan Vulić, and Anna Korhonen. 2021c. [MAD-G: Multilingual adapter generation for efficient cross-lingual transfer](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 4762–4781, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Mikel Artetxe, Sebastian Ruder, and Dani Yogatama. 2020. [On the cross-lingual transferability of monolingual representations](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4623–4637, Online. Association for Computational Linguistics.
- Ankur Bapna and Orhan Firat. 2019. [Simple, scalable adaptation for neural machine translation](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, pages 1538–1548. Association for Computational Linguistics.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Isaac Caswell, Theresa Breiner, Daan van Esch, and Ankur Bapna. 2020. [Language ID in the wild: Unexpected challenges on the path to a thousand-language web text corpus](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 6588–6608, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Ethan C. Chau, Lucy H. Lin, and Noah A. Smith. 2020. [Parsing with multilingual bert, a small treebank, and a small corpus](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: Findings, EMNLP 2020, Online Event, 16-20 November 2020*, pages 1324–1334.
- Vincent S. Chen, Sen Wu, Alexander J. Ratner, Jen Weng, and Christopher Ré. 2019. [Slice-based learning: A programming model for residual learning in critical data slices](#). In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 9392–9402.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. 2022. [Palm: Scaling language modeling with pathways](#). *arXiv preprint arXiv:2204.02311*.
- Alexandra Chronopoulou, Dario Stojanovski, and Alexander Fraser. 2020. [Reusing a Pretrained Language Model on Languages with Limited Corpora for Unsupervised NMT](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2703–2711, Online. Association for Computational Linguistics.
- Jonathan H. Clark, Eunsol Choi, Michael Collins, Dan Garrette, Tom Kwiatkowski, Vitaly Nikolaev, and Jennimaria Palomaki. 2020. [TyDi QA: A benchmark for information-seeking question answering in typologically diverse languages](#). *Transactions of the Association for Computational Linguistics*, 8:454–470.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020a. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online. Association for Computational Linguistics.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020b. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Conference of the Association for Computational Linguistics, ACL 2020, Virtual Conference, July 6-8, 2020*, pages 8440–8451.
- Alexis Conneau, Ruty Rinott, Guillaume Lample, Adina Williams, Samuel Bowman, Holger Schwenk, and Veselin Stoyanov. 2018. [XNLI: Evaluating cross-lingual sentence representations](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2475–2485, Brussels, Belgium. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4171–4186.
- Dheeru Dua, Shruti Bhosale, Vedanuj Goswami, James Cross, Mike Lewis, and Angela Fan. 2022. [Tricks for training sparse translation models](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3340–3345, Seattle, United States. Association for Computational Linguistics.
- Constantin Eichenberg, Sidney Black, Samuel Weinbach, Letitia Parcalabescu, and Anette Frank. 2022. [MAGMA – multimodal augmentation of generative models through adapter-based finetuning](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 2416–2428, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.

- William Fedus, Barret Zoph, and Noam Shazeer. 2021. [Switch Transformers: Scaling to Trillion Parameter Models with Simple and Efficient Sparsity](#). *arXiv preprint*.
- Jack FitzGerald, Christopher Hench, Charith Peris, Scott Mackie, Kay Rottmann, Ana Sanchez, Aaron Nash, Liam Urbach, Vishesh Kakarala, Richa Singh, et al. 2022. [MasSive: A 1m-example multilingual natural language understanding dataset with 51 typologically-diverse languages](#). *arXiv preprint arXiv:2204.08582*.
- Xavier Garcia, Noah Constant, Ankur Parikh, and Orhan Firat. 2021. [Towards continual learning for multilingual machine translation via vocabulary substitution](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1184–1192, Online. Association for Computational Linguistics.
- Suchin Gururangan, Mike Lewis, Ari Holtzman, Noah A. Smith, and Luke Zettlemoyer. 2021. [Demix layers: Disentangling domains for modular language modeling](#). *arXiv preprint*.
- Tahmid Hasan, Abhik Bhattacharjee, Md. Saiful Islam, Kazi Mubasshir, Yuan-Fang Li, Yong-Bin Kang, M. Sohel Rahman, and Rifat Shahriyar. 2021. [XL-sum: Large-scale multilingual abstractive summarization for 44 languages](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 4693–4703, Online. Association for Computational Linguistics.
- Junxian He, Chunting Zhou, Xuezhe Ma, Taylor Berg-Kirkpatrick, and Graham Neubig. 2022. [Towards a Unified View of Parameter-Efficient Transfer Learning](#).
- Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin de Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. 2019. [Parameter-efficient transfer learning for NLP](#). In *Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA*, pages 2790–2799.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. [Lora: Low-rank adaptation of large language models](#). In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*. OpenReview.net.
- Junjie Hu, Sebastian Ruder, Aditya Siddhant, Graham Neubig, Orhan Firat, and Melvin Johnson. 2020. [Xtreme: A massively multilingual multi-task benchmark for evaluating cross-lingual generalisation](#). In *International Conference on Machine Learning*, pages 4411–4421. PMLR.
- Pratik Joshi, Sebastin Santy, Amar Budhiraja, Kalika Bali, and Monojit Choudhury. 2020. [The state and fate of linguistic diversity and inclusion in the NLP world](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 6282–6293. Association for Computational Linguistics.
- Rabeeh Karimi Mahabadi, James Henderson, and Sebastian Ruder. 2021. [Compacter: Efficient low-rank hypercomplex adapter layers](#). *Advances in Neural Information Processing Systems*, 34:1022–1035.
- Sneha Kudugunta, Yanping Huang, Ankur Bapna, Maxim Krikun, Dmitry Lepikhin, Minh-Thang Luong, and Orhan Firat. 2021. [Beyond distillation: Task-level mixture-of-experts for efficient inference](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 16-20 November, 2021*, pages 3577–3599. Association for Computational Linguistics.
- Anne Lauscher, Olga Majewska, Leonardo F. R. Ribeiro, Iryna Gurevych, Nikolai Rozanov, and Goran Glavaš. 2020a. [Common sense or world knowledge? investigating adapter-based knowledge injection into pretrained transformers](#). In *Proceedings of Deep Learning Inside Out (DeeLIO): The First Workshop on Knowledge Extraction and Integration for Deep Learning Architectures*, pages 43–49, Online. Association for Computational Linguistics.
- Anne Lauscher, Vinit Ravishankar, Ivan Vulić, and Goran Glavaš. 2020b. [From zero to hero: On the limitations of zero-shot language transfer with multilingual Transformers](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4483–4499, Online.
- Hang Le, Juan Miguel Pino, Changhan Wang, Jiatao Gu, Didier Schwab, and Laurent Besacier. 2021. [Lightweight adapter tuning for multilingual speech translation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 2: Short Papers), Virtual Event, August 1-6, 2021*, pages 817–824. Association for Computational Linguistics.
- Rabeeh Karimi Mahabadi, Sebastian Ruder, Mostafa Dehghani, and James Henderson. 2021. [Parameter-efficient multi-task fine-tuning for transformers via shared hypernetworks](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021*, pages 565–576. Association for Computational Linguistics.
- Jonas Pfeiffer, Naman Goyal, Xi Lin, Xian Li, James Cross, Sebastian Riedel, and Mikel Artetxe. 2022. [Lifting the curse of multilinguality by pre-training modular transformers](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3479–3495, Seattle, United States. Association for Computational Linguistics.
- Jonas Pfeiffer, Aishwarya Kamath, Andreas Rücklé, Kyunghyun Cho, and Iryna Gurevych. 2021a. [AdapterFusion: Non-destructive task composition for transfer learning](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 487–503, Online. Association for Computational Linguistics.
- Jonas Pfeiffer, Aishwarya Kamath, Andreas Rücklé, Kyunghyun Cho, and Iryna Gurevych. 2021b. [AdapterFusion: Non-Destructive Task Composition for Transfer Learning](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics (EACL)*, Online. Association for Computational Linguistics.

- Jonas Pfeiffer, Sebastian Ruder, Ivan Vulić, and Edoardo Maria Ponti. 2023. [Modular deep learning](#). *arXiv preprint*.
- Jonas Pfeiffer, Ivan Vulić, Iryna Gurevych, and Sebastian Ruder. 2020. [MAD-X: An Adapter-Based Framework for Multi-Task Cross-Lingual Transfer](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7654–7673, Online. Association for Computational Linguistics.
- Jonas Pfeiffer, Ivan Vulić, Iryna Gurevych, and Sebastian Ruder. 2021c. [UNks Everywhere: Adapting Multilingual Language Models to New Scripts](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Online, November, 2021*.
- Jerin Philip, Alexandre Berard, Matthias Gallé, and Laurent Besacier. 2020. [Monolingual adapters for zero-shot neural machine translation](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4465–4470, Online. Association for Computational Linguistics.
- Edoardo Maria Ponti, Goran Glavaš, Olga Majewska, Qianchu Liu, Ivan Vulić, and Anna Korhonen. 2020. [XCOPA: A multilingual dataset for causal commonsense reasoning](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2362–2376, Online. Association for Computational Linguistics.
- Clifton Poth, Jonas Pfeiffer, Andreas Rücklé, and Iryna Gurevych. 2021. [What to pre-train on? efficient intermediate task selection](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 7-11 November, 2021*, pages 10585–10605. Association for Computational Linguistics.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *The Journal of Machine Learning Research*, 21(1):5485–5551.
- Sylvestre-Alvise Rebuffi, Hakan Bilen, and Andrea Vedaldi. 2017. [Learning multiple visual domains with residual adapters](#). In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, 4-9 December 2017, Long Beach, CA, USA*, pages 506–516.
- Sylvestre-Alvise Rebuffi, Hakan Bilen, and Andrea Vedaldi. 2018. [Efficient parametrization of multi-domain deep neural networks](#). In *2018 IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2018, Salt Lake City, UT, USA, June 18-22, 2018*, pages 8119–8127.
- Andreas Rücklé, Jonas Pfeiffer, and Iryna Gurevych. 2020. [Multitqa: Zero-shot transfer of self-supervised text matching models on a massive scale](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16-20, 2020*, pages 2471–2486. Association for Computational Linguistics.
- Sebastian Ruder. 2017. An overview of multi-task learning in deep neural networks. *arXiv preprint arXiv:1706.05098*.
- Sebastian Ruder, Noah Constant, Jan Botha, Aditya Siddhant, Orhan Firat, Jinlan Fu, Pengfei Liu, Junjie Hu, Dan Garrette, Graham Neubig, and Melvin Johnson. 2021. [XTREME-R: Towards more challenging and nuanced multilingual evaluation](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 10215–10245, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc V. Le, Geoffrey E. Hinton, and Jeff Dean. 2017. [Outrageously large neural networks: The sparsely-gated mixture-of-experts layer](#). In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net.
- Asa Cooper Stickland, Alexandre Berard, and Vassilina Nikoulina. 2021. [Multilingual domain adaptation for NMT: decoupling language and domain information with adapters](#). In *Proceedings of the Sixth Conference on Machine Translation, WMT@EMNLP 2021, Online Event, November 10-11, 2021*, pages 578–598. Association for Computational Linguistics.
- Asa Cooper Stickland and Iain Murray. 2019. [BERT and pals: Projected attention layers for efficient adaptation in multi-task learning](#). In *Proceedings of the 36th International Conference on Machine Learning, ICML 2019, 9-15 June 2019, Long Beach, California, USA*, volume 97 of *Proceedings of Machine Learning Research*, pages 5986–5995. PMLR.
- Ahmet Üstün, Alexandre Berard, Laurent Besacier, and Matthias Gallé. 2021. [Multilingual unsupervised neural machine translation with denoising adapters](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 7-11 November, 2021*, pages 6650–6662. Association for Computational Linguistics.
- Ahmet Üstün, Arianna Bisazza, Gosse Bouma, and Gertjan van Noord. 2020. [UDapter: Language adaptation for truly Universal Dependency parsing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2302–2315, Online. Association for Computational Linguistics.
- Marko Vidoni, Ivan Vulić, and Goran Glavaš. 2020. [Orthogonal language and task adapters in zero-shot cross-lingual transfer](#). In *arXiv preprint*.
- Tu Vu, Aditya Barua, Brian Lester, Daniel Cer, Mohit Iyyer, and Noah Constant. 2022. [Overcoming catastrophic forgetting in zero-shot cross-lingual generation](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 9279–9300, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Ruize Wang, Duyu Tang, Nan Duan, Zhongyu Wei, Xuanjing Huang, Jianshu Ji, Guihong Cao, Daxin Jiang, and Ming Zhou. 2021a. [K-adapter: Infusing knowledge into pre-trained models with adapters](#). In *Findings of the Association for Computational Linguistics: ACL/IJCNLP 2021, Online Event, August 1-6, 2021*, volume ACL/IJCNLP 2021 of *Findings of ACL*, pages 1405–1418. Association for Computational Linguistics.

Xinyi Wang, Yulia Tsvetkov, Sebastian Ruder, and Graham Neubig. 2021b. [Efficient test time adapter ensembling for low-resource language varieties](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 730–737, Punta Cana, Dominican Republic. Association for Computational Linguistics.

Shijie Wu and Mark Dredze. 2020. [Are all languages created equal in multilingual BERT?](#) In *Proceedings of the 5th Workshop on Representation Learning for NLP*, pages 120–130. Online. Association for Computational Linguistics.

Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2021. [mT5: A massively multilingual pre-trained text-to-text transformer](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 483–498, Online. Association for Computational Linguistics.

A Appendix

A.1 Freezing combinations

We show results with different freezing combinations in Table 5. We find that freezing the FFN component of the Decoder results in the biggest performance gains.

A.2 Language-ID prediction on Cross-lingual Summarization

We report the languages predicted by the Language Detection model from the Google Cloud Translation API⁹ (Caswell et al., 2020) for the XL-Sum^{ar,en,ja,zh} task in Table 10. We find that mmT5 achieves near perfect performance for all target languages when freezing parts of the decoder (s7)–99% of the text is generated in the correct target language—significantly outperforming all other model variants. Interestingly, mmT5 hallucinates in the source language when the decoder is fine-tuned (s1), resulting in a drop down to only 2% in the correct target language. mT5^s also benefits slightly from freezing parts of the decoder, with an improvement from 7% to 18% target language generation, however, this is no where close to the performance of mmT5.

A.3 Language-level Results

XNLI. We report XNLI validation results in Table 11 and test results in Table 6.

XQuAD. We report XQuAD validation results in Table 9 and test results in Table 7.

MASSIVE. We report MASSIVE validation results in Table 17 and test results in Table 8.

TyDiQA. We report TyDiQA validation results in Table 23.

Multilingual XL-Sum We report XL-Sum validation results in Tables 18, 19, 20, 21, and 22 and test results in Table 15.

Zeroshot XL-Sum^{en} We report XL-Sum validation results in Table 14 and test results in Table 13.

Zeroshot XL-Sum^{ar,en,ja,zh} We report XL-Sum validation results in Table 16 and test results in Table 12.

⁹<https://cloud.google.com/translate/docs/basic/detecting-language>

A.4 Language-level Pre-training Perplexities

We report the language-level perplexities of the different model variants and sizes in Figures 8, 9, 10, 11, 12, 13, 14.

cfg	Emb	Enc _{LN}	Dec _{LN}	Dec _{Att}	Dec _{CrossAtt}	Dec _{FFN}	XQuAD		XNLI dev acc	Zero-Shot		MASSIVE dev EM	Multi-Source	
							dev (en)	test		XL-Sum ^{en}	XL-Sum ^{ar, en, zh, ja}		XL-Sum	MASSIVE
							f1 / em	f1 / em		Rg ₁ / Rg ₂ / Rg _L	Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L	dev EM
s1							90.7 / 83.6	66.9 / 49.3	75.5	15.4 / 2.0 / 14.0	18.7 / 6.1 / 16.8	32.1	41.2 / 22.4 / 32.4	
s2		✗	✗				90.7 / 83.4	65.6 / 48.0	75.0					
s3	✗						90.7 / 83.5	61.0 / 43.4	76.9					
s4	✗	✗	✗				90.9 / 83.6	64.6 / 47.1	77.5					
s5	✗			✗	✗	✗	91.2 / 84.1	74.3 / 57.5	73.8					
s6	✗			✗	✗	✗	91.9 / 85.1	75.8 / 59.5	75.6			43.2	41.2 / 22.4 / 32.6	
s7	✗			✗	✗	✗	91.8 / 85.1	75.8 / 59.8	77.3	19.7 / 6.2 / 16.4	34.7 / 16.2 / 26.9	41.0	41.9 / 23.1 / 33.2	
s8		✗	✗		✗	✗	91.2 / 84.5	75.0 / 59.3	73.3					
s9		✗	✗		✗	✗	91.2 / 84.5	74.6 / 58.8	75.6					
s10	✗	✗	✗		✗	✗	92.1 / 85.5	76.3 / 60.3	76.1			45.4	40.8 / 22.1 / 32.3	66.78
s11			✗		✗	✗	90.9 / 84.0	74.8 / 58.8	73.1					
s12			✗	✗	✗	✗	91.2 / 84.5	75.0 / 59.3	75.6					
s13			✗		✗	✗	91.3 / 84.5	74.9 / 58.9	76.3					
s14	✗	✗	✗		✗	✗	91.8 / 85.1	75.0 / 59.2	77.7			39.9	41.8 / 23.0 / 33.1	

Table 5: Results with different freezing combinations of mmT5 base on different tasks. ✗ indicates that the component is frozen in the respective configuration Dev results for most. We always finetune the attention in the encoder (Enc_{Att}), the feed forward layer in the encoder (Enc_{FFN}), and always freeze the modules in the encoder (Enc_{Mod}) and decoder (Dec_{Mod}). We find that configurations s1-s4 strongly underperform the respective other configurations (s5-s14), suggesting that freezing the feed forward layer of the decoder is good for cross-lingual transfer performance.

	model	ar	bg	de	el	en	es	fr	hi	ru	sw	th	tr	ur	vi	zh	avg
small	mmT5	65.3	71.9	70.2	70.5	81.8	74.7	73.4	62.7	70.1	63.8	67.4	64.2	59.1	66.7	66.3	68.5
small	mT5 ^S	63.8	69.1	67.6	68.1	80.0	71.6	69.3	60.4	68.7	53.2	64.1	59.1	58.4	63.9	64.4	65.5
base	mmT5	75.0	81.2	80.3	79.5	86.9	82.6	80.9	73.4	78.3	74.0	74.9	76.3	69.9	76.7	77.2	77.8
base	mT5 ^S	72.7	78.7	77.6	77.3	85.5	80.7	78.5	70.7	77.7	66.6	73.0	72.8	67.7	73.8	73.5	75.1

Table 6: XNLI test results for all language. We select the checkpoint performing best on the validation set.

	model	ar	de	el	en	es	hi	ru	th	tr	vi	zh	avg
		F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM
small	mmT5	60.6 / 44.6	71.0 / 53.6	64.9 / 47.1	82.5 / 70.3	74.1 / 56.1	59.2 / 43.9	69.5 / 50.8	58.9 / 47.0	62.4 / 43.4	64.3 / 45.4	64.2 / 52.4	66.5 / 50.4
	mT5 ^S	53.5 / 37.1	67.2 / 48.7	59.5 / 41.1	81.7 / 69.7	69.8 / 53.7	54.7 / 40.8	62.8 / 44.5	50.3 / 37.9	57.2 / 39.3	59.7 / 40.9	64.7 / 54.0	61.9 / 46.2
base	mmT5	74.2 / 57.6	79.5 / 63.0	77.6 / 59.9	86.7 / 74.5	79.2 / 61.3	72.4 / 56.1	77.6 / 58.7	69.3 / 59.3	74.5 / 55.9	74.2 / 54.2	74.4 / 63.1	76.3 / 60.3
	mT5 ^S	63.3 / 43.0	75.9 / 57.2	63.3 / 40.3	84.3 / 71.9	76.1 / 58.7	62.8 / 47.1	64.0 / 42.6	59.6 / 48.5	70.1 / 51.7	70.4 / 50.4	66.0 / 55.5	68.7 / 51.5

Table 7: XQuAD test set results for all languages. We select the checkpoint performing best on the English development set.

Language	Exact Match (EM)
af_ZA	57.5
am_ET	29.6
ar_SA	38.3
az_AZ	41.3
bn_BD	37.2
cy_GB	35.5
da_DK	60.5
de_DE	55.3
el_GR	49.6
en_US	72.7
es_ES	53.8
fa_IR	48.2
fi_FI	54.4
fr_FR	51.4
hi_IN	44.1
hu_HU	47.4
hy_AM	38.6
id_ID	57.1
is_IS	42.8
it_IT	51.7
ja_JP	42.5
lv_ID	38.1
ka_GE	38.9
km_KH	40.7
kn_IN	34.4
ko_KR	39.1
lv_LV	50.3
ml_IN	36.0
mn_MN	34.2
ms_MY	52.5
my_MM	33.8
nb_NO	58.2
nl_NL	57.5
pl_PL	52.9
pt_PT	56.0
ro_RO	55.4
ru_RU	50.9
sl_SL	50.3
sq_AL	48.3
sv_SE	58.9
sw_KE	43.0
ta_IN	37.1
te_IN	35.4
th_TH	50.1
tr_TR	47.9
ur_PK	39.6
vi_VN	44.9
zh_CN	30.0
zh_TW	28.2
Average	46.0

Table 8: MASSIVE Exact Match (EM) test accuracies of the best model (s10 modular) for all languages

		en		
		cfg	F1 / EM	
Small	mmT5	s1	85.6 / 77.6	
		s6	87.2 / 79.4	
		s7	87.4 / 79.4	
		s10	87.3 / 79.6	
		s14	87.4 / 79.2	
	mT5 ^s	s1	84.9 / 76.5	
		s6	85.8 / 77.6	
		s7	85.9 / 77.7	
		s10	86.1 / 77.9	
		s14	85.9 / 77.6	
	Base	mmT5	s1	90.7 / 83.6
			s2	90.7 / 83.4
			s3	90.7 / 83.5
			s4	90.9 / 83.6
s5			91.2 / 84.1	
s6			91.9 / 85.1	
s7			91.8 / 85.1	
s8			91.2 / 84.5	
s9			91.2 / 84.5	
s10			92.1 / 85.5	
s11			90.9 / 84.0	
s12			91.2 / 84.5	
s13			91.3 / 84.5	
s14			91.8 / 85.1	
mT5 ^s	s1	89.9 / 82.5		
	s6	90.2 / 83.0		
	s7	90.5 / 83.6		
	s10	90.2 / 82.8		
	s14	90.4 / 83.5		

Table 9: XQuAD validation results for English across the different freezing configurations.

tgt lang		pred lang		am		ar		en		ja		zh		az		bn		cy								
cf	am	ar	en	ja	zh	ar	en	ja	zh	az	en	ja	zh	bn	en	ja	zh	cy	en	ja	zh					
mmT5	s1	0.00	0.50	0.07	0.02	0.36	1.0	1.0	0.0	0.0	0.0	0.00	0.18	0.29	0.06	0.29	0.00	0.4	0.10	0.05	0.41	0.06	0.05	0.84	0.0	0.01
mmT5	s7	0.99	0.00	0.00	0.00	0.00	1.0	1.0	0.0	0.0	0.0	1.00	0.00	0.00	0.00	0.00	1.00	0.0	0.00	0.00	0.00	0.91	0.00	0.08	0.0	0.00
mT5 ^S	s1	0.03	0.96	0.00	0.00	0.01	1.0	1.0	0.0	0.0	0.0	0.08	0.12	0.31	0.27	0.09	0.02	0.3	0.02	0.43	0.19	0.13	0.10	0.76	0.0	0.00
mT5 ^S	s7	0.02	0.95	0.00	0.00	0.00	1.0	1.0	0.0	0.0	0.0	0.36	0.03	0.35	0.05	0.02	0.13	0.1	0.13	0.47	0.11	0.22	0.01	0.76	0.0	0.00
tgt lang		pred lang		en		es		fa		fr		gd														
cf	en	ar	en	ja	zh	es	en	ja	zh	fa	en	ja	zh	fr	en	ja	zh	gd	en	ja	zh					
mmT5	s1	1.0	0.0	1.0	0.0	0.0	0.03	0.03	0.73	0.01	0.07	1.00	0.96	0.01	0.0	0.0	0.05	0.07	0.74	0.0	0.02	0.25	0.01	0.67	0.0	0.01
mmT5	s7	1.0	0.0	1.0	0.0	0.0	0.99	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.0	0.0	1.00	0.00	0.00	0.0	0.00	1.00	0.00	0.00	0.0	0.00
mT5 ^S	s1	1.0	0.0	1.0	0.0	0.0	0.02	0.00	0.95	0.00	0.00	0.01	0.99	0.00	0.0	0.0	0.01	0.00	0.98	0.0	0.00	0.23	0.01	0.76	0.0	0.00
mT5 ^S	s7	1.0	0.0	1.0	0.0	0.0	0.05	0.00	0.91	0.00	0.00	0.13	0.86	0.00	0.0	0.0	0.04	0.00	0.94	0.0	0.00	0.56	0.00	0.43	0.0	0.00
tgt lang		pred lang		gu		ha		hi		id		ig														
cf	gu	ar	en	ja	zh	ha	en	ja	zh	hi	en	ja	zh	id	en	ja	zh	ig	en	ja	zh					
mmT5	s1	0.00	0.24	0.18	0.10	0.41	0.03	0.17	0.62	0.01	0.01	0.00	0.33	0.26	0.04	0.30	0.01	0.13	0.62	0.03	0.13	0.10	0.25	0.33	0.02	0.17
mmT5	s7	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.98	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00
mT5 ^S	s1	0.13	0.16	0.01	0.56	0.13	0.11	0.03	0.83	0.00	0.00	0.03	0.23	0.02	0.64	0.05	0.07	0.14	0.73	0.01	0.02	0.63	0.01	0.34	0.00	0.00
mT5 ^S	s7	0.23	0.05	0.12	0.49	0.06	0.18	0.01	0.76	0.00	0.00	0.12	0.08	0.23	0.48	0.01	0.25	0.03	0.67	0.00	0.00	0.66	0.00	0.31	0.00	0.00
tgt lang		pred lang		ja		ko		ky		mr		my														
cf	ja	ar	en	ja	zh	ko	en	ja	zh	ky	en	ja	zh	mr	en	ja	zh	my	en	ja	zh					
mmT5	s1	1.0	0.0	0.0	1.0	0.0	0.00	0.01	0.04	0.50	0.43	0.00	0.05	0.12	0.13	0.65	0.00	0.12	0.24	0.04	0.55	0.00	0.24	0.03	0.30	0.27
mmT5	s7	1.0	0.0	0.0	1.0	0.0	1.00	0.00	0.00	0.00	0.00	0.99	0.00	0.00	0.00	0.00	0.96	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00
mT5 ^S	s1	1.0	0.0	0.0	1.0	0.0	0.01	0.00	0.00	0.99	0.00	0.02	0.15	0.04	0.56	0.14	0.07	0.09	0.05	0.64	0.08	0.05	0.03	0.00	0.91	0.01
mT5 ^S	s7	1.0	0.0	0.0	1.0	0.0	0.02	0.00	0.00	0.98	0.00	0.08	0.02	0.24	0.40	0.07	0.11	0.02	0.19	0.37	0.08	0.20	0.00	0.00	0.78	0.01
tgt lang		pred lang		ne		pa		ps		pt		ru														
cf	ne	ar	en	ja	zh	pa	en	ja	zh	ps	en	ja	zh	pt	en	ja	zh	ru	en	ja	zh					
mmT5	s1	0.00	0.25	0.10	0.10	0.47	0.01	0.22	0.22	0.07	0.42	0.03	0.92	0.00	0.0	0.0	0.04	0.08	0.74	0.01	0.03	0.00	0.50	0.21	0.02	0.20
mmT5	s7	0.99	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.0	0.0	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00
mT5 ^S	s1	0.00	0.15	0.00	0.67	0.14	0.05	0.24	0.04	0.48	0.16	0.02	0.96	0.00	0.0	0.0	0.02	0.00	0.97	0.00	0.00	0.07	0.53	0.28	0.01	0.04
mT5 ^S	s7	0.01	0.02	0.03	0.82	0.09	0.18	0.12	0.19	0.40	0.03	0.12	0.82	0.02	0.0	0.0	0.07	0.00	0.91	0.00	0.00	0.27	0.05	0.54	0.00	0.00
tgt lang		pred lang		si		so		sr		sw		ta														
cf	si	ar	en	ja	zh	so	en	ja	zh	sr	en	ja	zh	sw	en	ja	zh	ta	en	ja	zh					
mmT5	s1	0.00	0.30	0.22	0.11	0.26	0.01	0.22	0.45	0.03	0.04	0.00	0.110	0.590	0.035	0.185	0.01	0.18	0.51	0.02	0.06	0.01	0.24	0.16	0.14	0.33
mmT5	s7	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	0.95	0.000	0.010	0.000	0.000	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00
mT5 ^S	s1	0.02	0.48	0.01	0.40	0.02	0.04	0.65	0.25	0.00	0.00	0.01	0.375	0.525	0.005	0.005	0.01	0.84	0.13	0.00	0.00	0.07	0.09	0.02	0.68	0.07
mT5 ^S	s7	0.07	0.63	0.10	0.11	0.00	0.06	0.71	0.15	0.00	0.00	0.02	0.260	0.545	0.000	0.000	0.02	0.87	0.09	0.00	0.00	0.32	0.05	0.06	0.46	0.03
tgt lang		pred lang		te		th		tr		uk		ur														
cf	te	ar	en	ja	zh	th	en	ja	zh	tr	en	ja	zh	uk	en	ja	zh	ur	en	ja	zh					
mmT5	s1	0.01	0.35	0.14	0.10	0.32	0.00	0.13	0.04	0.01	0.79	0.01	0.04	0.49	0.13	0.18	0.00	0.24	0.32	0.04	0.32	0.01	0.88	0.04	0.00	0.00
mmT5	s7	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00
mT5 ^S	s1	0.09	0.30	0.02	0.49	0.09	0.08	0.18	0.01	0.00	0.68	0.08	0.01	0.44	0.39	0.03	0.02	0.79	0.12	0.00	0.03	0.02	0.56	0.01	0.20	0.14
mT5 ^S	s7	0.31	0.28	0.06	0.22	0.05	0.29	0.00	0.00	0.04	0.60	0.37	0.00	0.27	0.24	0.00	0.18	0.41	0.31	0.00	0.00	0.20	0.20	0.06	0.24	0.03
tgt lang		pred lang		uz		vi		yo		zh		avg (excluding source langs)														
cf	uz	ar	en	ja	zh	vi	en	ja	zh	yo	en	ja	zh	tgt	ar	en	ja	zh								
mmT5	s1	0.01	0.14	0.15	0.14	0.31	0.02	0.26	0.28	0.03	0.31	0.02	0.25	0.29	0.02	0.17	1.0	0.0	0.0	0.0	1.0	0.02	0.25	0.32	0.07	0.24
mmT5	s7	0.99	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	1.00	0.00	0.00	0.00	0.00	1.0	0.0	0.0	0.0	1.0	0.99	0.00	0.00	0.00	0.00
mT5 ^S	s1	0.00	0.36	0.01	0.45	0.11	0.08	0.24	0.49	0.00	0.16	0.22	0.07	0.66	0.00	0.01	1.0	0.0	0.0	0.0	1.0	0.07	0.29	0.29	0.24	0.07
mT5 ^S	s7	0.02	0.08	0.19	0.46	0.03	0.31	0.04	0.61	0.00	0.00	0.44	0.00	0.50	0.00	0.00	1.0	0.0	0.0	0.0	1.0	0.18	0.19	0.31	0.19	0.03

Table 10: Language prediction results on the XL-Sum^{ar,en,ja,zh} task setup. The generated summarization text is passed into the language prediction model. We report the percentage of text which the model predicts to be in the correct *target* language, as well as each of the 4 source languages. It is possible that another language was predicted, the numbers therefore do not need to sum up to 1.0.

		cfg	ar	bg	de	el	en	es	fr	hi	ru	sw	th	tr	ur	vi	zh	avg	
Small	mmT5	s1	63.7	68.4	68.4	66.7	77.6	71.6	69.3	60.8	66.3	60.2	62.2	62.5	56.2	64.5	63.4	65.4	
		s6	63.5	69.2	69.2	68.2	81.7	73.9	71.7	62.2	67.1	60.8	64.8	62.3	54.7	61.3	64.2	66.3	
		s7	65.4	70.8	70.5	70.1	81.5	74.5	73.0	63.1	69.1	62.7	66.1	63.1	58.4	65.7	65.7	68.0	
		s10	63.9	69.6	68.9	69.4	80.6	73.7	70.4	62.4	67.8	59.9	65.2	61.4	54.6	62.6	65.6	66.4	
		s14	64.7	70.7	70.4	69.5	81.6	74.5	72.6	63.2	68.8	60.9	65.3	62.4	58.0	65.1	65.9	67.6	
	mT5 ^S	s1	63.2	68.6	67.8	67.3	80.2	70.8	70.1	59.8	67.6	52.9	62.5	58.2	56.9	63.5	63.2	64.8	
		s6	58.8	64.5	64.2	62.4	77.2	67.3	65.9	55.0	64.0	48.2	60.3	53.1	50.9	58.6	61.2	60.8	
		s7	62.2	66.9	66.6	65.6	77.9	70.8	69.3	59.4	67.1	53.2	60.6	57.6	56.1	61.7	63.5	63.9	
		s10	57.5	64.2	66.8	63.6	77.6	68.2	66.3	56.4	64.4	51.0	59.9	54.8	51.8	59.0	61.3	61.5	
		s14	61.8	66.9	67.7	66.3	77.6	71.0	69.3	59.4	67.6	53.3	61.6	58.0	56.3	61.1	62.9	64.1	
	Base	mmT5	s1	73.5	77.9	77.6	77.7	84.3	79.2	77.8	72.2	75.3	71.7	72.9	73.5	68.9	75.0	74.6	75.5
			s2	73.3	77.1	77.2	77.1	84.1	79.8	76.9	71.2	75.2	70.7	72.8	72.6	68.7	74.2	74.9	75.0
			s3	74.4	79.9	79.7	78.2	85.8	81.3	79.5	73.6	76.7	72.9	75.0	74.4	69.2	76.2	77.0	76.9
			s4	75.9	79.8	79.5	79.6	86.2	81.9	80.1	73.5	78.0	73.5	74.3	75.2	70.1	77.0	77.4	77.5
s5			72.4	75.5	75.4	76.1	83.3	79.2	76.8	70.9	73.4	71.5	69.9	70.7	67.1	71.8	72.8	73.8	
s6			73.5	77.6	78.2	77.2	84.6	81.0	79.0	72.3	76.2	71.8	72.4	72.2	68.7	73.8	74.7	75.6	
s7			75.3	80.1	79.8	79.1	86.3	82.2	79.4	73.5	77.8	73.0	75.1	74.7	70.0	75.8	77.5	77.3	
s8			72.2	76.4	73.7	74.8	83.2	77.8	73.2	70.2	73.5	69.7	71.7	70.7	67.1	71.7	73.5	73.3	
s9			74.1	77.7	77.8	76.9	84.7	80.2	78.3	71.6	75.8	71.4	73.2	73.7	69.6	74.0	75.3	75.6	
s10			74.1	77.7	78.0	77.5	84.3	81.4	78.3	72.9	75.9	73.2	73.5	73.7	69.4	75.1	76.2	76.1	
s11		71.3	75.5	73.9	74.7	82.2	77.8	75.2	70.0	73.3	69.6	71.1	70.0	66.9	70.8	73.4	73.1		
s12		74.1	78.0	77.5	77.4	84.6	79.4	78.0	71.3	75.7	71.8	73.4	73.5	69.3	74.7	75.7	75.6		
s13		75.2	78.1	78.3	78.2	84.4	80.1	78.4	73.1	75.9	73.0	73.9	73.8	69.7	75.8	76.5	76.3		
s14		76.0	80.6	81.0	79.0	86.9	82.4	79.9	73.2	77.6	74.0	74.9	75.7	70.0	76.3	77.6	77.7		
mT5 ^S	s1	72.0	76.0	76.4	76.3	84.4	78.0	78.2	69.8	74.7	66.1	71.3	71.1	67.8	73.0	72.4	73.8		
	s6	71.2	75.0	75.0	75.7	84.3	78.7	78.0	68.3	74.0	61.6	71.0	69.6	64.9	70.9	71.9	72.7		
	s7	72.5	77.6	77.5	76.6	85.0	79.2	79.5	70.6	75.2	65.5	72.6	72.1	68.2	73.5	73.6	74.6		
	s10	66.7	70.8	71.3	69.9	78.9	73.3	71.8	64.5	69.2	60.8	66.9	64.9	61.8	66.1	68.7	68.4		
	s14	69.2	73.9	73.7	74.0	81.9	75.6	75.3	67.2	72.5	63.2	68.9	68.2	64.7	70.1	71.2	71.3		

Table 11: XNLI validation results for all languages. We report the results of different freezing configurations.

	lang	amharic		arabic		azerbaijani		bengali		burmese		chinese_simplified		chinese_traditional	
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	
small	mmT5	29.7 / 13.4 / 22.7	37.5 / 17.3 / 29.4	18.5 / 6.8 / 15.5	27.6 / 13.1 / 22.5	38.7 / 18.2 / 30.0	38.7 / 19.4 / 33.3	39.3 / 20.9 / 33.6							
	mT5 ^S	13.2 / 3.4 / 12.2	37.5 / 17.4 / 29.4	13.3 / 2.5 / 12.1	7.6 / 1.1 / 7.4	12.7 / 2.0 / 12.1	38.2 / 19.1 / 33.1	39.1 / 20.9 / 33.4							
base	mmT5	34.2 / 17.1 / 25.8	42.3 / 22.2 / 33.4	26.4 / 11.1 / 21.3	33.8 / 17.0 / 26.1	40.0 / 18.9 / 30.7	48.1 / 29.1 / 42.9	49.0 / 30.8 / 43.1							
	mT5 ^S	15.0 / 4.5 / 13.7	40.2 / 20.1 / 31.5	16.0 / 4.4 / 14.2	11.9 / 3.4 / 11.2	15.7 / 3.7 / 14.5	44.2 / 26.1 / 39.2	45.2 / 27.7 / 39.4							
	lang	english		french		gujarati		hausa		hindi		igbo		indonesian	
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	
small	mmT5	38.9 / 14.4 / 30.4	34.7 / 13.7 / 26.7	26.8 / 12.2 / 21.5	28.7 / 12.1 / 23.1	30.6 / 13.8 / 24.5	37.1 / 16.6 / 28.1	31.4 / 11.9 / 25.2							
	mT5 ^S	39.0 / 14.7 / 30.4	22.1 / 4.4 / 19.4	8.8 / 1.5 / 8.6	16.4 / 5.0 / 14.9	12.8 / 3.2 / 12.1	22.0 / 6.1 / 19.1	17.1 / 3.5 / 15.8							
base	mmT5	43.6 / 19.2 / 34.5	37.0 / 15.2 / 27.8	32.0 / 15.8 / 24.6	36.7 / 16.5 / 27.7	34.9 / 16.9 / 27.2	40.0 / 19.1 / 29.6	36.1 / 15.2 / 27.9							
	mT5 ^S	42.6 / 18.3 / 33.5	23.4 / 5.3 / 20.1	11.7 / 3.7 / 10.8	20.6 / 7.1 / 18.2	15.0 / 4.9 / 13.8	30.3 / 10.5 / 24.3	20.8 / 5.5 / 18.3							
	lang	japanese		korean		kyrgyz		marathi		nepali		pashto		persian	
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	
small	mmT5	44.9 / 25.6 / 37.0	31.3 / 13.3 / 25.8	20.0 / 7.1 / 17.0	19.4 / 8.2 / 15.9	29.6 / 13.8 / 24.2	37.8 / 16.9 / 28.6	37.7 / 17.0 / 29.0							
	mT5 ^S	41.0 / 21.7 / 33.1	8.3 / 2.3 / 7.7	10.3 / 1.6 / 9.7	11.7 / 3.6 / 10.7	8.8 / 1.4 / 8.6	18.1 / 3.4 / 16.2	21.4 / 5.5 / 18.7							
base	mmT5	48.2 / 28.3 / 39.5	34.4 / 16.1 / 27.9	26.0 / 10.7 / 21.2	25.5 / 11.4 / 20.3	34.6 / 17.0 / 26.9	42.1 / 19.8 / 30.7	41.0 / 19.6 / 30.6							
	mT5 ^S	44.3 / 24.8 / 36.0	10.9 / 4.3 / 9.9	12.3 / 2.4 / 11.5	13.4 / 5.1 / 12.0	12.0 / 3.1 / 11.1	21.1 / 4.8 / 18.2	23.6 / 6.4 / 19.9							
	lang	portuguese		punjabi		russian		scottish_gaelic		serbian_cyrillic		serbian_latin		sinhala	
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	
small	mmT5	33.4 / 12.2 / 26.2	32.1 / 14.0 / 24.2	25.4 / 8.3 / 20.4	29.3 / 11.5 / 24.3	21.4 / 6.5 / 17.9	10.8 / 3.1 / 9.5	28.6 / 14.2 / 21.8							
	mT5 ^S	23.1 / 5.2 / 20.5	10.8 / 1.3 / 10.5	12.9 / 1.4 / 12.5	19.4 / 5.9 / 17.3	11.1 / 0.9 / 11.0	11.5 / 2.3 / 10.4	9.2 / 1.1 / 9.0							
base	mmT5	38.3 / 15.5 / 28.2	37.6 / 19.1 / 27.5	30.8 / 11.3 / 23.7	30.6 / 13.7 / 24.3	29.2 / 10.0 / 22.6	19.0 / 5.4 / 16.1	34.0 / 18.8 / 25.5							
	mT5 ^S	25.5 / 6.5 / 21.5	13.7 / 3.0 / 12.8	16.2 / 3.0 / 14.9	23.2 / 7.2 / 20.1	13.8 / 1.9 / 13.3	18.8 / 4.2 / 16.6	10.0 / 2.0 / 9.4							
	lang	somal		spanish		swahili		tamil		telugu		thai		turkish	
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	
small	mmT5	28.8 / 11.3 / 22.5	28.5 / 8.3 / 22.3	30.8 / 11.5 / 23.4	25.0 / 11.8 / 20.4	23.2 / 10.6 / 19.0	26.6 / 12.9 / 20.4	24.9 / 10.0 / 20.6							
	mT5 ^S	16.7 / 2.6 / 15.1	18.7 / 3.6 / 16.8	14.5 / 2.7 / 13.4	7.9 / 1.8 / 7.5	8.4 / 1.3 / 8.2	7.1 / 2.1 / 6.6	16.7 / 4.1 / 14.8							
base	mmT5	33.6 / 14.4 / 25.1	32.7 / 10.7 / 24.1	36.1 / 15.3 / 26.7	29.0 / 14.4 / 23.0	26.5 / 12.9 / 21.1	30.3 / 15.3 / 22.9	31.3 / 14.0 / 25.3							
	mT5 ^S	18.0 / 3.6 / 16.2	21.0 / 4.6 / 18.2	16.1 / 3.6 / 14.7	10.5 / 3.6 / 9.6	10.8 / 2.9 / 10.0	10.5 / 3.5 / 9.5	18.7 / 5.7 / 16.3							
	lang	ukrainian		urdu		uzbek		vietnamese		welsh		yoruba		avg	
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	
small	mmT5	22.1 / 7.1 / 18.1	34.4 / 15.5 / 26.1	4.4 / 0.9 / 4.2	36.4 / 16.9 / 25.9	27.6 / 10.8 / 21.6	29.9 / 12.9 / 22.9	29.4 / 12.6 / 23.3							
	mT5 ^S	11.4 / 1.2 / 11.1	13.5 / 3.0 / 12.5	9.5 / 1.5 / 9.1	16.7 / 3.2 / 15.3	18.2 / 3.4 / 16.7	18.7 / 3.9 / 16.8	17.0 / 4.7 / 15.1							
base	mmT5	28.6 / 10.5 / 22.4	38.1 / 18.4 / 28.4	14.7 / 3.0 / 13.7	42.2 / 20.9 / 28.8	26.9 / 11.3 / 20.7	37.7 / 16.4 / 28.0	34.5 / 16.1 / 26.8							
	mT5 ^S	14.0 / 2.4 / 13.1	15.5 / 3.6 / 14.2	11.9 / 2.3 / 11.3	23.1 / 6.4 / 19.7	22.6 / 4.8 / 19.8	24.9 / 6.3 / 21.2	18.6 / 6.0 / 16.7							

Table 12: XL-Sum^{ar,en,ja,zh} test set results for all languages. We evaluate using the best performing model on the four source languages on the validation set.

	lang	amharic	arabic	azerbaijani	bengali	burmese	chinese_simplified	chinese_traditional
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	12.3 / 1.7 / 11.7	16.9 / 3.3 / 15.4	13.7 / 3.6 / 11.8	8.5 / 2.1 / 7.7	17.6 / 3.7 / 15.8	4.0 / 1.2 / 3.7	5.3 / 2.0 / 4.9
	mT5 ^S	13.6 / 1.2 / 12.9	15.2 / 0.6 / 14.9	13.9 / 1.7 / 12.7	9.8 / 0.4 / 9.6	18.3 / 0.6 / 18.0	5.5 / 1.2 / 5.3	5.9 / 1.7 / 5.7
base	mmT5	16.6 / 5.2 / 14.4	19.3 / 4.5 / 17.1	17.5 / 5.2 / 14.6	15.1 / 5.2 / 12.7	22.0 / 4.9 / 19.6	9.2 / 2.8 / 8.3	8.3 / 2.6 / 7.5
	mT5 ^S	13.7 / 1.7 / 13.1	15.8 / 1.3 / 15.1	15.3 / 2.5 / 13.5	10.5 / 0.8 / 10.0	18.1 / 1.6 / 17.2	6.7 / 1.8 / 6.4	6.9 / 2.3 / 6.6
	lang	english	french	gujarati	hausa	hindi	igbo	indonesian
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	41.5 / 17.0 / 32.5	27.3 / 8.3 / 22.2	11.8 / 2.6 / 10.9	19.8 / 6.9 / 17.5	13.8 / 3.2 / 12.7	28.2 / 9.7 / 22.9	22.4 / 6.1 / 19.1
	mT5 ^S	42.0 / 17.7 / 33.1	21.5 / 3.4 / 18.4	10.3 / 0.3 / 10.1	18.8 / 4.5 / 16.5	13.1 / 0.9 / 12.8	25.6 / 5.1 / 22.1	18.1 / 2.8 / 16.1
base	mmT5	45.8 / 21.7 / 36.5	27.7 / 8.3 / 22.0	15.9 / 5.6 / 13.7	27.8 / 11.0 / 22.3	16.9 / 4.6 / 15.0	25.6 / 9.0 / 20.8	26.2 / 8.2 / 21.5
	mT5 ^S	44.6 / 20.5 / 35.3	21.5 / 3.8 / 18.0	10.9 / 0.6 / 10.6	20.2 / 5.2 / 17.5	14.1 / 1.7 / 13.4	26.0 / 5.4 / 21.9	19.2 / 3.5 / 16.8
	lang	japanese	korean	kyrgyz	marathi	nepali	pashto	persian
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	4.0 / 1.0 / 3.8	17.2 / 4.8 / 15.4	9.9 / 1.7 / 9.2	9.1 / 1.4 / 8.5	12.7 / 3.6 / 11.4	17.4 / 3.1 / 16.1	18.2 / 4.0 / 16.8
	mT5 ^S	4.2 / 1.1 / 4.1	13.7 / 1.0 / 13.3	12.7 / 0.6 / 12.3	11.1 / 0.9 / 10.7	10.8 / 0.4 / 10.6	14.5 / 0.4 / 14.3	16.3 / 0.7 / 16.0
base	mmT5	6.1 / 2.1 / 5.6	19.4 / 5.8 / 16.8	13.0 / 2.1 / 11.7	11.5 / 2.2 / 10.5	13.7 / 3.6 / 12.2	18.4 / 4.4 / 16.2	23.0 / 6.8 / 19.9
	mT5 ^S	4.6 / 1.2 / 4.4	15.4 / 2.3 / 14.4	12.9 / 0.8 / 12.2	12.0 / 1.4 / 11.3	11.8 / 1.1 / 11.1	16.0 / 1.4 / 15.2	17.3 / 1.8 / 16.3
	lang	portuguese	punjabi	russian	scottish_gaelic	serbian_cyrillic	serbian_latin	sinhala
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	30.4 / 9.9 / 24.7	12.5 / 3.3 / 10.9	14.3 / 2.5 / 13.0	27.8 / 10.0 / 23.3	8.3 / 1.5 / 7.7	11.1 / 2.2 / 10.2	14.1 / 3.6 / 12.9
	mT5 ^S	23.5 / 5.0 / 20.2	12.1 / 0.3 / 11.9	14.6 / 1.1 / 13.8	21.7 / 5.2 / 19.0	13.3 / 0.7 / 12.9	17.1 / 2.2 / 15.3	10.8 / 0.4 / 10.6
base	mmT5	30.9 / 10.2 / 24.3	18.0 / 5.9 / 14.8	18.7 / 3.8 / 16.2	25.0 / 10.3 / 20.5	15.5 / 2.8 / 13.9	15.6 / 3.5 / 13.2	17.5 / 6.6 / 14.8
	mT5 ^S	23.6 / 5.5 / 19.8	12.7 / 0.8 / 12.2	14.8 / 1.2 / 13.7	22.7 / 6.3 / 19.2	13.8 / 0.9 / 13.1	17.3 / 2.3 / 15.1	10.7 / 0.6 / 10.4
	lang	somali	spanish	swahili	tamil	telugu	thai	turkish
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	20.2 / 5.0 / 17.0	21.2 / 5.6 / 17.4	22.0 / 5.8 / 18.1	13.4 / 4.2 / 12.0	12.8 / 3.5 / 11.7	13.0 / 4.0 / 11.6	15.7 / 4.8 / 13.4
	mT5 ^S	18.6 / 2.2 / 16.2	19.3 / 3.3 / 16.9	19.1 / 3.2 / 16.6	9.5 / 0.7 / 9.2	10.0 / 0.7 / 9.8	9.4 / 1.1 / 8.8	16.3 / 2.9 / 14.4
base	mmT5	22.0 / 6.4 / 17.3	25.5 / 6.9 / 20.0	25.6 / 8.0 / 20.1	17.3 / 6.4 / 14.4	15.2 / 5.2 / 13.0	14.3 / 4.9 / 12.5	21.6 / 7.1 / 17.5
	mT5 ^S	19.6 / 2.6 / 16.7	19.9 / 3.8 / 17.0	20.1 / 4.2 / 17.3	9.8 / 1.0 / 9.3	10.3 / 1.0 / 9.9	10.0 / 1.3 / 9.2	17.6 / 3.7 / 15.2
	lang	ukrainian	urdu	uzbek	vietnamese	welsh	yoruba	avg
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	10.8 / 1.7 / 10.1	16.6 / 3.8 / 15.0	8.6 / 0.6 / 8.4	29.8 / 11.4 / 22.1	20.5 / 5.4 / 17.5	28.8 / 10.0 / 23.3	16.7 / 4.6 / 14.4
	mT5 ^S	13.5 / 0.9 / 12.9	13.1 / 0.3 / 12.9	12.5 / 0.6 / 12.1	21.2 / 3.6 / 18.1	22.2 / 3.5 / 19.9	23.7 / 3.9 / 20.8	15.5 / 2.2 / 14.2
base	mmT5	16.9 / 3.6 / 14.9	17.6 / 4.7 / 15.3	8.5 / 0.7 / 8.2	32.9 / 13.8 / 23.6	22.8 / 6.4 / 18.9	24.8 / 8.5 / 19.8	19.6 / 6.1 / 16.4
	mT5 ^S	14.1 / 1.2 / 13.1	14.0 / 1.3 / 13.4	13.0 / 0.8 / 12.4	22.1 / 4.8 / 18.5	23.0 / 4.4 / 19.6	23.2 / 3.9 / 19.9	16.2 / 2.8 / 4.5

Table 13: XL-Sum^{en} test set results for all languages. We evaluate using the best performing model on the English language of the validation set.

		amharic		arabic		azerbaijani		bengali		burmese		chinese_simplified		chinese_traditional	
		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L	
Small	mmT5	s7	12.5 / 1.8 / 11.9	17.2 / 3.3 / 15.7	14.0 / 4.0 / 12.1	8.7 / 2.2 / 7.9	17.8 / 3.6 / 16.2	3.9 / 1.2 / 3.6	5.4 / 2.0 / 4.9						
	mT5 ^s	s1	13.6 / 1.2 / 13.0	15.3 / 0.6 / 15.0	14.0 / 1.9 / 12.7	9.5 / 0.3 / 9.4	18.1 / 0.5 / 17.8	5.6 / 1.2 / 5.4	5.8 / 1.6 / 5.6						
Base	mmT5	s1	12.6 / 0.2 / 12.4	15.0 / 0.3 / 14.7	13.9 / 1.4 / 12.5	9.5 / 0.2 / 9.3	17.8 / 0.2 / 17.6	5.3 / 0.5 / 5.1	5.0 / 0.5 / 4.9						
	mT5 ^s	s1	13.8 / 1.6 / 13.0	16.0 / 1.3 / 15.3	15.4 / 2.9 / 13.6	9.9 / 0.6 / 9.5	17.8 / 1.7 / 16.9	6.6 / 1.8 / 6.3	6.8 / 2.2 / 6.5						
		s7	13.7 / 1.4 / 13.1	16.7 / 1.3 / 16.0	16.7 / 3.6 / 14.7	9.9 / 0.5 / 9.6	18.2 / 1.4 / 17.4	6.4 / 1.6 / 6.2	6.0 / 1.6 / 5.8						
		english		french		gujarati		hausa		hindi		igbo		indonesian	
		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L	
Small	mmT5	s7	41.6 / 17.0 / 32.6	27.8 / 8.7 / 22.5	12.0 / 2.9 / 11.1	19.3 / 6.6 / 17.2	13.6 / 3.0 / 12.6	28.1 / 9.7 / 22.9	22.5 / 6.0 / 19.1						
	mT5 ^s	s1	42.3 / 17.9 / 33.2	22.1 / 3.6 / 18.9	10.6 / 0.4 / 10.4	18.3 / 4.3 / 16.3	13.1 / 0.9 / 12.8	25.4 / 5.0 / 21.8	18.1 / 2.8 / 16.2						
Base	mmT5	s1	45.0 / 20.8 / 35.6	21.1 / 3.6 / 17.8	10.6 / 0.2 / 10.4	20.1 / 5.5 / 17.7	12.4 / 0.2 / 12.1	24.5 / 4.0 / 21.4	18.4 / 2.9 / 16.2						
	mT5 ^s	s1	44.7 / 20.6 / 35.4	21.4 / 3.9 / 18.2	11.1 / 0.8 / 10.7	19.5 / 4.9 / 16.9	14.0 / 1.7 / 13.3	26.2 / 5.4 / 22.0	19.2 / 3.5 / 16.8						
		s7	43.3 / 18.7 / 34.1	22.7 / 4.7 / 19.3	11.3 / 0.7 / 11.0	21.7 / 6.3 / 18.7	14.2 / 1.5 / 13.6	27.1 / 6.5 / 22.8	20.9 / 4.3 / 18.2						
		japanese		korean		kyrgyz		marathi		nepali		pashto		persian	
		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L	
Small	mmT5	s7	3.7 / 0.8 / 3.4	16.7 / 4.5 / 14.8	10.3 / 1.6 / 9.6	8.9 / 1.6 / 8.4	13.0 / 3.8 / 11.6	17.7 / 3.2 / 16.1	18.2 / 4.0 / 16.7						
	mT5 ^s	s1	4.0 / 1.0 / 3.9	13.6 / 0.8 / 13.3	12.5 / 0.5 / 12.1	11.2 / 1.0 / 10.8	10.7 / 0.5 / 10.5	14.3 / 0.3 / 14.1	16.4 / 0.7 / 16.1						
Base	mmT5	s1	3.3 / 0.4 / 3.2	13.2 / 0.4 / 12.9	12.2 / 0.3 / 11.8	10.9 / 0.3 / 10.6	10.5 / 0.1 / 10.4	14.5 / 0.1 / 14.4	15.9 / 0.2 / 15.7						
	mT5 ^s	s1	4.5 / 1.1 / 4.4	15.4 / 2.5 / 14.4	12.8 / 0.8 / 12.2	12.0 / 1.3 / 11.3	11.5 / 1.1 / 11.0	15.9 / 1.5 / 15.1	17.4 / 1.8 / 16.4						
		s7	4.2 / 0.9 / 4.1	15.2 / 1.8 / 14.2	13.5 / 0.9 / 12.8	11.9 / 1.0 / 11.4	11.9 / 1.1 / 11.4	16.0 / 1.1 / 15.3	17.8 / 1.6 / 17.0						
		portuguese		punjabi		russian		scottish_gaelic		serbian_cyrillic		serbian_latin		sinhala	
		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L	
Small	mmT5	s7	30.7 / 10.1 / 24.9	12.1 / 3.1 / 10.6	14.3 / 2.5 / 13.0	27.6 / 10.7 / 23.3	8.3 / 1.4 / 7.7	10.9 / 2.2 / 9.8	13.9 / 3.3 / 12.8						
	mT5 ^s	s1	23.7 / 5.1 / 20.3	12.1 / 0.3 / 11.9	14.6 / 1.1 / 13.8	21.4 / 5.1 / 18.6	13.5 / 0.6 / 13.0	17.2 / 2.2 / 15.3	10.5 / 0.3 / 10.3						
Base	mmT5	s1	24.6 / 5.5 / 20.6	12.2 / 0.2 / 12.0	13.9 / 0.6 / 13.1	21.6 / 5.6 / 18.5	13.0 / 0.4 / 12.7	16.2 / 1.6 / 14.5	10.3 / 0.1 / 10.2						
	mT5 ^s	s1	31.3 / 10.5 / 24.5	17.8 / 5.8 / 14.6	18.9 / 3.9 / 16.3	24.8 / 10.5 / 20.2	15.6 / 2.8 / 13.8	15.8 / 3.5 / 13.6	17.5 / 6.7 / 14.8						
		s7	23.7 / 5.6 / 19.8	12.5 / 0.7 / 12.0	14.8 / 1.3 / 13.7	22.3 / 6.3 / 18.8	13.9 / 0.9 / 13.2	17.3 / 2.3 / 15.2	10.6 / 0.5 / 10.3						
		s7	24.9 / 6.5 / 20.8	12.1 / 0.4 / 11.8	15.6 / 1.6 / 14.4	24.6 / 8.3 / 20.3	14.2 / 0.9 / 13.5	18.7 / 2.8 / 16.4	11.0 / 0.6 / 10.8						
		somali		spanish		swahili		tamil		telugu		thai		turkish	
		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L	
Small	mmT5	s7	20.1 / 4.9 / 16.9	21.5 / 5.8 / 17.6	22.0 / 5.9 / 18.2	13.9 / 4.3 / 12.3	12.8 / 3.6 / 11.7	13.0 / 4.1 / 11.5	15.2 / 4.5 / 13.0						
	mT5 ^s	s1	19.2 / 2.5 / 16.5	19.4 / 3.4 / 17.0	19.3 / 3.4 / 16.7	9.5 / 0.7 / 9.2	10.0 / 0.6 / 9.8	9.2 / 1.0 / 8.6	16.3 / 2.8 / 14.5						
Base	mmT5	s1	19.5 / 2.7 / 16.7	19.9 / 3.5 / 17.0	18.5 / 3.2 / 16.2	9.0 / 0.2 / 8.7	9.7 / 0.2 / 9.5	8.9 / 0.4 / 8.3	16.6 / 2.6 / 14.5						
	mT5 ^s	s1	22.0 / 6.5 / 17.3	25.6 / 7.0 / 20.2	25.6 / 8.3 / 20.2	17.6 / 6.6 / 14.5	15.9 / 5.5 / 13.6	14.1 / 4.7 / 12.4	21.6 / 7.0 / 17.5						
		s7	19.6 / 2.6 / 16.8	20.0 / 3.8 / 17.1	20.3 / 4.3 / 17.2	9.9 / 1.0 / 9.4	10.3 / 0.9 / 9.8	10.0 / 1.2 / 9.2	17.6 / 3.5 / 15.1						
		s7	21.1 / 3.3 / 17.9	20.8 / 4.3 / 17.7	21.8 / 4.9 / 18.5	10.3 / 1.1 / 9.8	10.6 / 0.9 / 10.2	9.8 / 1.0 / 9.0	19.6 / 4.6 / 16.7						
		ukrainian		urdu		uzbek		vietnamese		welsh		yoruba		avg	
		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L		Rg ₁ / Rg ₂ / Rg _L	
Small	mmT5	s7	10.7 / 1.7 / 9.9	16.8 / 3.8 / 15.2	8.9 / 0.6 / 8.7	29.7 / 11.6 / 22.1	20.6 / 5.4 / 17.6	30.0 / 10.5 / 24.2	16.7 / 4.7 / 14.4						
	mT5 ^s	s1	13.4 / 0.9 / 12.8	13.1 / 0.3 / 13.0	12.8 / 0.6 / 12.3	21.2 / 3.7 / 18.2	22.3 / 3.3 / 19.9	23.8 / 4.0 / 20.9	15.5 / 2.2 / 14.2						
Base	mmT5	s1	13.3 / 0.6 / 12.6	13.1 / 0.2 / 13.0	12.7 / 0.4 / 12.2	21.1 / 3.4 / 18.1	21.3 / 3.1 / 18.5	23.9 / 3.6 / 21.3	15.4 / 2.0 / 14.0						
	mT5 ^s	s1	14.1 / 1.2 / 13.1	14.0 / 1.2 / 13.4	13.5 / 0.8 / 12.8	22.3 / 5.0 / 18.6	23.0 / 4.3 / 19.5	23.5 / 4.0 / 20.1	16.2 / 2.8 / 14.5						
		s7	15.0 / 1.6 / 14.0	14.2 / 1.0 / 13.8	14.0 / 1.0 / 13.2	23.0 / 5.4 / 19.3	24.7 / 5.7 / 20.8	25.0 / 5.4 / 21.4	16.8 / 3.0 / 15.0						

Table 14: XL-Sum^{en} validation results for each of the languages. We report results of different combinations of freezing the model.

		amharic	arabic	azerbaijani	bengali	burmese	chinese_simplified	chinese_traditional
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	37.5 / 19.2 / 27.9	36.6 / 16.6 / 28.5	28.3 / 13.4 / 23.5	35.4 / 19.5 / 28.0	43.3 / 23.1 / 34.1	36.7 / 17.9 / 31.7	37.9 / 19.6 / 32.1
	mT5 ^S	37.2 / 19.2 / 28.1	36.9 / 16.7 / 28.9	27.8 / 13.2 / 23.1	34.5 / 18.8 / 27.5	43.4 / 23.4 / 34.0	37.1 / 18.1 / 32.1	38.1 / 19.8 / 32.3
base	mmT5	42.9 / 25.1 / 33.0	41.9 / 21.5 / 33.0	33.6 / 18.3 / 28.4	40.7 / 24.7 / 32.4	50.0 / 29.9 / 39.6	42.2 / 22.3 / 36.6	43.0 / 24.0 / 36.7
	mT5 ^S	40.1 / 22.0 / 30.0	39.7 / 19.4 / 30.9	30.3 / 15.3 / 25.2	37.9 / 21.7 / 29.5	45.7 / 25.3 / 35.6	39.8 / 20.4 / 34.3	40.8 / 22.3 / 34.7
		english	french	gujarati	hausa	hindi	igbo	indonesian
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	38.4 / 14.0 / 30.0	38.2 / 17.3 / 29.5	33.5 / 18.2 / 26.8	41.6 / 21.0 / 32.2	39.1 / 21.0 / 31.3	41.9 / 21.2 / 30.9	37.7 / 17.4 / 29.8
	mT5 ^S	37.9 / 13.6 / 29.5	38.2 / 17.6 / 29.6	33.0 / 17.7 / 26.4	40.9 / 20.2 / 31.8	38.7 / 20.8 / 30.9	43.1 / 21.8 / 31.4	37.7 / 17.3 / 30.0
base	mmT5	42.4 / 17.7 / 33.3	42.6 / 22.1 / 33.3	38.3 / 23.1 / 31.1	46.2 / 25.3 / 36.4	44.1 / 26.4 / 35.9	47.2 / 25.8 / 34.4	42.5 / 21.9 / 34.2
	mT5 ^S	40.9 / 16.3 / 31.8	40.2 / 19.4 / 31.1	36.0 / 20.4 / 28.7	43.4 / 22.6 / 33.8	42.0 / 24.1 / 33.7	45.0 / 23.6 / 32.9	40.5 / 19.9 / 32.1
		japanese	korean	kyrgyz	marathi	nepali	pashto	persian
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	41.7 / 22.5 / 33.6	37.1 / 19.9 / 31.6	26.5 / 11.9 / 21.2	32.6 / 18.1 / 26.7	38.7 / 22.1 / 31.4	43.8 / 22.6 / 34.0	43.0 / 22.3 / 33.7
	mT5 ^S	41.7 / 22.5 / 33.8	37.4 / 20.2 / 32.0	26.8 / 12.4 / 21.5	32.7 / 18.5 / 26.7	39.0 / 22.3 / 31.6	43.4 / 22.1 / 33.4	42.7 / 21.9 / 33.3
base	mmT5	48.5 / 28.5 / 40.0	44.2 / 26.9 / 38.0	31.3 / 16.5 / 25.2	37.3 / 23.0 / 30.6	44.4 / 27.7 / 36.3	49.1 / 27.9 / 38.4	47.0 / 26.4 / 37.1
	mT5 ^S	45.4 / 25.6 / 36.7	39.0 / 21.8 / 32.9	27.6 / 12.9 / 21.7	35.4 / 20.8 / 28.8	41.6 / 24.9 / 33.5	47.0 / 25.3 / 36.0	45.3 / 24.5 / 35.3
		portuguese	punjabi	russian	scottish_gaelic	serbian_cyrillic	serbian_latin	sinhala
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	40.5 / 18.2 / 30.2	40.6 / 21.8 / 30.0	32.9 / 13.5 / 25.3	36.9 / 17.5 / 28.0	30.8 / 10.8 / 23.3	30.2 / 10.7 / 22.6	36.1 / 21.8 / 28.4
	mT5 ^S	40.3 / 17.9 / 30.1	40.1 / 21.4 / 29.8	32.2 / 13.0 / 24.8	36.5 / 16.9 / 27.4	30.6 / 10.5 / 23.2	29.4 / 10.5 / 22.4	35.8 / 21.5 / 28.1
base	mmT5	44.2 / 22.1 / 33.3	45.4 / 27.0 / 34.6	36.8 / 17.1 / 28.6	42.0 / 22.7 / 32.0	36.5 / 15.6 / 28.1	35.0 / 14.7 / 26.4	41.7 / 27.4 / 33.9
	mT5 ^S	42.5 / 20.3 / 31.7	42.7 / 24.2 / 31.7	35.0 / 15.6 / 27.0	38.2 / 18.6 / 28.4	33.7 / 13.0 / 25.2	32.8 / 12.4 / 24.1	38.0 / 23.3 / 29.7
		somali	spanish	swahili	tamil	telugu	thai	turkish
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	37.3 / 17.3 / 27.3	31.8 / 11.2 / 23.7	39.3 / 19.2 / 30.5	31.7 / 18.0 / 26.6	28.3 / 15.2 / 23.2	31.7 / 17.2 / 24.7	33.3 / 17.1 / 28.0
	mT5 ^S	37.5 / 17.1 / 27.0	32.1 / 11.2 / 24.0	39.2 / 18.9 / 30.3	31.6 / 18.0 / 26.5	27.6 / 14.7 / 22.6	31.5 / 17.1 / 24.9	33.2 / 17.0 / 27.8
base	mmT5	41.2 / 21.0 / 30.3	36.3 / 15.0 / 27.4	43.8 / 23.6 / 34.5	38.0 / 23.6 / 32.2	33.4 / 19.8 / 27.4	36.8 / 21.6 / 29.3	38.4 / 21.7 / 32.6
	mT5 ^S	39.3 / 19.1 / 28.6	34.4 / 13.4 / 25.8	41.3 / 20.8 / 32.0	34.9 / 20.5 / 29.0	30.6 / 17.2 / 24.7	33.2 / 18.4 / 25.9	36.1 / 19.7 / 30.4
		ukrainian	urdu	uzbek	vietnamese	welsh	yoruba	avg
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}
small	mmT5	31.8 / 13.4 / 25.0	42.3 / 22.8 / 33.0	28.5 / 13.0 / 23.3	44.8 / 23.0 / 30.8	41.2 / 20.6 / 31.1	43.7 / 21.1 / 32.0	36.7 / 18.1 / 28.7
	mT5 ^S	31.4 / 13.2 / 24.8	41.5 / 22.1 / 32.3	28.0 / 13.0 / 22.9	44.7 / 22.7 / 30.6	39.9 / 19.4 / 30.3	43.1 / 20.8 / 31.7	36.4 / 17.9 / 28.5
base	mmT5	36.2 / 17.3 / 28.5	46.7 / 27.8 / 37.3	32.8 / 17.0 / 27.0	49.0 / 27.6 / 34.6	44.0 / 23.9 / 33.7	47.5 / 25.0 / 35.6	41.6 / 22.8 / 33.0
	mT5 ^S	34.1 / 15.5 / 26.9	44.9 / 25.6 / 35.2	30.7 / 15.0 / 25.0	47.6 / 25.6 / 32.7	42.5 / 22.0 / 31.8	45.9 / 23.1 / 33.6	39.1 / 20.3 / 30.5

Table 15: Test set results for XL-Sum in the multisource setup. We evaluate using the model which performed best on all the languages in the validation set.

		lang	amharic	arabic	azerbaijani	bengali	burmese	chinese_simplified	chinese_traditional
		$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$
Small	mmT5	s7	29.1 / 13.0 / 22.2	37.7 / 17.3 / 29.6	19.0 / 7.2 / 15.9	27.6 / 12.8 / 22.3	38.3 / 17.7 / 29.7	38.3 / 19.1 / 33.2	39.8 / 21.4 / 34.0
	mT5 ^S	s1	13.0 / 3.1 / 12.0	37.6 / 17.3 / 29.4	13.4 / 2.6 / 12.1	7.4 / 1.1 / 7.2	11.9 / 1.9 / 11.4	38.5 / 19.5 / 33.4	39.9 / 21.6 / 34.1
Base	mmT5	s1	9.4 / 0.3 / 9.3	41.2 / 20.9 / 31.9	12.3 / 1.8 / 11.2	8.3 / 0.4 / 8.1	15.1 / 0.3 / 14.9	64.1 / 51.2 / 60.8	62.9 / 49.8 / 58.8
		s7	34.0 / 16.6 / 25.3	42.4 / 22.3 / 33.5	26.3 / 11.0 / 21.1	34.5 / 18.0 / 26.7	40.1 / 19.0 / 30.9	48.4 / 29.6 / 43.2	49.4 / 31.3 / 43.6
	mT5 ^S	s1	14.9 / 4.2 / 13.6	40.4 / 20.1 / 31.5	15.9 / 4.4 / 14.1	11.4 / 3.1 / 10.6	16.5 / 4.1 / 15.1	44.3 / 26.2 / 39.3	45.4 / 27.8 / 39.7
		s7	10.3 / 3.4 / 9.4	40.5 / 20.1 / 31.8	12.3 / 4.2 / 10.9	6.3 / 2.0 / 5.9	22.3 / 6.3 / 19.9	41.5 / 21.9 / 36.0	42.7 / 24.2 / 36.8
<hr/>									
		lang	english	french	gujarati	hausa	hindi	igbo	indonesian
		$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$
Small	mmT5	s7	39.0 / 14.5 / 30.6	35.4 / 14.2 / 27.1	27.1 / 12.5 / 21.7	28.4 / 11.7 / 22.9	30.1 / 13.4 / 24.1	37.7 / 17.4 / 29.0	31.4 / 11.8 / 25.0
	mT5 ^S	s1	39.1 / 14.7 / 30.4	22.1 / 4.4 / 19.4	9.1 / 1.6 / 8.8	16.4 / 5.0 / 14.9	12.7 / 3.2 / 12.0	21.8 / 6.2 / 19.1	17.1 / 3.4 / 15.7
Base	mmT5	s1	44.4 / 20.2 / 35.1	23.2 / 5.3 / 19.5	8.6 / 0.4 / 8.4	15.3 / 4.7 / 14.0	10.6 / 0.4 / 10.5	22.9 / 5.1 / 20.1	17.9 / 3.8 / 16.1
		s7	43.9 / 19.4 / 34.8	37.3 / 15.2 / 27.8	32.1 / 16.1 / 25.0	36.6 / 16.4 / 27.6	34.8 / 16.7 / 27.1	40.3 / 19.7 / 30.3	35.8 / 15.0 / 27.6
	mT5 ^S	s1	42.9 / 18.4 / 33.7	23.7 / 5.4 / 20.1	12.3 / 4.1 / 11.4	20.3 / 6.8 / 18.0	14.9 / 4.8 / 13.8	31.5 / 11.6 / 25.4	20.9 / 5.5 / 18.4
		s7	41.9 / 17.2 / 32.8	23.9 / 6.4 / 20.5	9.3 / 2.9 / 8.7	11.9 / 4.2 / 10.8	13.4 / 4.1 / 12.6	21.3 / 8.2 / 17.2	19.3 / 5.9 / 17.0
<hr/>									
		lang	japanese	korean	kyrgyz	marathi	nepali	pashto	persian
		$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$
Small	mmT5	s7	45.0 / 25.6 / 37.1	31.1 / 13.3 / 25.5	19.3 / 6.7 / 16.5	19.2 / 8.1 / 16.0	30.1 / 14.3 / 24.7	38.1 / 17.0 / 28.7	37.7 / 17.0 / 29.1
	mT5 ^S	s1	41.5 / 22.3 / 33.7	8.6 / 2.4 / 7.8	9.9 / 1.4 / 9.4	11.8 / 3.4 / 10.8	8.2 / 1.4 / 7.9	18.1 / 3.6 / 16.1	21.5 / 5.6 / 18.7
Base	mmT5	s1	46.7 / 27.0 / 38.1	10.3 / 1.0 / 10.0	10.9 / 0.6 / 10.5	9.0 / 0.5 / 8.8	9.1 / 0.3 / 9.0	18.7 / 3.6 / 16.2	18.8 / 4.3 / 16.6
		s7	49.0 / 29.1 / 40.3	34.5 / 15.7 / 27.4	26.1 / 10.7 / 20.9	26.1 / 11.7 / 20.7	35.6 / 18.1 / 27.8	42.5 / 20.3 / 30.9	41.2 / 19.7 / 30.7
	mT5 ^S	s1	45.2 / 25.7 / 36.6	11.0 / 4.3 / 10.0	12.0 / 2.1 / 11.3	13.4 / 4.9 / 12.0	12.6 / 3.6 / 11.5	21.0 / 4.9 / 18.1	23.6 / 6.5 / 19.9
		s7	48.1 / 28.6 / 39.7	16.8 / 5.9 / 15.1	9.0 / 1.9 / 8.5	11.1 / 3.7 / 10.1	9.8 / 2.9 / 9.2	19.1 / 5.8 / 16.8	27.3 / 10.2 / 22.7
<hr/>									
		lang	portuguese	punjabi	russian	scottish_gaelic	serbian_cyrillic	serbian_latin	sinhala
		$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$
Small	mmT5	s7	33.8 / 12.5 / 26.4	31.5 / 13.6 / 23.5	25.4 / 8.3 / 20.3	29.6 / 12.1 / 24.5	21.7 / 6.3 / 18.0	11.0 / 3.2 / 9.5	29.0 / 14.4 / 22.2
	mT5 ^S	s1	23.3 / 5.3 / 20.7	10.6 / 1.1 / 10.3	13.0 / 1.5 / 12.5	18.6 / 5.6 / 16.9	11.3 / 0.9 / 11.2	11.3 / 2.3 / 10.2	8.7 / 1.1 / 8.5
Base	mmT5	s1	24.9 / 6.7 / 21.0	10.4 / 0.7 / 10.3	13.7 / 1.0 / 13.0	17.4 / 5.4 / 15.4	11.9 / 0.8 / 11.6	14.9 / 2.3 / 13.4	8.1 / 0.3 / 8.0
		s7	38.8 / 15.8 / 28.4	37.0 / 17.9 / 26.7	30.7 / 11.1 / 23.5	31.2 / 14.5 / 24.5	28.6 / 9.4 / 22.1	19.0 / 5.2 / 16.0	34.4 / 19.0 / 25.5
	mT5 ^S	s1	25.6 / 6.6 / 21.6	13.2 / 2.7 / 12.4	16.1 / 2.9 / 14.8	22.8 / 7.6 / 19.6	13.8 / 1.7 / 13.1	18.4 / 3.8 / 16.2	10.2 / 2.3 / 9.7
		s7	26.2 / 7.7 / 22.3	8.5 / 1.9 / 8.0	12.9 / 2.8 / 11.7	20.0 / 7.7 / 17.5	10.6 / 1.4 / 10.2	7.3 / 1.8 / 6.5	5.5 / 1.3 / 5.2
<hr/>									
		lang	somali	spanish	swahili	tamil	telugu	thai	turkish
		$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$
Small	mmT5	s7	29.3 / 11.6 / 22.7	28.5 / 8.2 / 22.3	30.0 / 10.9 / 22.9	25.3 / 12.0 / 20.6	23.4 / 10.6 / 19.2	26.3 / 12.8 / 20.3	24.8 / 9.9 / 20.5
	mT5 ^S	s1	16.8 / 2.7 / 15.1	18.8 / 3.7 / 16.8	14.6 / 2.9 / 13.5	8.0 / 1.8 / 7.6	8.5 / 1.3 / 8.3	7.1 / 2.2 / 6.6	16.4 / 3.8 / 14.7
Base	mmT5	s1	15.9 / 3.0 / 14.0	19.7 / 4.3 / 17.0	16.4 / 3.5 / 14.5	7.5 / 0.6 / 7.3	8.3 / 0.4 / 8.1	7.4 / 0.6 / 7.0	16.0 / 3.4 / 14.0
		s7	34.0 / 15.0 / 25.1	32.6 / 10.4 / 24.0	36.0 / 15.0 / 26.4	29.6 / 14.8 / 23.2	26.8 / 12.8 / 21.1	30.7 / 15.7 / 23.3	31.2 / 13.8 / 25.1
	mT5 ^S	s1	18.6 / 3.8 / 16.4	21.2 / 4.7 / 18.3	16.8 / 4.1 / 15.2	10.6 / 3.5 / 9.7	10.8 / 2.9 / 10.2	10.9 / 3.9 / 9.9	18.4 / 5.4 / 16.0
		s7	12.6 / 2.5 / 11.5	19.8 / 4.9 / 17.3	13.8 / 3.5 / 12.7	10.0 / 3.9 / 9.1	8.7 / 2.7 / 8.0	11.1 / 4.7 / 9.8	17.8 / 6.7 / 15.4
<hr/>									
		lang	ukrainian	urdu	uzbek	vietnamese	welsh	yoruba	avg
		$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$	$R_{g1} / R_{g2} / R_{gL}$
Small	mmT5	s7	22.4 / 7.4 / 18.3	34.5 / 15.6 / 26.0	4.2 / 1.0 / 4.0	36.6 / 16.9 / 26.0	27.8 / 11.2 / 21.7	30.8 / 13.6 / 23.7	29.4 / 12.6 / 23.4
	mT5 ^S	s1	11.4 / 1.2 / 11.1	15.6 / 3.0 / 12.6	1.0 / 1.6 / 10.0	16.9 / 3.2 / 15.2	11.2 / 3.0 / 16.2	13.6 / 4.1 / 17.3	17.0 / 4.8 / 15.1
Base	mmT5	s1	12.6 / 1.0 / 12.1	13.5 / 1.6 / 12.5	10.7 / 0.5 / 10.4	18.0 / 3.7 / 15.8	20.1 / 3.6 / 17.8	20.2 / 3.2 / 18.3	20.4 / 6.8 / 17.8
		s7	29.1 / 10.9 / 22.6	38.5 / 18.6 / 28.6	15.2 / 3.1 / 14.2	42.2 / 21.1 / 28.9	26.6 / 11.1 / 20.6	38.6 / 17.3 / 28.5	34.7 / 16.2 / 26.9
	mT5 ^S	s1	14.2 / 2.5 / 13.2	15.6 / 3.5 / 14.3	12.3 / 2.1 / 11.5	23.2 / 6.3 / 19.7	22.8 / 4.9 / 19.9	26.1 / 6.6 / 22.3	18.7 / 6.1 / 16.8
		s7	12.0 / 2.8 / 11.0	13.2 / 4.6 / 11.9	8.8 / 2.2 / 8.2	21.1 / 7.3 / 17.6	12.7 / 3.3 / 11.2	18.0 / 5.7 / 15.4	17.8 / 6.6 / 15.4

Table 16: XL-Sum^{ar,en,ja,zh} validation set results for all languages. We report results for the different freezing configurations.

		af_ZA	am_ET	ar_SA	az_AZ	bn_BD	cy_GB	da_DK	de_DE	el_GR	en_US	
Small	mmT5	s1	27.4	5.3	14.0	12.9	9.7	8.8	31.1	30.8	21.1	69.4
		s6	35.6	6.2	19.2	16.9	11.4	7.8	45.4	41.4	28.6	72.8
		s7	39.5	5.6	20.9	18.3	11.9	10.0	46.6	42.6	31.4	73.0
		s10	38.6	6.9	19.9	19.0	12.4	9.2	47.0	41.8	30.2	72.2
		s14	38.6	6.6	20.1	18.4	13.6	10.3	46.7	43.5	30.1	73.2
Small	mT5 ^S	s1	25.6	5.5	16.6	12.8	9.8	5.6	35.1	31.0	22.8	71.0
		s6	26.4	4.8	16.8	13.0	8.6	4.1	34.6	30.6	24.1	71.3
		s7	27.3	4.4	16.9	13.2	10.0	3.9	36.6	32.3	25.9	72.4
		s10	26.7	5.0	17.3	13.7	9.3	4.8	35.7	31.3	24.7	71.4
		s14	28.4	4.8	17.0	12.4	10.4	5.1	36.5	34.5	27.1	72.3
Base	mmT5	s1	38.4	21.7	27.4	27.0	23.9	22.0	44.7	43.2	31.6	70.8
		s6	53.5	24.1	35.6	36.8	31.1	26.9	58.1	54.4	46.9	73.8
		s7	52.2	20.6	34.5	34.4	30.1	24.2	56.6	54.7	44.9	73.4
		s10	55.4	30.6	39.2	40.7	36.5	33.7	58.9	55.0	48.4	73.4
		s14	51.6	21.4	33.8	33.7	28.5	25.5	55.3	53.1	40.5	72.9
Base	mT5 ^S	s1	41.5	15.7	27.0	25.1	24.1	12.3	49.9	48.1	38.6	72.8
		s6	42.1	16.3	28.6	29.2	26.5	11.6	49.9	51.1	40.4	73.0
		s7	42.8	14.7	27.2	27.6	24.1	9.5	51.6	51.5	40.7	74.6
		s10	43.6	19.1	29.8	30.6	28.8	11.7	51.2	50.9	40.5	73.3
		s14	43.6	16.4	28.0	28.3	26.9	10.3	51.5	51.1	40.5	74.1
		es_ES	fa_IR	fi_FI	fr_FR	hi_IN	hu_HU	hy_AM	id_ID	is_IS	it_IT	
Small	mmT5	s1	29.6	15.9	23.4	31.0	12.7	21.0	10.8	28.5	18.1	29.3
		s6	42.9	23.3	33.0	42.1	19.3	29.5	16.8	36.4	23.9	40.2
		s7	44.0	25.5	36.5	43.8	22.1	30.2	19.0	39.9	25.1	42.1
		s10	44.1	24.6	33.5	43.1	20.2	30.1	19.6	39.1	24.9	41.6
		s14	44.9	23.9	34.7	42.6	21.7	31.9	18.6	40.5	25.8	41.2
Small	mT5 ^S	s1	34.2	18.9	21.2	36.0	17.2	20.6	14.6	29.5	15.9	32.2
		s6	36.4	19.4	21.1	36.5	14.2	21.9	14.1	30.0	15.7	32.1
		s7	37.5	19.2	22.0	36.5	15.2	22.3	13.8	32.3	16.6	33.9
		s10	36.2	19.4	23.0	36.6	14.2	22.2	14.9	29.7	16.6	31.7
		s14	38.3	20.3	22.2	38.2	15.6	22.6	16.0	33.1	16.6	33.0
Base	mmT5	s1	35.9	32.4	31.3	38.5	28.5	30.8	26.0	42.9	29.0	36.9
		s6	51.7	45.1	51.9	51.2	42.6	41.1	37.6	54.1	41.2	51.6
		s7	50.8	43.1	49.7	52.4	39.6	41.2	35.1	51.8	38.2	50.8
		s10	54.4	46.6	53.8	51.1	44.5	45.5	40.3	55.0	43.3	52.5
		s14	49.4	40.2	48.8	50.5	36.2	40.3	33.1	50.3	37.7	50.3
Base	mT5 ^S	s1	45.8	33.5	36.9	47.9	35.1	33.2	29.5	44.6	27.6	45.5
		s6	49.4	36.5	39.5	49.7	33.2	34.5	33.6	45.9	29.2	48.0
		s7	49.9	35.5	39.6	49.1	31.8	33.0	29.6	43.3	26.7	48.6
		s10	49.6	39.9	39.1	50.1	35.7	34.3	35.4	47.6	28.7	48.5
		s14	51.0	36.8	40.0	50.7	34.9	33.3	29.8	44.7	29.1	47.9
		ja_JP	jv_ID	ka_GE	km_KH	kn_IN	ko_KR	lv_LV	ml_IN	mn_MN	ms_MY	
Small	mmT5	s1	23.5	14.4	11.9	16.1	10.3	14.9	17.1	12.7	8.4	25.6
		s6	26.7	16.0	16.2	21.0	11.7	16.7	25.9	15.2	9.3	32.6
		s7	28.8	20.3	16.2	22.2	13.8	18.0	29.4	14.6	10.6	36.8
		s10	26.9	18.3	18.1	21.5	12.9	18.9	28.2	16.2	10.9	32.7
		s14	27.4	18.7	15.2	23.1	13.4	18.9	29.0	16.7	10.6	35.7
Small	mT5 ^S	s1	24.5	9.6	13.0	15.7	10.8	15.5	15.2	10.1	7.7	24.8
		s6	24.4	8.0	11.5	15.8	10.0	12.4	14.5	10.3	7.1	24.9
		s7	24.6	7.4	11.3	16.6	11.1	14.9	15.8	10.9	6.6	27.4
		s10	23.5	7.7	12.3	16.5	10.8	14.2	16.2	10.2	7.0	26.2
		s14	24.3	7.7	12.5	16.6	10.3	15.4	16.3	11.3	7.2	28.9
Base	mmT5	s1	33.1	23.2	22.8	27.4	22.8	30.1	33.1	23.3	18.8	39.8
		s6	41.1	36.6	34.1	36.4	29.8	37.8	48.5	33.8	27.8	50.7
		s7	37.0	31.8	30.8	34.1	26.8	36.8	45.3	31.1	25.8	48.1
		s10	40.6	39.1	37.0	39.2	33.3	42.0	51.8	35.4	33.0	53.0
		s14	33.8	29.6	33.1	33.5	25.8	33.9	44.9	30.2	26.5	47.4
Base	mT5 ^S	s1	32.8	16.5	23.7	28.1	24.8	28.8	30.1	25.6	16.3	40.3
		s6	37.0	16.1	26.7	29.9	26.0	31.1	30.7	27.0	17.3	41.0
		s7	38.0	15.3	25.6	30.0	24.0	30.7	29.0	24.6	17.5	41.2
		s10	37.2	17.4	29.8	31.6	28.2	32.8	32.0	29.4	20.0	43.3
		s14	35.8	14.5	26.9	28.9	24.5	31.9	30.6	25.6	18.6	41.1
		my_MM	nb_NO	nl_NL	pl_PL	pt_PT	ro_RO	ru_RU	sl_SL	sq_AL	sv_SE	
Small	mmT5	s1	13.3	29.5	31.8	28.1	30.2	26.2	19.8	22.0	21.6	32.0
		s6	13.0	42.5	42.5	35.4	42.4	36.4	36.0	28.5	27.0	44.9
		s7	14.4	46.0	45.9	36.7	44.3	39.9	36.9	30.6	30.8	46.5
		s10	14.4	42.9	43.5	37.7	43.2	39.5	37.2	30.3	30.1	46.1
		s14	16.0	45.3	46.3	37.5	44.0	40.8	36.4	30.0	30.1	47.2
Small	mT5 ^S	s1	14.9	27.7	38.3	28.3	34.0	28.6	29.1	16.8	18.7	34.2
		s6	13.0	29.7	37.2	28.7	34.2	29.8	29.0	16.3	18.6	36.1
		s7	13.2	32.0	38.5	28.6	35.4	30.6	29.2	17.4	19.1	37.5
		s10	15.3	31.1	37.1	27.7	34.7	29.2	30.6	17.3	17.9	35.3
		s14	14.4	31.7	39.6	29.3	36.4	31.8	31.0	18.2	18.4	37.1
Base	mmT5	s1	29.5	43.3	40.1	34.9	38.8	39.4	28.2	33.4	31.3	43.9
		s6	28.3	54.1	56.6	49.7	52.9	55.7	46.5	49.2	46.5	57.0
		s7	24.9	54.1	54.1	47.5	53.0	54.5	48.2	46.9	45.2	56.6
		s10	33.6	56.3	56.1	50.6	55.3	56.0	48.4	51.2	48.5	58.6
		s14	28.3	53.1	53.5	47.3	51.2	51.8	46.8	45.4	42.4	54.9
Base	mT5 ^S	s1	29.3	46.2	49.4	41.9	46.7	44.1	39.6	34.6	31.6	49.5
		s6	30.8	47.7	50.5	44.6	48.5	47.4	40.5	36.1	34.1	52.6
		s7	29.3	48.4	50.7	45.0	50.0	47.4	39.6	34.0	32.9	51.9
		s10	32.8	48.5	50.8	44.4	49.8	48.6	40.6	36.6	35.1	53.2
		s14	28.5	47.9	50.0	46.3	50.0	47.8	41.6	36.3	34.4	52.2
		sw_KE	ta_IN	te_IN	th_TH	tr_TR	ur_PK	vi_VN	zh_CN	zh_TW	avg	
Small	mmT5	s1	13.9	13.8	10.7	24.4	20.4	9.5	16.5	17.7	16.3	20.5
		s6	15.9	15.7	11.8	32.1	22.5	12.3	17.0	19.9	16.2	26.4
		s7	18.4	17.1	11.8	34.3	25.7	13.4	18.5	20.8	18.8	28.4
		s10	18.1	18.4	12.9	33.6	24.9	12.7	18.8	19.4	17.3	27.8
		s14	18.1	17.9	11.4	34.2	26.7	14.1	19.0	19.9	18.3	28.3
Small	mT5 ^S	s1	8.5	14.5	11.4	28.2	17.8	9.9	14.7	17.6	14.8	21.0
		s6	8.3	14.7	10.4	29.6	17.9	10.0	13.6	18.4	14.5	20.9
		s7	8.8	14.2	9.6	32.1	18.8	8.5	12.4	17.1	15.1	21.6
		s10	8.6	15.2	10.8	30.8	17.7	9.9	13.9	18.3	14.2	21.3
		s14	9.1	15.7	9.8	32.2	18.5	9.4	12.8	17.7	15.1	22.1
Base	mmT5	s1	28.3	24.4	21.7	37.0	33.7	24.4	31.6	25.3	24.4	32.1
		s6	40.4	34.5	30.4	50.4	42.6	33.9	38.5	31.6	31.2	43.2
		s7	35.0	32.7	28.0	47.9	40.9	29.4	36.2	26.0	23.9	41.0
		s10	40.8	36.1	34.1	49.4	46.1	38.2	43.1	29.6	28.5	45.4
		s14	35.2	32.0	27.0	44.4	41.4	29.1	34.8	24.6	21.7	39.9
Base	mT5 ^S	s1	18.2	27.1	24.1	40.9	32.4	23.4	32.2	22.8	22.1	33.8
		s6	19.3	28.3	26.9	44.3	37.1	25.6	33.4	27.9	26.4	35.8
		s7	17.2	27.0	24.9	42.6	35.9	23.7	31.5	25.9	26.1	34.9
		s10	19.4	29.6	28.8	45.8	38.5	28.2	34.1	29.5	27.9	37.0
		s14	17.6	26.6	25.1	42.5	36.4	24.6	30.9	25.2	24.2	35.4

Table 17: MASSIVE Exact Match (EM) dev accuracies of all models and settings for all languages.

	lang	english	french	gujarati	hausa	hindi	igbo	indonesian		
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}		
Small	mmT5	s1	38.5 / 30.0 / 33.5	38.1 / 29.3 / 31.5	33.5 / 27.0 / 31.2	41.9 / 32.6 / 36.0	39.0 / 31.2 / 35.7	43.0 / 31.8 / 34.5	38.0 / 30.0 / 33.8	
		s6	36.1 / 28.4 / 32.7	38.0 / 29.4 / 32.4	32.0 / 26.0 / 31.9	39.4 / 30.9 / 36.1	36.8 / 29.5 / 35.3	38.2 / 28.8 / 34.6	35.6 / 28.1 / 33.2	
		s7	37.3 / 29.1 / 33.5	37.9 / 29.1 / 33.0	32.8 / 26.5 / 31.8	40.4 / 31.4 / 37.1	38.1 / 30.4 / 35.8	41.0 / 30.8 / 35.0	36.5 / 28.9 / 34.1	
		s10	36.4 / 28.5 / 32.4	37.9 / 29.5 / 32.0	32.5 / 26.5 / 31.2	39.4 / 30.7 / 35.6	36.9 / 29.6 / 34.9	38.5 / 29.3 / 33.8	35.9 / 28.3 / 32.9	
		s14	36.7 / 28.7 / 33.3	38.3 / 29.5 / 33.1	32.8 / 26.7 / 31.5	40.4 / 31.4 / 36.6	37.8 / 30.2 / 35.7	41.3 / 31.2 / 34.9	36.3 / 28.6 / 34.1	
	mT5 ^s	s1	38.3 / 29.8 / 31.8	38.3 / 29.6 / 30.9	33.0 / 26.5 / 29.1	41.3 / 32.0 / 34.2	38.6 / 30.8 / 33.7	42.8 / 31.6 / 31.9	37.7 / 30.0 / 32.1	
		s6	36.2 / 28.3 / 30.0	37.2 / 28.8 / 30.3	31.9 / 26.0 / 29.2	38.0 / 29.6 / 32.3	36.9 / 29.4 / 32.5	37.4 / 28.5 / 31.7	35.0 / 27.6 / 30.7	
		s7	36.8 / 28.5 / 30.7	37.6 / 28.9 / 30.7	32.3 / 26.1 / 28.8	38.3 / 29.9 / 33.1	37.0 / 29.6 / 32.9	38.4 / 28.7 / 31.9	35.5 / 27.9 / 31.0	
		s10	35.4 / 27.7 / 30.6	36.8 / 28.6 / 30.5	31.8 / 25.9 / 29.3	37.2 / 28.9 / 32.6	36.1 / 28.8 / 32.9	35.6 / 27.4 / 32.4	34.3 / 27.0 / 30.9	
		s14	36.7 / 28.5 / 31.0	37.6 / 28.9 / 30.8	32.3 / 26.0 / 29.5	38.7 / 30.1 / 33.6	37.4 / 29.8 / 33.6	38.4 / 28.9 / 32.5	35.6 / 28.1 / 31.5	
	Base	mmT5	s1	42.6 / 17.9 / 33.5	41.2 / 20.2 / 31.5	38.8 / 23.2 / 31.2	45.6 / 25.3 / 36.0	44.0 / 26.2 / 35.7	46.3 / 25.0 / 34.5	42.3 / 21.5 / 33.8
			s6	41.9 / 17.0 / 32.7	41.6 / 20.9 / 32.4	39.1 / 23.9 / 31.9	46.1 / 25.1 / 36.1	43.3 / 25.7 / 35.3	46.7 / 25.5 / 34.6	41.6 / 21.0 / 33.2
			s7	42.7 / 17.9 / 33.5	42.6 / 21.8 / 33.0	39.2 / 24.0 / 31.8	46.9 / 26.2 / 37.1	44.0 / 26.4 / 35.8	47.3 / 26.0 / 35.0	42.6 / 22.0 / 34.1
			s10	41.6 / 16.7 / 32.4	41.5 / 20.7 / 32.0	38.3 / 23.0 / 31.2	45.6 / 24.7 / 35.6	42.9 / 25.3 / 34.9	45.6 / 24.9 / 33.8	41.2 / 20.6 / 32.9
s14			42.5 / 17.6 / 33.3	42.7 / 21.9 / 33.1	38.9 / 23.4 / 31.5	46.9 / 26.1 / 36.6	44.0 / 26.2 / 35.7	47.2 / 25.8 / 34.9	42.6 / 21.8 / 34.1	
mT5 ^s		s1	41.0 / 16.4 / 31.8	40.0 / 19.1 / 30.9	36.6 / 21.0 / 29.1	44.1 / 23.0 / 34.2	42.0 / 24.0 / 33.7	43.5 / 22.9 / 31.9	40.5 / 20.0 / 32.1	
		s6	38.7 / 14.0 / 30.0	39.4 / 18.8 / 30.3	35.9 / 20.8 / 29.2	41.7 / 20.7 / 32.3	40.6 / 22.6 / 32.5	42.8 / 22.4 / 31.7	38.8 / 18.1 / 30.7	
		s7	39.7 / 14.9 / 30.7	40.1 / 19.1 / 30.7	35.9 / 20.7 / 28.8	42.8 / 21.7 / 33.1	41.0 / 23.1 / 32.9	43.3 / 22.9 / 31.9	39.2 / 18.7 / 31.0	
		s10	39.4 / 14.6 / 30.6	39.6 / 18.9 / 30.5	35.8 / 21.0 / 29.3	42.0 / 21.0 / 32.6	40.9 / 23.0 / 32.9	43.7 / 23.0 / 32.4	39.0 / 18.4 / 30.9	
		s14	40.0 / 15.3 / 31.0	39.9 / 19.2 / 30.8	36.5 / 21.6 / 29.5	43.2 / 22.2 / 33.6	41.7 / 23.9 / 33.6	44.3 / 23.4 / 32.5	39.5 / 19.1 / 31.5	

Table 18: XL-Sum results . Different configurations of freezing.

	lang	japanese	korean	kyrgyz	marathi	nepali	pashto	persian		
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}		
Small	mmT5	s1	42.2 / 34.3 / 39.5	38.6 / 33.2 / 36.7	26.7 / 21.1 / 23.8	32.6 / 26.5 / 30.2	39.8 / 32.6 / 36.5	44.4 / 34.1 / 38.6	43.1 / 33.8 / 37.3	
		s6	39.1 / 32.5 / 39.9	37.9 / 32.3 / 38.8	25.6 / 21.2 / 25.3	30.6 / 25.4 / 29.8	36.8 / 30.1 / 36.9	42.7 / 33.1 / 38.4	41.4 / 32.6 / 36.8	
		s7	41.5 / 34.3 / 41.1	39.3 / 34.0 / 39.2	26.4 / 21.6 / 25.4	31.9 / 26.3 / 30.6	38.3 / 31.3 / 36.7	43.7 / 33.9 / 38.9	42.0 / 32.7 / 37.6	
		s10	39.8 / 32.9 / 39.5	38.3 / 32.9 / 38.7	26.3 / 21.8 / 25.2	30.9 / 25.4 / 29.7	37.3 / 30.4 / 36.3	42.5 / 33.1 / 38.0	41.6 / 32.7 / 36.6	
		s14	41.4 / 34.0 / 41.1	39.4 / 34.0 / 39.2	26.1 / 21.7 / 25.4	32.4 / 26.6 / 30.5	38.3 / 31.1 / 37.3	43.4 / 33.6 / 38.5	41.8 / 32.7 / 37.4	
	mT5 ^s	s1	42.9 / 34.8 / 37.9	38.6 / 32.9 / 35.1	26.4 / 21.4 / 22.1	32.9 / 26.9 / 28.7	39.0 / 31.6 / 34.5	44.2 / 34.0 / 36.2	42.8 / 33.5 / 35.8	
		s6	39.0 / 32.3 / 37.2	38.3 / 33.1 / 34.7	24.6 / 20.7 / 23.6	31.1 / 25.7 / 25.7	36.9 / 30.3 / 33.6	41.3 / 32.1 / 35.5	40.8 / 31.9 / 34.2	
		s7	40.1 / 33.1 / 37.5	38.2 / 33.0 / 36.1	25.4 / 21.1 / 23.7	31.9 / 26.2 / 28.3	37.3 / 30.4 / 34.1	42.4 / 33.0 / 35.8	41.7 / 32.5 / 34.6	
		s10	37.8 / 31.2 / 37.5	36.5 / 31.5 / 34.9	23.9 / 20.0 / 23.9	27.9 / 22.5 / 28.4	36.0 / 29.4 / 34.0	40.4 / 31.3 / 36.0	40.4 / 31.4 / 34.6	
		s14	40.4 / 33.1 / 38.6	38.3 / 33.0 / 37.1	25.2 / 21.0 / 23.7	32.0 / 26.2 / 28.8	37.3 / 30.2 / 34.8	42.5 / 33.1 / 36.3	41.5 / 32.4 / 35.0	
	Base	mmT5	s1	47.9 / 28.3 / 39.5	43.0 / 25.6 / 36.7	30.1 / 14.9 / 23.8	37.1 / 22.4 / 30.2	44.8 / 28.1 / 36.5	49.7 / 28.5 / 38.6	47.3 / 26.5 / 37.3
			s6	48.5 / 28.3 / 39.9	45.0 / 27.8 / 38.8	31.3 / 16.3 / 25.3	36.2 / 21.5 / 29.8	44.7 / 28.4 / 36.9	49.0 / 28.1 / 38.4	46.5 / 25.9 / 36.8
			s7	49.8 / 29.8 / 41.1	45.4 / 28.3 / 39.2	31.5 / 16.4 / 25.4	37.0 / 22.5 / 30.6	44.9 / 28.5 / 36.7	49.7 / 28.7 / 38.9	47.4 / 26.8 / 37.6
			s10	48.0 / 27.9 / 39.5	44.9 / 27.6 / 38.7	30.8 / 16.1 / 25.2	36.0 / 21.6 / 29.7	44.1 / 27.7 / 36.3	48.6 / 27.5 / 38.0	46.3 / 25.6 / 36.6
s14			49.7 / 29.8 / 41.1	45.4 / 28.2 / 39.2	31.8 / 16.7 / 25.4	37.2 / 22.5 / 30.5	45.4 / 29.1 / 37.3	49.4 / 28.4 / 38.5	47.4 / 26.7 / 37.4	
mT5 ^s		s1	46.3 / 26.4 / 37.9	40.8 / 24.0 / 35.1	28.4 / 13.3 / 22.1	35.3 / 20.4 / 28.7	43.1 / 26.3 / 34.5	47.1 / 25.7 / 36.2	45.7 / 24.9 / 35.8	
		s6	45.0 / 25.3 / 37.2	40.5 / 23.3 / 34.7	28.8 / 14.2 / 23.6	32.0 / 17.3 / 25.7	41.1 / 24.8 / 33.6	45.8 / 24.6 / 35.5	44.0 / 23.1 / 34.2	
		s7	46.0 / 26.0 / 37.5	42.0 / 24.7 / 36.1	29.4 / 14.6 / 23.7	34.8 / 20.1 / 28.3	41.9 / 25.4 / 34.1	46.2 / 25.0 / 35.8	44.4 / 23.4 / 34.6	
		s10	45.3 / 25.6 / 37.5	40.4 / 23.3 / 34.9	28.9 / 14.6 / 23.9	34.6 / 20.2 / 28.4	41.7 / 25.3 / 34.0	46.2 / 25.0 / 36.0	44.4 / 23.6 / 34.6	
		s14	46.9 / 26.9 / 38.6	43.2 / 26.1 / 37.1	29.3 / 14.5 / 23.7	35.2 / 20.8 / 28.8	42.6 / 26.1 / 34.8	46.9 / 25.7 / 36.3	44.9 / 23.9 / 35.0	

Table 19: Validation set results for XL-Sum in the multisource setup for languages English, French, Gujarati, Hausa, Hindi, Igbo, and Indonesian. We report results for the different freezing configurations.

	lang	portuguese	punjabi	russian	scottish_gaelic	serbian_cyrillic	serbian_latin	sinhala		
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}		
Small	mmT5	s1	40.6 / 30.4 / 33.5	39.7 / 29.0 / 33.3	33.1 / 25.5 / 28.8	37.1 / 28.1 / 30.9	30.5 / 23.1 / 25.6	30.4 / 19.0 / 26.1	36.4 / 29.2 / 31.9	
		s6	38.6 / 29.0 / 32.9	37.7 / 28.2 / 33.7	31.0 / 23.9 / 27.9	34.8 / 27.4 / 32.2	29.0 / 22.5 / 27.3	23.6 / 21.0 / 26.4	35.2 / 28.3 / 34.7	
		s7	39.5 / 29.3 / 33.7	38.8 / 28.8 / 33.9	31.7 / 24.4 / 28.8	36.3 / 28.2 / 32.1	29.4 / 22.7 / 27.9	26.1 / 20.5 / 27.0	35.5 / 28.7 / 35.0	
		s10	38.8 / 29.0 / 32.7	37.7 / 28.3 / 33.2	31.1 / 23.9 / 27.0	35.3 / 27.9 / 32.4	29.2 / 22.5 / 26.7	23.5 / 18.8 / 25.5	35.5 / 28.4 / 34.2	
		s14	39.4 / 29.3 / 33.5	38.3 / 28.3 / 33.5	31.0 / 23.9 / 28.7	35.3 / 27.6 / 32.1	29.2 / 22.6 / 27.9	24.4 / 19.3 / 26.9	35.0 / 28.1 / 34.3	
	mT5 ^s	s1	40.4 / 30.2 / 32.1	39.7 / 29.1 / 31.3	32.2 / 24.8 / 26.9	36.9 / 27.9 / 28.3	30.4 / 22.9 / 24.4	30.2 / 23.0 / 24.6	35.8 / 27.9 / 30.4	
		s6	38.4 / 28.6 / 30.6	37.9 / 28.1 / 30.9	31.1 / 23.9 / 25.2	35.0 / 27.6 / 29.2	28.7 / 22.3 / 24.6	24.3 / 19.3 / 23.1	34.5 / 27.7 / 31.2	
		s7	38.6 / 28.8 / 31.2	38.3 / 28.1 / 30.9	30.7 / 23.5 / 25.6	34.7 / 27.1 / 29.5	28.6 / 21.8 / 24.9	25.1 / 19.6 / 23.8	35.6 / 28.4 / 30.9	
		s10	37.3 / 28.0 / 30.9	36.9 / 27.4 / 31.2	30.4 / 23.3 / 25.4	33.1 / 26.4 / 29.5	28.0 / 21.6 / 24.9	23.4 / 18.8 / 23.5	33.9 / 27.1 / 31.9	
		s14	38.8 / 28.9 / 31.5	38.3 / 28.4 / 31.5	31.2 / 23.8 / 25.7	34.9 / 27.4 / 30.1	29.2 / 22.3 / 25.2	25.9 / 20.4 / 24.6	35.3 / 28.3 / 31.8	
	Base	mmT5	s1	44.5 / 22.4 / 33.5	44.2 / 25.9 / 33.3	37.3 / 17.4 / 28.8	41.0 / 22.1 / 30.9	34.3 / 13.5 / 25.6	34.8 / 14.4 / 26.1	40.1 / 25.5 / 31.9
			s6	43.9 / 21.6 / 32.9	44.4 / 26.1 / 33.7	36.2 / 16.4 / 27.9	42.1 / 23.0 / 32.2	35.6 / 14.6 / 27.3	34.5 / 14.6 / 26.4	42.4 / 28.1 / 34.7
			s7	44.8 / 22.5 / 33.7	44.8 / 26.4 / 33.9	37.1 / 17.4 / 28.8	42.1 / 23.2 / 32.1	36.4 / 15.5 / 27.9	35.9 / 15.2 / 27.0	42.5 / 28.2 / 35.0
			s10	43.6 / 21.2 / 32.7	43.8 / 25.6 / 33.2	35.2 / 15.8 / 27.0	41.8 / 23.1 / 32.4	34.9 / 14.1 / 26.7	33.6 / 13.8 / 25.5	41.8 / 27.4 / 34.2
s14			44.7 / 22.4 / 33.5	44.7 / 26.2 / 33.5	37.2 / 17.3 / 28.7	42.3 / 23.4 / 32.1	36.2 / 15.3 / 27.9	35.5 / 15.4 / 26.9	42.4 / 27.6 / 34.3	
mT5 ^s		s1	42.9 / 20.7 / 32.1	42.5 / 23.2 / 31.3	35.0 / 15.6 / 26.9	38.2 / 19.2 / 28.3	32.5 / 12.0 / 24.4	33.0 / 12.8 / 24.6	38.6 / 24.0 / 30.4	
		s6	41.3 / 18.7 / 30.6	41.1 / 22.5 / 30.9	32.9 / 13.8 / 25.2	37.5 / 18.8 / 29.2	32.3 / 12.0 / 24.6	30.1 / 11.3 / 23.1	38.5 / 24.4 / 31.2	
		s7	41.9 / 19.5 / 31.2	41.7 / 22.6 / 30.9	33.5 / 14.1 / 25.6	38.9 / 19.7 / 29.5	32.7 / 12.3 / 24.9	31.4 / 12.1 / 23.8	38.7 / 24.2 / 30.9	
		s10	41.7 / 19.1 / 30.9	41.5 / 23.0 / 31.2	33.1 / 14.0 / 25.4	38.6 / 19.7 / 29.5	32.7 / 12.2 / 24.9	30.6 / 11.7 / 23.5	39.3 / 25.1 / 31.9	
		s14	42.3 / 19.8 / 31.5	42.5 / 23.6 / 31.5	33.6 / 14.4 / 25.7	39.5 / 20.5 / 30.1	33.2 / 12.5 / 25.2	32.7 / 12.8 / 24.6	39.4 / 25.2 / 31.8	

Table 20: Validation set results for XL-Sum in the multisource setup for languages Portuguese, Punjabi, Russian, Scottish Gaelic, Serbian, and Sinhala. We report results for the different freezing configurations.

	lang	somali		spanish		swahili		tamil		telugu		thai		turkish	
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	
Small	mmT5	s1	38.4 / 28.3 / 30.6	31.3 / 23.5 / 27.3	38.9 / 30.0 / 33.3	31.8 / 26.6 / 31.2	29.0 / 23.6 / 27.5	31.5 / 24.8 / 28.2	33.2 / 27.8 / 32.0						
		s6	37.0 / 27.4 / 30.8	32.2 / 24.2 / 27.1	37.7 / 28.8 / 33.7	28.9 / 24.2 / 31.3	26.8 / 22.1 / 27.9	31.0 / 24.8 / 29.3	30.3 / 25.3 / 31.5						
		s7	37.5 / 27.7 / 31.2	30.8 / 23.1 / 27.6	38.3 / 29.5 / 34.7	30.8 / 26.0 / 32.2	27.6 / 22.7 / 28.4	31.8 / 25.3 / 29.8	31.5 / 26.4 / 32.4						
		s10	36.8 / 27.2 / 30.2	31.9 / 23.9 / 26.7	37.9 / 28.9 / 33.6	28.8 / 24.0 / 31.0	26.9 / 22.2 / 27.3	31.5 / 25.0 / 29.3	30.5 / 25.6 / 31.0						
		s14	37.6 / 27.6 / 31.0	31.1 / 23.3 / 27.5	38.3 / 29.4 / 34.3	30.4 / 25.6 / 32.1	27.7 / 22.6 / 28.2	31.8 / 25.1 / 29.6	31.2 / 26.1 / 32.1						
		s1	38.0 / 28.0 / 29.0	31.7 / 23.9 / 25.6	38.5 / 29.7 / 31.7	31.9 / 26.7 / 28.7	28.5 / 23.2 / 25.3	31.1 / 24.4 / 26.2	32.9 / 27.5 / 30.2						
		s6	35.4 / 26.3 / 28.4	32.1 / 23.9 / 25.1	36.1 / 27.9 / 31.3	29.7 / 25.0 / 26.2	26.9 / 22.3 / 25.0	30.6 / 24.7 / 26.7	29.8 / 25.1 / 28.3						
	mT5 ^S	s7	35.8 / 26.4 / 28.7	30.9 / 23.1 / 25.2	36.6 / 28.1 / 31.3	29.9 / 25.1 / 28.5	26.9 / 21.9 / 25.1	30.9 / 24.5 / 26.9	30.6 / 25.8 / 29.2						
		s10	34.6 / 25.8 / 28.7	31.6 / 23.6 / 25.6	35.3 / 27.0 / 31.5	27.5 / 22.7 / 28.3	26.0 / 21.6 / 25.3	30.4 / 24.2 / 27.0	29.2 / 24.5 / 28.8						
		s14	36.1 / 26.2 / 29.0	32.2 / 23.9 / 25.6	37.1 / 28.3 / 32.1	30.2 / 25.3 / 29.1	27.1 / 22.2 / 25.8	30.5 / 24.3 / 27.7	30.7 / 25.8 / 29.7						
		Base	mmT5	s1	41.7 / 21.4 / 30.6	36.2 / 14.8 / 27.3	42.7 / 22.6 / 33.3	37.0 / 22.4 / 31.2	33.8 / 20.0 / 27.5	35.5 / 20.3 / 28.2	38.0 / 21.3 / 32.0				
				s6	41.5 / 21.5 / 30.8	36.0 / 14.5 / 27.1	43.1 / 23.0 / 33.7	37.0 / 22.4 / 31.3	33.9 / 20.1 / 27.9	36.5 / 21.4 / 29.3	37.3 / 20.5 / 31.5				
				s7	41.7 / 21.7 / 31.2	36.5 / 15.1 / 27.6	44.2 / 24.0 / 34.7	37.9 / 23.4 / 32.2	34.4 / 20.7 / 28.4	37.4 / 22.0 / 29.8	38.3 / 21.6 / 32.4				
				s10	41.0 / 20.9 / 30.2	35.6 / 14.1 / 26.7	43.2 / 22.9 / 33.6	36.7 / 22.1 / 31.0	33.3 / 19.6 / 27.3	36.4 / 21.2 / 29.3	36.9 / 20.1 / 31.0				
s14	41.7 / 21.7 / 31.0			36.3 / 14.9 / 27.5	43.8 / 23.6 / 34.3	37.9 / 23.1 / 32.1	34.4 / 20.6 / 28.2	37.2 / 21.7 / 29.6	38.1 / 21.3 / 32.1						
s1	39.6 / 19.4 / 29.0			34.3 / 13.3 / 25.6	41.3 / 21.1 / 31.7	34.7 / 20.3 / 28.7	31.3 / 17.6 / 25.3	33.6 / 18.7 / 26.2	36.2 / 19.5 / 30.2						
s6	38.5 / 18.2 / 28.4			33.6 / 12.2 / 25.1	40.4 / 20.2 / 31.3	31.5 / 17.8 / 26.2	30.6 / 17.0 / 25.0	33.5 / 18.6 / 26.7	33.9 / 17.3 / 28.3						
mT5 ^S	s7		39.1 / 19.0 / 28.7	33.7 / 12.6 / 25.2	40.7 / 20.5 / 31.3	34.1 / 19.9 / 28.5	26.9 / 21.9 / 25.1	33.9 / 19.1 / 26.9	34.9 / 18.3 / 29.2						
	s10		38.8 / 18.7 / 28.7	34.1 / 12.6 / 25.6	40.8 / 20.5 / 31.5	33.7 / 19.8 / 28.3	30.8 / 17.4 / 25.3	33.8 / 18.9 / 27.0	34.5 / 18.0 / 28.8						
	s14		39.3 / 19.1 / 29.0	34.2 / 12.8 / 25.6	41.2 / 20.9 / 32.1	34.7 / 20.6 / 29.1	31.5 / 17.9 / 25.8	34.7 / 19.6 / 27.7	35.4 / 18.8 / 29.7						

Table 21: Validation set results for XL-Sum in the multisource setup for languages Somali, Spanish, Swahili, Tamil, Telugu, Thai, and Turkish . We report results for the different freezing configurations.

	lang	ukrainian		urdu		uzbek		vietnamese		welsh		yoruba		avg
		R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}	R _{g1} / R _{g2} / R _{gL}					
Small	mmT5	s1	32.2 / 25.3 / 29.2	42.3 / 33.0 / 37.3	28.4 / 23.5 / 26.6	44.8 / 31.0 / 34.4	41.1 / 31.0 / 34.0	45.2 / 33.2 / 35.6	36.8 / 18.3 / 28.8					
		s6	30.1 / 23.6 / 28.6	39.5 / 30.6 / 36.8	26.8 / 22.1 / 27.1	42.9 / 29.9 / 34.1	37.4 / 28.3 / 33.5	42.9 / 31.8 / 35.8	34.8 / 16.5 / 27.5					
		s7	30.5 / 23.7 / 29.2	41.1 / 32.0 / 37.4	27.3 / 22.4 / 27.5	43.8 / 30.3 / 34.8	39.5 / 29.8 / 34.0	44.0 / 32.6 / 36.6	35.8 / 17.4 / 28.2					
		s10	30.1 / 23.7 / 28.1	39.8 / 30.9 / 36.4	26.9 / 22.2 / 26.9	43.2 / 30.1 / 34.1	37.7 / 28.4 / 33.5	42.8 / 31.7 / 35.5	35.0 / 16.7 / 27.6					
		s14	30.5 / 23.8 / 29.0	40.5 / 31.5 / 37.3	26.8 / 22.0 / 27.4	43.7 / 30.3 / 34.4	39.3 / 29.9 / 34.1	43.5 / 32.3 / 36.2	35.6 / 17.2 / 28.0					
		s1	31.7 / 25.0 / 27.3	41.6 / 32.4 / 35.3	28.2 / 23.1 / 24.4	44.8 / 30.8 / 33.0	40.4 / 30.4 / 31.8	44.3 / 32.7 / 34.2	36.6 / 18.0 / 28.6					
		s6	29.7 / 23.2 / 25.8	39.4 / 30.4 / 33.7	26.9 / 22.3 / 24.6	42.8 / 29.7 / 31.9	37.7 / 28.4 / 30.0	41.8 / 31.0 / 33.5	34.5 / 16.2 / 27.2					
	mT5 ^S	s7	29.9 / 23.3 / 26.0	39.9 / 30.9 / 34.4	27.7 / 23.0 / 24.5	43.1 / 29.6 / 32.1	37.8 / 28.4 / 30.5	43.2 / 31.6 / 33.3	34.9 / 16.5 / 27.4					
		s10	29.1 / 22.9 / 26.1	38.5 / 29.6 / 34.1	26.8 / 22.1 / 25.1	42.1 / 29.1 / 32.2	36.7 / 27.7 / 30.9	40.8 / 30.1 / 33.5	33.6 / 15.5 / 26.4					
		s14	29.9 / 23.3 / 26.5	40.2 / 31.1 / 34.9	27.4 / 22.4 / 25.2	43.2 / 29.9 / 32.7	37.7 / 28.6 / 30.7	42.9 / 31.5 / 33.5	35.0 / 16.6 / 27.5					
		Base	mmT5	s1	36.8 / 18.0 / 29.2	47.0 / 27.8 / 37.3	33.0 / 16.5 / 26.6	49.1 / 27.6 / 34.4	44.9 / 24.8 / 34.0	48.0 / 25.4 / 35.6	41.2 / 22.4 / 32.4			
				s6	36.1 / 17.2 / 28.6	46.4 / 27.2 / 36.8	33.2 / 16.9 / 27.1	48.5 / 27.0 / 34.1	43.9 / 23.7 / 33.5	47.8 / 25.8 / 35.8	41.2 / 22.4 / 32.6			
				s7	36.8 / 17.9 / 29.2	46.9 / 27.8 / 37.4	33.9 / 17.4 / 27.5	49.1 / 27.8 / 34.8	44.8 / 24.5 / 34.0	48.3 / 26.2 / 36.6	41.9 / 23.1 / 33.2			
				s10	35.6 / 16.7 / 28.1	46.0 / 26.8 / 36.4	32.8 / 16.8 / 26.9	48.4 / 27.0 / 34.1	44.2 / 23.8 / 33.5	47.4 / 25.2 / 35.5	40.8 / 22.1 / 32.3			
s14	36.7 / 17.7 / 29.0			46.9 / 27.8 / 37.3	34.0 / 17.4 / 27.4	49.0 / 27.6 / 34.4	45.0 / 24.6 / 34.1	48.5 / 26.4 / 36.2	41.8 / 23.0 / 33.1					
s1	34.7 / 16.1 / 27.3			45.1 / 25.6 / 35.3	30.5 / 14.3 / 24.4	47.8 / 25.9 / 33.0	42.4 / 22.1 / 31.8	46.7 / 24.1 / 34.2	39.2 / 20.4 / 30.6					
s6	32.9 / 14.3 / 25.8			43.1 / 23.7 / 33.7	29.9 / 14.4 / 24.6	46.1 / 24.2 / 31.9	40.2 / 19.4 / 30.0	45.2 / 22.9 / 33.5	37.9 / 19.2 / 29.8					
mT5 ^S	s7		33.3 / 14.5 / 26.0	43.8 / 24.4 / 34.4	30.1 / 14.5 / 24.5	46.6 / 24.7 / 32.1	40.5 / 19.9 / 30.5	45.1 / 22.8 / 33.3	38.5 / 19.8 / 30.2					
	s10		33.2 / 14.6 / 26.1	43.6 / 24.2 / 34.1	30.5 / 15.0 / 25.1	46.3 / 24.6 / 32.2	41.2 / 20.4 / 30.9	45.1 / 23.2 / 33.5	38.4 / 19.8 / 30.2					
	s14		33.9 / 15.1 / 26.5	44.6 / 25.2 / 34.9	30.9 / 15.2 / 25.2	47.1 / 25.2 / 32.7	41.2 / 20.4 / 30.7	45.6 / 23.0 / 33.5	39.1 / 20.4 / 30.7					

Table 22: Validation set results for XL-Sum in the multisource setup for languages Ukrainian, Urdu, Uzbek, Vietnamese, Welsh, and Yoruba. We report results for the different freezing configurations.

	cfg	ar		bn		en		fi		id		ko		ru		sw		te		avg
		F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM	F1 / EM					
Small	mmT5	s1	51.6 / 34.9	30.4 / 16.8	62.7 / 51.4	46.9 / 32.1	49.9 / 33.6	26.6 / 19.6	46.3 / 28.6	34.4 / 23.8	31.5 / 22.1	42.3 / 29.2								
		s6	57.5 / 39.4	39.5 / 24.8	68.3 / 58.2	51.7 / 35.2	54.3 / 40.0	26.5 / 15.9	58.2 / 36.5	44.8 / 32.5	43.5 / 29.6	49.4 / 34.7								
		s7	63.2 / 46.0	40.6 / 26.5	70.7 / 60.5	59.3 / 41.9	57.9 / 43.4	30.7 / 18.5	60.3 / 39.9	36.4 / 25.7	38.1 / 23.9	50.8 / 36.3								
		s10	39.7 / 56.8	25.7 / 40.6	57.7 / 69.4	34.7 / 49.1	40.2 / 53.6	17.0 / 26.9	34.7 / 57.8	31.5 / 45.9	28.7 / 39.5	34.4 / 48.7								
		s14	63.1 / 47.6	40.5 / 25.7	71.0 / 60.2	58.1 / 40.3	56.1 / 41.1	30.4 / 18.1	59.3 / 37.9	40.9 / 29.9	33.9 / 22.9	50.4 / 36.0								
		s1	45.6 / 30.2	25.5 / 14.2	61.7 / 50.0	45.1 / 29.9	49.7 / 33.8	27.1 / 20.3	50.8 / 35.0	33.1 / 21.8	18.5 / 13.6	39.7 / 27.6								
		s6	47.3 / 31.6	30.0 / 18.6	65.9 / 54.3	51.4 / 35.7	52.1 / 35.2	26.9 / 18.1	57.1 / 40.3	40.1 / 28.1	19.0 / 13.8	43.3 / 30.6								
	mT5 ^S	s7	51.4 / 31.4	31.3 / 18.6	68.4 / 57.0	52.4 / 33.5	54.4 / 36.1	27.7 / 19.2	54.7 / 35.5	33.4 / 23.6	20.1 / 14.6	43.8 / 30.0								
		s10	46.5 / 30.7	30.8 / 19.5	66.8 / 55.7	51.2 / 35.5	50.8 / 35.9	28.3 / 20.3	55.6 / 38.1	43.1 / 29.5	19.9 / 14.9	43.7 / 31.1								
		s14	50.4 / 33.7	26.6 / 15.9	69.3 / 58.6	55.5 / 37.2	56.6 / 39.5	28.3 / 18.8	59.9 / 40.8	36.2 / 23.0	17.3 / 12.4	44.5 / 31.1								
		Base	mmT5	s1	65.8 / 45.5	51.3 / 32.7	74.1 / 63.4	65.2 / 50.9	69.2 / 50.1	54.2 / 44.2	55.3 / 32.5	61.8 / 44.3	53.0 / 37.2	61.1 / 44.5						
				s6	75.2 / 59.2	57.9 / 38.1	76.5 / 65.7	71.6 / 57.4	76.8 / 62.3	54.6 / 42.0	67.4 / 45.7	69.8 / 52.1	54.7 / 39.8	67.2 / 51.4						
				s7	75.2 / 59.8	59.7 / 38.1	77.5 / 67.7	73.3 / 59.0	77.4 / 61.6	59.2 / 48.9	67.5 / 45.3	69.6 / 53.7	61.6 / 45.1	69.0 / 53.2						
				s10	74.3 / 57.0	56.9 / 37.2	75.7 / 64.1	72.1 / 58.2	77.6 / 62.3	56.0 / 43.8	66.1 / 43.7	69.3 / 51.9	52.1 / 38.0	66.7 / 50.7						
s14	73.7 / 58.0			59.2 / 38.1	77.0 / 67.3	72.6 / 58.4	76.5 / 61.4	58.9 / 48.9	68.1 / 45.1	68.5 / 50.3	61.6 / 45.0	68.5 / 52.5								
s1	64.1 / 40.7			41.4 / 25.7	72.5 / 61.1	64.1 / 48.0	70.3 / 56.5	42.1 / 30.1	58.4 / 36.5	58.2 / 41.3	48.7 / 39.2	57.8 / 42.1								
s6	66.5 / 44.8			42.8 / 27.4	74.8 / 62.7	67.4 / 50.6	75.3 / 60.7	53.9 / 40.9	65.0 / 43.6	59.7 / 42.9	55.0 / 42.0	62.3 / 46.2								
mT5 ^S	s7		70.2 / 47.7	52.7 / 32.7	74.8 / 64.3	68.5 / 52.9	74.3 / 58.9	49.8 / 39.9	63.6 / 39.7	58.4 / 40.1	56.8 / 46.2	63.2 / 46.9								
	s10		67.5 / 46.9	48.5 / 30.1	74.2 / 63.9	67.0 / 51.0	73.5 / 57.7	47.7 / 35.1	64.7 / 42.5	57.9 / 42.3	53.3 / 42.6	61.6 / 45.8								
	s14		68.3 / 45.8	55.4 / 38.1	75.7 / 64.1	67.8 / 52.2	75.3 / 60.4	52.8 / 40.9	63.7 / 40.6	61.4 / 43.1	55.8 / 44.7	64.0 / 47.8								

Table 23: Results for the validation set of TyDiQA. We report results for the different configurations of freezing.

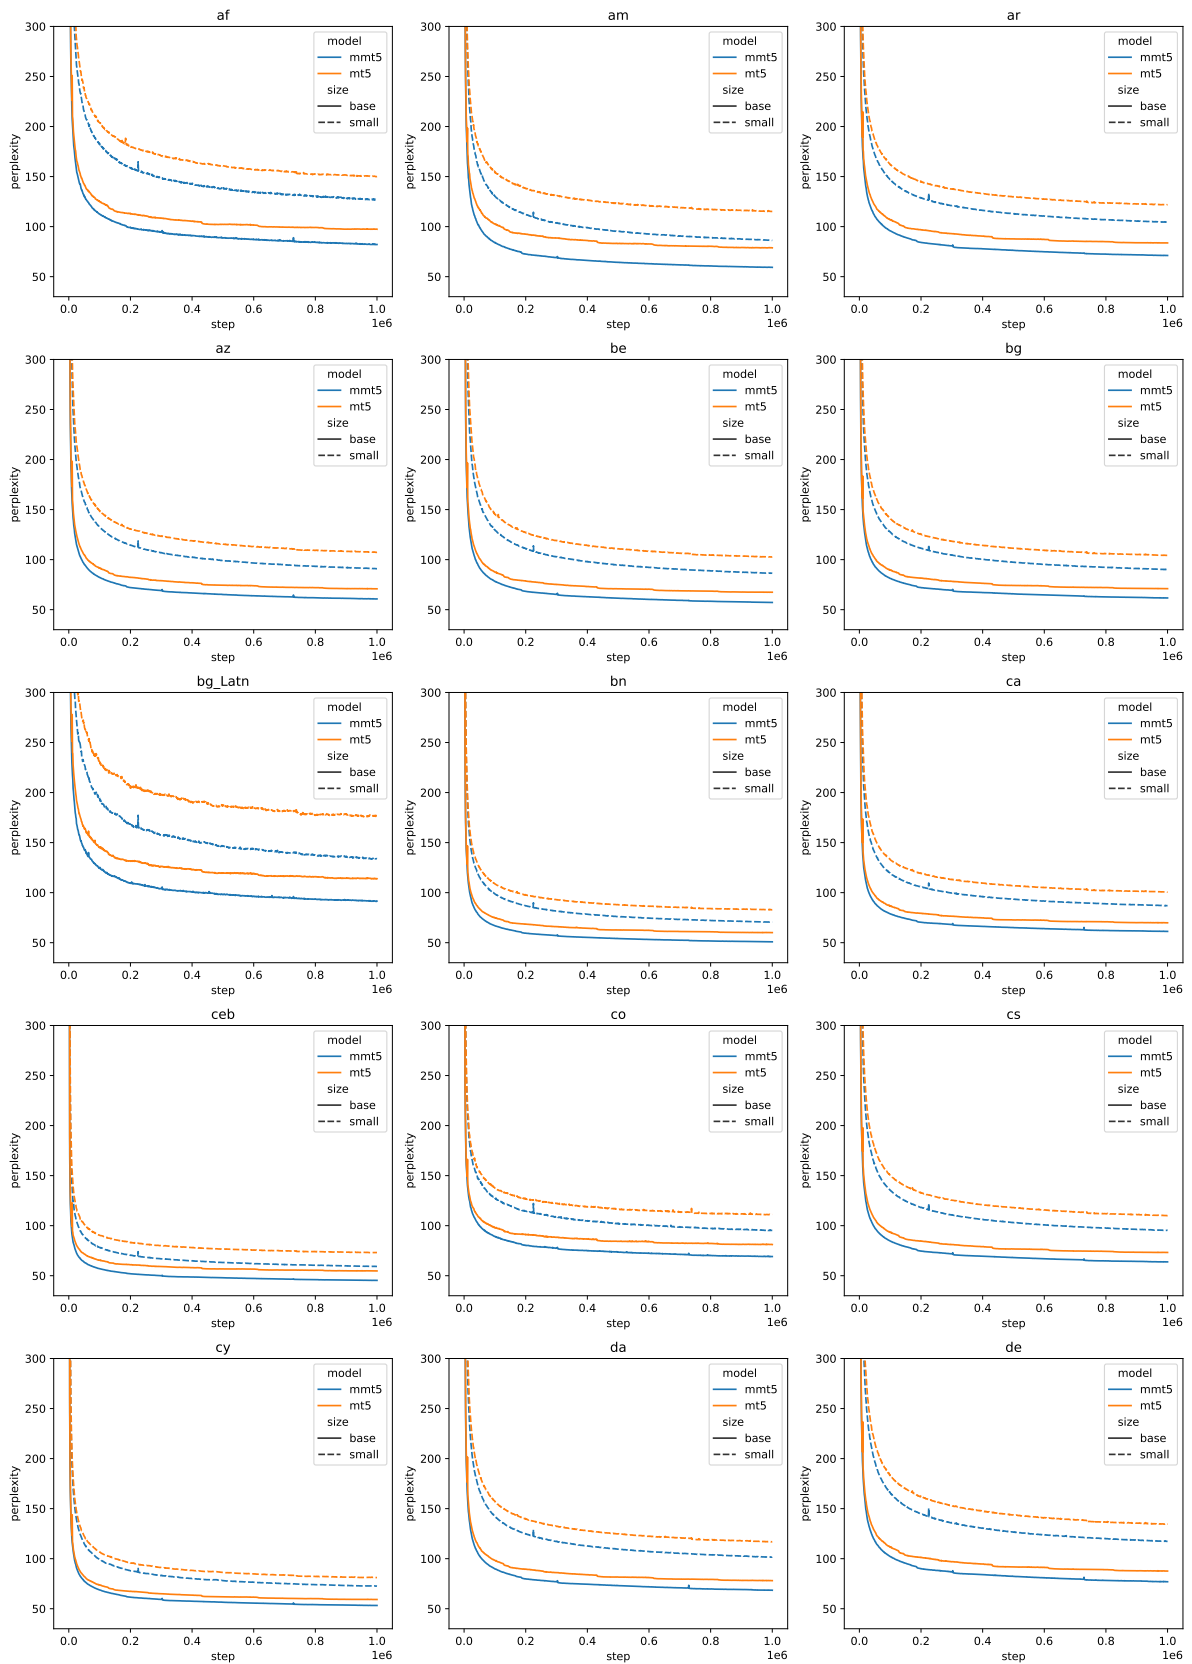


Figure 8: Per language perplexity of different model sizes for languages af-de.

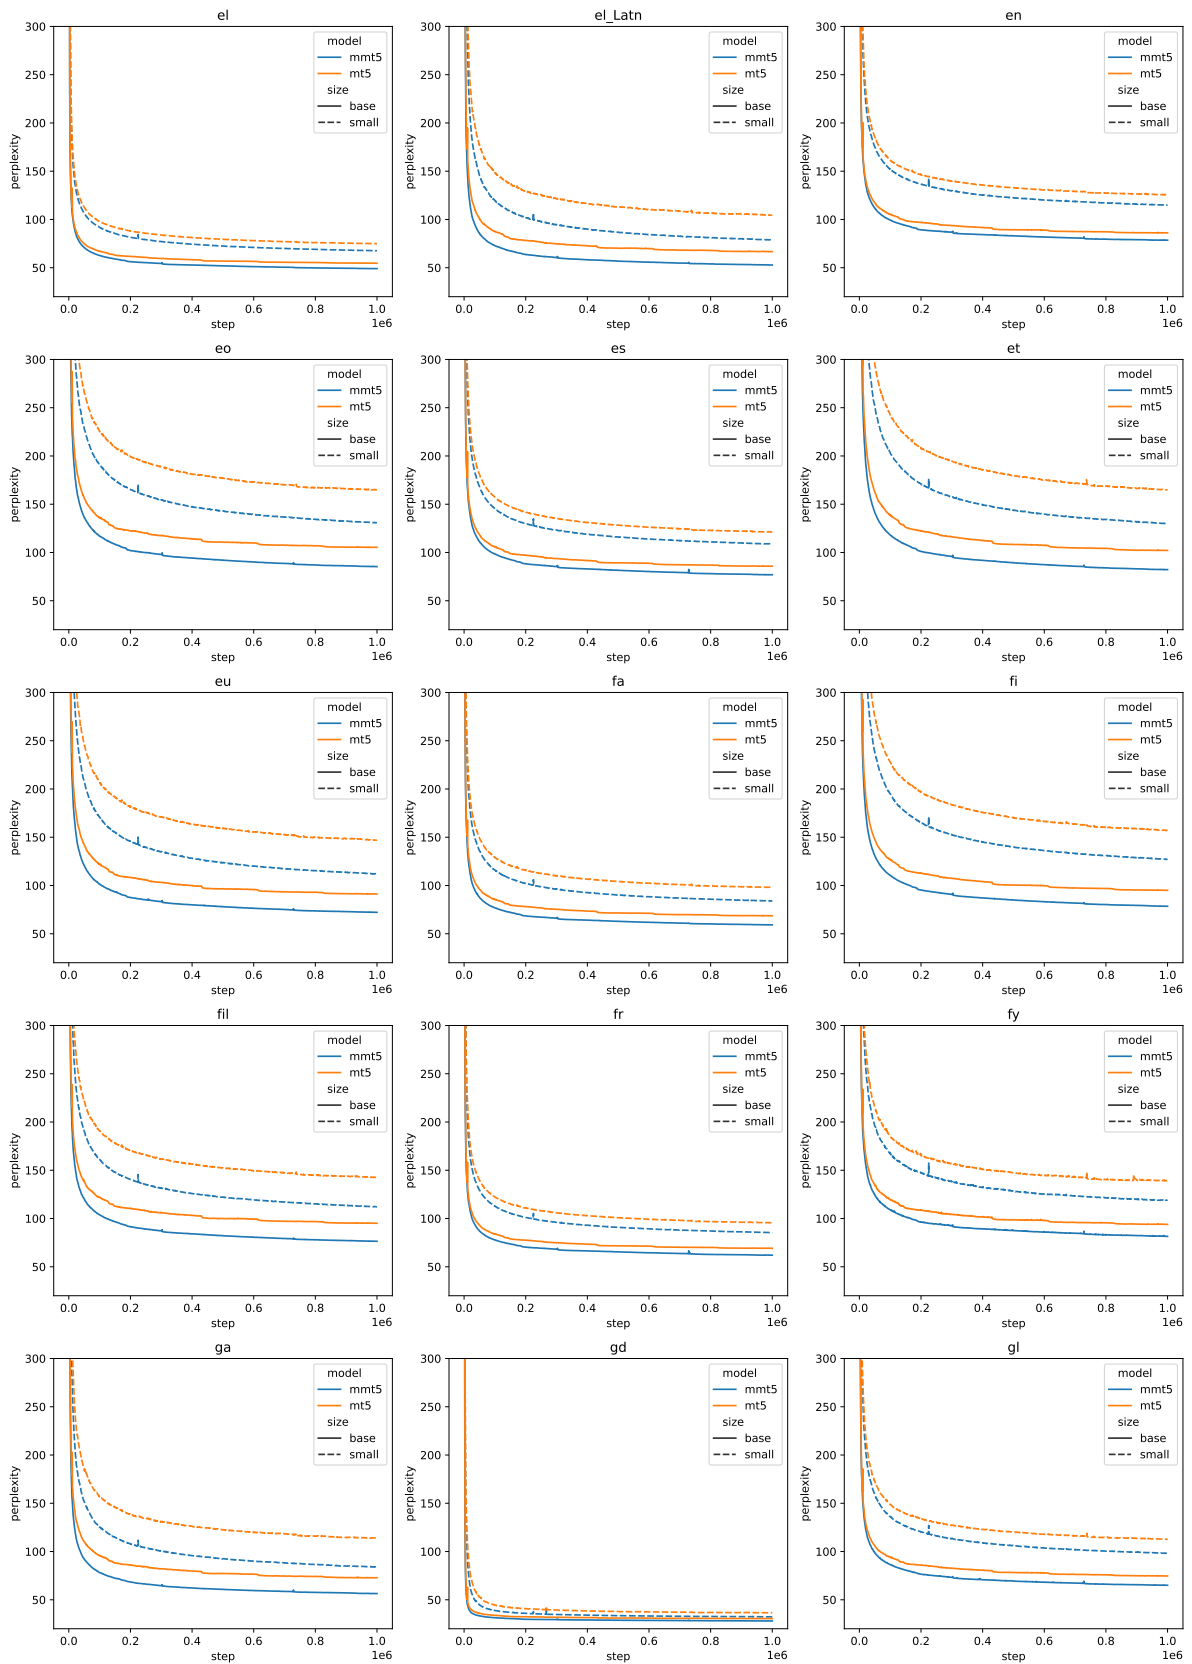


Figure 9: Per language perplexity of different model sizes for languages el-gl.

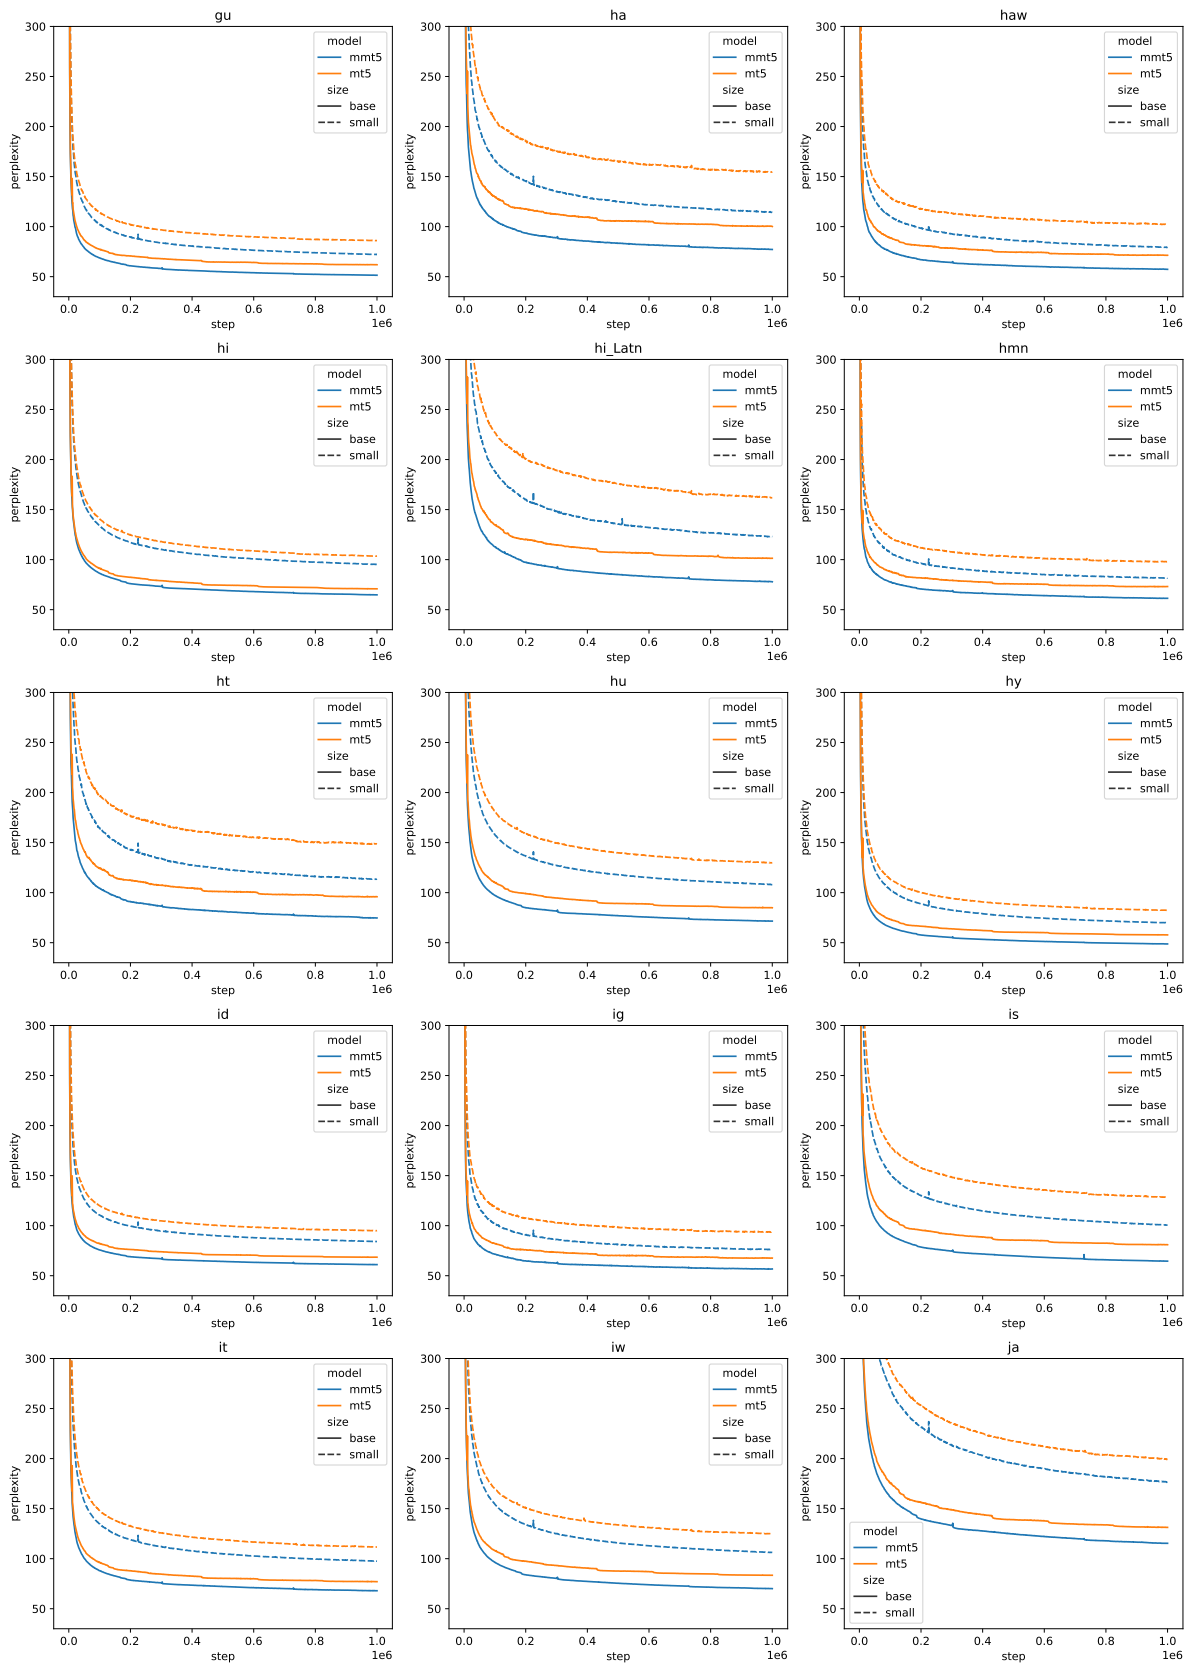


Figure 10: Per language perplexity of different model sizes for languages gu-ja.

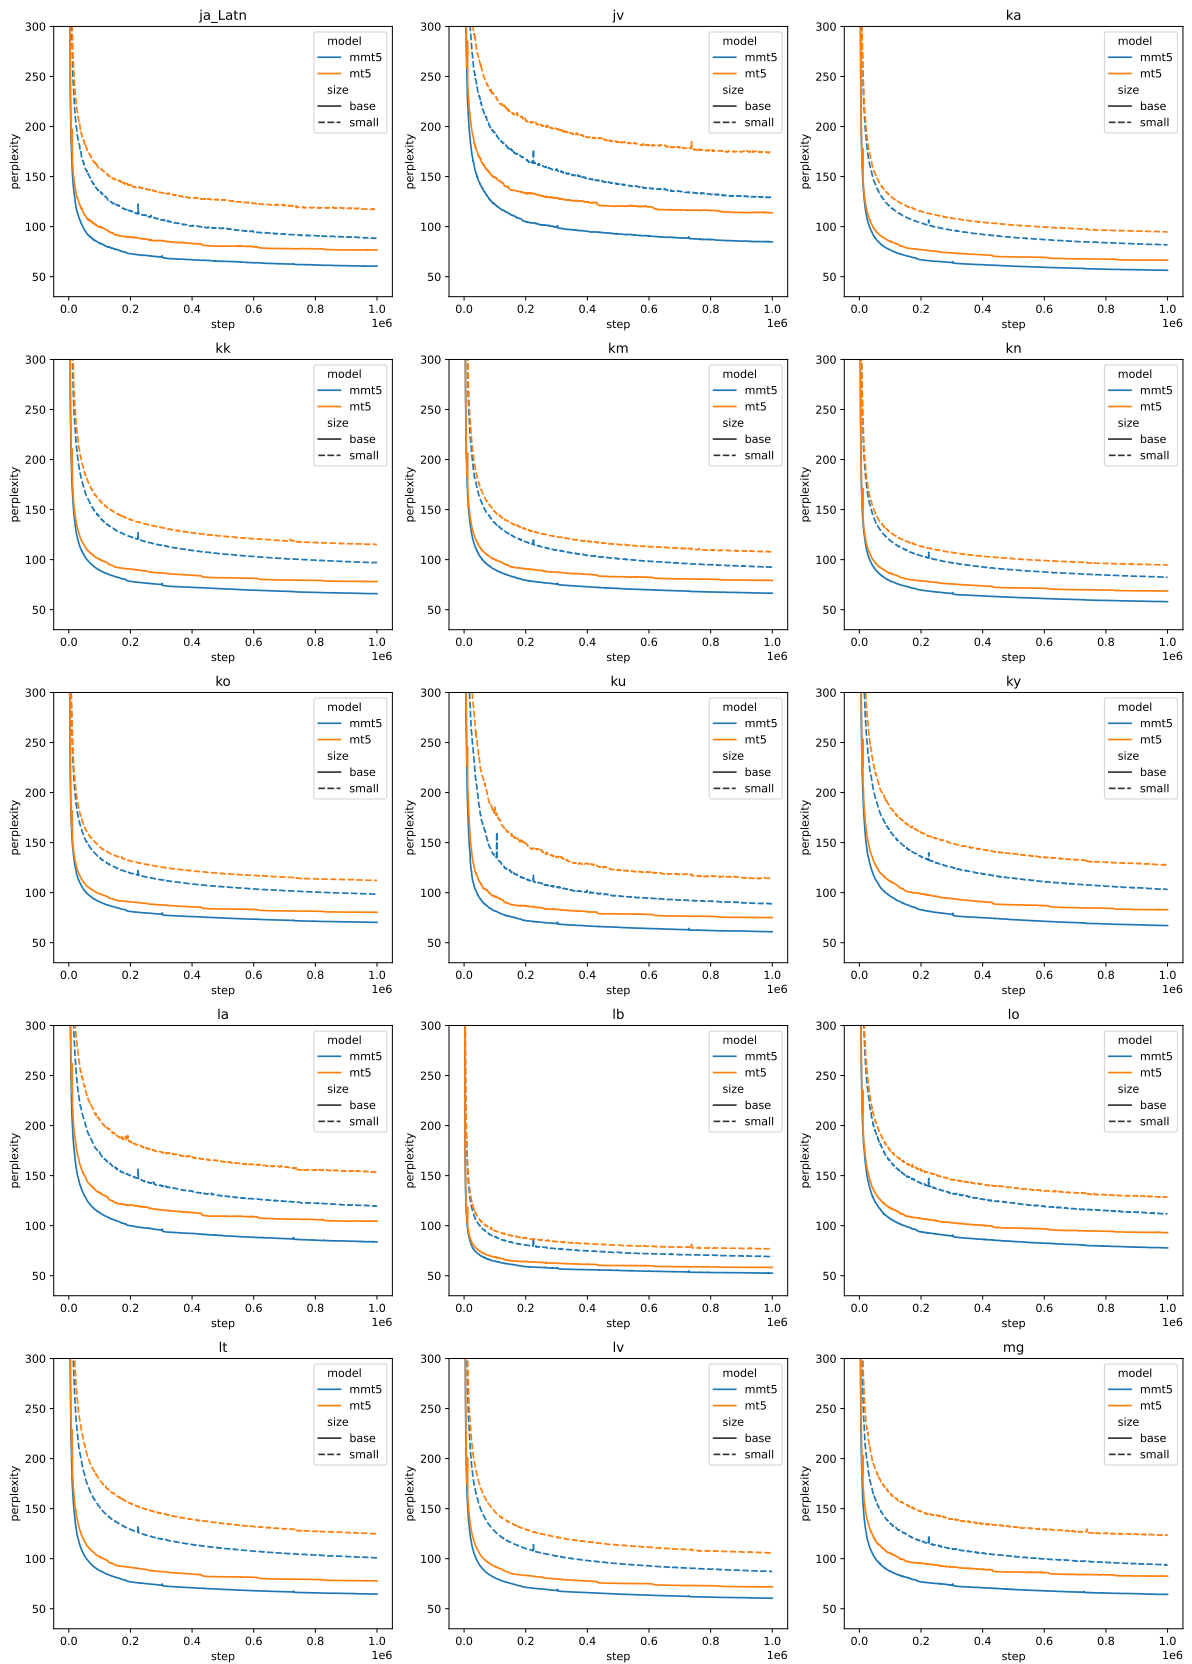


Figure 11: Per language perplexity of different model sizes for languages ja-mg.

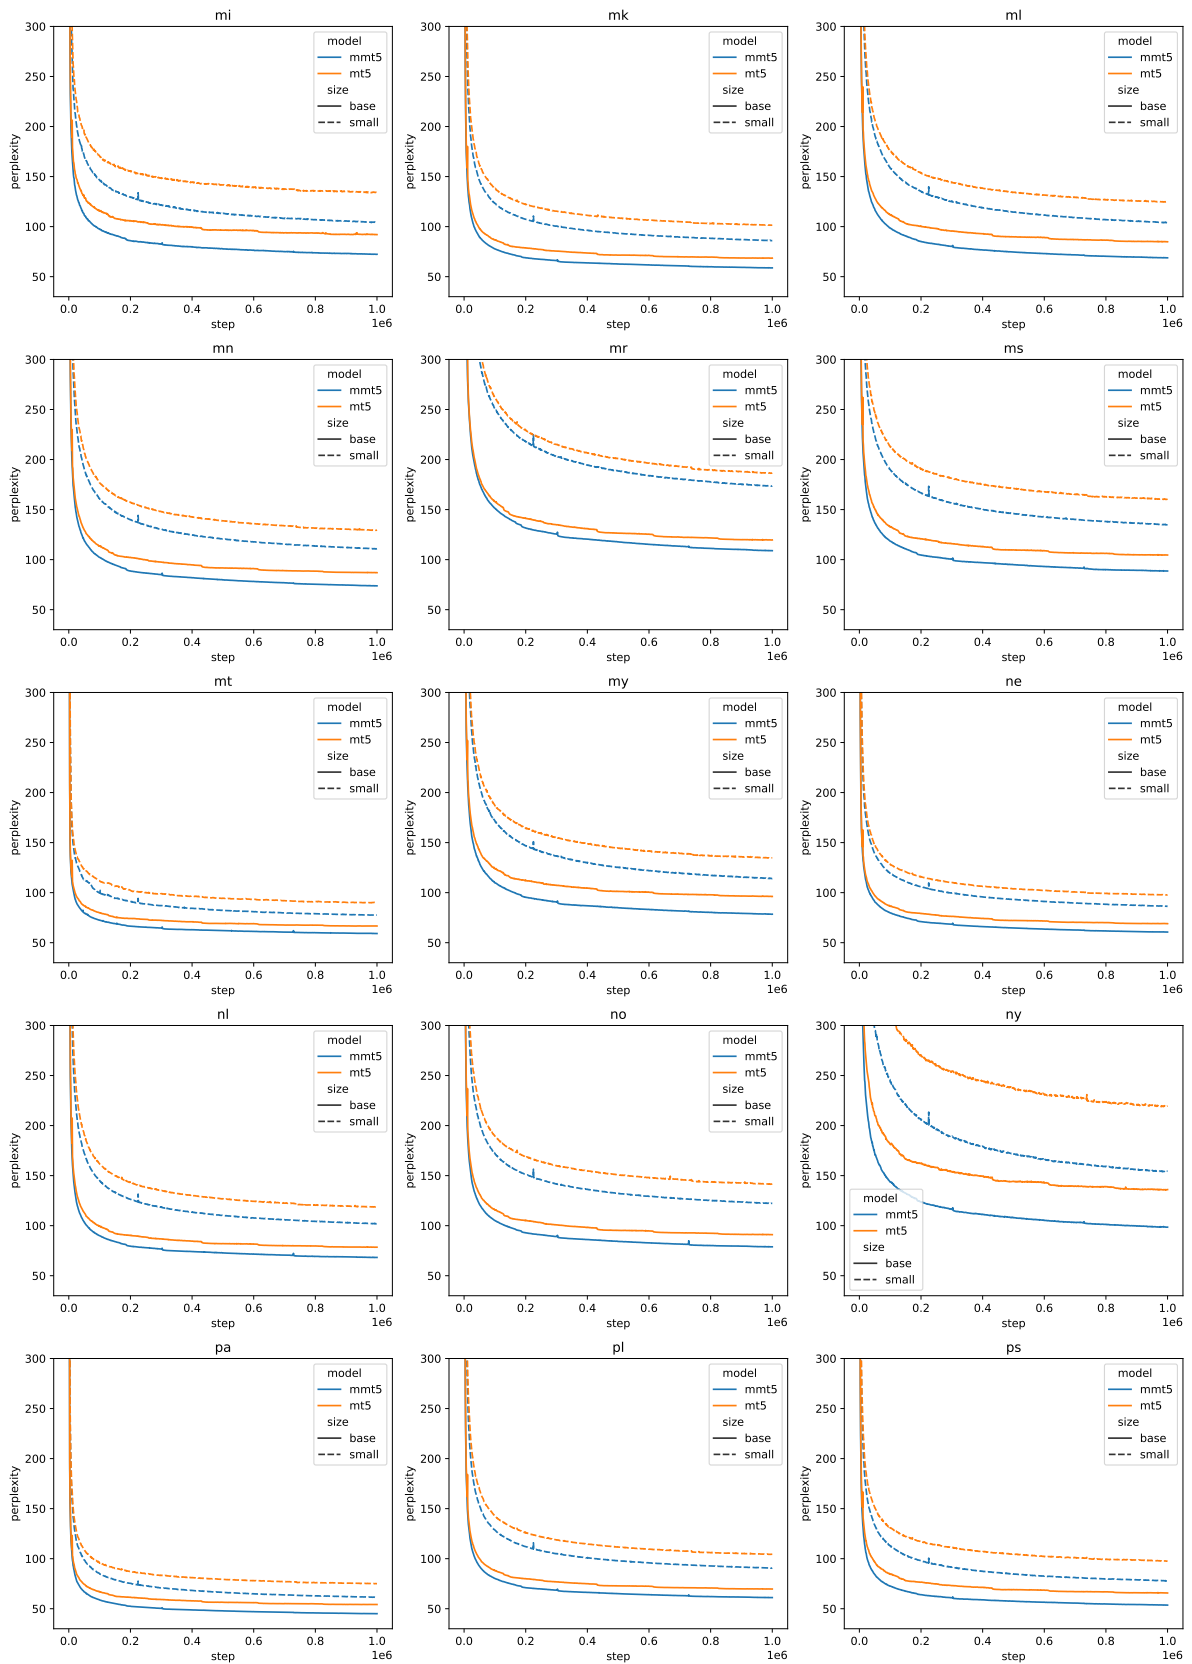


Figure 12: Per language perplexity of different model sizes for languages mi-gs.

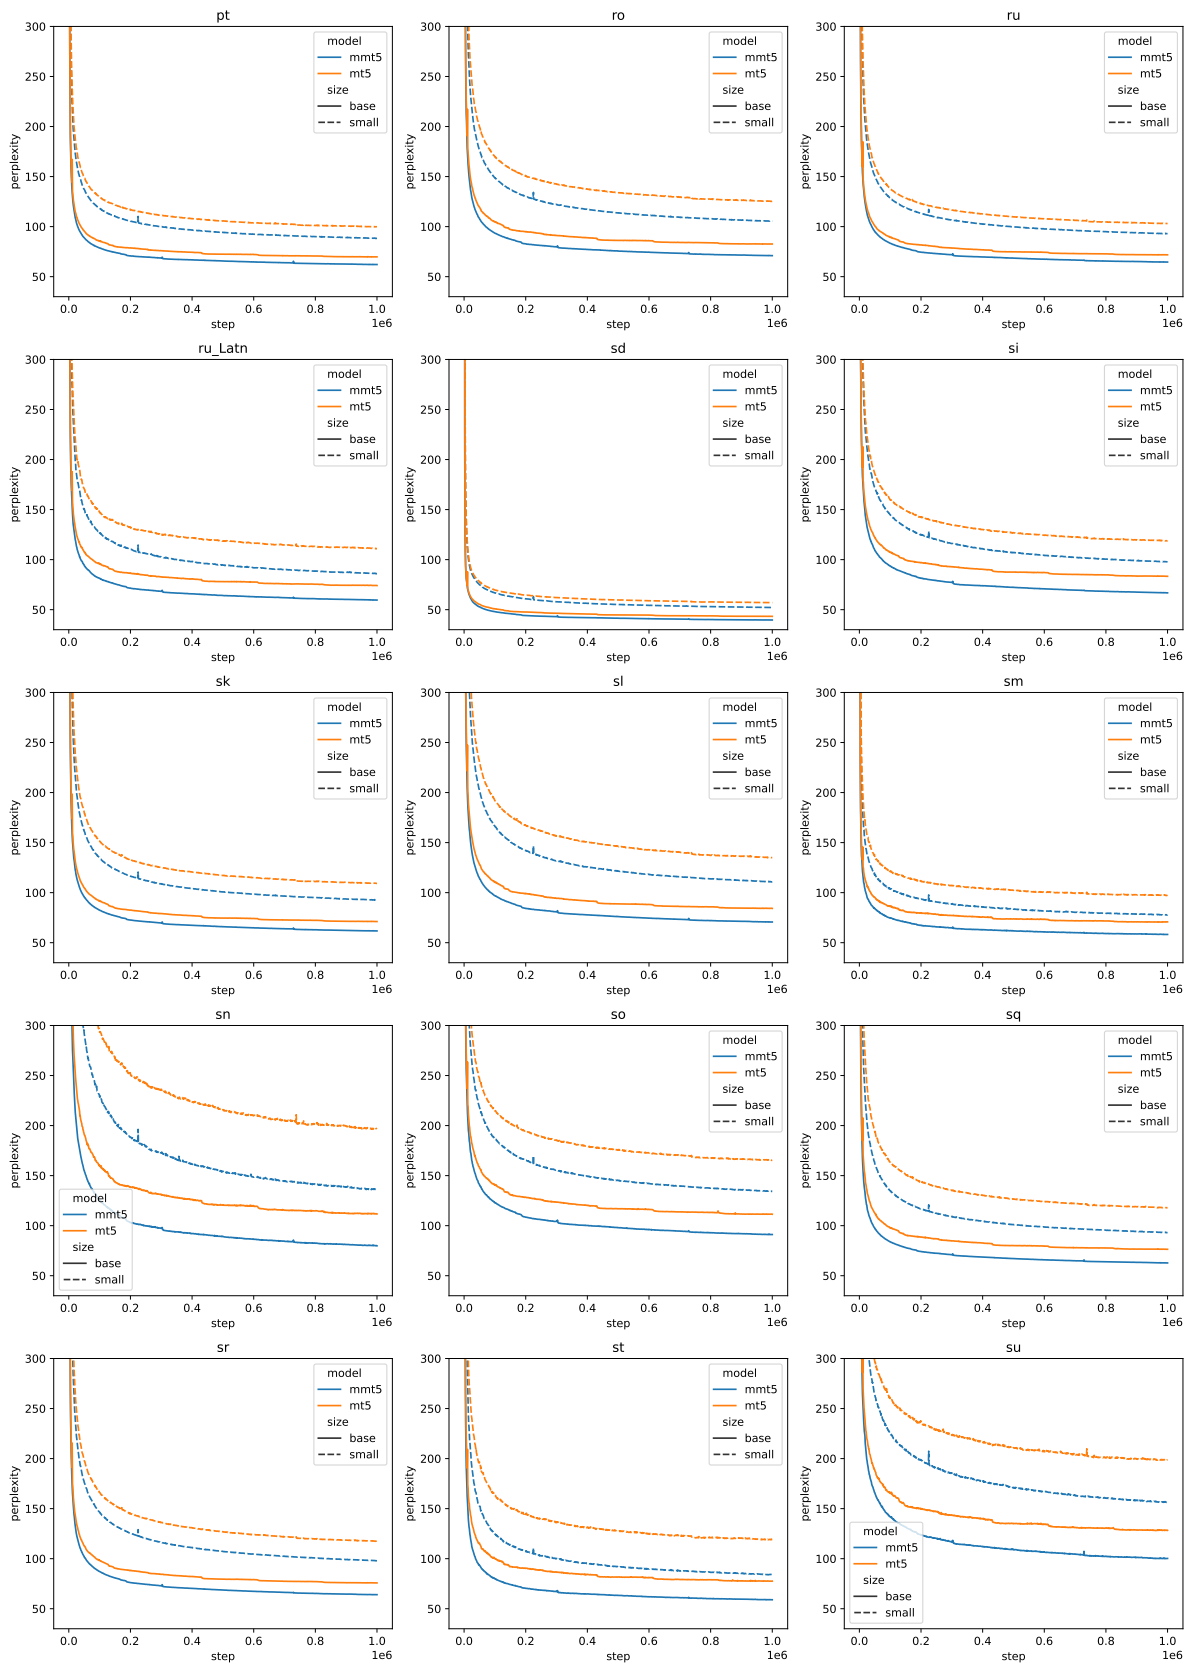


Figure 13: Per language perplexity of different model sizes for languages pt-sg.

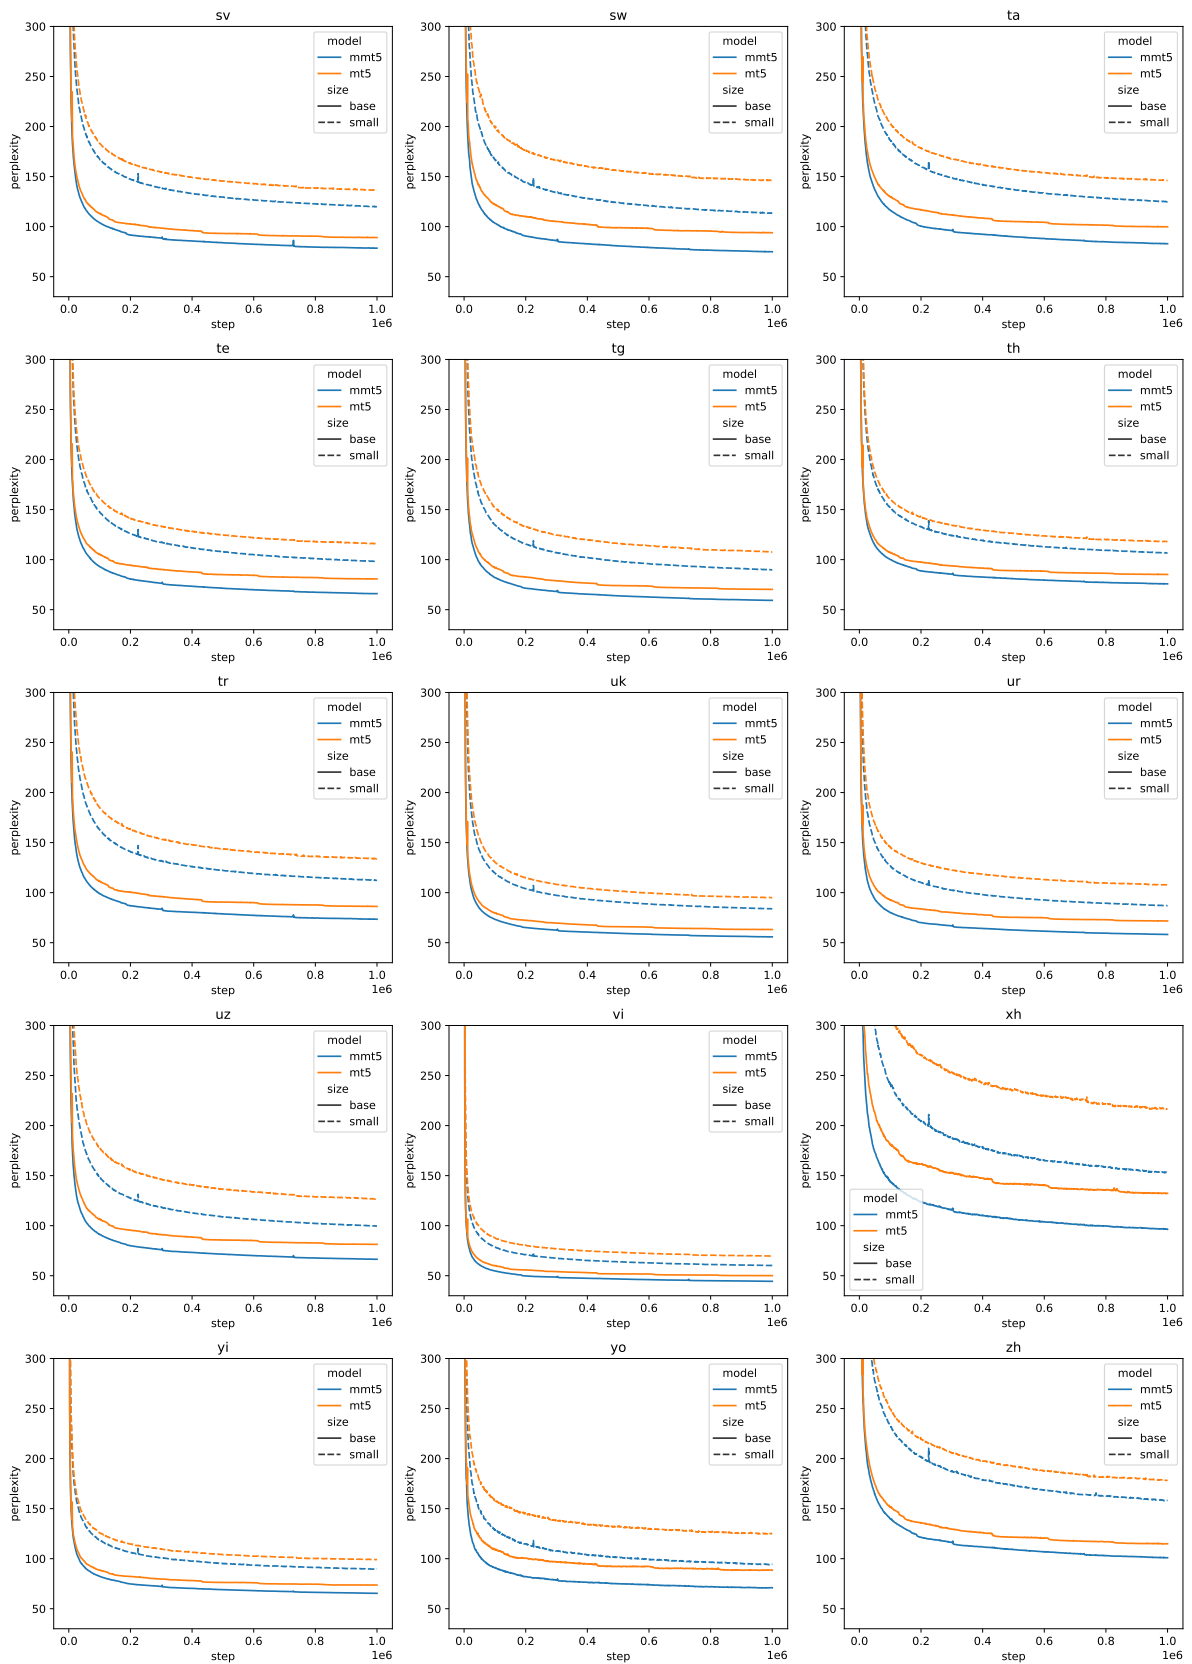


Figure 14: Per language perplexity of different model sizes for languages sv-zh.