ZICHENG ZHANG, Shanghai Jiao Tong University, China YINGJIE ZHOU, Shanghai Jiao Tong University, China CHUNYI LI, Shanghai Jiao Tong University, China BAIXUAN ZHAO, Shanghai Jiao Tong University, China XIAOHONG LIU[†], Shanghai Jiao Tong University, China GUANGTAO ZHAI[†], Shanghai Jiao Tong University, China

Quality assessment, which evaluates the visual quality level of multimedia experiences, has garnered significant attention from researchers and has evolved substantially through dedicated efforts. Before the advent of large models, quality assessment typically relied on small expert models tailored for specific tasks. While these smaller models are effective at handling their designated tasks and predicting quality levels, they often lack explainability and robustness. With the advancement of large models, which align more closely with human cognitive and perceptual processes, many researchers are now leveraging the prior knowledge embedded in these large models for quality assessment tasks. This emergence of quality assessment within the context of large models motivates us to provide a comprehensive review focusing on two key aspects: 1) the assessment of large models, and 2) the role of large models in assessment tasks. We begin by reflecting on the historical development of quality assessment. Subsequently, we move to detailed discussions of related works concerning quality assessment in the era of large models. Finally, we offer insights into the future progression and potential pathways for quality assessment in this new era. We hope this survey will enable a rapid understanding of the development of quality assessment in the era of large models and inspire further advancements in the field.

CCS Concepts: • **Computing methodologies** → **Artificial intelligence**.

Additional Key Words and Phrases: Quality assessment, large model, multimedia

ACM Reference Format:

1 Introduction

Thanks to the rising demand for high-quality multimedia consumption and an enhanced Quality of Experience (QoE), specialized quality assessment tools have been developed to predict the quality levels of various media types. These tools are instrumental in improving a wide range of applications, including low-level enhancements (such as dehazing, brightening, and denoising), as well as compression/transmission systems, and 3D scanning and reconstruction processes. Quality assessment serves as a guiding light, directing the optimization of numerous algorithms, which is crucial and fundamental for both academic and industry. Specifically, quality assessment can

Corresponding Authors[†]. Authors[†] Contact Information: Zicheng Zhang, Shanghai Jiao Tong University, Shanghai, China; Yingjie Zhou, Shanghai Jiao Tong University, Shanghai, China; Chunyi Li, Shanghai Jiao Tong University, Shanghai, China; Baixuan Zhao, Shanghai Jiao Tong University, Shanghai, China; Xiaohong Liu[†], Shanghai Jiao Tong University, Shanghai, China; Guangtao Zhai[†], Shanghai Jiao Tong University, Shanghai, China.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2018 Copyright held by the owner/author(s). Publication rights licensed to ACM.

https://doi.org/XXXXXXXXXXXXXXX

ACM 1557-735X/2018/8-ART111

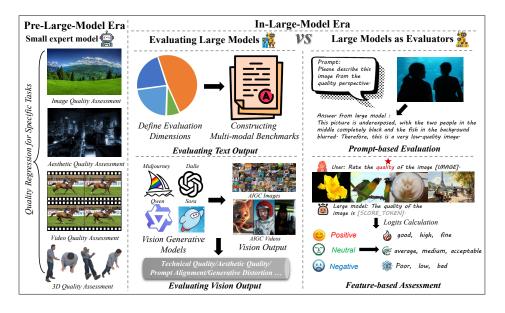


Fig. 1. Illustration of the quality assessment development of pre-large-model era and in-large-model era.

be divided into subjective quality assessment and objective quality. Subjective assessment is often regarded as the most reliable and accurate method because the human visual system (HVS) is the ultimate recipient of visual signals in most visual communication systems. However, subjective testing is time-consuming and costly, and it cannot be directly integrated as an optimization metric in practical systems. Objective quality assessment methods, which are typically designed or trained using data from subjective assessments, can automatically predict visual quality. These methods are ideal for timely evaluation and optimization of system performance.

In the era before large models, quality assessment typically focuses on specific domains such as image quality assessment (IQA), aesthetic quality assessment (AQA), video quality assessment (VQA), and 3D quality assessment (3DQA). IQA deals with traditional technical distortions like noise, blur, and compression artifacts. AQA evaluates the artistic and compositional elements of images, assessing factors such as color harmony, balance, and emotional impact. VQA addresses temporal issues in video streams, including frame rate, resolution, and motion artifacts, to ensure smooth and clear playback. Meanwhile, 3DQA focuses on the visual quality of 3D models, including point clouds, voxels, and meshes, evaluating aspects like texture, resolution, and structural accuracy. These specialized assessments help optimize multimedia content across various platforms and devices. Many researchers employ small expert models based on handcrafted features with support vector regression (SVR), convolution neural networks, or transformers to deal with quality assessment tasks. These expert models are typically trained and validated using databases specific to particular domains. However, they often lack the ability to adapt directly to other domains and provide scores without accompanying explanations.

In the era of large models, we can leverage large language models (LLMs) and large multi-modal models (LMMs) to provide detailed descriptions of quality information and answer questions related to the quality of multimedia content. This approach enhances the explainability of quality assessments. Additionally, the rise of AI-generated content (AIGC) necessitates robust quality assessment tools to monitor and enhance generation quality. Consequently, numerous new quality assessment benchmarks and methods have been developed to evaluate the multimedia outputs of these large models. For instance, various multi-modal benchmarks have been introduced to assess

the text response quality of LMMs, and many quality assessment methods are now focusing on predicting quality in a unified manner, rather than being confined to specific domains. Considering the significant changes in the quality assessment field, there is a pressing need for a comprehensive and updated survey. This survey would provide a better top-down understanding of the history, current state-of-the-art, and future trends in the field. Our survey is constructed on the core question:

How to evaluate large models and how to utilize large models as evaluators?

As limited by pages, we confine our survey pool to encompass only papers that are considered important in the corresponding field. Specifically as shown in Fig. 1, our survey is organized as follows:

- (1) We begin by reflecting on the development of quality assessment before the advent of large models, offering a comprehensive comparison with the developments during the large-model era.
- (2) We summarize the advancements in large multi-modal models (LMMs) and the corresponding multi-modal benchmarks. Additionally, we explore the emerging focus areas and the developmental psychology behind quality assessment for AI-generated content (AIGC).
- (3) We review the methods of using large models as evaluators, discussing the differences and relationships among various techniques.

2 Quality Assessment in the Pre-Large-Model Era

In this section, we explore the landscape of quality assessment before the integration of large models. We will examine the methodologies (Image/Aesthetic/Video/3D Quality) as well as classic datasets (shown in Table 1) traditionally employed, the limitations of these earlier approaches, and how they laid the groundwork for the development and necessity of large model frameworks.

2.1 Image Quality Assessment

Image quality assessment (IQA) aims at predicting the technical visual quality of images, which consistently attracts considerable attention [21]. Wang *et al.* [195] discuss the limitations of error sensitivity-based frameworks in IQA. Despite these challenges, researchers continue to develop objective metrics to predict perceived quality. Sheikh *et al.* [163] conduct a comprehensive subjective quality study with 779 distorted images to benchmark future research. Wang *et al.* [194] focus on computational models for predicting perceptual quality, detail leading algorithms, and propose new research directions. Moorthy *et al.* [132, 133] introduce visual importance pooling strategies and construct blind IQA indices using natural scene statistics, evaluated on the LIVE database. Researchers explore various approaches to enhance IQA, including measuring image sharpness in the frequency domain [37], utilizing relative gradient statistics and Adaboosting neural networks for blind IQA [48, 109], and employing deep learning for distortion-generic blind IQA [14]. Mohammadi *et al.* [131] provide an overview of quality assessment methods for conventional and emerging technologies like HDR and 3D images. Zhai *et al.* [233] emphasize the importance of perceptual quality assessment in visual communication systems.

Recent studies develop IQA methods focusing on more diverse image content, such as deep learning-based approaches for VR images [82] and blind 360-degree IQA using multi-channel convolutional neural networks [172]. Research on smartphone photography [47] and face image quality [158], including perceptual full-reference tasks [31] and unsupervised techniques [31], remains significant. Advancements in no-reference IQA include multiscale feature representation [31, 245], multi-dimension attention networks [31, 119, 120, 246], and CNN [19] via object detection.

Table 1. Brief comparison of the quality assessment databases in the Pre-Large-Model Era.

Datasat	Vara	£ ==1=	Cartant							
Dataset Quality assessment for In	Year	Scale	Content	Task						
LIVE [162]	2004	779	Compressed, blurred, and noisy images	Traditional image quality assessment						
TID2008 [147]	2004	1,700	17 different types of distorted images	Full Reference Visual Quality Assessment						
TID2008 [147] TID2013 [146]	2008	3,000	24 different types of distorted images	Full Reference Visual Quality Assessment						
KADID-10K [103]	2013	10,125	24 different types of distorted images 24 different types of distorted images	Weakly-supervised image quality assessment						
MDID2013 [56]	2013	324	Compressed, blurred, and noisy images	Image quality assessment for multiple distortions						
MDID2015 [50] MDID2016 [175]	2015	1,600	Images subject to random types and degrees of distortion	Image quality assessment for multiple distortions						
DHQ [126]	2010	1750	Dehazed images of real scenes	Dehazed image quality assessment						
SHRQ [127]	2019	600	Synthetic hazy images	Dehazed image quality assessment						
DIBR [16]	2011	84	Depth image-based rendering	Synthetic view quality assessment						
SIQAD [216]	2014	980	7 Commonly distorted screen content images	Screen image quality assessment						
SCIQ [137]	2017	1800	9 Commonly distorted screen content images	Screen image quality assessment						
CCT [125]	2019	1320	Natural scene, computer-generated, screen content images	Unified blind image quality assessment						
KonIQ-10k [65]	2018	10,073	Images from public multimedia dataset YFCC100m [178]	Quality Assessment of authentically distorted Images						
CGIQA [247]	2023	6000	Games, movies with in-the-wild distortion	Quality assessment for computer graphics images						
Construction Quality assessment for Computer graphics indexes with include with distortion Quality assessment for Computer graphics indexes										
ĀVA [134]	2012	255,530	Images and metadata from the web	Improve performance on preference tasks						
CUHK-PQ [121]	2011	17,613	7 different types of photo content	Content-based photo quality assessment						
AADB [85]	2016	10,000	Photographic images on the web	Ranking the aesthetics of images						
PCCD [23]	2017	4,235	Images from professional photographers	Assess photo aesthetics and photographic techniques						
DPC-Captions [75]	2019	154,384	Images labeled with 5 aesthetic attributes	Aesthetic attributes assessment of images						
TAD66K [60]	2022	66,327	Images of 47 themes	Theme-oriented image aesthetic quality assessment						
ICAA17K [59]	2023	17,726	Images covering 30 color combinations	Image color aesthetics assessment						
SPAQ [47]	2020	11,125	Images taken by 66 smartphones	Perceived quality of smartphone photography						
PARA [220]	2022	31,220	Images with wealthy annotations	Personalized image aesthetics assessment						
Quality assessment for V	ideos									
LIVE-VQA [160]	2008	160	Videos of natural scenes with 4 types of distortions	Full-reference video quality assessment						
CSIQ [184]	2014	228	Videos with 6 types of distortions	Full-reference video quality assessment						
CVD2014 [139]	2014	234	234 videos recorded using 78 different cameras	Quality assessment of video captured by cameras						
LIVE-Qualcomm [53]	2016	208	Videos with 6 common in-capture distortions	Mobile in-capture video quality assessment						
KoNViD-1K [64]	2017	1200	Public-domain video sequences from YFCC100m [178]	Unified video quality assessment						
LIVE-VQC [167]	2018	585	videos of unique content, captured by users	Quality assessment of real world videos						
YouTube-UGC [193]	2019	1380	Videos covering popular categories like Gaming, Sports	Quality assessment of user generated videos						
LSVQ [225]	2021	39075	Real-world distorted videos and video patches	Quality assessment of user generated videos						
LIVE-NFLX-I [12]	2017	112	Videos with highly diverse and contemporary content	Quality-of-experience assessment of streaming						
LIVE-NFLX-II [11]	2018	588	Videos with different bitrate and network conditions	Quality-of-experience assessment of streaming						
WaterlooSQoE-III [45]	2018	450	Videos with diverse distortions, network conditions	Quality-of-experience assessment of streaming						
WaterlooSQoE-IV [44]	2019	1,450	Streaming videos generated from different setups	Quality-of-experience assessment of streaming						
TaoLive [256]	2022	3,762	Videos collected in real live streaming scenarios	Quality assessment of live streaming video						
OAVQAD [272]	2023	375	Distorted omnidirectional audio-visual sequences	Omnidirectional audio-visual quality assessment						
THQA [266]	2024	800	AI-generated talking head videos	Generative digital human visual quality assessment						
Quality assessment for 3			•							
G-PCD [4, 7]	2017	40	Colorless point clouds	Colorless Point Cloud Quality Assessment						
RG-PCD [6]	2018	24	Colorless point clouds	Colorless Point Cloud Quality Assessment						
VsenseVVDB [231]	2019	32	Compressed volumetric videos	Volumetric video quality assessment						
IRPC [72]	2020	108	Point clouds under different rendering, coding solutions	Point cloud quality assessment						
WPC [110]	2021	740	3 different types of distorted point clouds	Colorful Point Cloud Quality Assessment						
WPC2.0 [111]	2021	400	Video-based compressed point clouds	Reduced-Reference Point cloud Quality Assessment						
SJTU-PCQA [218]	2020	420	6 different types of distorted point clouds	Colorful Point Cloud Quality Assessment						
LS-PCQA [116]	2023	1080	31 different types of distorted point clouds	No-Reference Point cloud Quality Assessment						
BASICS [3]	2023	1494	Static point clouds	Point cloud Visual Quality Assessment						
CMDM [136]	2020	80	Humans, Animals, Statues	Colored Mesh Quality Assessment						
TMQA [135]	2023	3,000	Statues, Animals, Daily objects	Textured Mesh Quality Assessment						
	2023	1540	Scanned 3D human heads	3D Digital human quality assessment						
DHH-QA [259]										
DDHQA [258]	2023	800	Dynamic 3D digital human	3D Digital human quality assessment						
	2023 2023 2024	800 1120 400	Dynamic 3D digital human Static digital human Digital twin dynamic characters	3D Digital human quality assessment 3D Digital human quality assessment Quality of Service for 3D Streaming in 6G Network						

Overall, the literature on IQA highlights ongoing efforts to improve accuracy and reliability, employing both traditional and advanced techniques to address the associated challenges.

2.2 Aesthetic Quality Assessment

Research on aesthetic quality assessment traditionally focuses on general photo sets without specific content considerations. Li *et al.* [91] shift this focus to consumer photos with faces, while Jin *et al.* [76] develop methods for learning artistic portrait lighting templates, emphasizing Haar-like local lighting contrast features. Su *et al.* [170] propose an aesthetic modeling method for scenic photographs, covering both implicit and explicit features through a learning process. In the realm of CNNs, Kao *et al.* [79] and Dong *et al.* [42] explore CNNs for aesthetic quality assessment. Kao

111:5

et al. treat it as a regression problem [79], and Dong *et al.* focus on understanding photo quality [42]. Lienhard *et al.* [102] predict aesthetic quality scores of facial images by computing features related to technical aspects. Building on these foundations, Kao *et al.* propose a hierarchical CNN framework, demonstrating superior performance [78], and later incorporate semantic information into aesthetic assessments [77].

Personalized algorithms for aesthetic assessment are introduced by Park *et al.* [144], aiming to increase user satisfaction. Jin *et al.* predict aesthetic score distributions using CNNs for a nuanced approach [74] and later introduce Aesthetic Attributes Assessment with the DPC-Captions dataset [75]. Wu *et al.* develop a method using deep convolutional neural networks (DCNNs) for predicting product design awards [212]. Kim *et al.* explore subjectivity in aesthetic quality assessment using a large-scale database [83]. Kuang *et al.* present a deep multimodality learning approach for UAV video aesthetic assessment [87]. Wang *et al.* propose a multidimensional aesthetic quality assessment method for mobile game images, focusing on fineness, color harmony, and overall quality [190]. Jin *et al.* introduce a new aesthetic mixed dataset and train a meta-reweighting network to address image aesthetic rating and image reconstruction [205]. Chambe *et al.* highlight the use of deep learning in assessing professional photograph aesthetics using the AVA dataset [22]. These studies underscore the diversity of approaches in aesthetic quality assessment across various domains.

2.3 Video Quality Assessment

Video quality assessment (VQA) is essential in diverse image and video processing applications, such as compression, communication, printing, analysis, registration, restoration, and enhancement [35, 101, 240]. Wang *et al.* [197] propose a new approach for designing VQA metrics, emphasizing structural distortion as a measure of perceived visual distortion. Seshadrinathan *et al.* [159] introduce a quality metric for video sequences that incorporates motion information, highlighting the significance of motion in VQA. Advancements in VQA methodologies increasingly integrate models of human visual perception. For instance, Wang *et al.* [196] suggest using a statistical model of human visual speed perception in VQA frameworks. Zhai *et al.* [232] expand VQA across multiple dimensions, assessing video quality across different spatial and temporal resolutions. Ninassi *et al.* [138] develop a perceptual full-reference VQA metric evaluating temporal distortions at eye fixation levels, emphasizing the importance of temporal variations in spatial visual distortions. Vu *et al.* [185] introduce a spatiotemporal most-apparent-distortion model that considers motion artifacts to estimate motion-based distortion in videos. Wu *et al.* [201, 202, 206] employ fragment sampling to improve the efficiency of VQA models. Zhou *et al.* [41, 265] carry out a VQA model for exposure correction evaluation, further enhancing the adaptability of VQA methods.

Subjective evaluations remain crucial in VQA algorithm assessment. Seshadrinathan *et al.* [160] conduct a study with human observers on distorted video sequences, leading to the creation of the LIVE Video Quality Database. Chikkerur *et al.* [32] propose a classification scheme for objective VQA methods based on whether they consider natural visual or human visual system characteristics. Recent advancements include display device-adapted video quality-of-experience assessments. Rehman *et al.* [154] introduce SSIMplus, a full-reference measure predicting real-time perceptual video quality based on human visual system behaviors, video content characteristics, display device properties, and viewing conditions. Bampis *et al.* [10] develop reduced-reference models like SpEED-QA, which efficiently compute perceptually relevant quality features using local spatial operations on image frames and frame differences.

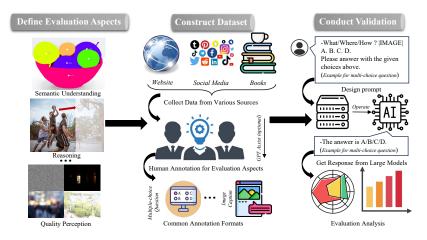


Fig. 2. Illustration of the typical process of assessing large models.

2.4 3D Quality Assessment

3D quality assessment (3DQA) has become increasingly popular with the advent of virtual reality (VR), augmented reality (AR), and the metaverse [267]. Alexiou *et al.* [5] observe a rising interest in point clouds, leading to the development of objective quality metrics. Su *et al.* [169] advance this field by creating a comprehensive 3D point cloud database for subjective user studies, thereby facilitating future research. Diniz *et al.* [39] introduce a quality metric based on multiple distances between reference and test point clouds, adapting the LBP descriptor for non-uniform point distributions. Recent advancements in machine learning and deep learning have significantly impacted 3DQA. Lu *et al.* [117] propose an assessment method based on vision tasks to evaluate machine perception of point cloud quality. Liu *et al.* [237] develop PQA-Net, a no-reference point cloud quality assessment model utilizing multi-view projection. Zhang *et al.* [237] further develop MS-GraphSIM, a multiscale model that considers geometric and color features to accurately predict human perception. Additionally, Zhang *et al.* [242, 243] create a no-reference metric for colored 3D models, including point clouds and meshes. Javaheri *et al.* [237] propose a point-to-distribution metric that outperforms existing metrics.

To address domain adaptation challenges, Yang *et al.* [219] present a no-reference assessment approach using natural images as the source domain and point clouds as the target domain. Zhang *et al.* explore different modalities to predict point cloud quality from rendered images or videos [46, 238, 251, 261]. Furthermore, Zhang *et al.* [244] propose MM-PCQA, a multi-modal learning approach that combines 2D texture and semantic information with 3D geometry distortion sensitivity. More recently, attention is directed toward the efficiency of 3DQA with advancements like those proposed by Zhang *et al.* [248, 249]. Additional works focus on 3D digital human quality assessment [25, 257, 260]. Overall, the literature on 3DQA showcases a broad spectrum of approaches, from traditional metrics to advanced deep learning models, all aiming to accurately evaluate the quality of 3D models.

3 Assessment of Large Models

Assessment is crucial in the realm of large models, particularly for Large Multi-modal Models (LMMs) designed to tackle multi-modal challenges and engage with users. Evaluating LMMs is complex due to the diverse aspects of assessment and the lack of a standardized evaluation framework. Consequently, numerous multi-modal benchmarks have been introduced to assess

111:7

both general and specific capabilities through various validation strategies. Despite these efforts, identifying an optimal solution remains an ongoing challenge. Additionally, the emergence of text-to-image/video and image-to-image generative large models has led to the creation of diverse visual AI-generated content (AIGC). Unlike traditional multimedia, visual AIGC content presents unique quality challenges, such as text alignment, generative-specific distortions, and unnaturalness. Addressing these issues necessitates the development of innovative quality assessment methods. In this section, we first provide an overview of the development of large multi-modal models. Next, we examine multi-modal benchmarks, with a particular focus on their ability-related aspects. Finally, we discuss the evaluation methods for visual AIGC.

3.1 Large Muli-modal Models

Large language models (LLMs) such as GPT-4 [140], T5 [34], and LLaMA [180] demonstrate remarkable linguistic proficiency across general human knowledge domains. These models extend their capabilities to multimodal tasks by incorporating visual inputs through CLIP [150] and additional adaptation modules, as seen in large multimodal models (LMMs) [36, 51, 90, 108, 235]. Specifically, OpenFlamingo [8] integrates gated cross-attention dense blocks into the pretrained language encoder layers. InstructBLIP [36] builds on BLIP-2 [96] by adding vision-language instruction tuning. To advance *open-source* LMMs, numerous projects utilize GPT-4 [140] for generating data to fine-tune vision-language models, exemplified by the LLaVA series [106–108]. To effectively benchmark the diverse and rapidly developed LMMs, it is essential to employ robust assessment approaches. These methods should not only highlight the strengths and weaknesses of the models but also guide the direction for future improvements. Such evaluations are crucial for understanding and enhancing the capabilities of LMMs in various applications.

3.2 Multi-modal Benchmarks

A comprehensive comparison of mainstream benchmarks is presented in Table 2. These multimodal benchmarks facilitate the quality assessment of LMMs through a structured approach. The process begins with defining evaluation criteria, followed by the collection of relevant instances. Subsequently, either human annotators or other LLMs assist in annotating the data. This is followed by crafting specific prompts (*multiple-choice questions, visual questions, multi-round dialogue*) designed to elicit responses from LMMs. Finally, a detailed analysis is conducted on the gathered responses to assess the effectiveness and accuracy of the LMMs.

(1) Assessment for image understanding capabilities. Image understanding traditionally includes tasks such as classification, detection, and identification. Early multi-modal benchmarks primarily address fundamental aspects of image comprehension, such as captioning significant elements and responding to simple queries [2, 26, 54]. However, these datasets mainly focus on extracting knowledge contained within the images themselves. To evaluate large models effectively, it becomes essential to test external knowledge. This includes recognizing well-known figures and comprehending specialized terms that necessitate a global understanding. The OK-VQA benchmark [124] is introduced to fill this gap by offering a variety of visual questions that rely on external knowledge and require intricate reasoning. With the rapid advancements in large models, particularly in interactive capabilities, new multi-modal benchmarks have been introduced. These benchmarks [161, 222, 229] challenge the models with open-ended questions that demand comprehensive, thoughtful responses to foster deeper discussions and analysis. Despite these developments, evaluating the responses of large models to open-ended questions remains a formidable challenge. OwlEval [222]

employs manual evaluation metrics to measure the quality of responses across various models. Additionally, some benchmarks utilize established NLP metrics like BLEU-4 [143] and CIDEr [183] to evaluate answers against set correct responses. The effectiveness of generative models, particularly GPT [140], has been highlighted in recent research [114, 208], which shows improved evaluation outcomes that align more closely with human judgment. More recent benchmarks [68, 208, 253, 254] have adopted multiple-choice formats. This shift offers advantages such as easier annotation and the straightforward transformation of visual questions and image captions into multiple-choice questions. Closed-answer formats enhance the accuracy of output assessments from large models and simplify the derivation of performance statistics based on question correctness. In addition, the focus of benchmarks has evolved from simple to complex, from general to specific, and from coarse-grained to fine-grained. This progression signifies a move towards more detailed and specialized evaluations of large models.

- (2) Assessment for video understanding capabilities. The multi-modal benchmarks for video understanding are still evolving. SEED-Bench [88] focuses on temporal understanding, encompassing action recognition, action prediction, and procedure understanding. MVBench [99] extends these capabilities by evaluating the temporal comprehension of LMMs across 20 challenging video tasks, introducing a novel static-to-dynamic task generation method and utilizing automatic conversion of public video annotations into multiple-choice questions for fair and efficient assessment. Video-MME [50] further explores LMM capabilities in video processing, offering a variety of video types across six visual domains and durations ranging from seconds to an hour. MLVU [264] tackles the challenges in evaluating long video understanding by extending video lengths, incorporating diverse video genres such as movies and surveillance footage, and developing varied evaluation tasks to comprehensively assess LMMs' performance in long-video understanding.
- (3) Assessment for science-related capabilities. Multi-modal benchmarks designed to evaluate science-related capabilities require LMMs to accurately comprehend science content depicted in images and understand relevant scientific terminology. MathVista [118] and Math-Vision [188] assess the math reasoning abilities of LMMs through a collection of high-quality mathematical problems set in visual contexts from real math competitions, which cover a range of mathematical disciplines and difficulty levels. More recently, MMMU [230] has been developed to include 11.5K meticulously curated multimodal questions derived from college exams, quizzes, and textbooks. These questions span six core disciplines: Art & Design, Business, Science, Health & Medicine, Humanities & Social Science, and Technology & Engineering, providing a comprehensive scope for evaluating the academic understanding capabilities of LMMs.
- (4) Assessment for hallucination-aware capabilities. When investigating LMMs, researchers have noted a significant language bias, where the models' reliance on language priors often overshadows the visual context. To address this, RAVIE [105] and HallusionBench [57] have been introduced to perform quantitative analyses of the models' response tendencies, logical consistency, and various failure modes related to hallucinations. These benchmarks aim to assess and mitigate the imbalance between language and visual processing in LMMs.
- (5) Assessment for 3D understanding capabilities. The area of 3D understanding is gaining traction to enhance the decision-making capabilities of autonomous agents. Yet, current 3D datasets and methodologies are often constrained to narrow applications. To broaden this scope, LAMM-Bench [224] and M3DBench [100] have been introduced to evaluate large models' proficiency in interpreting multimodal 3D content, thereby paving the way for LMMs to act as generalists in a wider array of 3D tasks.

Table 2. Brief comparison of the multi-modal benchmarks. The scale is recorded as the size of the valid
instances in the test set, if applicable.

Dataset	Year	Scale	Format	Evaluation Dimensions				
Assessment for image understanding capabilities								
COCO Caption [26]	COCO Caption [26] 2015 40K Image captions Image caption ability with common understanding							
VQA v2 [54]	2017	453K	Visual questions	Visual question answering ability with common understanding				
Nocaps [2]	2019	10.6K	Image captions	Image caption ability with common understanding				
OK-VQA [124]	2019	14K	Visual questions	Visual question answering ability with open knowledge				
OwlEval [222]	2023	82	Open-ended questions	Multiple image understanding capabilities				
MME [49]	2023	1,097	Yes-or-no questions	Perception and cognition abilities				
MMBench [114]	2023	3,000	Multiple-choice questions	Multiple bilingual multi-modal capabilities				
MM-Vet [229]	2023	200	Open-ended questions	Integrated capabilities for complicated tasks				
Tiny LVLM-eHub [161]	2023	2,100	Open-ended questions	Multiple multi-modal capabilities				
DEMON [98]	2023	18.2K	Task instructions	Demonstrative instruction understanding				
MagnifierBench [89]	2023	283	Visual questions	Detecting minute details in high resolution images				
Q-Bench [208]	2023	3,489	Multiple-choice questions	Low-level perception, description, and assessment abilities				
Aes-Bench [68]	2023	2,800	Multiple-choice questions	Image aesthetic perception and understanding				
BenchLMM [18]	2023	2,880	Visual questions	Robustness against different image styles				
Q-Bench ⁺ [254]	2024	2,499	Multiple-choice questions	Low-level perception comparison abilities				
MLLM-Bench [52]	2024	420	Visual questions	Multiple multi-modal capabilities				
A-Bench [253]	2024	2,864	Multiple-choice questions	Abilities of evaluating AI-generated Images				
GenAI-Bench [104]	2024	1,600	Visual questions	Visual-language alignment judging ability				
Assessment for video un	derstan	ding ca	pabilities					
SEED-Bench [88]	2023	19K	Multiple-choice questions	Comprehension for both the image and video modality				
MVBench [99]	2023	4,000	Multiple-choice questions	Multi-modal video understanding ability				
Video-MME [50]	2024	2,700	Multiple-choice questions	Comprehensive video analysis abilities				
MLVU [264]	2024	2,593	Mixed questions	Long video understanding capabilities				
Assessment for science-r	elated o	capabili	ties					
MathVista [118]	2023	6,141	Math problems	Mathematical reasoning abilities in visual contexts				
MMMU [230]	2023	11.5K	Visual questions	College-level subject knowledge and deliberate reasoning abilities				
Math-Vision [188]	2024	3,040	Math problems	Mathematical reasoning abilities in visual contexts				
Assessment for hallucination-aware capabilities								
GRAVIE [105]	2023	1,000	Open-ended questions	Hallucination and instruction following abilities				
HallusionBench [57]	2024	1,129	Visual questions	Image-context reasoning ability for hallucination				
Assessment for 3D understanding capabilities								
LAMM-Bench [224]	2023		2D/3D vision questions	2D/3D vision abilities				
M3DBench [100]	2023	1,500	Task instructions	Multiple 3D understanding capabilities				

3.3 Visual AIGC Evaluation

One look is worth a thousand words. Drawing inspiration from this timeless proverb, numerous researchers have concentrated their efforts on developing text-to-image/video (T2I/V) models that vividly translate textual descriptions into visual representations.

3.3.1 T2I/V Mdoels Development. Notable innovations such as AlignDRAW [123] and text-conditional GAN [153] have pioneered unique architectural approaches to image synthesis. The field has seen further advancements with the introduction of stable diffusion models [155, 156], significantly pushing the boundaries of T2I technology. On the commercial side, major companies are utilizing extensive datasets to develop and deploy highly effective T2I large models, including DALL-E [151], Midjourney [62], and Parti [228], among others. More recently, many efforts have been put into developing text-to-video large models. Extending pre-trained T2I models with temporal components is a standard method. CogVideo [63], built on CogView2 [38], introduces a multi-frame-rate hierarchical approach to better synchronize text-video sequences. Make-a-video [166] incorporates efficient spatial-temporal modules into a diffusion-based T2I architecture, specifically DALLE-2 [152]. VideoFusion [122] similarly utilizes DALLE-2 and implements a segmented diffusion method. A series of models including LVDM [61], Text2Video-Zero [81], Tune-A-Video [213],

111:10

Dataset	Year	Scale	Ratings	Models	Quality Assessment Aspects		
Quality assessment for A	IGIs			1	1		
DiffusionDB [198]	2022	14M	None	1	None		
HPS [214]	2023	98.8K	98.8K	1	Human preference		
ImageReward [215]	2023	136.9K	136.9K	3	Human preference		
Pick-A-Pic [84]	2023	500K	500K	6	Human preference		
AGIQA-1K [239]	2023	1,080	23.7K	2	Overall perceptual quality		
AGIQA-3K [95]	2023	2,982	125K	6	Perceptual quality and text alignment		
AIGCIQA2023 [186]	2023	2,400	48K	6	Perceptual quality, authenticity and correspondence		
AGIN [30]	2023	6,049	181K	18	Overall naturalness		
AIGIQA-20K [92]	2024	20K	420K	15	Perceptual quality and text alignment		
AIGCOIQA2024 [217]	2024	300	6,000	5	Perceptual quality, comfortability, and text alignment		
CMC-Bench [94]	2024	58K	160K	6	Ultra-low bitrates compression quality		
Quality assessment for A	IGVs			1			
Chivileva et al. [33]	2023	1,005	48,2K	5	Perceptual quality and text alignment		
EvalCrafter [113]	2023	3,500	8,647	7	Perceptual quality, text alignment, and temporal quality		
FETV [115]	2023	2,476	29.7K	3	Perceptual quality, text alignment, and temporal quali		
VBench [69]	2023	6,984	-	4	Video quality and consistency		
T2VQA-DB [86]	2024	10K	540K	9	Peceprual quality and text alignment		
GAIA [29]	2024	9,180	971K	18	Video action quality		

Table 3. Brief comparison of quality assessment datasets for visual AIGC.

AnimateDiff [58], Video LDM [15], MagicVideo[263], ModelScope [187], and VidRD [55], draw from the advancements of stable diffusion [155] in video creation. Show-1 [234] merges pixel-based and latent-based approaches within video diffusion models. LaVie [192] modifies the core transformer block to accommodate spatial-temporal dynamics. Recently, OpenAI introduced Sora [17], an impressive T2V model capable of producing 60-second high-fidelity videos, setting a new direction in T2V technology.

3.3.2 Quality assessment datasets for visual AIGC. To tackle the challenge of quality assessment for visual AIGC, many quality assessment datasets have been proposed during the last two years. A brief illustration of these datasets is shown in Table 3.

(1) Quality assessment datasets for AI-generated images (AIGI): In recent years, multiple AIGI datasets have been introduced. The DiffusionDB [198] dataset is launched as the inaugural large-scale text-to-image prompt dataset, comprising 14 million AIGIs created by stable diffusion based on real user prompts and hyperparameters. The HPS [214] dataset gathers 98,807 AIGIs generated in the Stable Foundation Discord channel, accompanied by 25,205 selections made by humans. ImageReward [215] offers a dataset with 137k prompt-image pairings derived from DiffusionDB, where each pair is evaluated on three criteria: overall rating, image-text alignment, and fidelity. The Pick-A-Pic [84] dataset features over 500,000 instances and 35,000 unique prompts, with each instance comprising a prompt, two generated AIGIs, and a preference label. The AGIQA-1K [239], AGIQA-3K [95], and AIGCIQA2023 [186] datasets include 1,080, 2,982, and 2,400 AIGIs respectively. Specifically, the AGIQA-1K dataset first proposes the three most important evaluation dimensions for AIGIs: technical quality, aesthetic quality, and text alignment. The AGIN [30] dataset assembles 6,049 AIGIs and performs an extensive subjective study to ascertain human perspectives on overall naturalness. More recently, the AIGIQA-20K [92] dataset has been released, featuring 20,000 AIGIs generated by 15 prominent T2I models, with MOSs obtained from 21 evaluators. To tackle the challenge of omnidirectional image quality assessment in VR/AR environment, the AIGCOIOA2024 [217] dataset conducts comprehensive benchmarks by generating 300 images from 5 AIGC models using 25 text prompts, assessing human visual preferences in

terms of quality, comfortability, and correspondence, and evaluating state-of-the-art IQA models' performance on this database. CMC-Bench [94] proposes to evaluate the cooperative performance of Image-to-Text and Text-to-Image models for ultra-low bitrate image compression, demonstrating that some model combinations outperform advanced visual codecs and highlighting areas for further optimization in LMMs.

(2) Quality assessment datasets for AI-generated videos (AIGV): In contrast to AIGI datasets, there are fewer AIGV datasets. Chivileva *et al.* [33] introduce a dataset comprising 1,005 videos generated by five T2V models, with 24 users participating in a subjective study. EvalCrafter [113] develops a dataset for user study from 500 prompts using five T2V models, resulting in a total of 2,500 AIGVs. Similarly, the FETV [115] dataset employs 619 prompts and four T2V models, with three users for annotation. VBench [69] is more extensive, encompassing approximately 1,700 prompts and four T2V models. To expand the scale, the T2VQA-DB [86] dataset has been proposed, featuring 10,000 AIGVs produced by nine different T2V models, with 27 subjects engaged in collecting the MOSs. More recently, the GAIA [29] dataset has been carried out to focus on the action quality of the generated videos. It's worth mentioning the first competition track on AIGI/AIGV quality assessment has been held by *NTIRE 2024 Quality Assessment for AI-Generated Content - Track 1/2: Image/Video* [112].

3.3.3 Quality assessment methods for visual AIGC. To be candid, the development of quality assessment methods for visual AIGC has lagged significantly behind the needs of AIGC technology. Researchers continue to struggle with accurately evaluating the quality of visual AIGC outputs. Initially, popular metrics for T2I/V generation such as Inception Score (IS) [157], Frechet Video Distance (FVD) [182], and CLIP Similarity (CLIPSim) [200], are found inadequate in reflecting actual user preferences. IS, which employs the Inception Network [176], generates a distribution that intends to capture image/video quality and diversity but has been criticized for its imprecision. FVD measures the similarity between the feature distributions of generated videos and natural videos using I3D features [20], with a lower FVD indicating a more natural-looking video. However, obtaining a suitable natural video for comparison is often impractical. CLIPSim leverages the CLIP model [148] to assess the alignment between the original text and the generated video content but falls short by neglecting temporal information and overall perceptual video quality.

To address these shortcomings, many researchers have reverted to traditional IQA methods. These traditional approaches, which evaluate technical distortions such as noise, blur, and semantic content, have provided partial solutions for AIGC evaluation in terms of technical quality. Recognizing the unique challenges of visual AIGC content, several IQA models have been specifically developed for AIGIs. Notably, HPS [214] and PickScore [84] use CLIP-based [149] models to mimic human preferences for generated images. ImageReward [215] employs a BLIP-based [97] architecture to predict image quality. Furthermore, the capability of LMMs is being explored to enhance AIGC evaluation tasks. Q-bench [208] is the first to investigate LMMs' performance in assessing visual quality. Subsequent studies such as those by Wu *et al.* [209–211, 252] have introduced training procedures to utilize LMMs for IQA tasks. Additionally, Q-Refine [93] is a quality-enhanced refiner designed to guide the refining processes in T2I models. Wang *et al.* [189] have further employed the coherence and semantic content discernment capabilities of LMMs to aid in the evaluation process. The details of these models are discussed in Section 4.

Similarly, for the AIGV evaluation aspects, the traditional VQA methods are used to predict the spatial and temporal quality of the generated AIGVs. Although these methods are capable of solving the specific dimension, they still can not satisfy the AIGV evaluation since the evaluation is conducted comprehensively from many aspects. Then there are several works targeting the VQA tasks of AIGVs. VBench [69] and EvalCrafter [113] build benchmarks for AIGVs by designing multidimensional metrics. MaxVQA [207] and FETV [115] propose separate metrics for the assessment of video-text alignment and video fidelity, while T2VQA [86] handles the features from the two dimensions as a whole. We believe the development of the VQA model for AIGV will certainly benefit the generation of high-quality videos.

4 Large Models in Assessment Roles

Considering the impressive capabilities of large models in visual understanding, it is logical to leverage them as evaluators for both traditional IQA/VQA tasks and emerging AIGC evaluation tasks. The benefits are clear: large models can interact with users and respond to quality-related inquiries, enhancing the scope and flexibility of assessments. However, a significant challenge arises because these models primarily produce textual outputs, whereas many specific tasks require quantifiable scores. The textual responses generated by these models can be ambiguous and lack the precision needed for definitive evaluations. Researchers have developed numerous innovative methods to employ large models as evaluators, which can broadly be categorized into two main strategies: 1) Prompt-driven Evaluation: This involves designing specific prompts that encourage large models to directly generate desired outcomes. By carefully crafting the input prompts, researchers can guide the models to produce outputs that align closely with evaluation objectives. 2) Feature-based Assessment: This strategy entails using large models to extract features that are indicative of quality. Once these quality-aware features are obtained, they can be used to perform regression analyses to quantitatively assess the quality of the content. These strategies showcase the flexibility and potential of large models in automating and enhancing content evaluation processes.

4.1 Prompt-driven Evaluation

Considering the various prompt techniques developed in the natural language processing (NLP) field, such as in-context learning [40], standard prompting [165], and chain-of-thought reasoning [191, 199], it is common to adapt these methods to engage large models in quality assessment tasks.

4.1.1 Single-stimulus Prompt-driven Evaluation. When evaluating single images, the prompt used for large models can be direct and straightforward. Q-Bench [208] offers a simple example of how to craft prompts for articulating the quality attributes of single images, as demonstrated in the sample provided below:

-User: Assume that you are an expert in quality assessment. Please describe the quality, aesthetics, and other low-level appearance of the image |<IMAGE>| in detail. Then give the final quality rating based on your previous description.

-Response: [The content of quality description] + [Quality Rating].

This prompt endows large models with a specific role and divides the quality assessment into two parts: quality description and final rating. The quality description enables large models to thoroughly examine the images, forming the foundation for the subsequent rating. X-iqe [27] further utilizes the chain-of-thought approach by breaking down the quality prompt into multiple rounds of quality-aware dialogue. This sequence encompasses fidelity evaluation \rightarrow alignment evaluation \rightarrow aesthetic evaluation and follows the prompt order from image description \rightarrow task-specific analysis \rightarrow scoring. Here we present the sample chain-of-thought prompt for multi-dialogue quality assessment:

-User: Assume that you are an expert in quality assessment. Please describe the quality, aesthetics, and other low-level appearance of the image |<IMAGE>| in detail.

-Response: [The content of quality description].

-User: Based on your description, how is the (specific-quality-dimension) of this image?

-Response: [Fine-grained analysis of (specific-quality-dimension)].

-User: Give the rating of (specific-quality-dimension) and overall perceptual quality of the image. -Response: [Quality Rating for (specific-quality-dimension) and overall perceptual quality].

The single-stimulus evaluation is simple and scalable, directly showcasing the quality understanding of large models, and can be easily adapted to many application scenarios. Promisingly, the single-stimulus prompt-driven evaluation is considered a leading candidate for future explainable noreference quality assessment tasks.

4.1.2 Multiple-stimulus Prompt-driven Evaluation. In some scenarios, pairwise or listwise comparisons are essential for determining superior image quality [221, 239, 241]. To address this, several researchers have developed specialized prompt systems for multiple-stimulus, prompt-driven evaluations. For example, 2AFC-LMMs [270] assess the IQA capabilities of LMMs using a two-alternative forced choice method. This approach involves devising coarse-to-fine pairing rules and employing maximum a posteriori (MAP) estimation [181] to convert pairwise preferences of different LMMs into global ranking scores. The pairwise comparison sample is illustrated as follows:

-User: Assume that you are an expert in quality assessment.

This is the first image: |<IMAGE1>|. This is the second image: |<IMAGE2>|. Which image has better visual quality?

-Response: The first/second image.

It's worth noting that in the prompt sample provided, it is crucial to specify which image is the first and which is the second. Without this clarification, LMMs may not be able to distinguish between the first and second images. Additionally, Wu *et al.* utilize MAP estimation under Thurstone's Case V assumption [179] to efficiently aggregate pairwise rankings and propose a novel method to gather partial rankings by presenting a set of images to LMMs for simultaneous ranking.

4.2 Feature-based Assessment

Assessment by CLIP. CLIP [149] represents an early breakthrough in large models that 4.2.1 align image and text modalities, though it lacks advanced reasoning and deep understanding. However, it is capable of aligning images with corresponding quality levels, which has spurred numerous quality assessment initiatives using CLIP and other pretrained vision-language models. ZEN-IQA [130] utilizes carefully constructed prompt pairs and triplets, enhancing the intuitiveness and interpretability of the evaluation process. QA-CLIP [142] introduces a fine-grained quality-level stratification strategy and a two-stage training model, optimizing both text and image encoders to improve the accuracy of quality assessments across a wide range of levels. Miyata et al. [129] employ a pre-trained vision-language model with a prompt pairing strategy using multiple antonymprompt pairs to accurately estimate and elucidate the perceptual quality of images. LIQE [236] capitalizes on auxiliary knowledge from scene classification and distortion type identification through vision-language correspondence, automatically optimizing model parameter sharing and loss weighting to bolster performance across various IQA datasets. PromptIQA [28] adapts to diverse IQA requirements without fine-tuning by leveraging a sequence of Image-Score Pairs (ISP) as prompts for targeted predictions and training on a mixed dataset with innovative data augmentation strategies. Pan et al.[141] improve semantic analysis by deploying a dual-prompt scheme and a multi-layer prompt structure in the visual branch to enhance adaptability and performance in image quality assessment, achieving robust and accurate results across diverse datasets. Wang et al. [189] augment traditional deep neural network-based IQA models with semantically informed guidance and a mixture of experts structure to dynamically integrate semantic and quality-aware features, significantly enhancing the assessment of AI-Generated images with superior generalization

Table 4. Performance of LMMs under the zero-shot setting on traditional quality assessment datasets, in comparison with NIQE and CLIP-ViT-Large-14 (the visual backbone of most LMMs). All the LMM models are tested with the Q-Bench [208] softmax-based strategy. Metrics are *SRCC/PLCC*. Best in bold.

Dataset Type	In-the-wild				Gene	rated	Authentic	
Model / Dataset	KONiQ-10k		LIVE-FB	LIVE-itw	CGIQA-6K	AGIQA-3K	KADID-10K	Average
NIQE [128]	0.32/0.38	0.69/0.67	0.21/0.29	0.48/0.45	0.08/0.06	0.56/0.52	0.37/0.43	0.39/0.40
CLIP-ViT-Large-14 [149]	0.47/0.51	0.39/0.39	0.22/0.24	0.31/0.31	0.29/0.29	0.44/0.46	0.38/0.39	0.35/0.37
InfiMM (Zephyr-7B) [177]	0.51/0.55	0.62/0.63	0.27/0.30	0.55/0.58	0.23/0.25	0.71/0.77	0.47/0.45	0.48/0.50
Emu2-Chat (LLaMA-33B) [171]	0.66/0.71	0.71/0.70	0.36/0.34	0.60/0.61	0.22/0.27	0.76 /0.75	0.84/0.79	0.59/0.60
Fuyu-8B (Persimmon-8B) [13]	0.12/0.12	0.13/0.18	0.16/0.13	0.23/0.18	0.12/0.12	0.37/0.32	0.10/0.09	0.17/0.16
BakLLava (Mistral-7B) [168]	0.39/0.39	0.41/0.40	0.23/0.22	0.34/0.34	0.18/0.21	0.54/0.56	0.34/0.36	0.35/0.35
mPLUG-Owl2 (LLaMA-7B) [223]	0.20/0.25	0.59/0.61	0.22/0.29	0.29/0.34	-0.02/-0.03	0.47/0.49	0.54/0.55	0.33/0.36
LLaVA-v1.5 (Vicuna-v1.5-7B) [106]	0.46/0.46	0.44/0.47	0.31/0.32	0.34/0.36	0.32/0.33	0.67/0.74	0.42/0.44	0.42/0.45
LLaVA-v1.5 (Vicuna-v1.5-13B) [106]	0.45/0.46	0.56/0.58	0.31/0.34	0.45/0.48	0.29/0.30	0.66/0.75	0.39/0.40	0.44/0.47
InternLM-VL (InternLM) [235]	0.56/0.62	0.73/0.75	0.36/0.42	0.61/0.68	0.24/0.27	0.73/ 0.78	0.55/0.57	0.54/0.58
IDEFICS-Instruct (LLaMA-7B) [71]	0.38/0.40	0.47/0.48	0.24/0.24	0.41/0.43	0.24/0.23	0.56/0.62	0.37/0.37	0.38/0.40
Qwen-VL (QwenLM) [9]	0.47/0.55	0.68/0.67	0.30/0.34	0.50/0.53	0.27/0.28	0.62/0.69	0.49/0.49	0.48/0.51
Shikra (Vicuna-7B) [24]	0.31/0.31	0.32/0.34	0.24/0.24	0.32/0.34	0.20/0.20	0.64/0.66	0.32/0.33	0.34/0.35
Otter-v1 (MPT-7B) [90]	0.41/0.41	0.44/0.44	0.14/0.14	-0.01/0.02	0.25/0.26	0.48/0.48	0.56/0.58	0.32/0.33
Kosmos-2 [145]	0.26/0.28	0.64/0.64	0.20/0.20	0.36/0.37	0.21/0.23	0.49/0.49	0.36/0.37	0.36/0.37
InstructBLIP (Flan-T5-XL) [36]	0.33/0.36	0.58/0.60	0.25/0.27	0.11/0.11	0.17/0.19	0.38/0.40	0.21/0.18	0.29/0.30
InstructBLIP (Vicuna-7B) [36]	0.36/0.44	0.68/0.69	0.20/0.28	0.25/0.37	0.26/0.30	0.63/0.66	0.34/0.38	0.39/0.45
VisualGLM-6B (GLM-6B) [43]	0.25/0.23	0.50/0.51	0.15/0.15	0.11/0.12	0.21/0.18	0.34/0.35	0.13/0.13	0.24/0.24
mPLUG-Owl (LLaMA-7B) [222]	0.41/0.43	0.63/0.64	0.24/0.27	0.44/0.49	0.15/0.18	0.69/0.71	0.47/0.49	0.43/0.46
LLaMA-Adapter-V2 [51]	0.35/0.36	0.46/0.51	0.28/0.33	0.30/0.36	0.26/0.27	0.60/0.67	0.41/0.43	0.38/0.42
LLaVA-v1 (Vicuna-13B) [108]	0.46/0.46	0.44/0.46	0.26/0.28	0.40/0.42	0.21/0.24	0.63/0.68	0.35/0.37	0.39/0.42
MiniGPT-4 (Vicuna-13B) [269]	0.24/0.26	0.24/0.25	0.17/0.18	0.34/0.34	0.25/0.25	0.57/0.59	0.24/0.23	0.29/0.30

capabilities. Finally, QualiCLIP [1] utilizes a CLIP-based self-supervised, opinion-unaware method that employs a quality-aware image-text alignment strategy, training on synthetically degraded images aligned with quality-related antonym text prompts to produce representations that correlate with image quality.

Apart from IQA, vision-language models have been effectively utilized in diverse tasks such as IAA, VQA, and 3DQA. VILA [80] leverages pre-trained image-text encoder-decoder models with image-comment pairs and a lightweight rank-based adapter for efficient adaptation, achieving powerful zero-shot capabilities in aesthetic tasks by learning from user comments instead of human-labeled scores. AesCLIP [164] enhances IAA by using a multi-attribute contrastive learning framework based on CLIP, which classifies aesthetic comments into attribute categories and learns attribute-aware representations to address the domain shift from general visual perceptions to specific aesthetic criteria. Hou et al. [66] introduce a transparent deep learning framework for IAA that develops Tag-based Content Descriptors (TCDs), utilizing human-readable tags to explicitly describe image content, thus enhancing model interpretability and significantly improving assessment accuracy. BVQI [203, 204] and its localized version, BVQI-Local, employ the Semantic Affinity Quality Index (SAQI) methodology using CLIP to assess video quality by evaluating semantic content affinity with textual prompts, significantly outperforming traditional zero-shot indices by integrating low-level metrics and optimizing fine-tuning schemes for enhanced generalization. DHQA [250] predicts the quality levels of digital humans by leveraging semantic and distortion features extracted from projections and geometry features from mesh structures, with the assistance of NIQE and CLIP. Zhang et al. [262] propose the use of pre-trained vision-language models in the transmission systems of digital twins under a 6G environment, showcasing the broad applicability and potential of these models in cutting-edge technology scenarios.

4.2.2 Zero-shot Assessment by LMMs. The Q-series [208, 252] introduces an innovative approach to employing LMMs as evaluators under zero-shot setting, presenting significant advancements that merit a comprehensive examination. Specifically, Q-Bench [208] identifies a key challenge: LMMs often struggle to produce sufficiently quantifiable outputs, whether instructed to provide direct textual ratings or numerical values. To address this issue, Q-Bench innovates by extracting the softmax-pooled results from the logits of the two most frequently predicted tokens (good and poor) as outlined in the model's response template. This approach not only aligns more closely with human judgment but also provides a more quantifiable measure of quality compared to the direct token outputs typically generated by LMMs. The softmax-based strategy developed by Q-Bench has proven to be highly effective, better correlating with human perceptions and effectively bridging the gap between emerging LMMs and traditional IQA tasks. This method also serves as a robust benchmark for evaluating the zero-shot performance of LMMs in quality assessment tasks.

By highlighting the performance of LMMs in Table 4 under this new strategy, we can swiftly gauge and enhance the quality assessment capabilities of current models. Primarily, it is observed that the majority of LMMs significantly outperform NIQE in non-natural circumstances (CGI, AIGC, artificial distortions), demonstrating their potential as general-purpose evaluators across a broader range of low-level appearances. Additionally, even without explicit alignment with human opinions during training, the top-performing LMM outperforms CLIP-ViT-Large-14 by a substantial margin (25%). These results indicate that, although most MLLMs still utilize CLIP as visual encoders, their robust capabilities in language decoding significantly enhance their performance in visual quality assessment, even without specific training. Q-Boost [252] further expand the token set from $\{good \leftrightarrow poor\}$ (*positive* \leftrightarrow *neutral* \leftrightarrow *negative*) to a more fine-grained token set $\{good + high + fine \leftrightarrow average + medium + acceptable \leftrightarrow poor + low + bad\}$ (*positive* \leftrightarrow *neutral* \leftrightarrow *negative*). By incorporating the neural tone and expanding the synonym words, Q-Boost significantly improves the performance of LMMs on zero-shot quality assessment tasks.

4.2.3 Quality-Infused LMM Assessment. Relying only on the inherent knowledge within LMMs for quality assessment tasks has proven inadequate. In response, researchers have developed several innovative strategies to infuse quality-aware knowledge into LMMs, thereby achieving state-of-the-art performance in quality assessment. Q-Instruct [209] enhances the perceptual capabilities of LMMs by introducing a large-scale, description-rich dataset. Q-Align [210] collects a multi-modal dataset to facilitate quality alignment, successfully reformatting traditional quality assessment datasets into text-labeled ones, thus fine-tuning LMMs to become effective evaluators with impressive performance and generalization capabilities. Co-instruct [211] amasses a large-scale multi-modal dataset annotated by GPT-4v, supporting the pretraining of LMMs in comparative settings such as pairwise choices and listwise rankings, enabling LMMs to handle open-ended quality comparison questions and provide necessary rationale. DepictQA [227] leverages LMMs to deliver detailed, language-driven evaluations that outperform score-based methods, closely mirroring human reasoning through a hierarchical task framework and diverse training data sources. DepictQA-Wild [226] addresses the shortcomings of existing methods by covering a broader range of IQA tasks, enhancing dataset quality, maintaining image resolution, and estimating confidence scores. Visualcritic [70] is engineered to reflect human-like perception of visual quality, offering both quantitative Mean Opinion Score measurements and qualitative evaluations with detailed explanations. Aesexpert [67] constructs expert-level aesthetic foundational models by assembling a rich corpus of aesthetic critique datasets, aligning LMMs with human aesthetic perceptions. UNIAA [268] introduces a cost-effective approach to transform existing datasets into unified, high-quality visual instruction tuning data, developing an expert-level aesthetics LMM. LMM-PCQA [255] extends the application of LMMs to point cloud quality assessment (PCQA) by converting PCQA datasets into question-answer instructional pairs and deducing point cloud quality from cube-like projections. Compare2Score [271] utilizes large multimodal training and an innovative soft comparison method to convert relative image quality comparisons into a continuous, precise quality score, significantly surpassing existing models across various datasets. More recently, Sun *et al.* [173, 174] utilize the feature map from the last hidden layer of large models to tackle the challenge of both no-reference video quality assessment and portrait image quality assessment.

5 Conclusion and Future Outlook

In this survey, we explore the evolution and current state of quality assessment in the era of large models, emphasizing the critical roles of large multimodal models (LMMs) and large language models (LLMs). These models have significantly advanced our ability to assess and enhance the quality of multimedia content across various dimensions such as images, videos, and 3D content. Our review meticulously details several key points: 1) the shift from traditional quality assessment methods to advanced techniques that leverage large models, 2) the nuanced evaluation of these large models, and 3) the utilization of large models as evaluators themselves. Through an indepth examination of multimodal benchmarks, we identify both the strengths and limitations of current models and outline the essential capabilities that these models need to develop further. The integration of LMMs has not only improved the precision and efficiency of quality assessments but also provided a closer alignment with human judgment, enabling the handling of complex, multimodal tasks that were previously challenging.

Looking forward, the field of quality assessment is poised for transformative advancements with the potential integration of even more sophisticated AI technologies. To summarize the future key points of quality assessment, we give the anticipated developments as follows:

- (1) Refined Benchmarks: We advocate for an evolution of benchmarks from broad-based approaches to more detailed and streamlined standards. It is crucial to collaboratively establish a universally accepted benchmarking standard to address the challenges posed by the rapid advancement of large models effectively.
- (2) Enhanced Multimodal Integration: Future advancements are likely to concentrate on deeper and more seamless integration of various modalities—text, image, video, and audio—to enable a more holistic and context-aware assessment of quality.
- (3) Ethical Considerations and Bias Mitigation: Given the inherent subjectivity in quality assessment, increasing focus on ethical considerations and bias mitigation is essential. Ensuring that AI-driven quality assessment tools are developed and used ethically will become increasingly important, which includes addressing potential biases in AI models and the training data used for these systems.

These directions highlight the necessity for continuous innovation and vigilance as we further integrate AI into quality assessment processes.

References

- Lorenzo Agnolucci, Leonardo Galteri, and Marco Bertini. 2024. Quality-Aware Image-Text Alignment for Real-World Image Quality Assessment. arXiv preprint arXiv:2403.11176 (2024).
- [2] Harsh Agrawal, Karan Desai, Yufei Wang, Xinlei Chen, Rishabh Jain, Mark Johnson, Dhruv Batra, Devi Parikh, Stefan Lee, and Peter Anderson. 2019. nocaps: novel object captioning at scale. In *ICCV*.
- [3] Ali Ak, Emin Zerman, Maurice Quach, Aladine Chetouani, Aljosa Smolic, Giuseppe Valenzise, and Patrick Le Callet. 2024. BASICS: Broad Quality Assessment of Static Point Clouds in a Compression Scenario. *IEEE Transactions on Multimedia* (2024).
- [4] Evangelos Alexiou and Touradj Ebrahimi. 2017. On the performance of metrics to predict quality in point cloud representations. In Applications of Digital Image Processing XL, Vol. 10396. SPIE, 282–297.

- [5] Evangelos Alexiou and Touradj Ebrahimi. 2018. Point cloud quality assessment metric based on angular similarity. In 2018 IEEE International Conference on Multimedia and Expo (ICME). IEEE, 1–6.
- [6] Evangelos Alexiou, Touradj Ebrahimi, Marco V Bernardo, Manuela Pereira, Antonio Pinheiro, Luis A Da Silva Cruz, Carlos Duarte, Lovorka Gotal Dmitrovic, Emil Dumic, Dragan Matkovics, et al. 2018. Point cloud subjective evaluation methodology based on 2D rendering. In 2018 Tenth international conference on quality of multimedia experience (QoMEX). IEEE, 1–6.
- [7] Evangelos Alexiou, Evgeniy Upenik, and Touradj Ebrahimi. 2017. Towards subjective quality assessment of point cloud imaging in augmented reality. In 2017 IEEE 19th International Workshop on Multimedia Signal Processing (MMSP). IEEE, 1–6.
- [8] Anas Awadalla, Irena Gao, Josh Gardner, Jack Hessel, Yusuf Hanafy, Wanrong Zhu, Kalyani Marathe, Yonatan Bitton, Samir Gadre, Shiori Sagawa, et al. 2023. Openflamingo: An open-source framework for training large autoregressive vision-language models. arXiv preprint arXiv:2308.01390 (2023).
- [9] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. 2023. Qwen-VL: A Versatile Vision-Language Model for Understanding, Localization, Text Reading, and Beyond. arXiv preprint arXiv:2308.12966 (2023).
- [10] Christos G Bampis, Praful Gupta, Rajiv Soundararajan, and Alan C Bovik. 2017. SpEED-QA: Spatial efficient entropic differencing for image and video quality. *IEEE signal processing letters* 24, 9 (2017), 1333–1337.
- [11] Christos G Bampis, Zhi Li, Ioannis Katsavounidis, Te-Yuan Huang, Chaitanya Ekanadham, and Alan C Bovik. 2021. Towards perceptually optimized adaptive video streaming-a realistic quality of experience database. *IEEE Transactions* on *Image Processing* 30 (2021), 5182–5197.
- [12] Christos George Bampis, Zhi Li, Anush Krishna Moorthy, Ioannis Katsavounidis, Anne Aaron, and Alan Conrad Bovik. 2017. Study of temporal effects on subjective video quality of experience. *IEEE Transactions on Image Processing* 26, 11 (2017), 5217–5231.
- [13] Rohan Bavishi, Erich Elsen, Curtis Hawthorne, Maxwell Nye, Augustus Odena, Arushi Somani, and Sağnak Taşırlar. 2023. Introducing our Multimodal Models. https://www.adept.ai/blog/fuyu-8b
- [14] Simone Bianco, Luigi Celona, Paolo Napoletano, and Raimondo Schettini. 2018. On the use of deep learning for blind image quality assessment. Signal, Image and Video Processing 12 (2018), 355–362.
- [15] Andreas Blattmann, Robin Rombach, Huan Ling, Tim Dockhorn, Seung Wook Kim, Sanja Fidler, and Karsten Kreis. 2023. Align your latents: High-resolution video synthesis with latent diffusion models. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 22563–22575.
- [16] Emilie Bosc, Romuald Pepion, Patrick Le Callet, Martin Koppel, Patrick Ndjiki-Nya, Muriel Pressigout, and Luce Morin. 2011. Towards a new quality metric for 3-D synthesized view assessment. *IEEE Journal of Selected Topics in Signal Processing* 5, 7 (2011), 1332–1343.
- [17] Tim Brooks, Bill Peebles, Connor Homes, Will DePue, Yufei Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, Clarence Wing Yin Ng, Ricky Wang, and Aditya Ramesh. 2024. Video generation models as world simulators. (2024). https://openai.com/research/video-generation-models-as-world-simulators
- [18] Rizhao Cai, Zirui Song, Dayan Guan, Zhenhao Chen, Xing Luo, Chenyu Yi, and Alex Kot. 2023. BenchLMM: Benchmarking cross-style visual capability of large multimodal models. arXiv preprint arXiv:2312.02896 (2023).
- [19] Jingchao Cao, Wenhui Wu, Ran Wang, and Sam Kwong. 2022. No-reference image quality assessment by using convolutional neural networks via object detection. *International Journal of Machine Learning and Cybernetics* 13, 11 (2022), 3543–3554.
- [20] Joao Carreira and Andrew Zisserman. 2017. Quo vadis, action recognition? a new model and the kinetics dataset. In proceedings of the IEEE Conference on Computer Vision and Pattern Recognition. 6299–6308.
- [21] Nicolas Chahine, Marcos V Conde, Daniela Carfora, Gabriel Pacianotto, Benoit Pochon, Sira Ferradans, Radu Timofte, Zhichao Duan, Xinrui Xu, Yipo Huang, et al. 2024. Deep portrait quality assessment. a NTIRE 2024 challenge survey. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 6732–6744.
- [22] Mathieu Chambe, Rémi Cozot, and Olivier Le Meur. 2022. Deep learning for assessing the aesthetics of professional photographs. *Computer Animation and Virtual Worlds* 33, 6 (2022), e2105.
- [23] Kuang-Yu Chang, Kung-Hung Lu, and Chu-Song Chen. 2017. Aesthetic critiques generation for photos. In Proceedings of the IEEE international conference on computer vision. 3514–3523.
- [24] Keqin Chen, Zhao Zhang, Weili Zeng, Richong Zhang, Feng Zhu, and Rui Zhao. 2023. Shikra: Unleashing Multimodal LLM's Referential Dialogue Magic. arXiv preprint arXiv:2306.15195 (2023).
- [25] Shi Chen, Zicheng Zhang, Yingjie Zhou, Wei Sun, and Xiongkuo Min. 2023. A no-reference quality assessment metric for dynamic 3D digital human. *Displays* 80 (2023), 102540.
- [26] Xinlei Chen, Hao Fang, Tsung-Yi Lin, Ramakrishna Vedantam, Saurabh Gupta, Piotr Dollar, and C. Lawrence Zitnick. 2015. Microsoft COCO Captions: Data Collection and Evaluation Server. arXiv:1504.00325 [cs.CV]

- [27] Yixiong Chen, Li Liu, and Chris Ding. 2023. X-iqe: explainable image quality evaluation for text-to-image generation with visual large language models. *arXiv preprint arXiv:2305.10843* (2023).
- [28] Zewen Chen, Haina Qin, Juan Wang, Chunfeng Yuan, Bing Li, Weiming Hu, and Liang Wang. 2024. PromptIQA: Boosting the Performance and Generalization for No-Reference Image Quality Assessment via Prompts. arXiv preprint arXiv:2403.04993 (2024).
- [29] Zijian Chen, Wei Sun, Yuan Tian, Jun Jia, Zicheng Zhang, Jiarui Wang, Ru Huang, Xiongkuo Min, Guangtao Zhai, and Wenjun Zhang. 2024. GAIA: Rethinking Action Quality Assessment for AI-Generated Videos. arXiv preprint arXiv:2406.06087 (2024).
- [30] Zijian Chen, Wei Sun, Haoning Wu, Zicheng Zhang, Jun Jia, Xiongkuo Min, Guangtao Zhai, and Wenjun Zhang. 2023. Exploring the Naturalness of AI-Generated Images. arXiv preprint arXiv:2312.05476 (2023).
- [31] Manri Cheon, Sung-Jun Yoon, Byungyeon Kang, and Junwoo Lee. 2021. Perceptual image quality assessment with transformers. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 433–442.
- [32] Shyamprasad Chikkerur, Vijay Sundaram, Martin Reisslein, and Lina J Karam. 2011. Objective video quality assessment methods: A classification, review, and performance comparison. *IEEE transactions on broadcasting* 57, 2 (2011), 165–182.
- [33] Iya Chivileva, Philip Lynch, Tomas E Ward, and Alan F Smeaton. 2023. Measuring the Quality of Text-to-Video Model Outputs: Metrics and Dataset. arXiv preprint arXiv:2309.08009 (2023).
- [34] Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. 2022. Scaling Instruction-Finetuned Language Models. https://doi.org/10.48550/ARXIV.2210.11416
- [35] Marcos V Conde, Saman Zadtootaghaj, Nabajeet Barman, Radu Timofte, Chenlong He, Qi Zheng, Ruoxi Zhu, Zhengzhong Tu, Haiqiang Wang, Xiangguang Chen, et al. 2024. AIS 2024 challenge on video quality assessment of user-generated content: Methods and results. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 5826–5837.
- [36] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. 2023. InstructBLIP: Towards General-purpose Vision-Language Models with Instruction Tuning. arXiv:2305.06500 [cs.CV]
- [37] Kanjar De and V Masilamani. 2013. Image sharpness measure for blurred images in frequency domain. Procedia Engineering 64 (2013), 149–158.
- [38] Ming Ding, Wendi Zheng, Wenyi Hong, and Jie Tang. 2022. Cogview2: Faster and better text-to-image generation via hierarchical transformers. Advances in Neural Information Processing Systems 35 (2022), 16890–16902.
- [39] Rafael Diniz, Pedro Garcia Freitas, and Mylene CQ Farias. 2020. Multi-distance point cloud quality assessment. In 2020 IEEE International Conference on Image Processing (ICIP). IEEE, 3443–3447.
- [40] Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Zhiyong Wu, Baobao Chang, Xu Sun, Jingjing Xu, and Zhifang Sui. 2022. A survey on in-context learning. arXiv preprint arXiv:2301.00234 (2022).
- [41] Yunlong Dong, Xiaohong Liu, Yixuan Gao, Xunchu Zhou, Tao Tan, and Guangtao Zhai. 2023. Light-vqa: A multidimensional quality assessment model for low-light video enhancement. In Proceedings of the 31st ACM International Conference on Multimedia. 1088–1097.
- [42] Zhe Dong, Xu Shen, Houqiang Li, and Xinmei Tian. 2015. Photo quality assessment with DCNN that understands image well. In MultiMedia Modeling: 21st International Conference, MMM 2015, Sydney, NSW, Australia, January 5-7, 2015, Proceedings, Part II 21. Springer, 524–535.
- [43] Zhengxiao Du, Yujie Qian, Xiao Liu, Ming Ding, Jiezhong Qiu, Zhilin Yang, and Jie Tang. 2022. GLM: General Language Model Pretraining with Autoregressive Blank Infilling. In Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers). 320–335.
- [44] Zhengfang Duanmu, Wentao Liu, Zhuoran Li, Diqi Chen, Zhou Wang, Yizhou Wang, and Wen Gao. 2020. The Waterloo Streaming Quality-of-Experience Database-IV. *IEEE Dataport* (2020).
- [45] Zhengfang Duanmu, Abdul Rehman, and Zhou Wang. 2018. A quality-of-experience database for adaptive video streaming. *IEEE Transactions on Broadcasting* 64, 2 (2018), 474–487.
- [46] Yu Fan, Zicheng Zhang, Wei Sun, Xiongkuo Min, Ning Liu, Quan Zhou, Jun He, Qiyuan Wang, and Guangtao Zhai. 2022. A no-reference quality assessment metric for point cloud based on captured video sequences. In 2022 IEEE 24th International Workshop on Multimedia Signal Processing (MMSP). IEEE, 1–5.
- [47] Yuming Fang, Hanwei Zhu, Yan Zeng, Kede Ma, and Zhou Wang. 2020. Perceptual Quality Assessment of Smartphone Photography. In *CVPR*.
- [48] Yoav Freund and Robert E Schapire. 1997. A decision-theoretic generalization of on-line learning and an application to boosting. *Journal of computer and system sciences* 55, 1 (1997), 119–139.

- [49] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Zhenyu Qiu, Wei Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, and Rongrong Ji. 2023. MME: A Comprehensive Evaluation Benchmark for Multimodal Large Language Models. arXiv:2306.13394 [cs.CV]
- [50] Chaoyou Fu, Yuhan Dai, Yondong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. 2024. Video-MME: The First-Ever Comprehensive Evaluation Benchmark of Multi-modal LLMs in Video Analysis. arXiv preprint arXiv:2405.21075 (2024).
- [51] Peng Gao, Jiaming Han, Renrui Zhang, Ziyi Lin, Shijie Geng, Aojun Zhou, Wei Zhang, Pan Lu, Conghui He, Xiangyu Yue, Hongsheng Li, and Yu Qiao. 2023. LLaMA-Adapter V2: Parameter-Efficient Visual Instruction Model. arXiv preprint arXiv:2304.15010 (2023).
- [52] Wentao Ge, Shunian Chen, Guiming Chen, Junying Chen, Zhihong Chen, Shuo Yan, Chenghao Zhu, Ziyue Lin, Wenya Xie, Xidong Wang, et al. 2023. Mllm-bench, evaluating multi-modal llms using gpt-4v. arXiv preprint arXiv:2311.13951 (2023).
- [53] Deepti Ghadiyaram, Janice Pan, Alan C. Bovik, Anush Krishna Moorthy, Prasanjit Panda, and Kai-Chieh Yang. 2018. In-Capture Mobile Video Distortions: A Study of Subjective Behavior and Objective Algorithms. *IEEE TCSVT* 28, 9 (2018), 2061–2077.
- [54] Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. 2017. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 6904–6913.
- [55] Jiaxi Gu, Shicong Wang, Haoyu Zhao, Tianyi Lu, Xing Zhang, Zuxuan Wu, Songcen Xu, Wei Zhang, Yu-Gang Jiang, and Hang Xu. 2023. Reuse and diffuse: Iterative denoising for text-to-video generation. arXiv preprint arXiv:2309.03549 (2023).
- [56] Ke Gu, Guangtao Zhai, Xiaokang Yang, and Wenjun Zhang. 2014. Hybrid no-reference quality metric for singly and multiply distorted images. *IEEE Transactions on Broadcasting* 60, 3 (2014), 555–567.
- [57] Tianrui Guan, Fuxiao Liu, Xiyang Wu, Ruiqi Xian, Zongxia Li, Xiaoyu Liu, Xijun Wang, Lichang Chen, Furong Huang, Yaser Yacoob, et al. 2024. HallusionBench: an advanced diagnostic suite for entangled language hallucination and visual illusion in large vision-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 14375–14385.
- [58] Yuwei Guo, Ceyuan Yang, Anyi Rao, Yaohui Wang, Yu Qiao, Dahua Lin, and Bo Dai. 2023. Animatediff: Animate your personalized text-to-image diffusion models without specific tuning. arXiv preprint arXiv:2307.04725 (2023).
- [59] Shuai He, Anlong Ming, Yaqi Li, Jinyuan Sun, ShunTian Zheng, and Huadong Ma. 2023. Thinking image color aesthetics assessment: Models, datasets and benchmarks. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 21838–21847.
- [60] Shuai He, Yongchang Zhang, Rui Xie, Dongxiang Jiang, and Anlong Ming. 2022. Rethinking Image Aesthetics Assessment: Models, Datasets and Benchmarks.. In IJCAI. 942–948.
- [61] Yingqing He, Tianyu Yang, Yong Zhang, Ying Shan, and Qifeng Chen. 2022. Latent video diffusion models for high-fidelity video generation with arbitrary lengths. arXiv preprint arXiv:2211.13221 (2022).
- [62] David Holz. 2023. Midjourney. https://www.midjourney.com.
- [63] Wenyi Hong, Ming Ding, Wendi Zheng, Xinghan Liu, and Jie Tang. 2022. Cogvideo: Large-scale pretraining for text-to-video generation via transformers. arXiv preprint arXiv:2205.15868 (2022).
- [64] Vlad Hosu, Franz Hahn, Mohsen Jenadeleh, Hanhe Lin, Hui Men, Tamás Szirányi, Shujun Li, and Dietmar Saupe. 2017. The Konstanz natural video database (KoNViD-1k). In *QoMEX*. 1–6.
- [65] Vlad Hosu, Hanhe Lin, Tamas Sziranyi, and Dietmar Saupe. 2020. KonIQ-10k: An Ecologically Valid Database for Deep Learning of Blind Image Quality Assessment. IEEE TIP 29 (2020), 4041–4056.
- [66] Jingwen Hou, Weisi Lin, Yuming Fang, Haoning Wu, Chaofeng Chen, Liang Liao, and Weide Liu. 2023. Towards Transparent Deep Image Aesthetics Assessment with Tag-based Content Descriptors. *IEEE TIP* (2023).
- [67] Yipo Huang, Xiangfei Sheng, Zhichao Yang, Quan Yuan, Zhichao Duan, Pengfei Chen, Leida Li, Weisi Lin, and Guangming Shi. 2024. AesExpert: Towards Multi-modality Foundation Model for Image Aesthetics Perception. arXiv preprint arXiv:2404.09624 (2024).
- [68] Yipo Huang, Quan Yuan, Xiangfei Sheng, Zhichao Yang, Haoning Wu, Pengfei Chen, Yuzhe Yang, Leida Li, and Weisi Lin. 2024. AesBench: An Expert Benchmark for Multimodal Large Language Models on Image Aesthetics Perception. arXiv preprint arXiv:2401.08276 (2024).
- [69] Ziqi Huang, Yinan He, Jiashuo Yu, Fan Zhang, Chenyang Si, Yuming Jiang, Yuanhan Zhang, Tianxing Wu, Qingyang Jin, Nattapol Chanpaisit, Yaohui Wang, Xinyuan Chen, Limin Wang, Dahua Lin, Yu Qiao, and Ziwei Liu. 2024. VBench: Comprehensive Benchmark Suite for Video Generative Models. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition.
- [70] Zhipeng Huang, Zhizheng Zhang, Yiting Lu, Zheng-Jun Zha, Zhibo Chen, and Baining Guo. 2024. VisualCritic: Making LMMs Perceive Visual Quality Like Humans. arXiv preprint arXiv:2403.12806 (2024).

- [71] Huggingface. 2023. Introducing IDEFICS: An Open Reproduction of State-of-the-Art Visual Language Model. https://huggingface.co/blog/idefics
- [72] Alireza Javaheri, Catarina Brites, Fernando Pereira, and Joao Ascenso. 2020. Point cloud rendering after coding: Impacts on subjective and objective quality. *IEEE Transactions on Multimedia* 23 (2020), 4049–4064.
- [73] Xin Jin, Hao Lou, Heng Huang, Xinning Li, Xiaodong Li, Shuai Cui, Xiaokun Zhang, and Xiqiao Li. 2022. Pseudolabeling and meta reweighting learning for image aesthetic quality assessment. *IEEE Transactions on Intelligent Transportation Systems* 23, 12 (2022), 25226–25235.
- [74] Xin Jin, Le Wu, Xiaodong Li, Siyu Chen, Siwei Peng, Jingying Chi, Shiming Ge, Chenggen Song, and Geng Zhao. 2018. Predicting aesthetic score distribution through cumulative jensen-shannon divergence. In *Proceedings of the* AAAI Conference on Artificial Intelligence, Vol. 32.
- [75] Xin Jin, Le Wu, Geng Zhao, Xiaodong Li, Xiaokun Zhang, Shiming Ge, Dongqing Zou, Bin Zhou, and Xinghui Zhou. 2019. Aesthetic attributes assessment of images. In *Proceedings of the 27th ACM international conference on multimedia*. 311–319.
- [76] Xin Jin, Mingtian Zhao, Xiaowu Chen, Qinping Zhao, and Song-Chun Zhu. 2010. Learning artistic lighting template from portrait photographs. In Computer Vision–ECCV 2010: 11th European Conference on Computer Vision, Heraklion, Crete, Greece, September 5-11, 2010, Proceedings, Part IV 11. Springer, 101–114.
- [77] Yueying Kao, Ran He, and Kaiqi Huang. 2017. Deep aesthetic quality assessment with semantic information. IEEE Transactions on Image Processing 26, 3 (2017), 1482–1495.
- [78] Yueying Kao, Kaiqi Huang, and Steve Maybank. 2016. Hierarchical aesthetic quality assessment using deep convolutional neural networks. *Signal Processing: Image Communication* 47 (2016), 500–510.
- [79] Yueying Kao, Chong Wang, and Kaiqi Huang. 2015. Visual aesthetic quality assessment with a regression model. In 2015 IEEE International Conference on Image Processing (ICIP). IEEE, 1583–1587.
- [80] Junjie Ke, Keren Ye, Jiahui Yu, Yonghui Wu, Peyman Milanfar, and Feng Yang. 2023. Vila: Learning image aesthetics from user comments with vision-language pretraining. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 10041–10051.
- [81] Levon Khachatryan, Andranik Movsisyan, Vahram Tadevosyan, Roberto Henschel, Zhangyang Wang, Shant Navasardyan, and Humphrey Shi. 2023. Text2video-zero: Text-to-image diffusion models are zero-shot video generators. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 15954–15964.
- [82] Hak Gu Kim, Heoun-Taek Lim, and Yong Man Ro. 2019. Deep virtual reality image quality assessment with human perception guider for omnidirectional image. *IEEE Transactions on Circuits and Systems for Video Technology* 30, 4 (2019), 917–928.
- [83] Won-Hee Kim, Jun-Ho Choi, and Jong-Seok Lee. 2018. Objectivity and subjectivity in aesthetic quality assessment of digital photographs. *IEEE Transactions on Affective Computing* 11, 3 (2018), 493–506.
- [84] Yuval Kirstain, Adam Polyak, Uriel Singer, Shahbuland Matiana, Joe Penna, and Omer Levy. 2024. Pick-a-pic: An open dataset of user preferences for text-to-image generation. Advances in Neural Information Processing Systems 36 (2024).
- [85] Shu Kong, Xiaohui Shen, Zhe Lin, Radomir Mech, and Charless Fowlkes. 2016. Photo Aesthetics Ranking Network with Attributes and Content Adaptation. In ECCV.
- [86] Tengchuan Kou, Xiaohong Liu, Zicheng Zhang, Chunyi Li, Haoning Wu, Xiongkuo Min, Guangtao Zhai, and Ning Liu. 2024. Subjective-Aligned Dateset and Metric for Text-to-Video Quality Assessment. arXiv preprint arXiv:2403.11956 (2024).
- [87] Qi Kuang, Xin Jin, Qinping Zhao, and Bin Zhou. 2019. Deep multimodality learning for UAV video aesthetic quality assessment. *IEEE Transactions on Multimedia* 22, 10 (2019), 2623–2634.
- [88] Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. 2023. SEED-Bench: Benchmarking Multimodal LLMs with Generative Comprehension. arXiv:2307.16125 [cs.CL]
- [89] Bo Li, Peiyuan Zhang, Jingkang Yang, Yuanhan Zhang, Fanyi Pu, and Ziwei Liu. 2023. Otterhd: A high-resolution multi-modality model. arXiv preprint arXiv:2311.04219 (2023).
- [90] Bo Li, Yuanhan Zhang, Liangyu Chen, Jinghao Wang, Jingkang Yang, and Ziwei Liu. 2023. Otter: A Multi-Modal Model with In-Context Instruction Tuning. arXiv preprint arXiv:2305.03726 (2023).
- [91] Congcong Li, Andrew Gallagher, Alexander C Loui, and Tsuhan Chen. 2010. Aesthetic quality assessment of consumer photos with faces. In 2010 IEEE International Conference on Image Processing. IEEE, 3221–3224.
- [92] Chunyi Li, Tengchuan Kou, Yixuan Gao, Yuqin Cao, Wei Sun, Zicheng Zhang, Yingjie Zhou, Zhichao Zhang, Haoning Wu, Weixia Zhang, Xiaohong Liu, Xiongkuo Min, and Guangtao Zhai. 2024. AIGIQA-20K: A Large Database for AI-Generated Image Quality Assessment. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops.
- [93] Chunyi Li, Haoning Wu, Zicheng Zhang, Hongkun Hao, Kaiwei Zhang, Lei Bai, Xiaohong Liu, Xiongkuo Min, Weisi Lin, and Guangtao Zhai. 2024. Q-Refine: A Perceptual Quality Refiner for AI-Generated Image. arXiv preprint

arXiv:2401.01117 (2024).

- [94] Chunyi Li, Xiele Wu, Haoning Wu, Donghui Feng, Zicheng Zhang, Guo Lu, Xiongkuo Min, Xiaohong Liu, Guangtao Zhai, and Weisi Lin. 2024. CMC-Bench: Towards a New Paradigm of Visual Signal Compression. arXiv preprint arXiv:2406.09356 (2024).
- [95] Chunyi Li, Zicheng Zhang, Haoning Wu, Wei Sun, Xiongkuo Min, Xiaohong Liu, Guangtao Zhai, and Weisi Lin. 2023. Agiqa-3k: An open database for ai-generated image quality assessment. *IEEE Transactions on Circuits and Systems for Video Technology* (2023).
- [96] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. 2023. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*. PMLR, 19730–19742.
- [97] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. 2022. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *International conference on machine learning*. PMLR, 12888–12900.
- [98] Juncheng Li, Kaihang Pan, Zhiqi Ge, Minghe Gao, Wei Ji, Wenqiao Zhang, Tat-Seng Chua, Siliang Tang, Hanwang Zhang, and Yueting Zhuang. 2023. Fine-tuning multimodal llms to follow zero-shot demonstrative instructions. In *The Twelfth International Conference on Learning Representations.*
- [99] Kunchang Li, Yali Wang, Yinan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, et al. 2024. Mvbench: A comprehensive multi-modal video understanding benchmark. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 22195–22206.
- [100] Mingsheng Li, Xin Chen, Chi Zhang, Sijin Chen, Hongyuan Zhu, Fukun Yin, Gang Yu, and Tao Chen. 2023. M3DBench: Let's Instruct Large Models with Multi-modal 3D Prompts. arXiv preprint arXiv:2312.10763 (2023).
- [101] Xin Li, Kun Yuan, Yajing Pei, Yiting Lu, Ming Sun, Chao Zhou, Zhibo Chen, Radu Timofte, Wei Sun, Haoning Wu, et al. 2024. NTIRE 2024 challenge on short-form UGC video quality assessment: Methods and results. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 6415–6431.
- [102] Arnaud Lienhard, Patricia Ladret, and Alice Caplier. 2015. Low level features for quality assessment of facial images. In International conference on computer vision theory and applications, Vol. 2. SciTePress, 545–552.
- [103] Hanhe Lin, Vlad Hosu, and Dietmar Saupe. 2019. KADID-10k: A Large-scale Artificially Distorted IQA Database. In QoMEX. 1–3.
- [104] Zhiqiu Lin, Deepak Pathak, Baiqi Li, Jiayao Li, Xide Xia, Graham Neubig, Pengchuan Zhang, and Deva Ramanan. 2024. Evaluating Text-to-Visual Generation with Image-to-Text Generation. arXiv preprint arXiv:2404.01291 (2024).
- [105] Fuxiao Liu, Kevin Lin, Linjie Li, Jianfeng Wang, Yaser Yacoob, and Lijuan Wang. 2023. Mitigating hallucination in large multi-modal models via robust instruction tuning. In *The Twelfth International Conference on Learning Representations*.
- [106] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. 2023. Improved Baselines with Visual Instruction Tuning.
- [107] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. 2024. LLaVA-NeXT: Improved reasoning, OCR, and world knowledge. https://llava-vl.github.io/blog/2024-01-30-llava-next/
- [108] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. 2023. Visual Instruction Tuning.
- [109] Lixiong Liu, Yi Hua, Qingjie Zhao, Hua Huang, and Alan Conrad Bovik. 2016. Blind image quality assessment by relative gradient statistics and adaboosting neural network. Signal Processing: Image Communication 40 (2016), 1–15.
- [110] Qi Liu, Honglei Su, Zhengfang Duanmu, Wentao Liu, and Zhou Wang. 2022. Perceptual quality assessment of colored 3D point clouds. *IEEE Transactions on Visualization and Computer Graphics* (2022).
- [111] Qi Liu, Hui Yuan, Raouf Hamzaoui, Honglei Su, Junhui Hou, and Huan Yang. 2021. Reduced reference perceptual quality model with application to rate control for video-based point cloud compression. *IEEE Transactions on Image Processing* 30 (2021), 6623–6636.
- [112] Xiaohong Liu, Xiongkuo Min, Guangtao Zhai, Chunyi Li, Tengchuan Kou, Wei Sun, Haoning Wu, Yixuan Gao, Yuqin Cao, Zicheng Zhang, et al. 2024. NTIRE 2024 Quality Assessment of AI-Generated Content Challenge. arXiv preprint arXiv:2404.16687 (2024).
- [113] Yaofang Liu, Xiaodong Cun, Xuebo Liu, Xintao Wang, Yong Zhang, Haoxin Chen, Yang Liu, Tieyong Zeng, Raymond Chan, and Ying Shan. 2023. Evalcrafter: Benchmarking and evaluating large video generation models. arXiv preprint arXiv:2310.11440 (2023).
- [114] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, Kai Chen, and Dahua Lin. 2023. MMBench: Is Your Multi-modal Model an All-around Player? arXiv:2307.06281 [cs.CV]
- [115] Yuanxin Liu, Lei Li, Shuhuai Ren, Rundong Gao, Shicheng Li, Sishuo Chen, Xu Sun, and Lu Hou. 2024. Fetv: A benchmark for fine-grained evaluation of open-domain text-to-video generation. Advances in Neural Information Processing Systems 36 (2024).
- [116] Yipeng Liu, Qi Yang, Yiling Xu, and Le Yang. 2023. Point cloud quality assessment: Dataset construction and learningbased no-reference metric. ACM Transactions on Multimedia Computing, Communications and Applications 19, 2s

(2023), 1-26.

- [117] Jiapeng Lu, Linyao Gao, Wenjie Zhu, and Yiling Xu. 2020. Machine perception point cloud quality assessment via vision tasks. In 2020 International Conference on 3D Immersion (IC3D). IEEE, 1–7.
- [118] Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. 2023. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. arXiv preprint arXiv:2310.02255 (2023).
- [119] Wei Lu, Wei Sun, Xiongkuo Min, Wenhan Zhu, Quan Zhou, Jun He, Qiyuan Wang, Zicheng Zhang, Tao Wang, and Guangtao Zhai. 2022. Deep neural network for blind visual quality assessment of 4K content. *IEEE Transactions on Broadcasting* 69, 2 (2022), 406–421.
- [120] Wei Lu, Wei Sun, Wenhan Zhu, Xiongkuo Min, Zicheng Zhang, Tao Wang, and Guangtao Zhai. 2021. A cnn-based quality assessment method for pseudo 4k contents. In *International Forum on Digital TV and Wireless Multimedia Communications*. Springer, 164–176.
- [121] Wei Luo, Xiaogang Wang, and Xiaoou Tang. 2011. Content-based photo quality assessment. In 2011 international conference on computer vision. IEEE, 2206–2213.
- [122] Zhengxiong Luo, Dayou Chen, Yingya Zhang, Yan Huang, Liang Wang, Yujun Shen, Deli Zhao, Jingren Zhou, and Tieniu Tan. 2023. VideoFusion: Decomposed Diffusion Models for High-Quality Video Generation. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 10209–10218.
- [123] Elman Mansimov, Emilio Parisotto, Jimmy Lei Ba, and Ruslan Salakhutdinov. 2015. Generating images from captions with attention. arXiv preprint arXiv:1511.02793 (2015).
- [124] Kenneth Marino, Mohammad Rastegari, Ali Farhadi, and Roozbeh Mottaghi. 2019. OK-VQA: A Visual Question Answering Benchmark Requiring External Knowledge. In *Conference on Computer Vision and Pattern Recognition* (CVPR).
- [125] Xiongkuo Min, Kede Ma, Ke Gu, Guangtao Zhai, Zhou Wang, and Weisi Lin. 2017. Unified blind quality assessment of compressed natural, graphic, and screen content images. *IEEE Transactions on Image Processing* 26, 11 (2017), 5462–5474.
- [126] Xiongkuo Min, Guangtao Zhai, Ke Gu, Xiaokang Yang, and Xinping Guan. 2018. Objective quality evaluation of dehazed images. IEEE Transactions on Intelligent Transportation Systems 20, 8 (2018), 2879–2892.
- [127] Xiongkuo Min, Guangtao Zhai, Ke Gu, Yucheng Zhu, Jiantao Zhou, Guodong Guo, Xiaokang Yang, Xinping Guan, and Wenjun Zhang. 2019. Quality evaluation of image dehazing methods using synthetic hazy images. *IEEE Transactions* on Multimedia 21, 9 (2019), 2319–2333.
- [128] Anish Mittal, Rajiv Soundararajan, and Alan C. Bovik. 2013. Making a "Completely Blind" Image Quality Analyzer. IEEE Signal Processing Letters 20, 3 (2013), 209–212.
- [129] Takamichi Miyata. 2023. Interpretable Image Quality Assessment via CLIP with Multiple Antonym-Prompt Pairs. In 2023 IEEE 13th International Conference on Consumer Electronics-Berlin (ICCE-Berlin). IEEE, 39–40.
- [130] Takamichi Miyata. 2024. ZEN-IQA: Zero-Shot Explainable and No-Reference Image Quality Assessment With Vision Language Model. IEEE Access 12 (2024), 70973–70983.
- [131] Pedram Mohammadi, Abbas Ebrahimi-Moghadam, and Shahram Shirani. 2014. Subjective and objective quality assessment of image: A survey. arXiv preprint arXiv:1406.7799 (2014).
- [132] Anush Krishna Moorthy and Alan Conrad Bovik. 2009. Visual importance pooling for image quality assessment. IEEE journal of selected topics in signal processing 3, 2 (2009), 193–201.
- [133] Anush Krishna Moorthy and Alan Conrad Bovik. 2010. A two-step framework for constructing blind image quality indices. *IEEE Signal processing letters* 17, 5 (2010), 513–516.
- [134] Naila Murray, Luca Marchesotti, and Florent Perronnin. 2012. AVA: A large-scale database for aesthetic visual analysis. In CVPR. 2408–2415.
- [135] Yana Nehmé, Johanna Delanoy, Florent Dupont, Jean-Philippe Farrugia, Patrick Le Callet, and Guillaume Lavoué. 2023. Textured mesh quality assessment: Large-scale dataset and deep learning-based quality metric. ACM Transactions on Graphics 42, 3 (2023), 1–20.
- [136] Yana Nehmé, Florent Dupont, Jean-Philippe Farrugia, Patrick Le Callet, and Guillaume Lavoué. 2020. Visual quality of 3d meshes with diffuse colors in virtual reality: Subjective and objective evaluation. *IEEE Transactions on Visualization and Computer Graphics* 27, 3 (2020), 2202–2219.
- [137] Zhangkai Ni, Lin Ma, Huanqiang Zeng, Jing Chen, Canhui Cai, and Kai-Kuang Ma. 2017. ESIM: Edge similarity for screen content image quality assessment. *IEEE Transactions on Image Processing* 26, 10 (2017), 4818–4831.
- [138] Alexandre Ninassi, Olivier Le Meur, Patrick Le Callet, and Dominique Barba. 2009. Considering temporal variations of spatial visual distortions in video quality assessment. *IEEE Journal of Selected Topics in Signal Processing* 3, 2 (2009), 253–265.
- [139] Mikko Nuutinen, Toni Virtanen, Mikko Vaahteranoksa, Tero Vuori, Pirkko Oittinen, and Jukka Häkkinen. 2016. CVD2014–A Database for Evaluating No-Reference Video Quality Assessment Algorithms. *IEEE TIP* 25, 7 (2016).

- [140] OpenAI. 2023. GPT-4 Technical Report. arXiv:2303.08774 [cs.CL]
- [141] Wensheng Pan, Timin Gao, Yan Zhang, Runze Hu, Xiawu Zheng, Enwei Zhang, Yuting Gao, Yutao Liu, Yunhang Shen, Ke Li, et al. 2024. Multi-Modal Prompt Learning on Blind Image Quality Assessment. arXiv preprint arXiv:2404.14949 (2024).
- [142] Wensheng Pan, Zhifu Yang, DingMing Liu, Chenxin Fang, Yan Zhang, and Pingyang Dai. 2023. Quality-Aware CLIP for Blind Image Quality Assessment. In *Chinese Conference on Pattern Recognition and Computer Vision (PRCV)*. Springer, 396–408.
- [143] Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In Proceedings of the 40th annual meeting of the Association for Computational Linguistics. 311–318.
- [144] Kayoung Park, Seunghoon Hong, Mooyeol Baek, and Bohyung Han. 2017. Personalized image aesthetic quality assessment by joint regression and ranking. In 2017 IEEE winter conference on applications of computer vision (WACV). IEEE, 1206–1214.
- [145] Zhiliang Peng, Wenhui Wang, Li Dong, Yaru Hao, Shaohan Huang, Shuming Ma, and Furu Wei. 2023. Kosmos-2: Grounding Multimodal Large Language Models to the World. ArXiv abs/2306 (2023).
- [146] Nikolay Ponomarenko, Lina Jin, Oleg Ieremeiev, Vladimir Lukin, Karen Egiazarian, Jaakko Astola, Benoit Vozel, Kacem Chehdi, Marco Carli, Federica Battisti, et al. 2015. Image database TID2013: Peculiarities, results and perspectives. Signal processing: Image communication 30 (2015), 57–77.
- [147] Nikolay Ponomarenko, Vladimir Lukin, Alexander Zelensky, Karen Egiazarian, Marco Carli, and Federica Battisti. 2009. TID2008-a database for evaluation of full-reference visual quality assessment metrics. Advances of modern radioelectronics 10, 4 (2009), 30–45.
- [148] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In International conference on machine learning. PMLR, 8748–8763.
- [149] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In International conference on machine learning. PMLR, 8748–8763.
- [150] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. 2021. Learning Transferable Visual Models From Natural Language Supervision.
- [151] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. 2022. Hierarchical Text-Conditional Image Generation with CLIP Latents. 2204.06125.
- [152] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. 2022. Hierarchical text-conditional image generation with clip latents. arXiv preprint arXiv:2204.06125 1, 2 (2022), 3.
- [153] Scott Reed, Zeynep Akata, Xinchen Yan, Lajanugen Logeswaran, Bernt Schiele, and Honglak Lee. 2016. Generative adversarial text to image synthesis. In *International conference on machine learning*. PMLR, 1060–1069.
- [154] Abdul Rehman, Kai Zeng, and Zhou Wang. 2015. Display device-adapted video quality-of-experience assessment. In Human vision and electronic imaging XX, Vol. 9394. SPIE, 27–37.
- [155] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. 2022. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern* recognition. 10684–10695.
- [156] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L Denton, Kamyar Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, et al. 2022. Photorealistic text-to-image diffusion models with deep language understanding. Advances in neural information processing systems 35 (2022), 36479–36494.
- [157] Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. 2016. Improved techniques for training gans. Advances in neural information processing systems 29 (2016).
- [158] Torsten Schlett, Christian Rathgeb, Olaf Henniger, Javier Galbally, Julian Fierrez, and Christoph Busch. 2022. Face image quality assessment: A literature survey. ACM Computing Surveys (CSUR) 54, 10s (2022), 1–49.
- [159] Kalpana Seshadrinathan and Alan C Bovik. 2007. A structural similarity metric for video based on motion models. In 2007 IEEE International Conference on Acoustics, Speech and Signal Processing-ICASSP'07, Vol. 1. IEEE, I–869.
- [160] Kalpana Seshadrinathan, Rajiv Soundararajan, Alan Conrad Bovik, and Lawrence K. Cormack. 2010. Study of Subjective and Objective Quality Assessment of Video. *IEEE TIP* 19, 6 (2010), 1427–1441.
- [161] Wenqi Shao, Yutao Hu, Peng Gao, Meng Lei, Kaipeng Zhang, Fanqing Meng, Peng Xu, Siyuan Huang, Hongsheng Li, Yu Qiao, et al. 2023. Tiny lvlm-ehub: Early multimodal experiments with bard. arXiv preprint arXiv:2308.03729 (2023).
- [162] H Sheikh. 2005. LIVE image quality assessment database release 2. http://live. ece. utexas. edu/research/quality (2005).
- [163] Hamid R Sheikh, Muhammad F Sabir, and Alan C Bovik. 2006. A statistical evaluation of recent full reference image quality assessment algorithms. *IEEE Transactions on image processing* 15, 11 (2006), 3440–3451.

- [164] Xiangfei Sheng, Leida Li, Pengfei Chen, Jinjian Wu, Weisheng Dong, Yuzhe Yang, Liwu Xu, Yaqian Li, and Guangming Shi. 2023. AesCLIP: Multi-Attribute Contrastive Learning for Image Aesthetics Assessment. In Proceedings of the 31st ACM International Conference on Multimedia. 1117–1126.
- [165] Seongjin Shin, Sang-Woo Lee, Hwijeen Ahn, Sungdong Kim, HyoungSeok Kim, Boseop Kim, Kyunghyun Cho, Gichang Lee, Woomyoung Park, Jung-Woo Ha, et al. 2022. On the effect of pretraining corpora on in-context learning by a large-scale language model. arXiv preprint arXiv:2204.13509 (2022).
- [166] Uriel Singer, Adam Polyak, Thomas Hayes, Xi Yin, Jie An, Songyang Zhang, Qiyuan Hu, Harry Yang, Oron Ashual, Oran Gafni, et al. 2022. Make-a-video: Text-to-video generation without text-video data. arXiv preprint arXiv:2209.14792 (2022).
- [167] Zeina Sinno and Alan Conrad Bovik. 2019. Large-Scale Study of Perceptual Video Quality. IEEE TIP 28, 2 (2019), 612–627.
- [168] SkunkworksAI. 2024. BakLLaVA. https://github.com/SkunkworksAI/BakLLaVA
- [169] Honglei Su, Zhengfang Duanmu, Wentao Liu, Qi Liu, and Zhou Wang. 2019. Perceptual quality assessment of 3D point clouds. In 2019 IEEE International Conference on Image Processing (ICIP). IEEE, 3182–3186.
- [170] Hsiao-Hang Su, Tse-Wei Chen, Chieh-Chi Kao, Winston H Hsu, and Shao-Yi Chien. 2011. Scenic photo quality assessment with bag of aesthetics-preserving features. In Proceedings of the 19th ACM international conference on Multimedia. 1213–1216.
- [171] Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiying Yu, Zhengxiong Luo, Yueze Wang, Yongming Rao, Jingjing Liu, Tiejun Huang, et al. 2023. Generative multimodal models are in-context learners. arXiv preprint arXiv:2312.13286 (2023).
- [172] Wei Sun, Xiongkuo Min, Guangtao Zhai, Ke Gu, Huiyu Duan, and Siwei Ma. 2019. MC360IQA: A multi-channel CNN for blind 360-degree image quality assessment. *IEEE Journal of Selected Topics in Signal Processing* 14, 1 (2019), 64–77.
- [173] Wei Sun, Haoning Wu, Zicheng Zhang, Jun Jia, Zhichao Zhang, Linhan Cao, Qiubo Chen, Xiongkuo Min, Weisi Lin, and Guangtao Zhai. 2024. Enhancing Blind Video Quality Assessment with Rich Quality-aware Features. arXiv preprint arXiv:2405.08745 (2024).
- [174] Wei Sun, Weixia Zhang, Yanwei Jiang, Haoning Wu, Zicheng Zhang, Jun Jia, Yingjie Zhou, Zhongpeng Ji, Xiongkuo Min, Weisi Lin, et al. 2024. Dual-Branch Network for Portrait Image Quality Assessment. arXiv preprint arXiv:2405.08555 (2024).
- [175] Wen Sun, Fei Zhou, and Qingmin Liao. 2017. MDID: A multiply distorted image database for image quality assessment. Pattern Recognition 61 (2017), 153–168.
- [176] Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. 2016. Rethinking the inception architecture for computer vision. In Proceedings of the IEEE conference on computer vision and pattern recognition. 2818–2826.
- [177] InfiMM Team. 2024. InfiMM: Advancing Multimodal Understanding from Flamingo's Legacy through Diverse LLM Integration. https://huggingface.co/Infi-MM/
- [178] Bart Thomee, David A. Shamma, Gerald Friedland, Benjamin Elizalde, Karl Ni, Douglas Poland, Damian Borth, and Li-Jia Li. 2016. YFCC100M: The New Data in Multimedia Research. *Commun. ACM* 59, 2 (2016), 64–73.
- [179] Louis L Thurstone. 2017. A law of comparative judgment. In Scaling. Routledge, 81-92.
- [180] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023. LLaMA: Open and Efficient Foundation Language Models. arXiv:2302.13971 [cs.CL]
- [181] Kristi Tsukida, Maya R Gupta, et al. 2011. How to analyze paired comparison data. Department of Electrical Engineering University of Washington, Tech. Rep. UWEETR-2011-0004 1 (2011).
- [182] Thomas Unterthiner, Sjoerd Van Steenkiste, Karol Kurach, Raphael Marinier, Marcin Michalski, and Sylvain Gelly. 2018. Towards accurate generative models of video: A new metric & challenges. arXiv preprint arXiv:1812.01717 (2018).
- [183] Ramakrishna Vedantam, C Lawrence Zitnick, and Devi Parikh. 2015. Cider: Consensus-based image description evaluation. In Proceedings of the IEEE conference on computer vision and pattern recognition. 4566–4575.
- [184] Phong V. Vu and Damon M. Chandler. 2014. ViS3: an algorithm for video quality assessment via analysis of spatial and spatiotemporal slices. *Journal of Electronic Imaging* 23 (2014).
- [185] Phong V Vu, Cuong T Vu, and Damon M Chandler. 2011. A spatiotemporal most-apparent-distortion model for video quality assessment. In 2011 18th IEEE international conference on image processing. IEEE, 2505–2508.
- [186] Jiarui Wang, Huiyu Duan, Jing Liu, Shi Chen, Xiongkuo Min, and Guangtao Zhai. 2023. Aigciqa2023: A largescale image quality assessment database for ai generated images: from the perspectives of quality, authenticity and correspondence. In *CAAI International Conference on Artificial Intelligence*. Springer, 46–57.
- [187] Jiuniu Wang, Hangjie Yuan, Dayou Chen, Yingya Zhang, Xiang Wang, and Shiwei Zhang. 2023. Modelscope text-tovideo technical report. arXiv preprint arXiv:2308.06571 (2023).

- [188] Ke Wang, Junting Pan, Weikang Shi, Zimu Lu, Mingjie Zhan, and Hongsheng Li. 2024. Measuring Multimodal Mathematical Reasoning with MATH-Vision Dataset. arXiv preprint arXiv:2402.14804 (2024).
- [189] Puyi Wang, Wei Sun, Zicheng Zhang, Jun Jia, Yanwei Jiang, Zhichao Zhang, Xiongkuo Min, and Guangtao Zhai. 2024. Large Multi-modality Model Assisted AI-Generated Image Quality Assessment. arXiv preprint arXiv:2404.17762 (2024).
- [190] Tao Wang, Wei Sun, Wei Wu, Ying Chen, Xiongkuo Min, Wei Lu, Zicheng Zhang, and Guangtao Zhai. 2022. A deep learning-based multidimensional aesthetic quality assessment method for mobile game images. *IEEE Transactions on Games* 15, 4 (2022), 658–668.
- [191] Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2022. Self-consistency improves chain of thought reasoning in language models. arXiv preprint arXiv:2203.11171 (2022).
- [192] Yaohui Wang, Xinyuan Chen, Xin Ma, Shangchen Zhou, Ziqi Huang, Yi Wang, Ceyuan Yang, Yinan He, Jiashuo Yu, Peiqing Yang, et al. 2023. Lavie: High-quality video generation with cascaded latent diffusion models. arXiv preprint arXiv:2309.15103 (2023).
- [193] Yilin Wang, Sasi Inguva, and Balu Adsumilli. 2019. YouTube UGC Dataset for Video Compression Research. In 2019 MMSP.
- [194] Zhou Wang and Alan Conrad Bovik. 2006. Modern image quality assessment. Ph. D. Dissertation. Springer.
- [195] Zhou Wang, Alan C Bovik, and Ligang Lu. 2002. Why is image quality assessment so difficult?. In 2002 IEEE International conference on acoustics, speech, and signal processing, Vol. 4. IEEE, IV-3313.
- [196] Zhou Wang and Qiang Li. 2007. Video quality assessment using a statistical model of human visual speed perception. JOSA A 24, 12 (2007), B61–B69.
- [197] Zhou Wang, Ligang Lu, and Alan C Bovik. 2004. Video quality assessment based on structural distortion measurement. Signal processing: Image communication 19, 2 (2004), 121–132.
- [198] Zijie J Wang, Evan Montoya, David Munechika, Haoyang Yang, Benjamin Hoover, and Duen Horng Chau. 2022. Diffusiondb: A large-scale prompt gallery dataset for text-to-image generative models. arXiv preprint arXiv:2210.14896 (2022).
- [199] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. Advances in neural information processing systems 35 (2022), 24824–24837.
- [200] Chenfei Wu, Lun Huang, Qianxi Zhang, Binyang Li, Lei Ji, Fan Yang, Guillermo Sapiro, and Nan Duan. 2021. Godiva: Generating open-domain videos from natural descriptions. *arXiv preprint arXiv:2104.14806* (2021).
- [201] Haoning Wu, Chaofeng Chen, Jingwen Hou, Liang Liao, Annan Wang, Wenxiu Sun, Qiong Yan, and Weisi Lin. 2022. FAST-VQA: Efficient End-to-end Video Quality Assessment with Fragment Sampling. Proceedings of European Conference of Computer Vision (ECCV) (2022).
- [202] Haoning Wu, Chaofeng Chen, Liang Liao, Jingwen Hou, Wenxiu Sun, Qiong Yan, Jinwei Gu, and Weisi Lin. 2022. Neighbourhood Representative Sampling for Efficient End-to-end Video Quality Assessment. arXiv:2210.05357
- [203] Haoning Wu, Liang Liao, Chaofeng Chen, Jingwen Hou Hou, Erli Zhang, Annan Wang, Wenxiu Sun, Qiong Yan, and Weisi Lin. 2023. Exploring Opinion-unaware Video Quality Assessment with Semantic Affinity Criterion. In International Conference on Multimedia and Expo (ICME).
- [204] Haoning Wu, Liang Liao, Annan Wang, Chaofeng Chen, Jingwen Hou Hou, Erli Zhang, Wenxiu Sun Sun, Qiong Yan, and Weisi Lin. 2023. Towards Robust Text-Prompted Semantic Criterion for In-the-Wild Video Quality Assessment. arXiv:2304.14672 [cs.CV]
- [205] Hao Wu and Jiangchao Yao. 2022. PEAR: Photographic Embedding for Aesthetic Rating. In ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 4038–4042.
- [206] Haoning Wu, Erli Zhang, Liang Liao, Chaofeng Chen, Jingwen Hou, Annan Wang, Wenxiu Sun, Qiong Yan, and Weisi Lin. 2023. Exploring Video Quality Assessment on User Generated Contents from Aesthetic and Technical Perspectives. In *ICCV*.
- [207] Haoning Wu, Erli Zhang, Liang Liao, Chaofeng Chen, Jingwen Hou, Annan Wang, Wenxiu Sun, Qiong Yan, and Weisi Lin. 2023. Towards explainable in-the-wild video quality assessment: a database and a language-prompted approach. In Proceedings of the 31st ACM International Conference on Multimedia. 1045–1054.
- [208] Haoning Wu, Zicheng Zhang, Erli Zhang, Chaofeng Chen, Liang Liao, Annan Wang, Chunyi Li, Wenxiu Sun, Qiong Yan, Guangtao Zhai, and Weisi Lin. 2023. Q-Bench: A Benchmark for General-Purpose Foundation Models on Low-level Vision. (2023).
- [209] Haoning Wu, Zicheng Zhang, Erli Zhang, Chaofeng Chen, Liang Liao, Annan Wang, Kaixin Xu, Chunyi Li, Jingwen Hou, Guangtao Zhai, et al. 2023. Q-instruct: Improving low-level visual abilities for multi-modality foundation models. arXiv preprint arXiv:2311.06783 (2023).

111:26

- [210] Haoning Wu, Zicheng Zhang, Weixia Zhang, Chaofeng Chen, Liang Liao, Chunyi Li, Yixuan Gao, Annan Wang, Erli Zhang, Wenxiu Sun, et al. 2023. Q-align: Teaching lmms for visual scoring via discrete text-defined levels. arXiv preprint arXiv:2312.17090 (2023).
- [211] Haoning Wu, Hanwei Zhu, Zicheng Zhang, Erli Zhang, Chaofeng Chen, Liang Liao, Chunyi Li, Annan Wang, Wenxiu Sun, Qiong Yan, et al. 2024. Towards Open-ended Visual Quality Comparison. arXiv preprint arXiv:2402.16641 (2024).
- [212] Jianfeng Wu, Baixi Xing, Huahao Si, Jian Dou, Jin Wang, Yuning Zhu, and Xiaojian Liu. 2020. Product design award prediction modeling: Design visual aesthetic quality assessment via DCNNs. IEEE Access 8 (2020), 211028–211047.
- [213] Jay Zhangjie Wu, Yixiao Ge, Xintao Wang, Stan Weixian Lei, Yuchao Gu, Yufei Shi, Wynne Hsu, Ying Shan, Xiaohu Qie, and Mike Zheng Shou. 2023. Tune-a-video: One-shot tuning of image diffusion models for text-to-video generation. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 7623–7633.
- [214] Xiaoshi Wu, Keqiang Sun, Feng Zhu, Rui Zhao, and Hongsheng Li. 2023. Human preference score: Better aligning text-to-image models with human preference. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 2096–2105.
- [215] Jiazheng Xu, Xiao Liu, Yuchen Wu, Yuxuan Tong, Qinkai Li, Ming Ding, Jie Tang, and Yuxiao Dong. 2024. Imagereward: Learning and evaluating human preferences for text-to-image generation. Advances in Neural Information Processing Systems 36 (2024).
- [216] Huan Yang, Yuming Fang, Weisi Lin, and Zhou Wang. 2014. Subjective quality assessment of screen content images. In 2014 Sixth International Workshop on Quality of Multimedia Experience (QoMEX). IEEE, 257–262.
- [217] Liu Yang, Huiyu Duan, Long Teng, Yucheng Zhu, Xiaohong Liu, Menghan Hu, Xiongkuo Min, Guangtao Zhai, and Patrick Le Callet. 2024. Aigcoiqa2024: Perceptual quality assessment of ai generated omnidirectional images. arXiv preprint arXiv:2404.01024 (2024).
- [218] Qi Yang, Hao Chen, Zhan Ma, Yiling Xu, Rongjun Tang, and Jun Sun. 2020. Predicting the perceptual quality of point cloud: A 3d-to-2d projection-based exploration. *IEEE Transactions on Multimedia* 23 (2020), 3877–3891.
- [219] Qi Yang, Yipeng Liu, Siheng Chen, Yiling Xu, and Jun Sun. 2022. No-reference point cloud quality assessment via domain adaptation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 21179– 21188.
- [220] Yuzhe Yang, Liwu Xu, Leida Li, Nan Qie, Yaqian Li, Peng Zhang, and Yandong Guo. 2022. Personalized Image Aesthetics Assessment With Rich Attributes. In CVPR. 19861–19869.
- [221] Peng Ye and David Doermann. 2014. Active sampling for subjective image quality assessment. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 4249–4256.
- [222] Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, Chaoya Jiang, Chenliang Li, Yuanhong Xu, Hehong Chen, Junfeng Tian, Qian Qi, Ji Zhang, and Fei Huang. 2023. mPLUG-Owl: Modularization Empowers Large Language Models with Multimodality. arXiv:2304.14178 [cs.CL]
- [223] Qinghao Ye, Haiyang Xu, Jiabo Ye, Ming Yan, Haowei Liu, Qi Qian, Ji Zhang, Fei Huang, and Jingren Zhou. 2023. mplugowl2: Revolutionizing multi-modal large language model with modality collaboration. arXiv preprint arXiv:2311.04257 (2023).
- [224] Zhenfei Yin, Jiong Wang, Jianjian Cao, Zhelun Shi, Dingning Liu, Mukai Li, Xiaoshui Huang, Zhiyong Wang, Lu Sheng, Lei Bai, et al. 2024. Lamm: Language-assisted multi-modal instruction-tuning dataset, framework, and benchmark. Advances in Neural Information Processing Systems 36 (2024).
- [225] Zhenqiang Ying, Maniratnam Mandal, Deepti Ghadiyaram, and Alan Bovik. 2021. Patch-VQ: 'Patching Up' the Video Quality Problem. In *CVPR*.
- [226] Zhiyuan You, Jinjin Gu, Zheyuan Li, Xin Cai, Kaiwen Zhu, Tianfan Xue, and Chao Dong. 2024. Descriptive Image Quality Assessment in the Wild. arXiv preprint arXiv:2405.18842 (2024).
- [227] Zhiyuan You, Zheyuan Li, Jinjin Gu, Zhenfei Yin, Tianfan Xue, and Chao Dong. 2023. Depicting beyond scores: Advancing image quality assessment through multi-modal language models. arXiv preprint arXiv:2312.08962 (2023).
- [228] Jiahui Yu, Yuanzhong Xu, Jing Yu Koh, Thang Luong, Gunjan Baid, Zirui Wang, Vijay Vasudevan, Alexander Ku, Yinfei Yang, Burcu Karagol Ayan, et al. 2022. Scaling autoregressive models for content-rich text-to-image generation. arXiv preprint arXiv:2206.10789 2, 3 (2022), 5.
- [229] Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. 2023. Mm-vet: Evaluating large multimodal models for integrated capabilities. arXiv preprint arXiv:2308.02490 (2023).
- [230] Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, et al. 2023. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. arXiv preprint arXiv:2311.16502 (2023).
- [231] Emin Zerman, Pan Gao, Cagri Ozcinar, and Aljosa Smolic. 2019. Subjective and objective quality assessment for volumetric video compression. *Electronic Imaging* 31 (2019), 1–7.
- [232] Guangtao Zhai, Jianfei Cai, Weisi Lin, Xiaokang Yang, Wenjun Zhang, and Minoru Etoh. 2008. Cross-dimensional perceptual quality assessment for low bit-rate videos. *IEEE Transactions on Multimedia* 10, 7 (2008), 1316–1324.

- [233] Guangtao Zhai and Xiongkuo Min. 2020. Perceptual image quality assessment: a survey. Science China Information Sciences 63 (2020), 1–52.
- [234] David Junhao Zhang, Jay Zhangjie Wu, Jia-Wei Liu, Rui Zhao, Lingmin Ran, Yuchao Gu, Difei Gao, and Mike Zheng Shou. 2023. Show-1: Marrying pixel and latent diffusion models for text-to-video generation. arXiv preprint arXiv:2309.15818 (2023).
- [235] Pan Zhang, Xiaoyi Dong, Bin Wang, Yuhang Cao, Chao Xu, Linke Ouyang, Zhiyuan Zhao, Shuangrui Ding, Songyang Zhang, Haodong Duan, Wenwei Zhang, Hang Yan, Xinyue Zhang, Wei Li, Jingwen Li, Kai Chen, Conghui He, Xingcheng Zhang, Yu Qiao, Dahua Lin, and Jiaqi Wang. 2023. InternLM-XComposer: A Vision-Language Large Model for Advanced Text-image Comprehension and Composition. arXiv:2309.15112 [cs.CV]
- [236] Weixia Zhang, Guangtao Zhai, Ying Wei, Xiaokang Yang, and Kede Ma. 2023. Blind Image Quality Assessment via Vision-Language Correspondence: A Multitask Learning Perspective. In *IEEE Conference on Computer Vision and Pattern Recognition*.
- [237] Yujie Zhang, Qi Yang, and Yiling Xu. 2021. MS-GraphSIM: Inferring point cloud quality via multiscale graph similarity. In Proceedings of the 29th ACM International Conference on Multimedia. 1230–1238.
- [238] Zicheng Zhang, Yu Fan, Wei Sun, Xiongkuo Min, Xiaohong Liu, Chunyi Li, Haoning Wu, Weisi Lin, Ning Liu, and Guangtao Zhai. 2024. Optimizing Projection-Based Point Cloud Quality Assessment With Human Preferred Viewpoints Selection. IEEE International Conference on Multimedia and Expo (ICME) (2024).
- [239] Zicheng Zhang, Chunyi Li, Wei Sun, Xiaohong Liu, Xiongkuo Min, and Guangtao Zhai. 2023. A perceptual quality assessment exploration for aigc images. In 2023 IEEE International Conference on Multimedia and Expo Workshops (ICMEW). IEEE, 440–445.
- [240] Zicheng Zhang, Wei Lu, Wei Sun, Xiongkuo Min, Tao Wang, and Guangtao Zhai. 2022. Surveillance video quality assessment based on quality related retraining. In 2022 IEEE International Conference on Image Processing (ICIP). IEEE, 4278–4282.
- [241] Zicheng Zhang, Wei Sun, Xiongkuo Min, Tao Wang, Wei Lu, and Guangtao Zhai. 2021. A full-reference quality assessment metric for fine-grained compressed images. In 2021 International Conference on Visual Communications and Image Processing (VCIP). IEEE, 1–4.
- [242] Zicheng Zhang, Wei Sun, Xiongkuo Min, Tao Wang, Wei Lu, and Guangtao Zhai. 2022. No-reference quality assessment for 3d colored point cloud and mesh models. *IEEE Transactions on Circuits and Systems for Video Technology* 32, 11 (2022), 7618–7631.
- [243] Zicheng Zhang, Wei Sun, Xiongkuo Min, Tao Wang, Wei Lu, Wenhan Zhu, and Guangtao Zhai. 2021. A no-reference visual quality metric for 3d color meshes. In 2021 IEEE International Conference on Multimedia & Expo Workshops (ICMEW). IEEE, 1–6.
- [244] Zicheng Zhang, Wei Sun, Xiongkuo Min, Quan Zhou, Jun He, Qiyuan Wang, and Guangtao Zhai. 2022. Mm-pcqa: Multi-modal learning for no-reference point cloud quality assessment. arXiv preprint arXiv:2209.00244 (2022).
- [245] Zicheng Zhang, Wei Sun, Xiongkuo Min, Wenhan Zhu, Tao Wang, Wei Lu, and Guangtao Zhai. 2021. A no-reference evaluation metric for low-light image enhancement. In 2021 IEEE International Conference on Multimedia and Expo (ICME). IEEE, 1–6.
- [246] Zicheng Zhang, Wei Sun, Xiongkuo Min, Wenhan Zhu, Tao Wang, Wei Lu, and Guangtao Zhai. 2022. A no-reference deep learning quality assessment method for super-resolution images based on frequency maps. In 2022 IEEE International Symposium on Circuits and Systems (ISCAS). IEEE, 3170–3174.
- [247] Zicheng Zhang, Wei Sun, Tao Wang, Wei Lu, Quan Zhou, Qiyuan Wang, Xiongkuo Min, Guangtao Zhai, et al. 2023. Subjective and Objective Quality Assessment for in-the-Wild Computer Graphics Images. ACM TOMM (2023).
- [248] Zicheng Zhang, Wei Sun, Haoning Wu, Yingjie Zhou, Chunyi Li, Zijian Chen, Xiongkuo Min, Guangtao Zhai, and Weisi Lin. 2024. Gms-3dqa: Projection-based grid mini-patch sampling for 3d model quality assessment. ACM Transactions on Multimedia Computing, Communications and Applications 20, 6 (2024), 1–19.
- [249] Zicheng Zhang, Wei Sun, Yingjie Zhou, Wei Lu, Yucheng Zhu, Xiongkuo Min, and Guangtao Zhai. 2023. Eep-3dqa: Efficient and effective projection-based 3d model quality assessment. In 2023 IEEE International Conference on Multimedia and Expo (ICME). IEEE, 2483–2488.
- [250] Zicheng Zhang, Wei Sun, Yingjie Zhou, Haoning Wu, Chunyi Li, Xiongkuo Min, and Xiaohong Liu. 2023. Advancing Zero-Shot Digital Human Quality Assessment through Text-Prompted Evaluation. arXiv:2307.02808 [cs.CV]
- [251] Zicheng Zhang, Wei Sun, Yucheng Zhu, Xiongkuo Min, Wei Wu, Ying Chen, and Guangtao Zhai. 2023. Evaluating point cloud from moving camera videos: A no-reference metric. *IEEE Transactions on Multimedia* (2023).
- [252] Zicheng Zhang, Haoning Wu, Zhongpeng Ji, Chunyi Li, Erli Zhang, Wei Sun, Xiaohong Liu, Xiongkuo Min, Fengyu Sun, Shangling Jui, et al. 2023. Q-Boost: On Visual Quality Assessment Ability of Low-level Multi-Modality Foundation Models. arXiv preprint arXiv:2312.15300 (2023).
- [253] Zicheng Zhang, Haoning Wu, Chunyi Li, Yingjie Zhou, Wei Sun, Xiongkuo Min, Zijian Chen, Xiaohong Liu, Weisi Lin, and Guangtao Zhai. 2024. A-Bench: Are LMMs Masters at Evaluating AI-generated Images? arXiv e-prints (2024),

111:28

arXiv-2406.

- [254] Zicheng Zhang, Haoning Wu, Erli Zhang, Guangtao Zhai, and Weisi Lin. 2024. A Benchmark for Multi-modal Foundation Models on Low-level Vision: from Single Images to Pairs. *arXiv preprint arXiv:2402.07116* (2024).
- [255] Zicheng Zhang, Haoning Wu, Yingjie Zhou, Chunyi Li, Wei Sun, Chaofeng Chen, Xiongkuo Min, Xiaohong Liu, Weisi Lin, and Guangtao Zhai. 2024. LMM-PCQA: Assisting Point Cloud Quality Assessment with LMM. arXiv preprint arXiv:2404.18203 (2024).
- [256] Zicheng Zhang, Wei Wu, Wei Sun, Dangyang Tu, Wei Lu, Xiongkuo Min, Ying Chen, and Guangtao Zhai. 2023. MD-VQA: Multi-Dimensional Quality Assessment for UGC Live Videos. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR).
- [257] Zicheng Zhang, Yingjie Zhou, Chunyi Li, Kang Fu, Wei Sun, Xiaohong Liu, Xiongkuo Min, and Guangtao Zhai. 2024. A Reduced-Reference Quality Assessment Metric for Textured Mesh Digital Humans. In ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2965–2969.
- [258] Zicheng Zhang, Yingjie Zhou, Wei Sun, Wei Lu, Xiongkuo Min, Yu Wang, and Guangtao Zhai. 2023. Ddh-qa: A dynamic digital humans quality assessment database. In 2023 IEEE International Conference on Multimedia and Expo (ICME). IEEE, 2519–2524.
- [259] Zicheng Zhang, Yingjie Zhou, Wei Sun, Xiongkuo Min, Yuzhe Wu, and Guangtao Zhai. 2023. Perceptual quality assessment for digital human heads. In ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 1–5.
- [260] Zicheng Zhang, Yingjie Zhou, Wei Sun, Xiongkuo Min, and Guangtao Zhai. 2023. Geometry-Aware Video Quality Assessment for Dynamic Digital Human. In 2023 IEEE International Conference on Image Processing (ICIP). IEEE, 1365–1369.
- [261] Zicheng Zhang, Yingjie Zhou, Wei Sun, Xiongkuo Min, and Guangtao Zhai. 2023. Simple Baselines for Projection-based Full-reference and No-reference Point Cloud Quality Assessment. arXiv preprint arXiv:2310.17147 (2023).
- [262] Zicheng Zhang, Yingjie Zhou, Long Teng, Wei Sun, Chunyi Li, Xiongkuo Min, Xiao-Ping Zhang, and Guangtao Zhai. 2024. Quality-of-Experience Evaluation for Digital Twins in 6G Network Environments. *IEEE Transactions on Broadcasting* (2024).
- [263] Daquan Zhou, Weimin Wang, Hanshu Yan, Weiwei Lv, Yizhe Zhu, and Jiashi Feng. 2022. Magicvideo: Efficient video generation with latent diffusion models. arXiv preprint arXiv:2211.11018 (2022).
- [264] Junjie Zhou, Yan Shu, Bo Zhao, Boya Wu, Shitao Xiao, Xi Yang, Yongping Xiong, Bo Zhang, Tiejun Huang, and Zheng Liu. 2024. MLVU: A Comprehensive Benchmark for Multi-Task Long Video Understanding. arXiv preprint arXiv:2406.04264 (2024).
- [265] Xunchu Zhou, Xiaohong Liu, Yunlong Dong, Tengchuan Kou, Yixuan Gao, Zicheng Zhang, Chunyi Li, Haoning Wu, and Guangtao Zhai. 2024. Light-VQA+: A Video Quality Assessment Model for Exposure Correction with Vision-Language Guidance. arXiv preprint arXiv:2405.03333 (2024).
- [266] Yingjie Zhou, Zicheng Zhang, Wei Sun, Xiaohong Liu, Xiongkuo Min, Zhihua Wang, Xiao-Ping Zhang, and Guangtao Zhai. 2024. THQA: A Perceptual Quality Assessment Database for Talking Heads. arXiv preprint arXiv:2404.09003 (2024).
- [267] Yingjie Zhou, Zicheng Zhang, Wei Sun, Xiongkuo Min, and Guangtao Zhai. 2023. Perceptual Quality Assessment for Point Clouds Point Clouds: A Survey A Survey. ZTE COMMUNICATIONS 21, 4 (2023).
- [268] Zhaokun Zhou, Qiulin Wang, Bin Lin, Yiwei Su, Rui Chen, Xin Tao, Amin Zheng, Li Yuan, Pengfei Wan, and Di Zhang. 2024. UNIAA: A Unified Multi-modal Image Aesthetic Assessment Baseline and Benchmark. arXiv preprint arXiv:2404.09619 (2024).
- [269] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. 2023. MiniGPT-4: Enhancing Vision-Language Understanding with Advanced Large Language Models. arXiv preprint arXiv:2304.10592 (2023).
- [270] Hanwei Zhu, Xiangjie Sui, Baoliang Chen, Xuelin Liu, Peilin Chen, Yuming Fang, and Shiqi Wang. 2024. 2AFC prompting of large multimodal models for image quality assessment. arXiv preprint arXiv:2402.01162 (2024).
- [271] Hanwei Zhu, Haoning Wu, Yixuan Li, Zicheng Zhang, Baoliang Chen, Lingyu Zhu, Yuming Fang, Guangtao Zhai, Weisi Lin, and Shiqi Wang. 2024. Adaptive Image Quality Assessment via Teaching Large Multimodal Model to Compare. arXiv preprint arXiv:2405.19298 (2024).
- [272] Xilei Zhu, Huiyu Duan, Yuqin Cao, Yuxin Zhu, Yucheng Zhu, Jing Liu, Li Chen, Xiongkuo Min, and Guangtao Zhai. 2023. Perceptual quality assessment of omnidirectional audio-visual signals. In CAAI International Conference on Artificial Intelligence. Springer, 512–525.

Received 20 February 2007; revised 12 March 2009; accepted 5 June 2009