

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 April 2006 (06.04.2006)

PCT

(10) International Publication Number
WO 2006/037054 A1


- (51) International Patent Classification:
G06F 17/30 (2006.01)
- (21) International Application Number:
PCT/US2005/034852
- (22) International Filing Date:
26 September 2005 (26.09.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/613,463 27 September 2004 (27.09.2004) US
10/985,700 10 November 2004 (10.11.2004) US
60/647,710 27 January 2005 (27.01.2005) US
11/180,261 13 July 2005 (13.07.2005) US
- (71) Applicant (for all designated States except US): **BROWSTER, INC.** [US/US]; 475 Sansome Street, Suite 1850, San Francisco, California 94111 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MILENER, Scott** [US/US]; 2729 Lombard Street, #1, San Francisco, California 94123 (US). **BROWN, Wendell** [US/US]; 4132 South Rainbow Blvd., #494, Las Vegas, Nevada 89103 (US). **KELLY, James** [US/US]; 4749 18th Street, San Francisco, California 94114 (US).
- (74) Agent: **VAUGHAN, Daniel, E.**; 39180 Liberty Street, Suite 103, Fremont, California 94538, (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR ENHANCED BROWSING

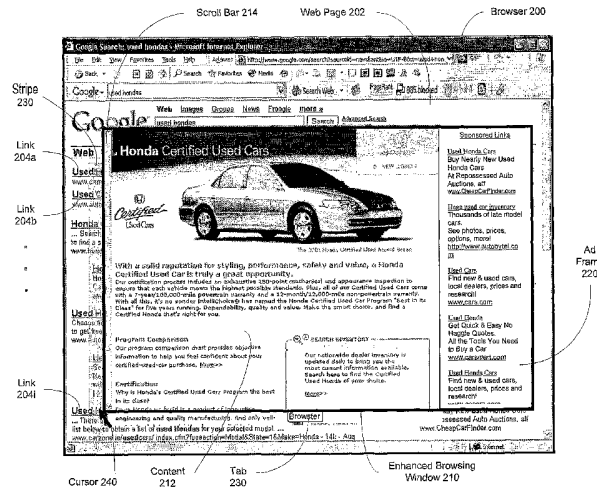

(57) Abstract: A method and apparatus for enhanced browsing. The apparatus presents an enhanced browsing window containing content identified by a link in a page displayed by a browser. The apparatus includes a fetcher for fetching or prefetching the content and a cache for storing the window. The apparatus may also include an ad interface for retrieving advertisements for display with the content. The apparatus may further include an interface to a central server for exchanging data regarding user browsing behavior, facilitating identification of links on browsed pages, prioritizing links for prefetching of identified data, etc. When a first page is displayed in a browser, content identified by a link to a second page is fetched and an enhanced browsing window, which may initially be invisible, is built. When a user mouses-over the link or an associated icon, the window is automatically displayed and the user can navigate the displayed content.

WO 2006/037054 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD AND APPARATUS FOR ENHANCED BROWSING

BACKGROUND

5 This invention relates to the field of computer systems. More particularly, a method and apparatus are provided for improving the quality and efficiency of users' browsing experiences.

Today's browsers provide users with substandard browsing, primarily because their focus is limited to a single web page at any given time. Specifically, a browser generally
10 displays just a single page, which may include hyperlinks to any number of other pages or sites. The browser does not allow the user to see what is on a linked page until he or she redirects the browser to that page (e.g., by selecting a hyperlink). Only then can the user determine whether the page contains anything of interest to her. If not, she must retrace her action to return to another possible branching point (e.g., by clicking a "back" button).

15 This pattern – of selecting a link to go to a new page, reviewing its content, and possibly selecting a link on that page – may continue any number of levels deep, all of which must be retraced to return to a starting point. When that starting point is a list of links to web sites or pages (e.g., at a search engine site) or a list of links to goods or services (e.g., at a retail or auction site), a user may have to traverse a number of chains of linked pages, and
20 continually return to the starting point, in the hope of finding content that more closely matches her interest.

In addition, when the user selects a link to navigate to a corresponding page, only then does the browser retrieve the content of that page. Depending on the bandwidth or type of communication link available to the user, and the status of the starting point and target
25 web site (e.g., how congested the web server is), there is often a noticeable time lag before the target page is fully displayed. When the user accesses numerous pages, as is typical during a search session with a search engine or retail/auction site, the combined duration of the time lags can cause a significant amount of wasted time. A user wishing to quickly review several links or pages can become very frustrated with her browser's response time.
30 And, if an error is encountered while trying to load a page, the user may have to try reloading it multiple times before she is successful or before she gives up.

Further, users receive little assistance, if any, while navigating multiple chains of linked pages. For example, when a user browses through multiple chains from a page of search results provided by a search engine, she may come across pages that, while not fully matching her interest, may bear further examination if better pages are not found.

5 Traditionally, she would have to remember how she reached that page (e.g., the sequence of links she selected to get there) or add a bookmark to her browser. Remembering sequences of links becomes more and more difficult as they (and her browsing session) get longer and longer. And, accumulating bookmarks that are like to be of little or no interest makes bookmark management increasing difficult.

10

SUMMARY

Therefore, in one embodiment of the invention, a method and apparatus are provided for enhanced browsing of electronic data. In one method, a first page (e.g., web page, image, electronic mail message) displayed in a browser includes a link from the first page to a
15 second page. An enhanced browsing window containing content from the second page is constructed, and may be cached, but is initially invisible.

The content may be augmented by one or more ads that are relevant to the content or that are deemed to be possible interest to the user. When the user mouses-over (places a cursor over) the link to the second page or an icon or status indicator associated with the link,
20 or otherwise indicates an interest in the link, the enhanced browsing window is automatically displayed.

The content used to populate an enhanced browsing window may be fetched when the user expresses an interest in the content, or may be prefetched beforehand. Content from any number of pages linked to the first page may be fetched or prefetched; the links may be
25 prioritized to determine the order of content retrieval. In this embodiment, actual content of a linked page is retrieved (e.g., not just an image of the content).

On the first page, status indicators or icons may be placed near some or all of the links to other pages. The icons are configured to indicate the status of the fetching or prefetching of content from the linked pages, or some other status of the content. For
30 example, different icons may be employed or an icon's appearance may be changed to indicate that a link has been identified for prefetching, that retrieval or prefetching is in progress, that retrieval has completed, that prefetching was delayed or interrupted, that the linked content could not be retrieved, etc. Or, an icon associated with a link may be

configured to indicate that the linked content matches content already viewed, that the content presents a security risk (e.g., contains a virus or spyware), that the content will take an extended period of time to load, that the content may be inappropriate (e.g., obscene material), etc. The icons may be enabled as controls for facilitating access to the content and/or for configuring the enhanced browsing.

An enhanced browsing window may be approximately 75% of the size of the browser window, may be located anywhere on top of the browser, and the cursor may be moved to a location within the window when the window is opened. If the cursor is moved out of the window, the enhanced browsing window may close. Another window may open with other content if the user mouses-over a different link in the first page. If the user chooses (e.g., by clicking a user interface control), the first page (in the browser) may be replaced by the page that was displayed in an enhanced browsing window. Content identified by a link in an enhanced browsing window may also be prefetched, so that a user may enjoy multiple levels of enhanced browsing.

In one embodiment of the invention, an enhanced browsing apparatus includes a fetcher for fetching (or prefetching) content identified by links in a page displayed by a browser, a window generator for generating and/or displaying an enhanced browsing window, and a cache for storing the enhanced browsing window. The apparatus may also include an ad interface for retrieving advertisements for inclusion in the window, and may include an interface to a central server for exchanging data regarding user browsing behavior, facilitating identification of links on pages, prioritizing links for fetching of identified data, etc. An enhanced browsing apparatus may be implemented with, or as, a browser or graphical user interface, and may accept user input from a pointing device (e.g., a mouse controlling a cursor), keyboard and/or other devices.

DESCRIPTION OF THE FIGURES

FIG. 1 is a block diagram depicting an enhanced browsing apparatus, in accordance with an embodiment of the present invention.

FIG. 2 depicts an enhanced browsing window, in accordance with an embodiment of the invention.

FIG. 3 is a flowchart demonstrating a method of providing enhanced browsing, in accordance with an embodiment of the invention.

FIG. 4 is a flowchart demonstrating a method of prefetching target content, in accordance with an embodiment of the present invention.

FIG. 5 depicts a method of using an enhanced browsing column or stripe, in accordance with an embodiment of the present invention.

5 FIG. 6 illustrates a navigation tree for facilitating a user's navigation of content that was browsed or searched, in accordance with an embodiment of the invention.

FIG. 7 depicts an enhanced browsing window, in accordance with an alternative embodiment of the invention.

10 FIG. 8 depicts illustrative icons for indicating the status of target content or target content retrieval, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

The following description is presented to enable any person skilled in the art to make and use the invention, and is provided in the context of particular applications of the invention and their requirements. Various modifications to the disclosed embodiments will be readily apparent to those skilled in the art and the general principles defined herein may be applied to other embodiments and applications without departing from the scope of the present invention. Thus, the present invention is not intended to be limited to the embodiments shown, but is to be accorded the widest scope consistent with the principles and features disclosed herein.

15
20

Introduction

In one embodiment of the invention, a method and apparatus are provided for enhanced browsing of electronic data. A user browses or navigates his browser to a first electronic page (e.g., web page, document, electronic mail message) that contains one or more links or references to other pages. When he selects (e.g., mouses-over or places a cursor over) a link to a second page or an icon or indicator associated with the link, an enhanced browsing window or frame containing content of the second page is displayed on top of or in front of the browser.

25

30 In this embodiment, the enhanced browsing window contains actual content from the second page, such as HTML (HyperText Markup Language), not just an image (e.g., a .gif or .jpg image) of the content. The content of the second page may be prefetched before the user chooses to preview it, and so the enhanced browsing window can be displayed almost

immediately when the user selects the link to the second page. The contents of the window may change as the user mouses-over other links, or separate enhanced browsing windows may be generated for each link.

For purposes of describing embodiments of the invention, a “link” that identifies or is associated with data that may be retrieved or prefetched may take any form – graphical, textual or other. A link may therefore include any object (e.g., an icon) or information that embodies or is accompanied by a link (e.g., a hyperlink) or reference to other electronic data or content.

The apparatus for providing enhanced browsing may include various program modules, which may be written in software using any appropriate programming language or coded in firmware. An illustrative apparatus includes a graphical user interface for presenting the enhanced browsing window and controls associated with enhanced browsing, a cache for caching content for display in the window, and a fetcher or prefetcher for fetching the content. The apparatus may also include one or more interfaces to servers storing ads for display in an enhanced browsing window and data describing users’ viewing activity. One such interface couples the enhanced browsing apparatus to a central server for facilitating enhanced browsing. The apparatus may be constructed as a plug-in to an existing browser (e.g., Internet Explorer, Firefox), a plug-in to another application (e.g., Microsoft Outlook) or as a complete browser or other application.

The content of the second page displayed in an enhanced browsing window may be augmented with ads, particularly ads relevant to the content. For example, the content may be analyzed to determine a theme or nature of the second page or, if the links from which data are retrieved comprise a list of search results, the ads may be selected based on the search criteria that yielded the search results. In one implementation of this embodiment of the invention, ads retrieved as part of the second page’s content may be replaced with different ads. In addition, content for an enhanced browsing window may be scanned for security purposes (e.g., to detect viruses, spyware, etc. Details of this enhanced browsing embodiment of the invention are provided in a following section.

In another embodiment of the invention, content of a page linked to a browsed web page (or other content) is prefetched, possibly for viewing in an enhanced browsing window. Various methods or heuristics may be applied to determine which linked pages or content to fetch or prefetch. Illustratively, when the user’s browser displays a page of search results from a search engine (e.g., google.com, yahoo.com), prefetching is done automatically for

some or all of the linked pages or content (e.g., web pages or sites that may have information relevant to the user's search criteria). Similarly, when the browser displays a list of links to goods or services offered for sale at a merchant or auction site (e.g., amazon.com, ebay.com), prefetching of content may automatically begin with the linked items.

5 Prefetching may be initiated as soon as the browser receives or displays the main browser page. The prefetching may therefore coincide with the user's review of the page and/or the list of linked pages or other content. Thus, before the user even selects a link to content that he would like to see, that content (and/or other content) may be prefetched. Prefetched content (or content that is to be prefetched) may be scanned for viruses, spyware,
10 adware, pornography and/or other undesired content or code. Icons or other indicators may be associated with links and configured to indicate the status of the retrieval or prefetching of content through the links.

 In implementations of this embodiment of the invention, a choice of what to prefetch may be heuristically determined based on the font size of a link, the link's location on the
15 browser page, its position within a list of links, etc. Further details of this embodiment of the invention for prefetching are provided in a following section.

 In yet another embodiment of the invention, a mechanism is provided for maintaining a user's ability to enjoy an enhanced browsing experience while scrolling through a list of links (e.g., hyperlinks). In one implementation of this embodiment, a graphical stripe or
20 column overlaps or is superimposed on the list. The stripe may be arranged as (or adjacent to) a border or edge of an enhanced browsing window. The list of links may extend multiple pages or screens, and the stripe is configured to extend as the list is scrolled into view. The user may scroll through the list by sliding a user interface cursor along or within the stripe (e.g., up/down or left/right). While navigating within the stripe, content described by the
25 links is previewed or displayed in an enhanced browsing window.

 Also while navigating within the stripe, as the cursor nears the boundary of the main browser in a list that is too long to fully display within the browser, the contents of the browser are scrolled. As the cursor crosses over or is aligned with a link, content from that link is displayed in an enhanced browsing window, or a separate window may be opened and
30 closed for each link. Thus, in this embodiment of the invention, the user can very quickly scan the content of some or all links in a list. Further details of this browsing stripe embodiment of the invention are provided in a following section.

In an alternative implementation of this embodiment of the invention, a user operates a mouse wheel or provides other control input (e.g., an arrow key, page up or page down key), while an enhanced browsing window is open with a first page of content, to quickly exchange the current contents of the window with content from another link in a series of
5 links. Illustratively, the mouse wheel is operated while a cursor is located proximate to (e.g., on top of, adjacent to) an icon or indicator associated with a link to the first page. When the scroll wheel is rotated, the cursor moves to the icon associated with the next link, and the page containing the links may also scroll.

In another embodiment of the invention, the apparatus displays a graphical depiction
10 of a user's navigation or viewing of content (e.g., web pages, documents, electronic mail messages). The depiction may be rendered as a vertical or horizontal tree, wherein each node corresponds to one item (e.g., web page, image, document) or one set of items.

In one implementation of this embodiment, a tree root is created when the user initiates a new search (e.g., on a search engine site or at a site offering a good or service) and
15 a page of search results is displayed in the user's browser. When the user navigates to a page linked to the current (e.g., search results) page, a new node in the tree is generated and connected to the previous node. As the user navigates deeper by selecting additional links, more and more nodes are added. To quickly move backward in his search, the user may click on a node and be taken back to the corresponding content. From there, he may choose
20 to navigate a different path. Similarly, the user may quickly move to any other content represented in the tree by selecting the appropriate node.

The user may be able to mark a node by altering its appearance (e.g., color, size, pattern); this may facilitate the user's return to a particular page. Further details of this
25 embodiment of the invention are provided in a following section.

Enhanced Browsing

FIG. 1 depicts an apparatus for enhanced browsing of electronic data, according to one embodiment of the invention. In the illustrated implementation, the apparatus is configured as a plug-in or add-on to a web browser such as Internet Explorer by Microsoft
30 Corporation, Firefox by the Mozilla Foundation, Netscape Communicator by Netscape Communications Corporation, etc. In other implementations, the apparatus may be provided as part of a distinct application or browser, or as a plug-in or add-on to a different type of application (e.g., electronic mail, instant messaging, database).

The term "target link" may be used herein to refer to a link whose content is, or may be, selected for retrieval for display in an enhanced browsing window. Similarly, the term "target content" may be used to refer to content that is or may be retrieved for display, with or without prefetching.

5 Enhanced browsing apparatus 102 operates on virtually any type of computing device (e.g., computer, personal digital assistant, web-enabled telephone) and comprises user interface 104, content fetcher or prefetcher 106, cache(s) 108, ad server interface 110 and optional central server interface 112. The apparatus is coupled to a host browser, similar to other plug-ins.

10 Enhanced browsing apparatus 102 is coupled to computer systems or networks containing web sites, web pages, documents, electronic mail messages and/or other electronic data or content. The apparatus may be coupled to these entities by any types of communication links, which may be shared (e.g., network) or dedicated, and wired or wireless. In particular, apparatus 102 may be coupled to a central server, which may include
15 or be coupled to a database or other collection of data for facilitating enhanced browsing, as described below. Content accessed through enhanced browsing apparatus 102 may also, or instead, be stored on the same computing device as the apparatus.

User interface 104 is configured to build, display and manipulate an enhanced browsing window. The user interface may also provide any number and type of controls to
20 allow a user to navigate or manipulate content within such a window, such as buttons, icons, a toolbar, etc., and may also accept keyboard input (e.g., key sequences using the CTRL or ALT keys, up and down arrow keys, page-up or page-down keys).

The various controls may allow a user to initiate or terminate fetching or prefetching of target content, open or close an enhanced browsing window, navigate his or her browser
25 to retrieved content (e.g., by directing the browser to a page displayed in an enhanced browsing window), fetch content linked to content displayed in an enhanced browsing window, replace the content displayed in an enhanced browsing window with other content, replace a displayed window with another window, etc.

In particular, user interface 104 may provide controls, menus or other means for
30 allowing the user to customize the enhanced browsing apparatus or change how it operates. User customization options may include: size or position of an enhanced browsing window, number of target links at a time from which to fetch content (e.g., none, all, ten, twenty), how to identify or prioritize target links, default action(s) to take in response to certain user

activity (e.g., when the user clicks inside a window or on a link within the displayed target content), how long to delay opening, closing or changing an enhanced browsing window, etc.

In one embodiment of the invention, user interface 104 builds an enhanced browsing window when target content is retrieved, but keeps the window invisible until and unless the user actually indicates an interest in (e.g., mouses-over) the associated target link or an indicator (e.g., an icon) associated with the link. The window is then made visible. Invisible windows may be stored in cache(s) 108.

Content prefetcher 106 is responsible for fetching content from appropriate sources (e.g., web sites, databases, document repositories, electronic mail gateways) based on default criteria and/or a user's specified criteria. For example, content prefetcher 106 may commence prefetching target content immediately after the browser loads or displays a page containing one or more target links, thereby taking advantage of communication bandwidth that is idle while a user examines the page. Any number of links on the browser page may be treated as target links. Content from a specific link may be fetched in response to a predetermined user input (e.g., an ALT-click or ALT-mouse-over of the link or an associated status indicator).

In embodiments of the invention described herein, content prefetcher 106 may fetch or prefetch target content when a user expresses an interest in a link by mousing-over or otherwise indicating an interest in a target link or an indicator (e.g., icon) associated with a target link. As described in a following section, an indicator associated with a target link may be configured (e.g., by user interface 104) to indicate a status of the fetching or prefetching (e.g., commenced, in process, completed, aborted, broken link) and/or a status of the content (e.g., previously viewed, contains a virus, contains spyware, contains obscene material).

Content prefetcher 106 and/or some other component of enhanced browser apparatus 102 (e.g., a separate target identification module) may be configured to identify target links. As described in the following section, prefetch templates may be employed to identify target links in some web pages or other content. Briefly, a prefetch template is designed for a specific page (or set of pages) and indicates where on the page a target link (or set of target links, such as a list of search results) may be found. Alternatively, any list of links or set of links apparently arranged in a list format may be treated as target links.

However target links are chosen (e.g., by the user, according to a default rule or template), they may be prioritized before the target content is retrieved. Rules for

prioritizing target links are discussed below, and may be based upon the order of the links in a list of search results, their position on the page on which they appear, their font size, etc.

Depending on any priority assigned to a particular target link, the associated content is retrieved by content prefetcher 106. Upon retrieval of the target content, user interface
5 104 and/or some other component of apparatus 102 constructs an enhanced browsing window for the content.

It should be noted that prefetching and/or prefetch status indication are not required for all embodiments of the invention. Although prefetching content may speed up a user's browsing or previewing of content, other benefits of the invention may be enjoyed without
10 content being prefetched.

For example, it may be desirable to detect unwanted content (e.g., spyware, viruses, pornography) regardless of whether the content is being prefetched or just fetched. Or, a user may find it helpful to be reminded that he or she has already viewed the content, saved the target link to a favorites list, decided or indicated whether the content is or is not helpful or
15 enjoyable, etc.

Cache(s) 108 include one or more caches for storing target links, target content, prefetch templates, enhanced browsing windows, a user history (e.g., a sequence of sites browsed or previewed) and/or other data. In the embodiment of the invention depicted in
20 FIG. 1, a cache used by enhanced browsing apparatus 102 is separate and distinct from any cache(s) maintained by the browser. Cache(s) 108 need not be included in all embodiments of the invention, or its functions may be performed by some other component of apparatus 102.

In the illustrated embodiment of the invention, when target content is displayed in an enhanced browsing window, it may be accompanied by one or more advertisements. The
25 retrieval of ads is managed by ad server interface 110. The ad server interface interacts with any number of ad sources (e.g., advertisers, media organizations) and/or central server 120. For example, when an advertisement is needed, ad server interface 110 may communicate with central server 120 to determine which ad(s) to retrieve. The ad server interface may then contact the appropriate source to obtain the ad or retrieve it from the central server. The
30 same ads may be displayed in enhanced browsing windows opened for different target links, particularly for all target links appearing on one browser page.

Ads may be content-based, to match or reflect target content within an enhanced browsing window, or may be matched to a main browser page containing the associated

target link. For example, if target links on the main browser page comprise a list of search results, the search terms that yielded the search results may be used to select an ad. Thus, ad selection may be made by apparatus 102, central server 120, some other entity (e.g., an ad source) or any combination of these components. Ad server interface 110 may be optional in
5 other embodiments of the invention, or its functions may be performed by another component of apparatus 102.

Central server 120 maintains a database or other collection of prefetch templates, user behavior (e.g., navigation activity or patterns), prefetch or prioritization heuristics, and/or other data. In particular, the central server may collect, from users' enhanced browsing
10 apparatuses, information regarding web pages (or other content) accessed by the users, what links in those pages were selected for browsing or previewing, the order in which they were browsed, etc.

This information may be used to help generate prefetch templates, to prioritize prefetching, and/or for other purposes. For example, by assembling information on central
15 server 120 from many users' enhanced browsing apparatuses, the most popular links within content viewed by those users can be determined and/or prioritized for prefetching. Some or all of this data may be replicated on, or shared with, enhanced browsing apparatus 102.

Central server 120 may also be a source of ads and content for display in an enhanced browsing window. The central server may be operated by an organization that
20 provides enhanced browser apparatus 102 or by a different organization.

Optional central server interface 112 communicates with central server 120 to access and share data with the central server, as described above. Thus, the central server interface may forward to the central server information regarding a user's activity (e.g., sites visited, links clicked, search terms employed) and may retrieve information useful in identifying or
25 prioritizing target links (e.g., prefetch templates, analyses of users' preferred links or content).

In other embodiments, an enhanced browsing apparatus may include more or fewer components, or the functionality of the components described above may be distributed in a different fashion. For example, an enhanced browsing apparatus may also include a
30 component for scanning prefetched content for viruses, pornography (or other material unsuitable for certain users), spyware, adware, other malware, etc.

One alternative embodiment of the invention may be implemented without prefetcher 106 or cache 108. In this embodiment, when a user browses a first page and mouses-over or

hovers near a link to a second page or a control (e.g., icon) associated with the link, an enhanced browsing window may still be displayed with content from the second page, but the content may not be retrieved until the mouse-over. And, the apparatus may make use of the browser's cache or another cache already available on the user's computing device.

5 FIG. 2 depicts an enhanced browsing window according to one embodiment of the invention. In FIG. 2, browser 200 (e.g., Microsoft Internet Explorer) is open to a first page 202, which includes a list of links 204 (e.g., 204a – 204i). Links 204 are search results in this example, but in other implementations may comprise any types of links, to any type of content. The content identified by or associated with links 204 may or may not be inter-
10 related. For example, if the links comprise results of one search operation, as do links 204 in page 202, their content may be considered inter-related.

Enhanced browsing window 210 is positioned so as to allow a user to see portions of links 204. However, in other implementations, window 210 may cover links 204 to a greater or lesser degree. Alternatively, any or all of window 210 may be made fully or partially
15 transparent, so that some or all of the content of browser page 202 is viewable even when window 210 is displayed. As described above, enhanced browsing window 210 may be constructed and cached prior to being displayed.

In the embodiment of the invention depicted in FIG. 2, when a user mouses-over the link (e.g., link 204i) corresponding to the content 212 of the enhanced browsing window, or
20 a control (e.g., icon, indicator) associated with the link, the window is automatically and quickly displayed. The size and/or position of window 210 may be adjustable by a user, but limits may be placed on the user's ability to re-size or re-position the window.

Ad frame 220 is also positioned within enhanced browsing window 210. The ad frame may be arranged in any position or along any edge of the window. Illustratively, ads
25 received along with or as part of content 212 from a location identified by link 204c may be removed or replaced prior to display of the content within window 210.

Content 212 may be reduced in font size to allow it to more fully or easily fit within window 210, and/or scroll bars (e.g., scroll bar 214) may be provided to allow a user to scroll vertically and/or horizontally. If the user clicks (e.g., left-clicks) within window 210, page
30 202 of browser 200 may be replaced by the page or content displayed in the enhanced browsing window. The user may be able to close window 210 by simply moving the cursor out of the enhanced browsing window (e.g., to somewhere within browser page 202) or taking other action (e.g., right-clicking within the enhanced browsing window).

In one embodiment of the invention, a selectable tab or drop-down menu 230 is positioned adjacent to or within enhanced browsing window 210. Clicking on tab 230 opens a menu allowing a user to customize one or more features of the enhanced browsing window or apparatus (e.g., size of window 210, how long the user must pause over a link before the window opens, degree of transparency). Alternatively, menus or controls for customizing a user's enhanced browsing may be located elsewhere within enhanced browsing window 210, or may be summoned with a particular command or user interface input.

In other embodiments of the invention, other user interface controls or options may be provided. For example, a set of controls may be provided to allow a user to specify how the enhanced browsing apparatus should act when the user takes certain action (e.g., clicks on or mouses-over a link within an enhanced browsing window, clicks within a window but not on a link, mouses-over a second target link while a first link's content is still being previewed).

In one implementation, buttons or controls (e.g., "load," "prefetch content from all links") may be provided with an enhanced browsing window to allow a user to specifically request the target content or target page to be loaded into a browser, to prefetch content, or take some other action. For example, a "hold" button may allow a user to specify that the enhanced browsing window should remain open on its current content regardless of subsequent mouse movements, perhaps until the user selects a "hold off" button or clicks within the window.

Another button or control may be provided to enable a user to immediately return to the results of the latest search he or she conducted. For example, every time the user initiates a search, a "Back to Search Results" button may be configured with the URL (Uniform Resource Locator) of the search results. Then, until the user initiates a new search, he or she can select the button to return (in his or her browser or an enhanced browsing window) to the latest results.

FIG. 7 depicts an enhanced browsing window according to another embodiment of the invention. In FIG. 7, enhanced browser window 710 is employed to preview content within an electronic mail application (e.g., Microsoft Outlook).

In the illustrated implementation, when electronic mail message 702 is displayed, content identified by or associated with a link included in the message (e.g., link 704) may be prefetched. Thus, content 712 within enhanced browsing window 710 comprises content

retrieved from a location identified by link 704. The enhanced browsing window also includes ad frame 720, which may present ads relevant to content 712 or message 702.

In another implementation, an enhanced browsing window may be employed to preview content of electronic mail messages, such as messages listed or indexed in message
5 folder window 706.

FIG. 3 demonstrates a method for enhanced browsing, according to one embodiment of the invention. This method may be employed with apparatus 102 of FIG. 1 and is thus implemented on a user's client computing device, which is equipped with a browser.

In state 302, the user's browser is opened at a web page or other collection of content,
10 which may be considered the "browser page" herein to differentiate it from another page or other target content displayed in an enhanced browsing window.

In state 304, the enhanced browsing apparatus applies default or custom rules to locate a target link on the browser page. Any number of additional target links may also be identified. For example, the apparatus may automatically locate all links on the browser
15 page and treat them as target links. Or, the apparatus may apply a prefetch template, customized for the browser page, to identify links most likely to be of interest to the user.

A prefetch template may be stored (e.g., cached) within the enhanced browsing apparatus, or may be stored on a central server for retrieval by the apparatus before or when the browser page is opened. As yet another alternative, the template or other information for
20 identifying (and/or prioritizing) target links may be retrieved from the same server that served the browser page, or may be received as part of the browser page.

In state 306, content associated with the target link is prefetched. The target content may include all or a portion of the web page, document, image or other data identified by the target link. Thus, the target content may include HTML, XML or other markup language,
25 but in this embodiment of the invention is not just an image of the content. As will be seen below, because the actual content is prefetched, it can be presented in a readable, understandable manner, and can be navigated (e.g., if it contains links). In particular, the prefetched content will not be presented as "thumbnails" or other non-navigable, often illegible, images.

30 One or more ads may also be retrieved, to display with the target content. As described above, the ads may be retrieved from any suitable ad source, and may be selected based on the target content, the browser page, search terms entered by the user, the user's browsing history, or other information.

In one embodiment of the invention, a target link or status indicator associated with a target link changes appearance (e.g., design, color, size, underlining, bold) to indicate when the target content has been prefetched. In one implementation, a target link may first appear (in the browser page) in a first color (e.g., light blue), but then change to a different color (e.g., dark blue) after the target content has been fetched. Multiple color palettes may be employed to allow link colors to be changed easily and rapidly.

In another implementation, described in a following section, a status indicator associated with the target link changes appearance or is altered to indicate the status of the prefetching of content from the target link has changed (e.g., been initiated, completed, failed).

Advantageously, after content for a target link is prefetched, if the user navigates the browser to that link (i.e., by clicking on it), the content can load almost immediately from the enhanced browsing apparatus' cache (or wherever else it was stored). Thus, the user's browsing experience is enhanced even without using an enhanced browsing window to preview content.

In state 308, an enhanced browsing window is constructed and populated with the target content and any ads that were retrieved to accompany the content. The content may be resized or may retain its full size, in which case scroll bars may be provided for scrolling vertically and/or horizontally. In different implementations of this embodiment of the invention, ads received as part of the target content may be retained, excised or replaced.

In one implementation, when target content from multiple target links is prefetched, enhanced browser windows may be generated (but not displayed) for any number of the links. Thus, if content is prefetched for fifty target links, enhanced browsing windows may initially be generated for any number of the target links, from zero to fifty. Windows may be generated for the remainder later (e.g., after the user starts previewing content).

In state 310, the enhanced browsing window is cached without being displayed. By constructing the window before it needs to be displayed, the enhanced browsing window can be presented almost instantly when the user indicates an interest in the target link. In the method of FIG. 3, a separate enhanced browsing window is constructed and cached for each target link whose content was prefetched. Thus, states 304 through 310 may be repeated for any number of target links.

In state 312, the enhanced browsing apparatus detects a user mouse-over or other selection of the target link. When a user interface cursor (e.g., mouse cursor, a cursor or

selector controlled by the TAB key) appears over or adjacent to the target link or a control (e.g., icon, status indicator) associated with the target link, a predetermined period of time (e.g., one second) may be required to pass before the window containing the target content will be switched to visible status. This time period may be adjustable by the user.

5 Illustratively, if the user employs a keyboard for input (e.g., instead of a mouse), selection of the target link may be identified by the user's tabbing to the link and pausing for the necessary time period.

In state 314, when it is determined that the user has moused-over or otherwise selected or expressed an interest in the target link, the enhanced browsing window is made
10 visible. In one implementation, the window is approximately 75% of the size of the user's browser, and may be positioned adjacent to (or overlapping) the target link or a list of links that includes the target link. The screen cursor may be positioned within the enhanced browsing window, near (or over) the target link.

In optional state 316, enhanced browsing may be extended to the target content so
15 that the user can navigate the content or the enhanced browsing window. That is, one or more links within the target content may be treated as target links, in which case their associated content is prefetched. Then, if the user mouses-over a target link in the target content, or a control (e.g., status indicator) associated with that link, another enhanced browsing window may be created to display the new target content. Or, the target content of
20 the enhanced browsing window may be replaced with the new target content.

Illustratively, if the user clicks on the target link associated with the target content, or left-clicks (i.e., clicks the primary mouse button) within the target content (but not on a link), the browser page may be replaced by the target content or the page containing the target content. The same action may be taken if the user leaves the cursor motionless within the
25 enhanced browsing window for a predetermined period of time (e.g., 5 seconds). If the user clicks on a link within the target content, the linked content may replace the target content within the enhanced browsing window or the user's browser may be directed to that content or page.

In state 318, if the user moves the cursor out of the enhanced browsing window, it
30 may close because it may be assumed that the user is no longer interested in viewing the target content. Or, right-clicking (clicking a mouse button other than the primary button) within the window (e.g., but not on a link) may cause it to close.

If the user moves the cursor from the window to a second target link, the window may disappear and be replaced with the enhanced browsing window constructed for the second target content (or the target content may be replaced by the second target content). In one embodiment of the invention, if the user rotates a scroll wheel or generates other
5 predetermined input (e.g., up arrow or down arrow), the cursor may be automatically moved to the next (or previous) link and the corresponding target content will be displayed in an enhanced browsing window.

In one embodiment, the state of an enhanced browsing window may be retained for some period of time after it is closed. Then, if a link to the same content is moused-over or
10 otherwise selected for enhanced browsing, the window may open with the same state (e.g., centered or scrolled to the same portion of the content).

As one skilled in the art will recognize, the enhanced browsing experience described herein differs significantly from a traditional “pop-up” within a web page. Traditional pop-ups, when selected, merely display information that was received with or as part of the web
15 page. In contrast, an enhanced browsing window displays content from a different page or source, and that content may be navigable. In one implementation, the enhanced browsing apparatus may be configured to suppress traditional pop-ups.

The illustrated method ends after state 318.

In one implementation of this embodiment of the invention, as a user mouses-over
20 different target links and new enhanced browsing windows are opened, the same or similar ads may accompany each set of target content. The ads may change, however, if the user directs her browser to a different page, initiates a new search (with new search terms) in the browser page, or doesn't click on any of the ads. In the latter case, if a set of ads is presented a number of times and the user expresses no interest in them, another examination may be
25 performed of the user's latest search criteria and/or the content of pages she has chosen to view, and a new set of ads may be selected for placement in an enhanced browsing window.

In another implementation of this embodiment of the invention, a user's enhanced browsing apparatus or windows may be branded or customized by an organization that provides the enhanced browsing apparatus (e.g., a favored web site) or by some other
30 organization. In this case, an enhanced browsing window may be constructed with the provider's logo, with a link to the provider, with ads sponsored by the provider, etc.

In yet another implementation, the enhanced browsing apparatus is installed and operated at a central server. In this implementation a user navigates to the server to engage and employ the apparatus. This implementation may be well suited for thin clients.

An embodiment of the invention has thus been described in which: content from a second web page is prefetched while a browser displays in a first window a first web page containing a link to the second page; a set of advertisements is retrieved; a second window is constructed to contain the prefetched content and advertisements, but is not displayed; placement of a cursor in the first window and proximate to the link is detected; and the second window is then displayed in front of the first window.

An embodiment of the invention has been described in which an apparatus for facilitating the viewing of electronic data comprises: a browser for displaying a first page having links to other pages; a first cache managed by the browser; an enhanced browsing window for displaying a second page while the browser displays the first page; a second cache for caching the enhanced browsing window; a fetcher (or prefetcher) configured to retrieve content identified by the links in the first page; and a user interface configured to detect positioning of a cursor (or other pointing tool) proximate to a link to the second page; wherein the enhanced browsing window is invisible until positioning of the cursor is detected.

Prefetching Target Content

In one embodiment of the invention, methods are provided for identifying and/or prioritizing target links for retrieval of associated target content. The links may be identified within a web page or other browsable object (e.g., document, image, electronic mail message). Content from any number of links on the page (i.e., zero or more) may be retrieved.

As described in the preceding section, prefetching of content may be done in a default manner, or may be based on user-specified criteria and/or criteria customized for a particular web page or site. Thus, content from links that are more popular or more likely to be selected by a user may be prefetched before (or instead of) content from links less likely to be selected by the user.

In one implementation of this embodiment of the invention, a prefetch template may be used to identify a set of links on a page. A prefetch template may be designed for a specific web page or site, to identify target links (or recommended target links) by their

location or position on the page. For example, lists of search results (e.g., from a search engine or merchant web site) may be located in various locations on different pages (e.g., in a single column on the left or right hand side of a page, in a two-column table), and prefetch templates for those pages would be designed accordingly.

5 Content described by links other than those identified by a prefetch template may also be prefetched, but the target links identified by the prefetch template may be awarded higher priority. Illustratively, the default order of prefetching target content may match the order in which their links are posted on the page (or in a list of search results), or content for some or all target links may be prefetched simultaneously (e.g., in parallel)

10 Enhanced browsing apparatuses may maintain (or even generate) prefetch templates, or may retrieve them from a central server or other source. Thus, when a particular page is loaded into a browser, an enhanced browsing apparatus operating with the browser may quickly retrieve a prefetch template from the central server.

 In another implementation, a prefetch template for a web page (or other content) may
15 comprise a list of target links on that page. The list may be prioritized, and may be derived by observing any number of users' selection of links while browsing or viewing the page. Thus, a central server may collect data regarding multiple users' browsing activity (e.g., pages visited, links selected), and distill the data to identify and/or prioritize links on web pages those users' visited.

20 In other implementations of this embodiment of the invention, all links on a page may be treated as target links by default, or all links within a list of search results. Content from any number of target links may be prefetched in any order and/or in parallel with other links' content. Yet further, a link retrieved as part of the content associated with a target link may also be treated as a target link, in which case content that is multiple pages or multiple
25 links removed from the current page (the current page to which a browser is open) may be prefetched without leaving the current page.

 In yet other implementations, heuristics may be used to help identify and/or prioritize target links, in addition to or instead of using a prefetch template (e.g., for a page for which
30 no prefetch template is available). For example, a set of heuristics may specify that links having certain characteristics or meeting certain criteria should be target links, or that target links should be prioritized based on those characteristics or criteria. Illustrative characteristics include: the region of a page in which a link is located (e.g., center, top, left side), font size, link color, the number of links to the same content (e.g., the more links there

are to a particular page of content, the higher priority it should receive), a link's proximity to an image or other notable content, etc.

In another implementation of this embodiment a user may be able to select or de-select target links for prefetching. For example, the user may be able to enter one particular
5 key sequence (e.g., ALT-B) or select one particular control or button within a user interface to instruct a content prefetcher to target one certain link, or all links, on a page, or some other key sequence (e.g., ALT-N) or control to prevent the apparatus from targeting a certain link or any links.

A user may be able to train an enhanced browsing apparatus to identify target links.
10 For example, the user may be able to select desired target links on a page (e.g., by drawing a box around them, by mousing-over or clicking on them), after which the apparatus memorizes the links for automatic identification the next time the user visits the page. Illustratively, to train the apparatus the user may first initiate a training mode (e.g., by activating a particular user interface control), then select the target links and disengage the
15 training mode.

In one implementation, a user may be able to construct or customize a prefetch template, which may be useful if the user often visits a page for which the enhanced browsing apparatus does not have a template. A user interface for the apparatus may provide controls allowing the user to construct the template by identifying locations of target links in
20 the page, by specifying that all links are target links, by selecting individual links as target links, choosing characteristics for selecting target links, etc.

As described above, an enhanced browsing apparatus may collect a user's browsing or previewing (i.e., enhanced browsing) activity to help identify target links. Thus, if the user frequently selects or navigates to links arrayed along the right side of pages at a
25 particular site, upon a subsequent visit to that site the user's enhanced browsing apparatus may automatically treat such links as target links and prefetch their associated content. Similarly, if the user selects links in a set of links in a particular order (e.g., top to bottom, bottom to top, left to right), the enhanced browsing apparatus may prioritize prefetching of the links' content accordingly.

30 Data accumulated by the apparatus may be shared with a central server in order to accumulate and analyze data for multiple users, which may then be distributed to their (and/or other users') enhanced browsing apparatuses to help identify or prioritize target links. For example, based on activity data collected from users who visited a particular web site,

the central server may identify certain links (or links in a certain location of a page at that site) as being most popular. That information may be shared with users' apparatuses to make those links target links. In one implementation, however, users may be provided with an option to not share information regarding their browsing activity.

5 Thus, a centralized database for identifying and/or prioritizing target links may be maintained. Individual enhanced browsing apparatuses may receive data from the database on periodic intervals, when a browser is opened (or opened to a particular page), or on some other schedule. For example, when a browser is directed to a particular page, the database may be accessed to retrieve pertinent data.

10 In addition to, or instead of, collecting at a central database data regarding users' activity (e.g., what sites they visited, what links they clicked on), similar data may be retrieved from web sites. This information may indicate which pages/links were most often selected by the web sites' visitors, the most popular order in which they were selected, etc. This information may be retrieved by a central server or by a user's enhanced browsing
15 apparatus.

 In one method of prefetching, links may be chosen as target links, or target links may be prioritized for prefetching, based on a point system. For example, from information accumulated by the enhanced browsing apparatus or a central server, links on a web page may be assigned points based on their popularity (e.g., how often they were selected). Points
20 may also be awarded based on heuristics (e.g., font size, location of a link within a page). The more points awarded to a link, the more likely it is treated as a target link and/or the higher priority it will receive for prefetching.

 Prefetching is not limited to links present or visible in a single page. For example, a page displayed in a browser may be too long to view at once, and so some links on that page
25 may be off-screen. Further, and as can be seen with search result listings, a list of links may span multiple pages, with each page linked to the next (e.g., using "previous" and "next" buttons). Therefore, in one method of prefetching content for enhanced browsing, links may be target links even if they are off-screen or on a page linked to the current page. In general, any number of pages that continue or are forward-linked to a current page (e.g., by "next
30 buttons) may be prefetched, and/or links appearing on those pages.

 In addition, when a web page or other content that contains links is prefetched or displayed in an enhanced browsing window, those links may be treated as target links. Thus,

a user may use the enhanced browsing window to quickly navigate several levels or links away from the page to which his or her browser is currently opened.

In one method of prefetching, when target content cannot be retrieved, the target link's appearance may be altered. For example, the link may be changed to a different color (e.g., gray, yellow) to alert a user that the link is not functional. Prefetching may fail because a target link is broken or a "page not found" error is received, a necessary certificate or other security token is not available, or for various other reasons.

In one implementation of this embodiment of the invention, prefetched content, or content to be prefetched, is scanned for viruses, malware (e.g., spyware, adware), obscene or pornographic material, etc.

FIG. 4 demonstrates a method of prefetching electronic data or content, according to one embodiment of the invention. As described above, prefetching may be performed in many different ways in other embodiments.

In state 402, a user's browser is opened at a web page or other electronic content (e.g., document, image, electronic mail message), which may be considered the "browser page" herein to differentiate it from a page or other target content displayed in an enhanced browsing window.

In state 404, a set of data for identifying target links in the browser page may be retrieved from local or remote storage (e.g., from a central server). The data may include a prefetch template, a list of specific links, heuristics, etc.

In state 406, one or more target links are selected in a default manner (e.g., all links on the page) and/or using data retrieved in state 404. For example, if the page contains a relatively small number of links (e.g., five, ten), they may all be considered target links (and prefetching may begin immediately) without waiting for data designed to facilitate the identification of target links. Some or all of the links are to pages or sites different from the browser page, and therefore will require prefetching of content from different locations than the browser page was received from.

In state 408, the target links may be prioritized. For example, data for prioritizing target links may be retrieved separately or in conjunction with data for identifying target links. Data for prioritizing target links may include information regarding the relative popularities of links on the page (e.g., from a central server, from the web site that provided the browser page), a recommended order of priority, heuristics, etc.

In state 410, the target content is prefetched. If the target links were prioritized, their content may be prefetched in priority order. Additionally, content from multiple target links may be retrieved in parallel. The number of prefetch operations performed in parallel may depend upon the available communication bandwidth. For example, if the user has a
5 broadband connection, more prefetches may be done in parallel than if the user has a dial-up connection.

Illustratively, the prefetched content may include the full content described by a target link or located at the specified location (e.g., URL or Uniform Resource Locator). Or, some of the content located at or retrieved from that location (e.g., an ad, an image) may be
10 discarded.

In state 412, it is determined whether prefetching should proceed to the next level (i.e., to links within prefetched content) or another page. If so, another page is selected, such as a page retrieved as target content in state 410, and the method returns to state 404. Otherwise, the method ends.

15 State 412 may be applied sometime after target content is retrieved. For example, after content is retrieved in state 410, it may be cached until a user chooses to preview it in an enhanced browsing window. When this occurs, the method of FIG. 4 may be applied to the page or content being previewed.

In another method of prefetching, identification of target links and/or prioritization of
20 target links for prefetching may be dynamic, and depend upon a user's enhanced browsing activity. For example, if a user selects for previewing a first link in a particular position on a web page, it may be assumed that he or she will also want to preview content from links close to the first link. Thus, some prediction may be made to what content a viewer may wish to preview.

25 In yet another implementation of this embodiment of the invention, content may be prefetched from a pay-per-click or pay-for-performance ad (e.g., a textual ad, a banner, an image) without the prefetching counting as a "click." In particular, an ad or other type of content may register each user "click through" (or selection) of the ad, with each click through generating revenue to an entity that presented the ad.

30 In this implementation, content from the ad is prefetched like other content, but no "click through" is registered until the user actually selects the ad for browsing (or, in one alternative implementation, until he mouses-over the ad). Illustratively, when the ad content is prefetched, the URL or XML code used for the prefetching may include a tag, keyword or

other indicator that the ad content is not being retrieved as part of a click through. When the user selects the link (i.e., generates a click through), then a normal "click through" of the ad may be initiated. This helps ensure that the ad revenue is correctly apportioned. However, the content may be served from the prefetched version rather than awaiting the newly
5 requested copy.

An embodiment of the invention has thus been described in which an automated method of prefetching a second page of content identified by a first page comprises: retrieving data for facilitating the identification of links to pages of content; identifying in the first page one or more links to other pages; prioritizing the one or more links; for each link,
10 prefetching content from a page identified by the link; constructing an enhanced browsing window comprising prefetched content for a first link to the second page, without displaying the window; detecting placement of a cursor proximate to the first link; and displaying the enhanced browsing window after detecting placement of the cursor.

An embodiment of the invention has also been described in which a computer-
15 implemented method of prefetching content from a second electronic page linked to a first electronic page while the first electronic page is browsed comprises: while the first electronic page is displayed within a browser, identifying a set of links to target electronic pages, including a link to the second electronic page; and for each link in the set of links, prior to selection of the link by an operator of the browser, prefetching content from the target
20 electronic page.

Also described is an automated method of fetching content of a pay-per-click ad for which a payment is normally registered for each click-through of the ad, comprising: when a first page of electronic data is browsed, identifying within the first page a first link to a first pay-per-click ad; prefetching content from the pay-per-click ad without causing a payment to
25 be registered; constructing, without displaying, an enhanced browsing window comprising the prefetched content; and causing a payment to be registered for the pay-per-click ad only if a user selects the first link.

Further, an enhanced browsing apparatus has been described, which comprises: a prefetcher configured to prefetch content from a second page of electronic data while a
30 browser displays a first page of electronic data containing a first link to the second page; data configured to facilitate prefetching of content by said prefetcher, wherein the data includes link identification data configured to identify the first link and/or link prioritization data configured to prioritize the first link among a set of links within the first page; a window

generator configured to generate an enhanced browsing window comprising the prefetched content; and a cache configured to store the prefetched content and/or the enhanced browsing window.

5 Indicating Fetching and/or Content Status

In one embodiment of the invention, icons, buttons or other indicators are displayed within a page of electronic data to indicate the status of content fetching or prefetching from a target link within that page, and/or the status of the target content. The indicators, which may be considered "status indicators," may comprise any type of object (e.g., an animated or
10 static icon) that can be embedded within electronic content and provide a visual and/or audio status indication.

When configured to indicate content status, a status indicator may reveal whether a security threat was detected within the target content. Security threats may include viruses, spyware, adware, other malware, pornography, other types of obscene or inappropriate
15 content, etc.

A status indicator may also, or instead, indicate the status of a target link or an electronic connection to a content location identified by the link. For example, a status indicator may reveal that a link is broken, that an electronic connection to the linked site or page has low bandwidth or is noisy, that a connection is fast or slow, or may provide some
20 other information regarding the quality or status of the link or communication connection.

Status indicators may be received as part of the web page or other content in which they are displayed. Alternatively, the indicators may be dynamically inserted by some script or code included in the web page, by a user interface configured to facilitate enhanced browsing (e.g., user interface 104 of FIG. 1), another component of an enhanced browsing
25 apparatus, or by some other client application or browser plug-in.

Individual status indicators may be associated with each target link (or one indicator may be associated with multiple target links), and may comprise controls for taking some action relating to enhanced browsing. For example, left-clicking or mousing-over an indicator associated with a target link (with or without some other key input, such as an ALT
30 key) may serve as a trigger for fetching, re-fetching or prefetching the corresponding target content and/or displaying an enhanced browsing window containing the content.

Some other action (e.g., right-clicking on an indicator, ALT-clicking) may open a menu or set of options for configuring an enhanced browsing experience (e.g., to turn

prefetching on or off, adjust the timing with which an enhanced browsing window is opened or closed, choose the type of information to indicate with an indicator, configure user interface controls).

In one embodiment of the invention, indicators are inserted when target links are identified, and may change appearance to indicate that prefetching of target content is initiated, completed, delayed, impossible, etc. An indication that prefetching is complete may mean that the target content has been prefetched and is ready for display in an enhanced browsing window. An indication of successful prefetching may inherently indicate that the content has been cached, or such status may be separately indicated.

Indications of prefetching failure may differ for different reasons for the failure (e.g., connection timed out, target content unavailable, broken link) or may be uniform and simply reveal that prefetching could not be completed. A status indicator may indicate that prefetching is partially complete, and may even indicate how complete (e.g., by fraction or percentage).

Embodiments of the invention may be implemented within a search result listing, a shopping site, electronic mail (web or client-based), online classified ads, job boards, blogs, news story listing, and virtually any other type of application or utility that involves collections of links. These implementations may therefore be configured for operation with browsers, electronic mail programs, news readers, search clients, word processing applications, spreadsheet programs, databases, etc. A status indicator may be placed beside, above, below or in some other location that readily indicates an association between the indicator and the associated link. Placement of status indicators may be user-configurable.

Indicators may be embedded into a web page via DHTML (Dynamic HyperText Markup Language), javascript or some other programming or scripting language. The indicators may become part of the layout of the page in which they appear, or may float over the browsing window and therefore not be part of the page.

Indicators need not always be visible. Whether a particular indicator is displayed may depend on the number of target links on a page, the type of information represented by the indicator, how the page is laid out, etc. For example, if a page comprises multiple frames with many links, indicators associated with some links may not appear until a cursor is moved into a particular frame. In one embodiment, a status indicator may not be displayed for a link if content cannot be prefetched from that link.

As prefetching of target content proceeds, a status indicator associated with the corresponding target link may change appearance. For example, a status indicator may flash, blink, change color or intensity, change sound, changed design, exhibit motion, etc. Or, an indicator indicating a first status of the prefetching may be replaced by another indicator
5 indicating a different status. The status indicator associated with target content currently displayed in an enhanced browsing window may be highlighted or otherwise marked to show that it is the current status indicator.

FIG. 8 demonstrates how status indicators for indicating prefetching and/or content status may appear in one embodiment of the invention. In FIG. 8, web page 802 is displayed
10 by browser 800, and includes target links 804a – 804d. Individual indicators 814a – 814d are associated with the target links.

In this embodiment of the invention, a status indicator comprises a rectangular icon, possibly reminiscent of a miniature web page. Before prefetching of content for an associated target link commences, an icon may be plain, dim or opaque, as shown by
15 indicator 814c. When prefetching successfully completes, as shown by indicator 814a, a lightning bolt, check mark or other affirmative symbol is added to the icon.

For a target link whose content is currently being prefetched, a status indicator (e.g., indicator 814b) may include an arrow or other symbol of activity. If a particular target link's content cannot be fetched (e.g., or prefetching times out), the associated status indicator may
20 be marked with an "X", a slash or other negative symbol, as illustrated by indicator 814d.

In an alternative embodiment of the invention, a status indicator such as indicator 814c may first appear when a target link is identified. The indicator may retain the same appearance until prefetching succeeds (e.g., indicator 814a) or fails (e.g., indicator 814d). In this alternative embodiment, therefore, indicator 814b may not be employed, especially if a
25 high-speed data connection is available, which would allow prefetching to be completed quickly.

In one embodiment of the invention, content from a first target link is displayed when a user mouses-over or selects in some other manner an indicator associated with the first target link. The user may then rotate a mouse scroll wheel or provide other input (e.g., press
30 an arrow key) to display content fetched or prefetched from a next target link or previous target link, depending on the direction of rotation. Thus, in this embodiment of the invention, content from multiple target links may be viewed quickly, without requiring fine cursor movement.

When a scroll wheel (or equivalent input) is used to move from one status indicator to another, the main browser page may be scrolled by the distance between the two status indicators, unless the page can no longer be scrolled in the corresponding direction.

Regardless of whether the main browser page can be scrolled the same distance, the cursor used to mouse-over the status indicator may be repositioned to the next status indicator. A time delay may be imposed when a user scrolls from one status indicator to another, to help prevent from scrolling too far or to the wrong status indicator.

In one implementation of this embodiment, the cursor is automatically moved to the next, or previous, status indicator. And, the web page in which the target links are displayed may also scroll (e.g., to keep the cursor in relatively the same location of the display screen). The target links and associated status indicators need not be aligned linearly. If not linear in alignment, as the web page scrolls in one direction the cursor may be offset to place it over the next indicator.

If an enhanced browsing window in which target content is displayed normally closes after some period of time when the user's cursor is outside the enhanced browsing window (e.g., when it is hovering over the associated status indicator), in this embodiment of the invention, that behavior may be modified so that the window does not close while the cursor remains on (or near) an indicator. For example, until the cursor is no longer positioned above a status indicator, or some other action is taken, scrolling the mouse wheel may continue to cause content from different target links to be displayed (in the same or different enhanced browsing windows).

Other user input may affect the user's enhanced browsing experience in similar or different ways. For example, pressing up and down arrow keys (or left and right arrow keys) while a mouse cursor is positioned within the enhanced browsing window may cause the displayed target content to scroll. Pressing those keys while the cursor is in the main browser page, however, may cause the cursor to move to the previous or next status indicator (and change the target content displayed in an enhanced browsing window).

Similarly, pressing page-up and page-down keys or clicking appropriate controls (e.g., "previous" and "next," "forward" and "backward") while a mouse cursor is positioned within the enhanced browsing window may cause the displayed target content to be replaced by the content associated with the previous or next status indicator. Providing the same input while the cursor is positioned in the main browser page, however, may cause the content of that page to scroll.

An embodiment of the invention has thus been described in which an automated method of enhanced browsing of a second web page linked to a first web page displayed by a browser in a browser window comprises: identifying, in the first web page, a target link to the second web page; displaying in the browser window a first indicator associated with the target link, the first indicator indicating the initiation of prefetching of content from the second web page; prefetching the content from the second web page; displaying a second indicator in place of the first indicator, the second indicator indicating completion of the prefetching; detecting placement of a cursor proximate to the second indicator; and in response to detecting placement of the cursor, displaying a second window comprising the prefetched content.

Another embodiment of the invention is also described, in which a computer-implemented method of enhanced browsing comprises: displaying in a browser window a first electronic page containing a set of target links; displaying a first status indicator associated with a first target link, to indicate a status of prefetching of content via the first target link; and displaying the prefetched content in an enhanced browsing window if a cursor is positioned over the first status indicator.

Also described is a computer-implemented method of enhanced browsing of electronic content, the method comprising: displaying in a browser window a first electronic page comprising a set of target links; for each target link, indicating a status of content corresponding to the target link; altering a first status indication associated with a first target link if the status of content corresponding to the first target link changes; and displaying the content corresponding to a first target link in an enhanced browsing window if a cursor is positioned over the first status indication.

An apparatus for facilitating enhanced browsing of electronic data is also described, and comprises: a browser for displaying a main page of electronic data comprising links to other pages; an enhanced browsing window configured to display a first page of electronic data while the browser displays the main page; a prefetcher configured to automatically retrieve content identified by the links in the main page, including a first link to the first page, without awaiting a user request to retrieve the content; and a user interface configured to (1) display a first status indicator associated with the first link, to indicate a status of prefetching of content of the first page, (2) alter an appearance of the first status indicator if the status of the prefetching changes, and (3) detect the positioning of a cursor proximate to the first status indicator; wherein the enhanced browsing window is invisible until detection

of the positioning of the cursor, at which time the enhanced browsing window is made visible.

Also described is a graphical user interface for facilitating enhanced browsing of electronic data, the graphical user interface comprising: a browser window for displaying electronic data; a set of target links displayed within the electronic data, wherein each target link identifies corresponding target content; for each target link, an associated status indicator configured to indicate a status of prefetching of the corresponding target content;

a cursor operable by a user; and an enhanced browsing window configured to display target content; wherein the enhanced browsing window is invisible until the cursor is placed on or near a status indicator.

Enhanced Browsing Stripe

In one embodiment of the invention, an enhanced browsing stripe or column is provided for facilitating enhanced browsing of target content identified by multiple links in a page. For example, when a list of search result links (e.g., from a search engine, from a merchant or auction site) is displayed in a browser, the enhanced browsing stripe may be overlaid or superimposed on the list.

A user interface cursor may then be moved within the stripe and, as the cursor passes over or adjacent to a link, an enhanced browsing window may be opened to display the target content. Or, if an enhanced browsing window is already open, the displayed target content may change as the cursor reaches different links.

In different implementations, an enhanced browsing stripe or column may be horizontal, vertical, diagonal or even non-linear, so as to overlay or remain close to links in a browser page. A stripe may be of any thickness (e.g., one-quarter inch, one centimeter), and may be transparent or semi-transparent (e.g., light gray) so as to allow a user to read or identify a link underneath the stripe.

When a list of links is first presented (e.g., in a browser page), the stripe may or may not be automatically applied. If not, when a user mouses-over or selects a first target link in a list and an enhanced browsing window is displayed with the corresponding target content, the stripe may be presented at that time. The stripe may therefore appear adjacent to an enhanced browsing window or as one edge or border of the window.

In FIG. 2, stripe 230 is adjacent to the left edge of enhanced browsing window 210, but extends over the list of links 204 only, not the full length of the window. The stripe may

extend the full length of the window in other implementations. As seen in FIG. 2, stripe 230 may extend below the bottom edge of window 210, so that it appears over all links 204.

In one implementation, when an enhanced browsing window is opened and an enhanced browsing stripe displayed, a user interface cursor (e.g., mouse cursor 240 in FIG. 2) may be moved to a position within the stripe and on top of or near the target link whose content is displayed within the window. This may make it easier for a user to quickly preview content from other links, by moving the cursor within the stripe to those links. The stripe may be closed or removed if the cursor is moved (or clicked) outside of the stripe and an open enhanced browsing window. Alternatively, the cursor may be initially placed within the enhanced browsing window.

If the cursor is moved within the stripe to one end of the stripe, and the list of links associated with the stripe extends past that end, off the display device (e.g., to another page or screen), the web page or other content containing the list of links may be automatically scrolled to reveal additional links. The stripe will automatically extend as the content is scrolled, for as long as additional links appear. Alternatively, a stripe may extend even beyond the list of links, to allow a user to continue scrolling the web page (e.g., to the end of the page). If an enhanced browsing window is open when the web page is scrolled, the window may remain in the same location of the display device as scrolling continues.

An enhanced browsing stripe may be generated and maintained by a user interface or other component of an enhanced browsing apparatus.

FIG. 5 demonstrates a method of using an enhanced browsing stripe or column to facilitate enhanced browsing, according to one embodiment of the invention.

In state 502, a user's browser is opened at a web page or other electronic content (e.g., document, image, electronic mail message) that contains a list of search result links. The web page may be considered the "browser page" herein to differentiate it from a page or other target content displayed in an enhanced browsing window.

In state 504, target links are identified, including some or all of the search result links. Any or all links may be identified by default, a prefetch template may be applied, a list of most popular links may be used, etc. The links may be prioritized, and content identified by some or all target links is retrieved.

Enhanced browsing windows may be constructed (but not yet displayed) for target content for some or all of the target links. Illustratively, all target content is retrieved, but not necessarily all at the same time (i.e., in parallel).

In state 506, an enhanced browsing stripe is displayed on top of the list of search results. The stripe may be displayed as soon as one or more target links' content is retrieved, may be displayed when a first enhanced browsing window is displayed, or may be displayed as soon as the target links are identified.

5 In state 508, as the user moves a user interface cursor over target links, but within the enhanced browsing stripe, target content for the links is displayed in one or more enhanced browsing windows. For example, a first window may be opened when the user mouses-over a first target link. That window may remain open while the user moves the cursor, and other links' content may replace the first link's content in the window. Alternatively, an enhanced
10 browsing window may open when the user mouses-over a target link, and then close when the cursor leaves the link.

In state 510, if the cursor is moved to the edge of the browser window and the list of search results extends to another page or screen, the browser page will be scrolled as needed (e.g., upward, to the left) to bring other links onscreen. The enhanced browsing stripe will
15 extend or elongate as the page scrolls. After state 510, the method ends.

An embodiment of the invention has thus been described in which a computer-implemented method of facilitating enhanced browsing of electronic content comprises: when a first page of electronic content is browsed in a browser, identifying within the first page a set of links to other pages of electronic content, including a first link to a second page;
20 superimposing a stripe on the set of links within the browser; detecting placement of a cursor within the stripe and in proximity to the first link; and in response to detecting placement of the cursor, displaying an enhanced browsing window containing electronic content of the second page.

Also described is a graphical user interface for facilitating enhanced browsing of
25 electronic data, comprising: a browser window for displaying a first page of electronic data, wherein the first page comprises a plurality of links to other pages of electronic data; and a non-opaque stripe superimposed on the plurality of links.

Further, an enhanced browsing apparatus for facilitating enhanced browsing of
30 electronic data is described, in which the apparatus comprises: a prefetcher configured to prefetch content from a second page of electronic data while a browser displays a first page of electronic data containing multiple links, wherein the multiple links include a first link to the second page; and a user interface configured to display a stripe superimposed on the multiple links and, when a cursor is placed within said stripe and in proximity to the first

link, display an enhanced browsing window comprising said prefetched content.

Graphical History Navigation Tree for Searching/Browsing

In one embodiment of the invention, a method and apparatus are provided for
5 facilitating a user's navigation or browsing of search results or some other collection of
interrelated links to electronic data. In one implementation of this embodiment, a graphical
history navigation tree is rendered, wherein each node corresponds to a different web page or
other set of data (e.g., documents, images, electronic mail messages).

The tree may be displayed anywhere within the user's display screen, such as within a
10 window placed immediately below an enhanced browsing window (or immediately below a
location at which an enhanced browsing window may be opened), along the left or right side
of the display screen, etc. Within its window, a history navigation tree may start with a root
representing a new set of search results or a new browsing session, and thereafter grow in
any direction (e.g., from left to right, from top to bottom). A new tree root may be placed
15 when a new search is initiated, when a new browser window is opened, or anytime a user
requests a new tree be started.

Execution of a new search may be detected by monitoring the web site or page a user
is browsing. Initiation of a new browsing session may be assumed when a browser is
opened. If the site the user is browsing employs a search engine and the user engages the
20 engine, a root of a new history navigation tree may be placed at that time. Any previous
history navigation trees may still appear in the same window, but may be scrolled off-screen
as the current tree grows.

In one embodiment, each time the user navigates (e.g., in the browser) to or previews
(e.g., in an enhanced browsing window) one of the search result listings (or some other top-
25 level link within the page being browsed), a new child node is added to the current tree and
connected to the root. As the user continues to navigate or preview linked content, yet more
nodes are added and linked to the history navigation tree. Thus, for each page, site or other
collection of content the user accesses, another node is added to the tree.

Thereafter, the user can quickly navigate to or preview content previously visited by
30 selecting the appropriate node. Illustratively, if the user clicks (e.g., left-clicks) on a node,
the user's browser is opened to the corresponding content. If the user mouses-over a node
(e.g., for a predetermined period of time) or right-clicks on the node, the corresponding
content may be opened for previewing in an enhanced browsing window.

Thus, an enhanced browsing apparatus's cache may store content corresponding to any number of nodes in the current history navigation tree, and/or previous trees. Alternatively, the content may be retrieved from the target page or site at the time the user clicks on or mouses-over a node.

5 When the user clicks on or mouses-over a node corresponding to a particular web domain or site, a list of links visited at that domain may be displayed. Thus, a node may represent a collection of web pages or content, not just a single document.

 A user may be permitted to alter the appearance of a node. For example, if the user decides that a particular page warrants a closer examination if nothing more interesting or
10 helpful is found, he may choose to change the node's color, size or other characteristic (e.g., make it blink, animate it) to mark it. One particular marking may be applied to identify the node corresponding to content the user is currently browsing or previewing.

 Similarly, the user may be able to notate a node and/or search (e.g., to name the search) by selecting it (e.g., right-clicking) and entering his notes into a file that will be saved
15 with the tree.

 As described above, a new search/browsing history navigation tree may be started for each new search. However, when a user merely modifies the search terms of a current (or previous) search, this may simply result in a new branch being added to the current (or previous) tree.

20 A search/browsing history navigation tree may be generated and maintained by a user interface or other component of an enhanced browsing apparatus.

 FIG. 6 depicts a search/browsing history navigation tree, according to one embodiment of the invention. Program code for generating such a tree may be implemented as a plug-in to an existing browser,

25 In FIG. 6, window 602 tree frame 604 and ad frame 606. The horizontal nature of window 602 makes the window suited for placement above or below an enhanced browsing window. In other embodiments, window 602 may be oriented vertically.

 The history navigation tree displayed in tree frame 604 begins with root 610, which, in this example, corresponds to a search for a used Honda automobile. This search may have
30 returned any number of links to relevant content. Among those links, the user has so far browsed or previewed web pages or sites identified by two top-level links, corresponding to nodes 612, 614.

As the user visited or previewed content linked to those pages, additional nodes were added to represent that content. As shown in FIG. 6, any number of nodes may be notated. Such notations may be automatically extracted from HTML of the corresponding content, or may be specified by the user. Logos of organizations associated with a node's content may
5 be displayed in addition to (or instead of) descriptive text.

Window 602 is expanded in FIG. 6 to allow for closer inspection. In different implementations of this embodiment of the invention, the window may be relatively narrow in height (when aligned horizontally) or width (when aligned vertically), on the order of 0.5 inches to 1.5 inches.

10 The visual history navigation tree allows a user to easily track his navigation and quickly jump from one node's content to another's. Because window 602 may remain open even after the user navigates away from the search results, he can quickly and easily return. Window 602 may include standard controls (e.g., buttons) to close, expand, minimize or otherwise manipulate the window.

15 Because a history navigation tree may be saved (e.g., to disk), the user may open a history navigation tree window (e.g., using the normal browser drop-down menus), which may be automatically populated with the most recent tree.

Ads displayed in ad frame 606 may include ads relevant to the search associated with the tree in tree frame 604, ads relevant to the specific node the user is at, pay-per-click
20 sponsored ads, etc. Either or both of tree frame 604 and ad frame 606 may include scroll bars (horizontal and/or vertical).

An embodiment of the invention has thus been described in which a computer-implemented method of facilitating enhanced browsing of electronic content comprises: in association with a user's viewing of a first page of electronic content, presenting a root node
25 of a navigable tree, wherein the root node corresponds to the first page; in response to selection by the user of a second page of electronic content linked to the first page, adding a child node to the tree, wherein the child node corresponds to the second page and is connected to the root node; and as additional pages of electronic content are selected by the user, adding additional nodes to the tree, the additional nodes corresponding to the additional
30 pages.

Also described is a graphical user interface for facilitating enhanced browsing of electronic data that comprises: a tree window configured for display in conjunction with a browser window for browsing electronic data and/or an enhanced browsing window for

previewing electronic data; and, displayed within said tree window, a navigable graphical tree comprising nodes corresponding to electronic data that has been browsed or previewed.

Further described is an enhanced browsing apparatus for facilitating enhanced browsing of electronic data, the apparatus comprising: a browsing window configured to display electronic data to a user; and a user interface configured to construct a tree
5 comprising nodes corresponding to content displayed in the browsing window and facilitate the user's navigation of the content by re-displaying, in the browsing window, content corresponding to a node selected by the user.

The program environment in which a present embodiment of the invention is
10 executed illustratively incorporates a general-purpose computer or a special purpose device such as a hand-held computer. Details of such devices (e.g., processor, memory, data storage, display) may be omitted for the sake of clarity.

It should also be understood that the techniques of the present invention may be implemented using a variety of technologies. For example, the methods described herein
15 may be implemented in software executing on a computer system, or implemented in hardware utilizing either a combination of microprocessors or other specially designed application specific integrated circuits, programmable logic devices, or various combinations thereof. In particular, the methods described herein may be implemented by a series of computer-executable instructions residing on a suitable computer-readable medium.
20 Suitable computer-readable media may include volatile (e.g., RAM) and/or non-volatile (e.g., ROM, disk) memory, carrier waves and transmission media (e.g., copper wire, coaxial cable, fiber optic media). Exemplary carrier waves may take the form of electrical, electromagnetic or optical signals conveying digital data streams along a local network, a publicly accessible network such as the Internet or some other communication link.

25 The foregoing embodiments of the invention have been presented for purposes of illustration and description only. They are not intended to be exhaustive or to limit the invention to the forms disclosed. Accordingly, the scope of the invention is defined by the appended claims, not the preceding disclosure.

What Is Claimed Is:

1. A computer-implemented method of facilitating the preview of a second electronic page linked to a first electronic page while the first electronic page is browsed, the
5 method comprising:
while the first electronic page is displayed within a browser, retrieving content of the second electronic page;
generating, without displaying, an enhanced browsing window comprising said content of the second electronic page;
10 detecting user interest in the second electronic page; and
displaying the enhanced browsing window.
2. The method of claim 1, further comprising, prior to said retrieving:
locating a set of links within the first electronic page, including the link to the second
15 electronic page.
3. The method of claim 2, further comprising:
prioritizing the located links for retrieval of content identified by the located links.
- 20 4. The method of claim 1, further comprising, prior to said generating:
retrieving a set of ads relevant to said content of the second electronic page.
5. The method of claim 4, wherein said generating comprises:
including the set of ads in the enhanced browsing window.
25
6. The method of claim 4, wherein said generating comprises:
replacing one or more ads included in said content of the second electronic page with
the set of ads.
- 30 7. The method of claim 1, further comprising, prior to said displaying:
caching said enhanced browsing window.
8. The method of claim 7, wherein said enhanced browsing window is cached in

a cache separate from a cached used by the browser.

9. The method of claim 1, wherein said retrieving comprises prefetching said content of the second electronic page.

5

10. The method of claim 1, wherein said retrieving comprises:
identifying the link to the second electronic page; and
fetching said content of the second electronic page prior to said detecting user interest in the second electronic page.

10

11. The method of claim 1, wherein said retrieving comprises:
automatically locating a set of links in the first electronic page when the first electronic page is displayed; and
retrieving content identified by one or more of the located links, including the link to
15 the second electronic page.

12. The method of claim 11, further comprising, prior to said retrieving content identified by one or more of the located links:
prioritizing retrieval of content identified by the located links.

20

13. The method of claim 1, wherein said content of the second electronic page is navigable content including one or more hyperlinks.

14. The method of claim 1, wherein said detecting comprises:
25 detecting a mouse-over of the link to the second electronic page.

15. The method of claim 1, wherein said detecting comprises:
detecting a user placement of a cursor proximate to the link to the second electronic
page.

30

16. The method of claim 1, wherein said detecting comprises:
detecting a user placement of a cursor proximate to an icon associated with the link to
the second electronic page.

17. The method of claim 1, further comprising:

closing said enhanced browsing window if a cursor is moved from a position within said enhanced browsing window to a position outside said enhanced browsing window.

5

18. The method of claim 1, further comprising:

if a cursor is moved in the first electronic page proximate to a link to a third electronic page, closing said enhanced browsing window and displaying another enhanced browsing window containing content of the third electronic page that was fetched prior to the movement of the cursor proximate to the link to the third electronic page.

10

19. The method of claim 1, further comprising:

if a user operates a pointing device within said enhanced browsing window, replacing the first electronic page in the browser with the second electronic page.

15

20. The method of claim 1, further comprising:

if a link within said enhanced browsing window to a third electronic page is selected, replacing said content of the second electronic page in said enhanced browsing window with content of the third electronic page.

20

21. The method of claim 1, wherein the first electronic page comprises a list of search results and said retrieving comprises:

forwarding to a central server a set of search terms that yielded the list of search results.

25

22. A computer readable medium storing instructions that, when executed by a computer, cause the computer to perform a method of facilitating the preview of a second electronic page linked to a first electronic page while the first electronic page is browsed, the method comprising:

while the first electronic page is displayed within a browser, retrieving content of the second electronic page;

30

generating, without displaying, an enhanced browsing window comprising said content of the second electronic page;

detecting user interest in the second electronic page; and
displaying the enhanced browsing window.

23. A computer-implemented method of previewing a second electronic
5 document linked to a first electronic document while the first electronic document is
browsed, the method comprising:

while a first electronic document is displayed in a browser window, automatically
detecting placement of a cursor, within the browser window, proximate to a link to the
second electronic document; and

10 in response to said detecting, automatically displaying an enhanced browsing window
comprising fetchable content of the second electronic document.

24. The method of claim 23, further comprising, prior to said automatically
displaying:

15 generating, but not displaying said enhanced browsing window.

25. The method of claim 23, wherein said automatically displaying comprises:
retrieving the fetchable content; and
generating said enhanced browsing window to include the fetchable content.

20

26. The method of claim 23, wherein said automatically detecting comprises:
detecting placement of the cursor on the link.

25 of:

markup language for formatting an electronic document; and
script code for formatting an electronic document.

30 of:

HTML (HyperText Markup Language);
XML (eXtensible Markup Language);
ASP (Active Server Page);

Javascript; and
PHP (Hypertext Preprocessor).

5 29. An enhanced browsing apparatus for facilitating enhanced browsing of
electronic data, the apparatus comprising:
a fetcher configured to fetch content from a second page while a browser displays a
first page containing a link to the second page;
a window generator configured to generate an enhanced browsing window
comprising the fetched content;
10 a cache configured to store said enhanced browsing window; and
a user interface configured to detect a positioning of a cursor proximate to the link to
the second page;
wherein, in response to detection of the positioning of the cursor, said enhanced
browsing window is displayed.

15

30. The enhanced browsing apparatus of claim 29, wherein said fetcher is further
configured to identify links in the first page, including the link to the second page.

20

31. The enhanced browsing apparatus of claim 30, further comprising:
a database comprising a template configured to identify a location of a set of links
within the first page.

25

32. The enhanced browsing apparatus of claim 30, further comprising:
a set of heuristics for facilitating identification of the links in the first page.

30

33. The enhanced browsing apparatus of claim 30, wherein said fetcher is further
configured to prioritize the identified links for fetching of content identified by the identified
links.

34. The enhanced browsing apparatus of claim 33, further comprising:
a set of heuristics for facilitating said prioritization.

35. The enhanced browsing apparatus of claim 29, wherein said window

generator is further configured to keep said enhanced browsing window invisible until said detection of the positioning of the cursor.

36. The enhanced browsing apparatus of claim 29, wherein said window
5 generator is further configured to include a set of ads in said enhanced browsing window.

37. The enhanced browsing apparatus of claim 29, wherein said cache is separate
from a cache managed by the browser.

10 38. The enhanced browsing apparatus of claim 29, wherein said positioning of the
cursor comprises a mouse-over.

39. The enhanced browsing apparatus of claim 29, wherein:
the browser is navigable to locations at which electronic data are stored; and
15 said enhanced browsing window is configured to preview the electronic data without
navigating to the locations.

40. The enhanced browsing apparatus of claim 29, wherein said fetcher is
configured to prefetch the content from the second page prior to said positioning of the
20 cursor.

41. A graphical user interface for facilitating enhanced browsing of electronic
data, comprising:
a browser configured to display a first page of electronic data, wherein the first page
25 comprises a plurality of links to other pages of electronic data, including a first link to a
second page of electronic data;
a cursor able to be positioned by a user; and
an enhanced browsing window configured to display content from the second page;
wherein said enhanced browsing window is invisible until the cursor is placed in
30 proximity to the first link.

42. The graphical user interface of claim 41, wherein said enhanced browsing
window comprises:

a content window configured to display the content from the second page; and
an ad frame configured to display a set of ads.

43. The graphical user interface of claim 41, wherein:
5 the content from the second page is prefetched before the cursor is placed in
proximity to the first link.

44. The graphical user interface of claim 43, wherein:
said enhanced browsing window is constructed, but kept invisible, after the content
10 from the second page is prefetched.

45. The graphical user interface of claim 41, wherein:
said enhanced browsing window is closed when the cursor is moved from a position
within said enhanced browsing window to a position outside said enhanced browsing
15 window.

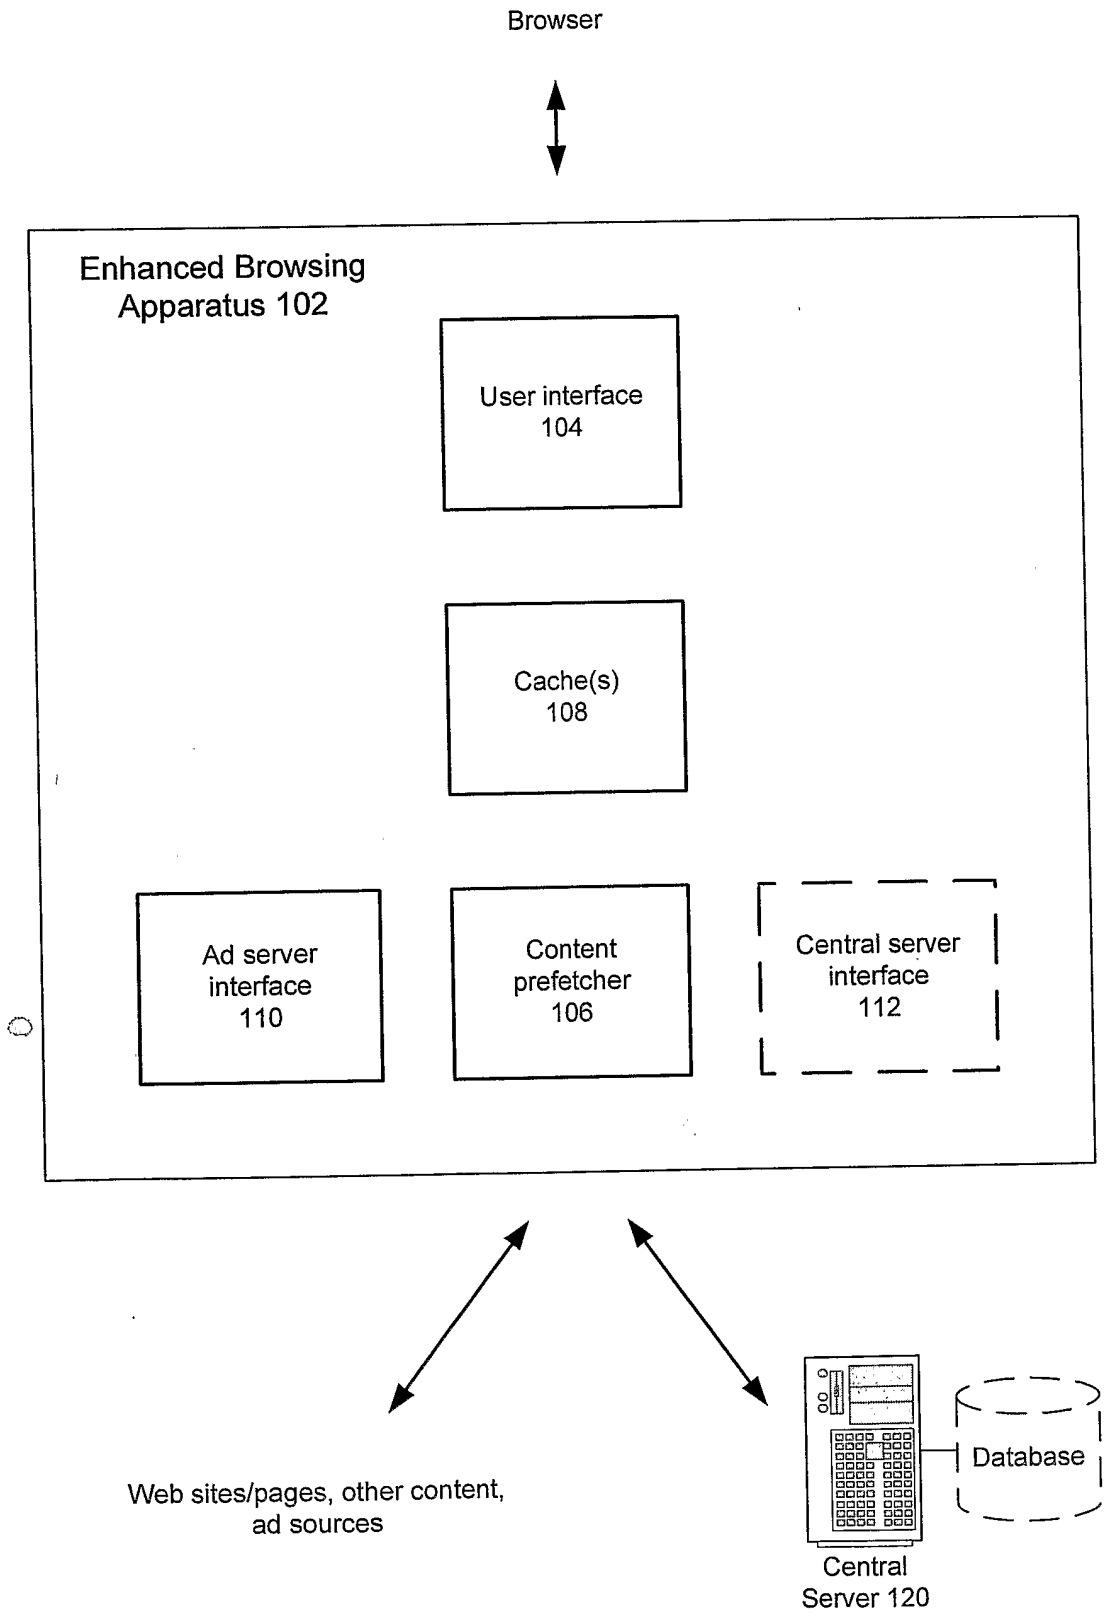


FIG. 1

Browser 200

Web Page 202

Scroll Bar 214

The screenshot shows a Microsoft Internet Explorer browser window. The address bar contains the URL: <http://www.google.com/search?sourceid=navclient&ie=UTF-8&q=used+honda>. The search results show a link for "Honda Certified Used Cars" with a thumbnail image of a silver sedan. The main content area features a large heading "Honda Certified Used Cars" and a detailed description of the certification process. A "SEARCH INVENTORY" pop-up window is overlaid on the right, providing information about the dealer's inventory and a link to search for used Hondas. The browser's scroll bar is visible on the left side of the window.

Stripe 230

Link 204a

Link 204b

Ad Frame 220

Enhanced Browsing Window 210

FIG. 2

Tab 230

Content 212

Cursor 240

Link 204i

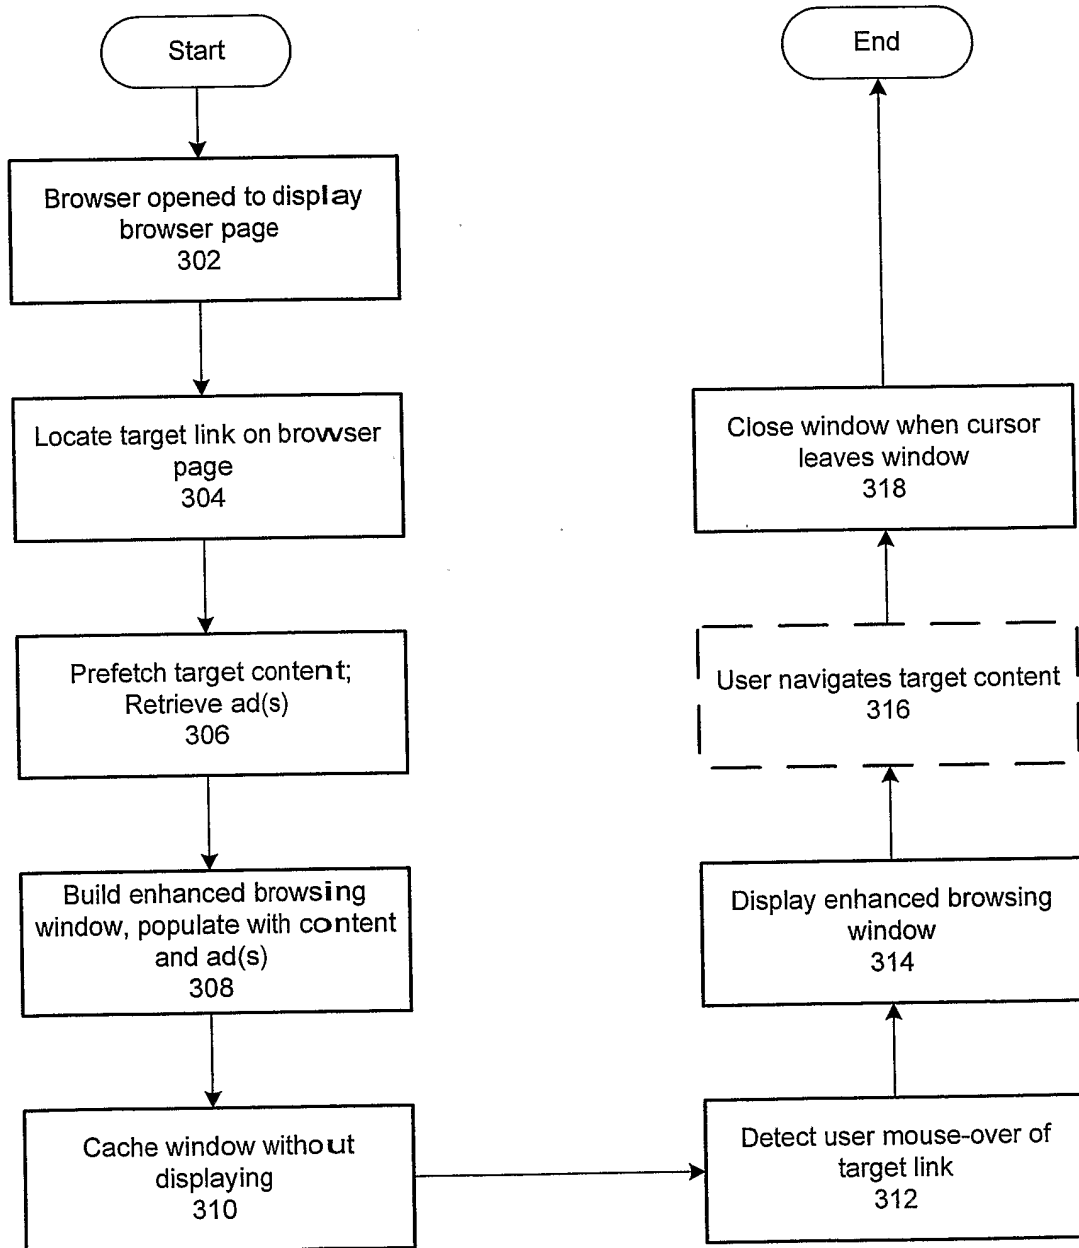


FIG. 3

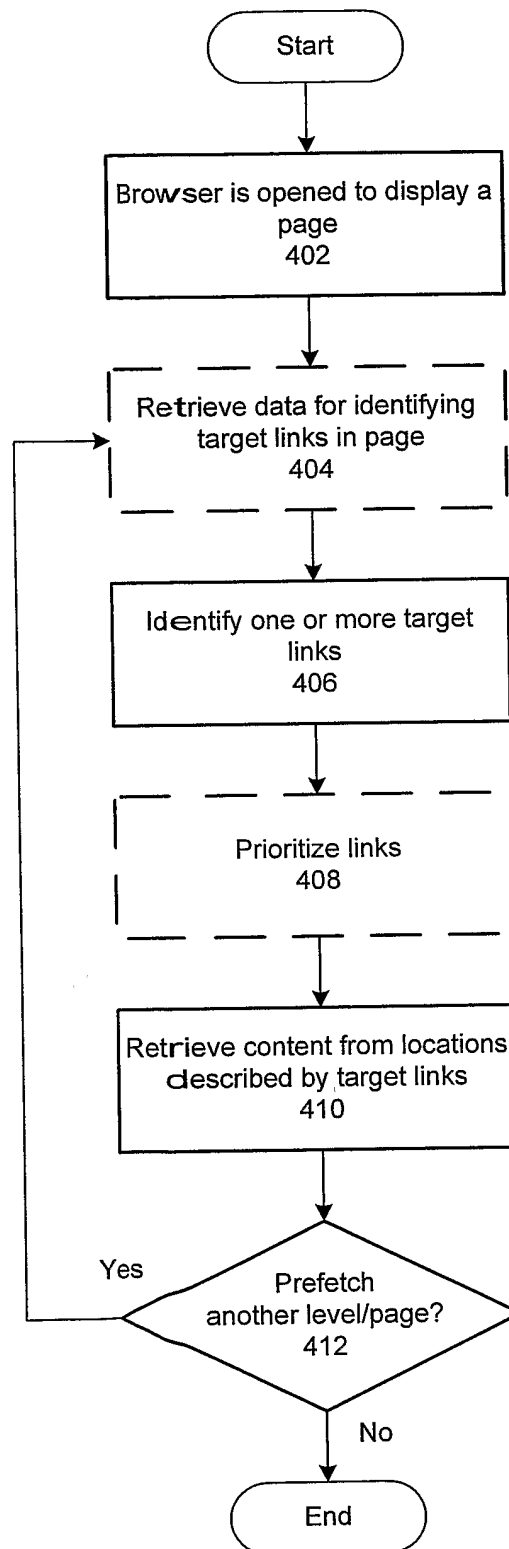


FIG. 4

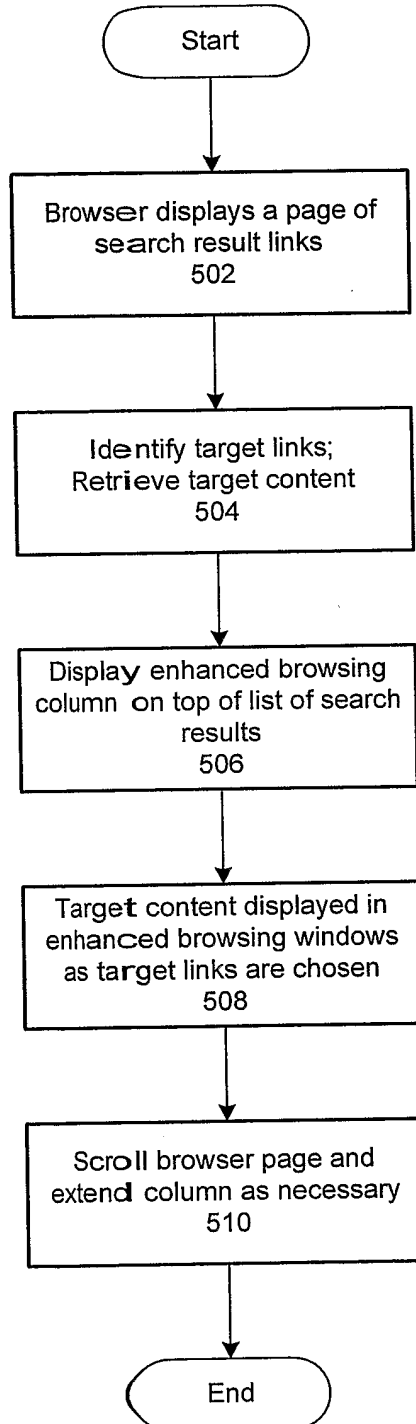


FIG. 5

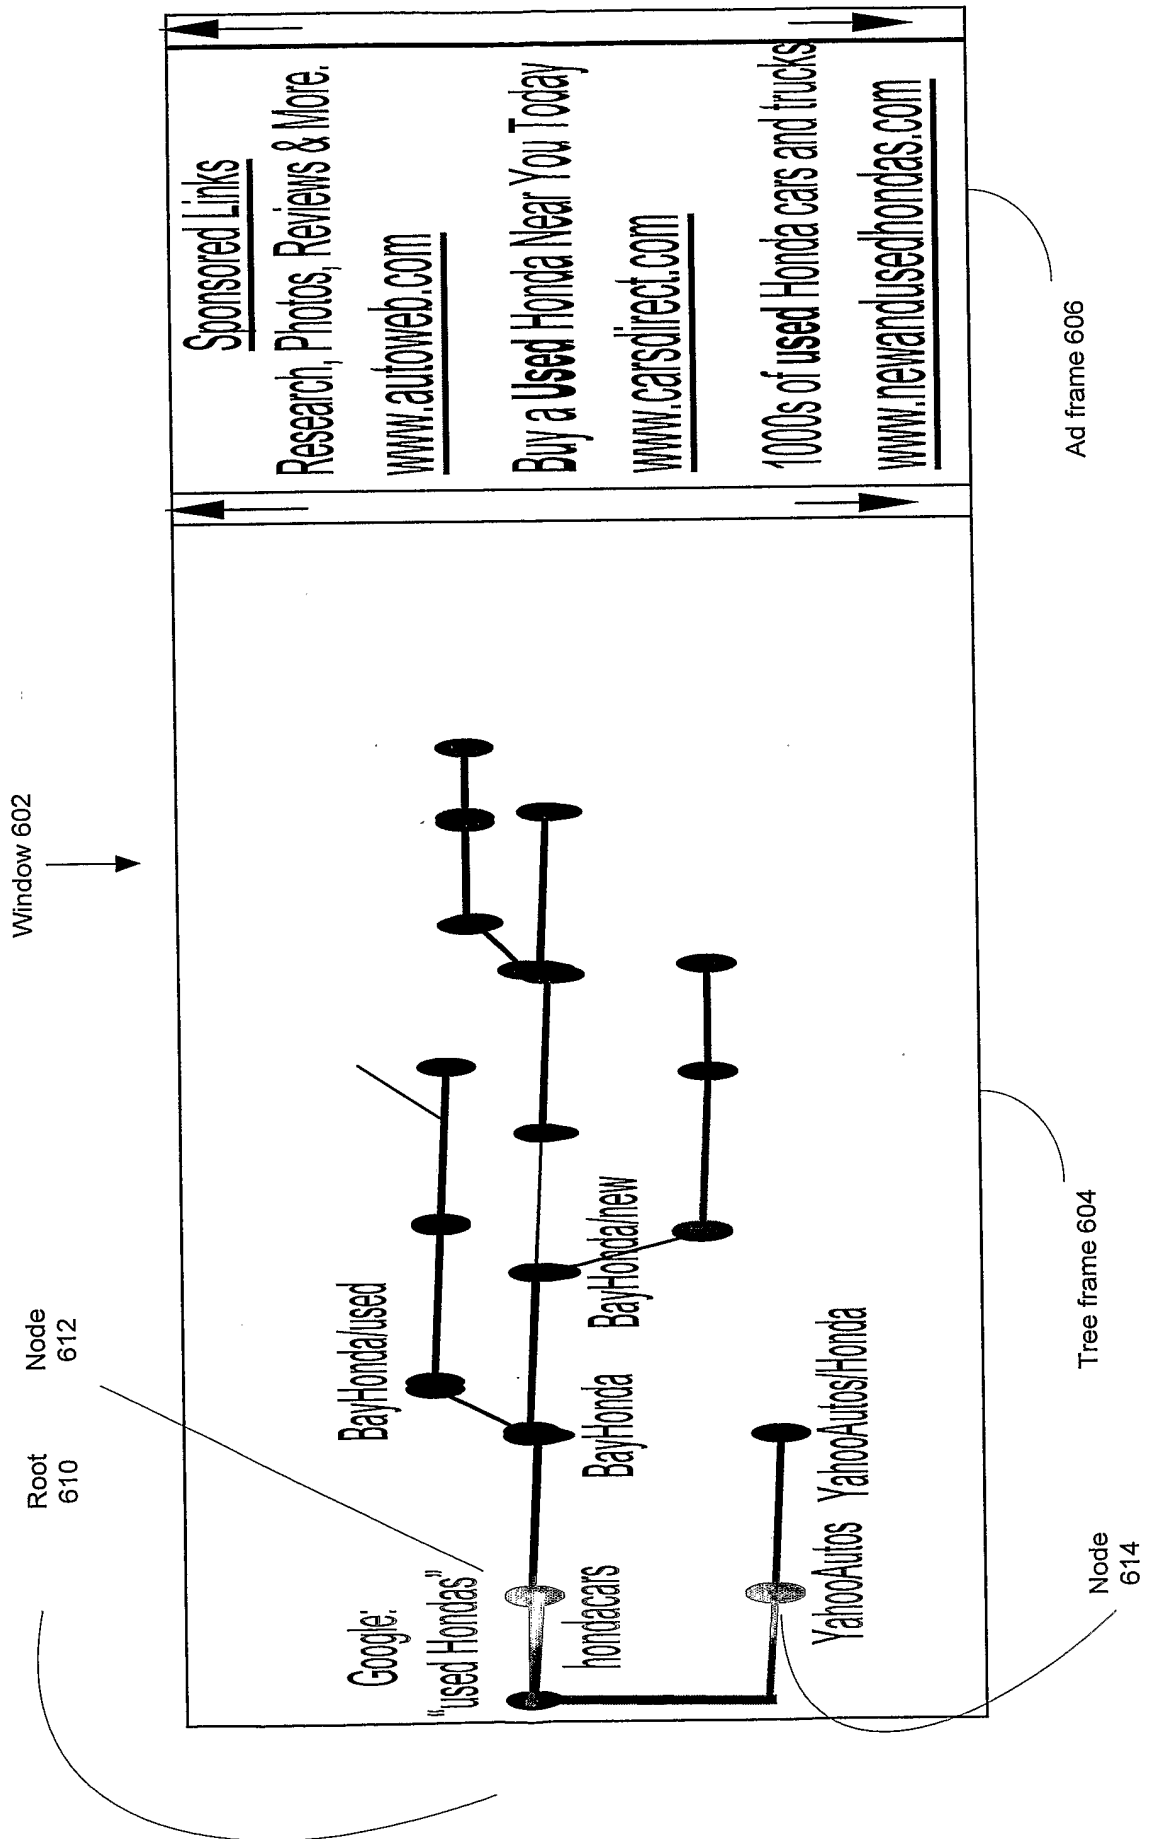


FIG. 6

Enhanced Browsing Window 710

Message Folder Window 706

The screenshot displays the Microsoft Outlook interface. On the left, the 'Message Folder Window 706' shows a list of folders including 'Inbox', 'Outbox', 'Deleted Items', 'Drafts', 'Inbox (2)', 'Journal', 'Marketing', 'Memo', 'Mobile', 'Notes', 'Operations', 'Outbox', 'People', 'Personal', 'Promotes', 'Photo Backup', 'Roundtrip', 'Sent Items', 'Tasks', and 'Travel'. The main window shows an 'Enhanced Browsing Window 710' displaying a CarsDirect advertisement. The ad is divided into 'NEW' and 'USED' car sections, each with a search bar and a 'GO' button. A 'Certified Pre-Owned' section is also visible. A 'Browser' button is located at the bottom of the ad. Callouts point to various elements: 'Link 704' points to the URL 'http://www.carsdirect.com'; 'Content 712' points to the main text of the advertisement; 'Tab 730' points to the 'Browser' button; and 'Ad Frame 720' points to the overall advertisement area.

Electronic Mail Message 702

FIG. 7

The image shows a screenshot of a Google search results page. At the top left is the Google logo. To its right are navigation links: Web, Images, Groups, News, Froogle, and more. A search bar contains the text 'japanese food' and a 'Search' button. Below the search bar, the word 'Web' is displayed in a large font. The search results are listed below, with several items annotated with arrows and labels:

- Web page 802**: Points to the search bar.
- Link 804a**: Points to the first search result, which includes a small icon of a book and the text: **Japanese food**, **... Japan Guide Homepage, Home - Japanese Food. ... Books. A Dictionary of Food. A Taste of Japan: Food Fact and Fable What the People Eat Customs and Etiquette ...** www.japan-guide.com/e/e620.html - 29k - Jan 9, 2005 - [Cached](#) - [Similar pages](#)
- Indicator 814a**: Points to the text 'A Taste of Japan: Food Fact and Fable What the People Eat Customs and Etiquette ...' in the first result.
- Link 804b**: Points to the second search result, which includes a small icon of a book and the text: **Japanese dishes**, **... Japan Guide Homepage, Food - Popular Dishes. ... Voice them in the of Japanese Food, A Dictionary of Japanese Food Book by Richard Hosi** www.japan-guide.com/e/e2035.html - 38k - Jan 9, 2005 - [Cached](#) - [Similar pages](#) [[More results from www.japan-guide.com](#)]
- Indicator 814b**: Points to the text 'Voice them in the of Japanese Food, A Dictionary of Japanese Food Book by Richard Hosi' in the second result.
- Link 804c**: Points to the third search result, which includes a small icon of a book and the text: **Tokyo Food Page**, **The Tokyo Food Page, a complete guide to Japanese food and restaurants in featuring recipes, articles on Japanese cooking, restaurant listings, culinary ...** www.bento.com/tokyofood.html - 14k - Jan 9, 2005 - [Cached](#) - [Similar pages](#)
- Indicator 814c**: Points to the text 'The Tokyo Food Page, a complete guide to Japanese food and restaurants in featuring recipes, articles on Japanese cooking, restaurant listings, culinary ...' in the third result.
- Link 804d**: Points to the fourth search result, which includes a small icon of a book and the text: **Tokyo Food Page - Japanese Cuisines**, **... cuisines. The Tokyo Food Page Bookstore. Order more books about books about Tokyo. Japanese foods in history. Excerpted ...** www.bento.com/recipe.html - 21k - Jan 9, 2005 - [Cached](#) - [Similar pages](#) [[More results from www.bento.com](#)]
- Indicator 814d**: Points to the text 'The Tokyo Food Page Bookstore. Order more books about books about Tokyo. Japanese foods in history. Excerpted ...' in the fourth result.

FIG. 8

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/034852

A. CLASSIFICATION OF SUBJECT MATTER G06F17/30		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) G06F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 356 908 B1 (BROWN MICHAEL WAYNE ET AL) 12 March 2002 (2002-03-12) paragraph '0042! - paragraph '0048!; figures 10,12,14 paragraph '0057! - paragraph '0065! -----	1-45
X	US 2004/064471 A1 (BROWN MICHAEL WAYNE ET AL) 1 April 2004 (2004-04-01) paragraph '0044! - paragraph '0051!; claims 26,29; figures 8,10 paragraph '0067! - paragraph '0071! -----	1-45
X	US 2002/124022 A1 (YOO CHIN-WOO) 5 September 2002 (2002-09-05) paragraph '0022! - paragraph '0041!; claims 9,31 -----	1, 22, 23, 29, 41
----- -/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *Z* document member of the same patent family	
Date of the actual completion of the international search	Date of mailing of the international search report	
27 January 2006	06/02/2006	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Herry, T	

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/034852

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01/90912 A (QMGN, INC) 29 November 2001 (2001-11-29) the whole document -----	1-45

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2005/034852

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6356908	B1	12-03-2002	NONE
US 2004064471	A1	01-04-2004	GB 2356474 A 23-05-2001 US 2003079179 A1 24-04-2003 US 6665838 B1 16-12-2003
US 2002124022	A1	05-09-2002	WO 02054273 A1 11-07-2002 KR 2001044189 A 05-06-2001
WO 0190912	A	29-11-2001	AU 6487001 A 03-12-2001