


REV.	DESCRIPTION	DATE
A		01-2018

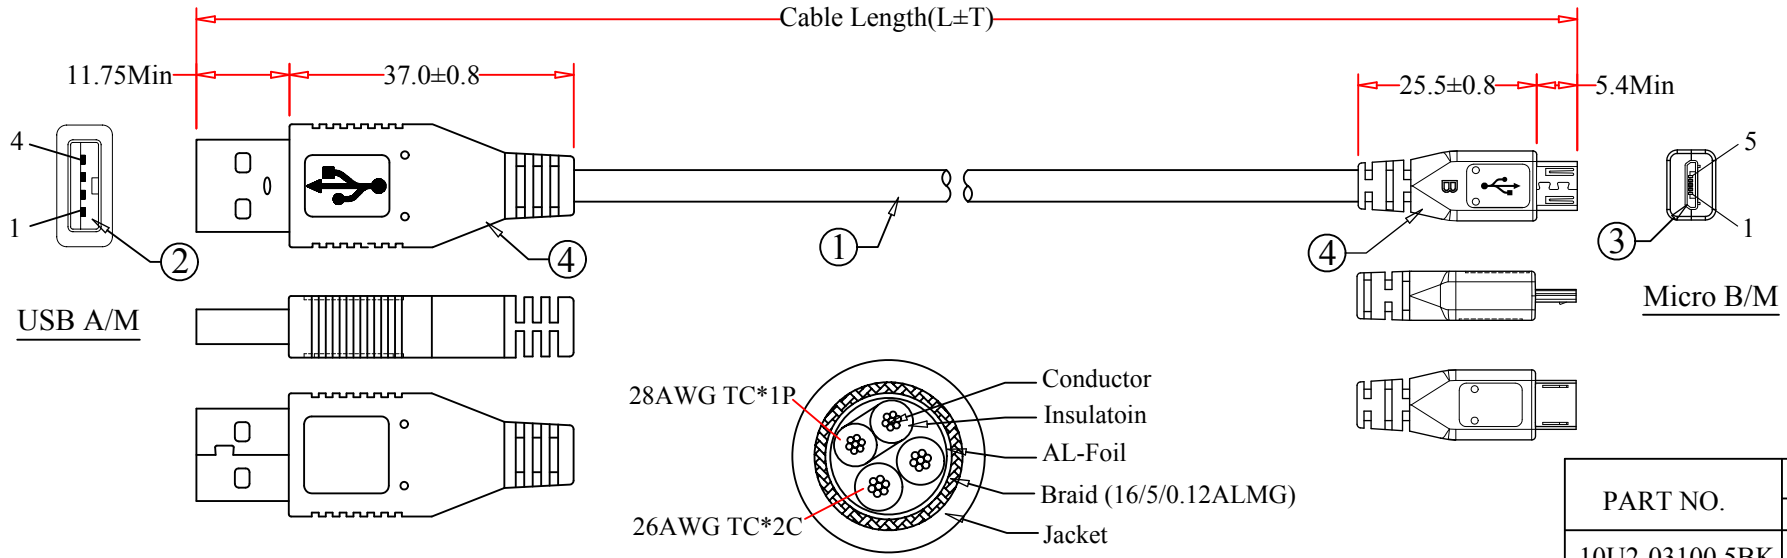

PART NO.	CABLE LENGTH	
	L	±T(mm)
10U2-03100.5BK	6 inch	-0/+30
10U2-03101BK	1 FT	-10/+30
10U2-03101.5BK	1.5 FT	±30
10U2-03103BK	3 FT	±30
10U2-03106BK	6 FT	±50
10U2-03110BK	10 FT	±50
10U2-03115BK	15 FT	±50

Pin Assignment		
USB AM		Micro BM
1	Red	1
2	Green	2
3	White	3
4	Black	5
Shell	Braid	Shell

RoHS

NOTES:
 1. Electrical Test:
 (1) 100% Open Short & Miswire Test.
 (2) Insulation Resistance 1 MΩ MIN.

4	Black Molded PVC
3	USB Micro 5Pin (B Type) Male, Gold Flash On Contacts, Nickel Plated Steel Shell, Black Insulation
2	USB A Type Male, Gold Flash On Contacts, Nickel Plated Steel Shell, White Insulation
1	USB 2.0 CABLE UL 2725 28AWG*1P+26AWG*2C+AB(16/5/0.12ALMG), OD: 4.5±0.15mm, Black Outer PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10U2-031xxBK			DRAWER	JL
TITLE	Micro USB 2.0 Cable, Black, Type A Male / Micro-B Male			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	INCH		
DRAWING NO:				 888-212-8295.com CableWholesale.com	
ID(NO.)	124				